
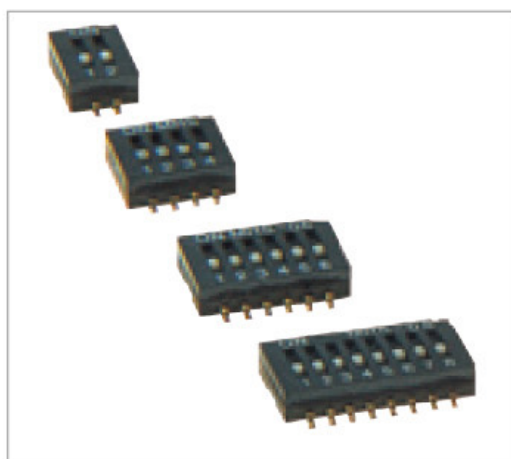


MINI DIP SWITCHES (Half-pitch) 1.27mm

• FEATURES :

- This series is surface mount type based on 1.27mm pitch.
- The contacts is twin points' and gold-plated.
- You have a choice of Reel or Tube for the packaging.
- The epoxies sealed (treated whole internal circumference and a part of outer circumference) keep out impure flux.

Part Number Ordering Terminology

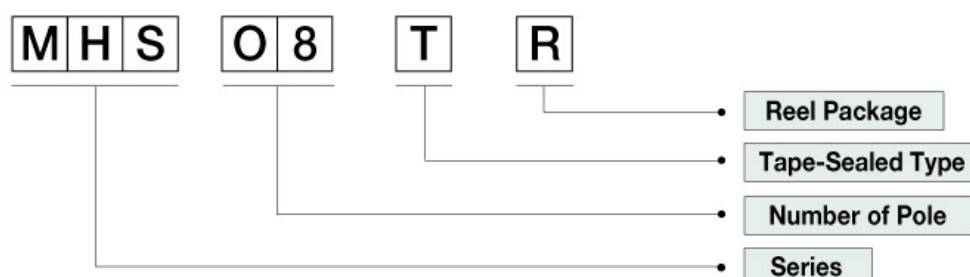

Type	Poles(n)	A(mm)
MHS-02	2	4.3
MHS-04	4	6.9
MHS-06	6	9.4
MHS-08	8	12.0

SPECIFICATION	
Contact Resistance	100mA 50VDC on load 25mA 25VDC on switching
Insulation Resistance	100mA 5VDC on switching Max 100mΩ
Dielectric Strength	100VDC. Min 100MΩ
Durability	250VDC. 1minute
Operating Force	1,000 operations. min 500g max

Outline & Mounting Dimensions

