
Processor, flash and programming









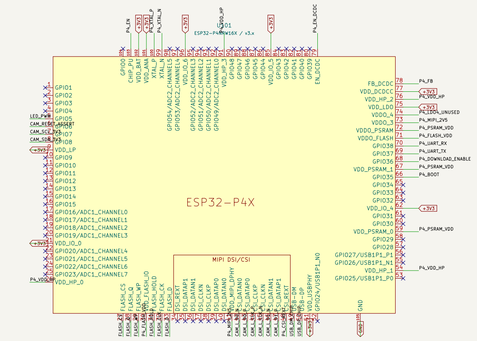



Sensor and 24 MHz clock







Power, USB and control translation






























Supporting components / net names are electrical connections

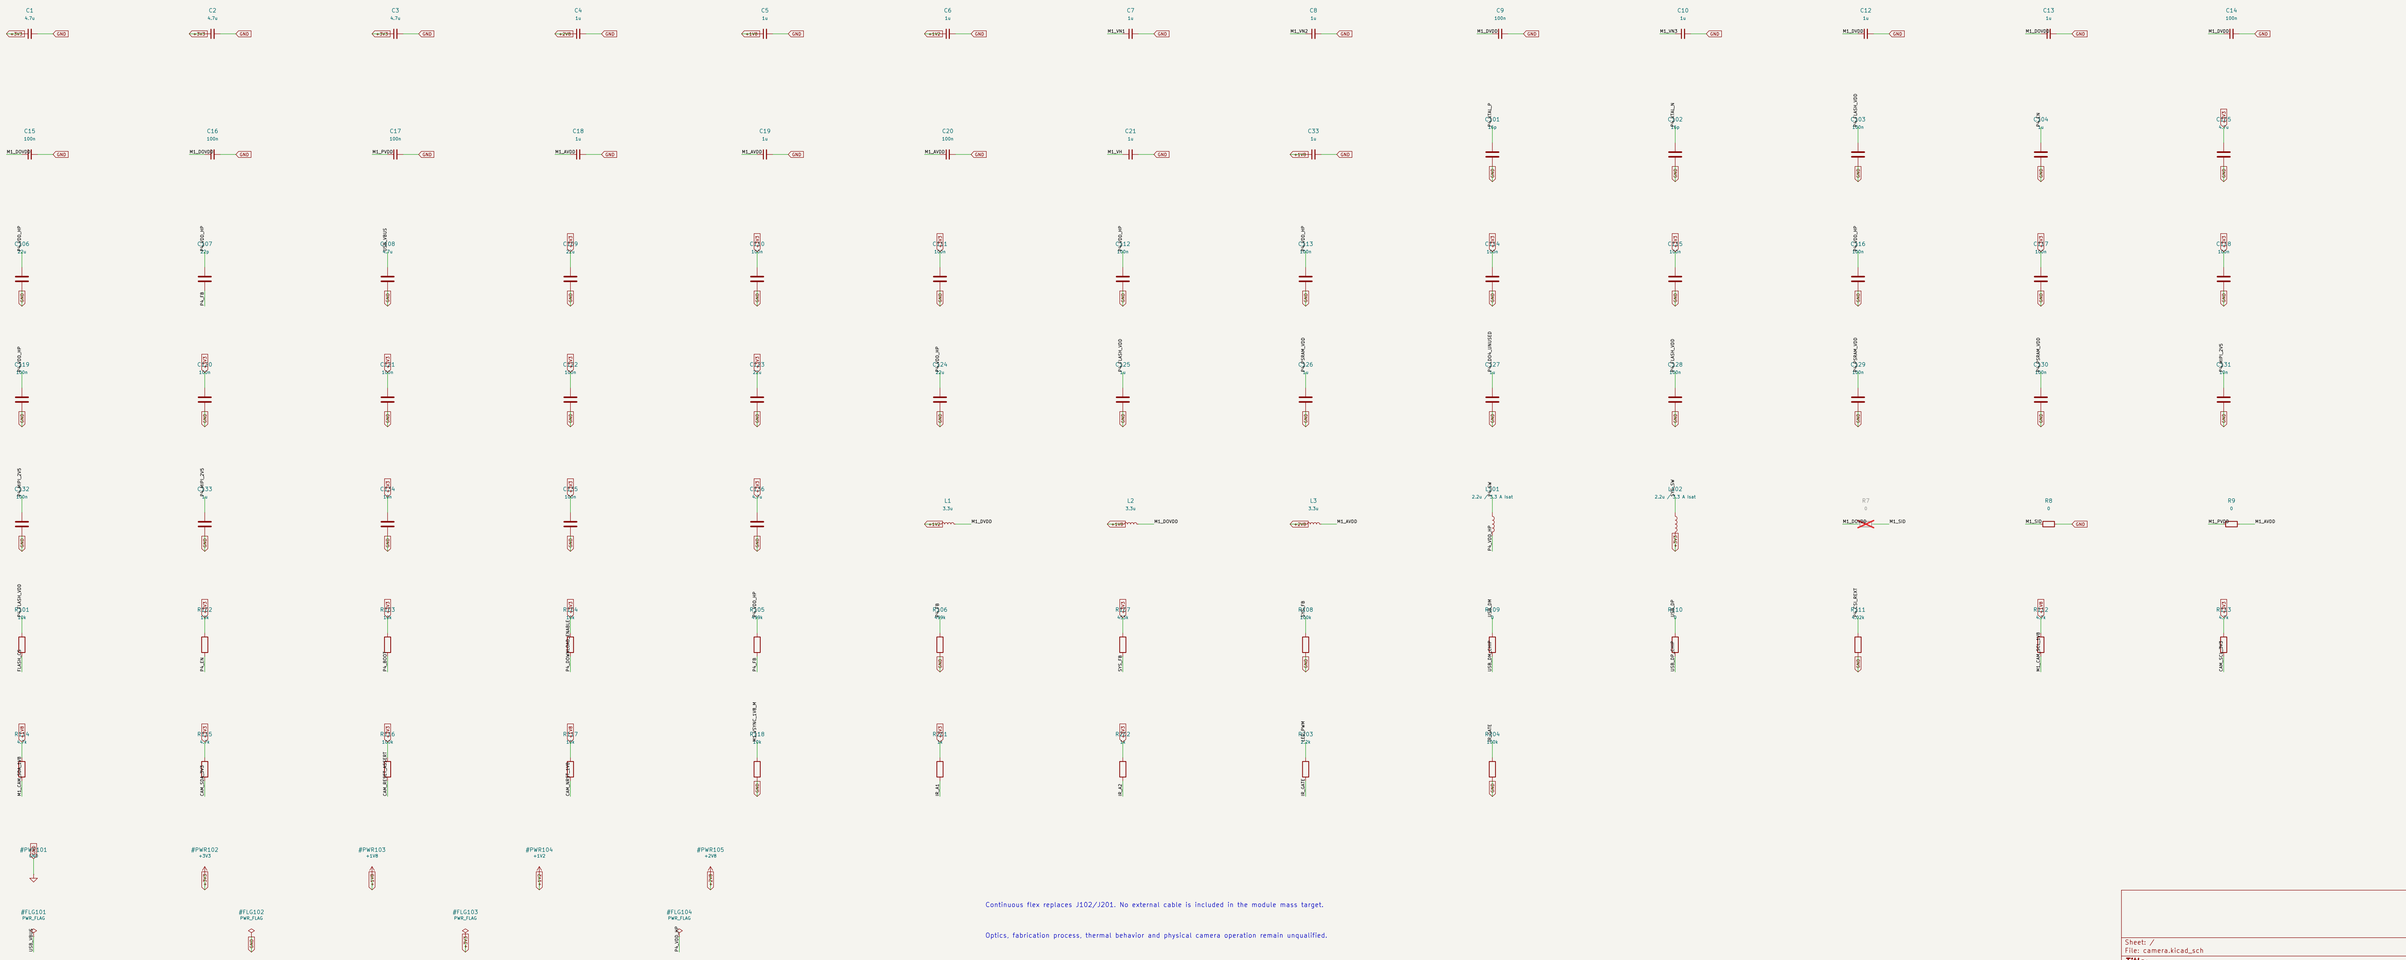

Continuous flex replaces J102/J201. No external cable is included in the module mass target.

Optics, fabrication process, thermal behavior and physical camera operation remain unqualified.

Sheet: /	
File: camera.kicad_sch	
Title:	
Size: A1	Date:
KiCad E.D.A. 10.0.7	Rev:
	Id: 1/1