



# Hosts & switch

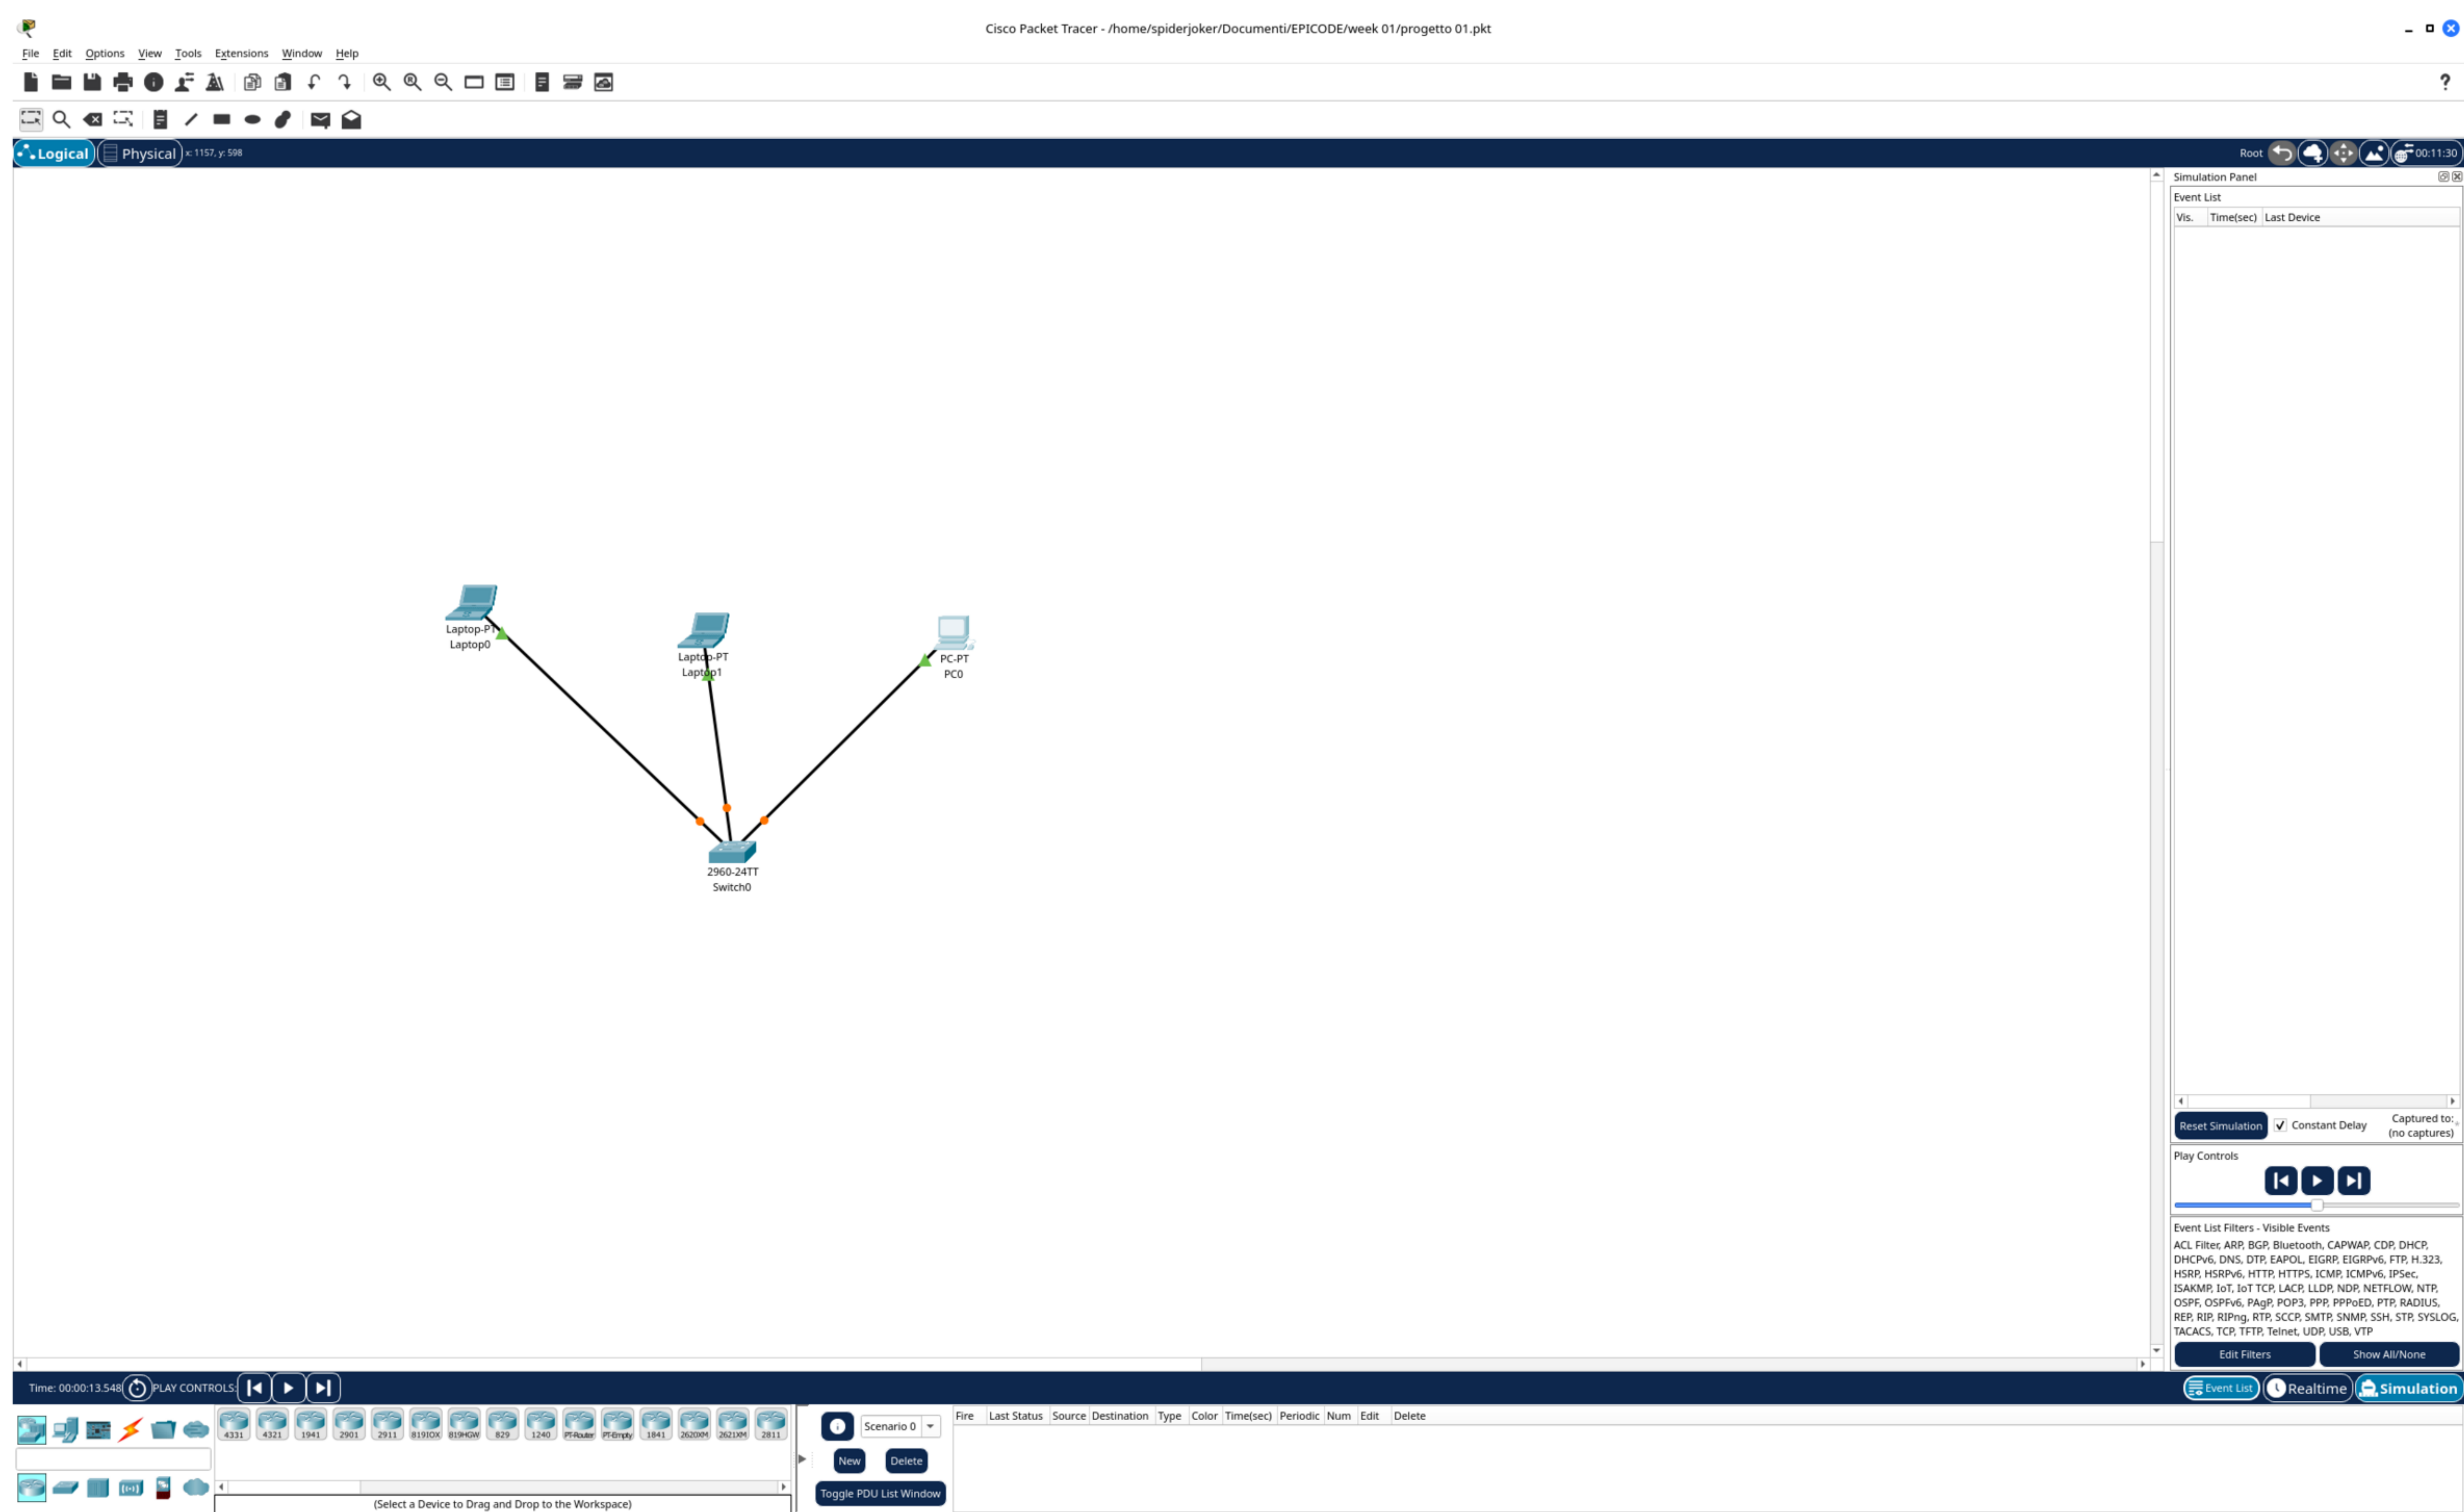

# Invio e risultato ping

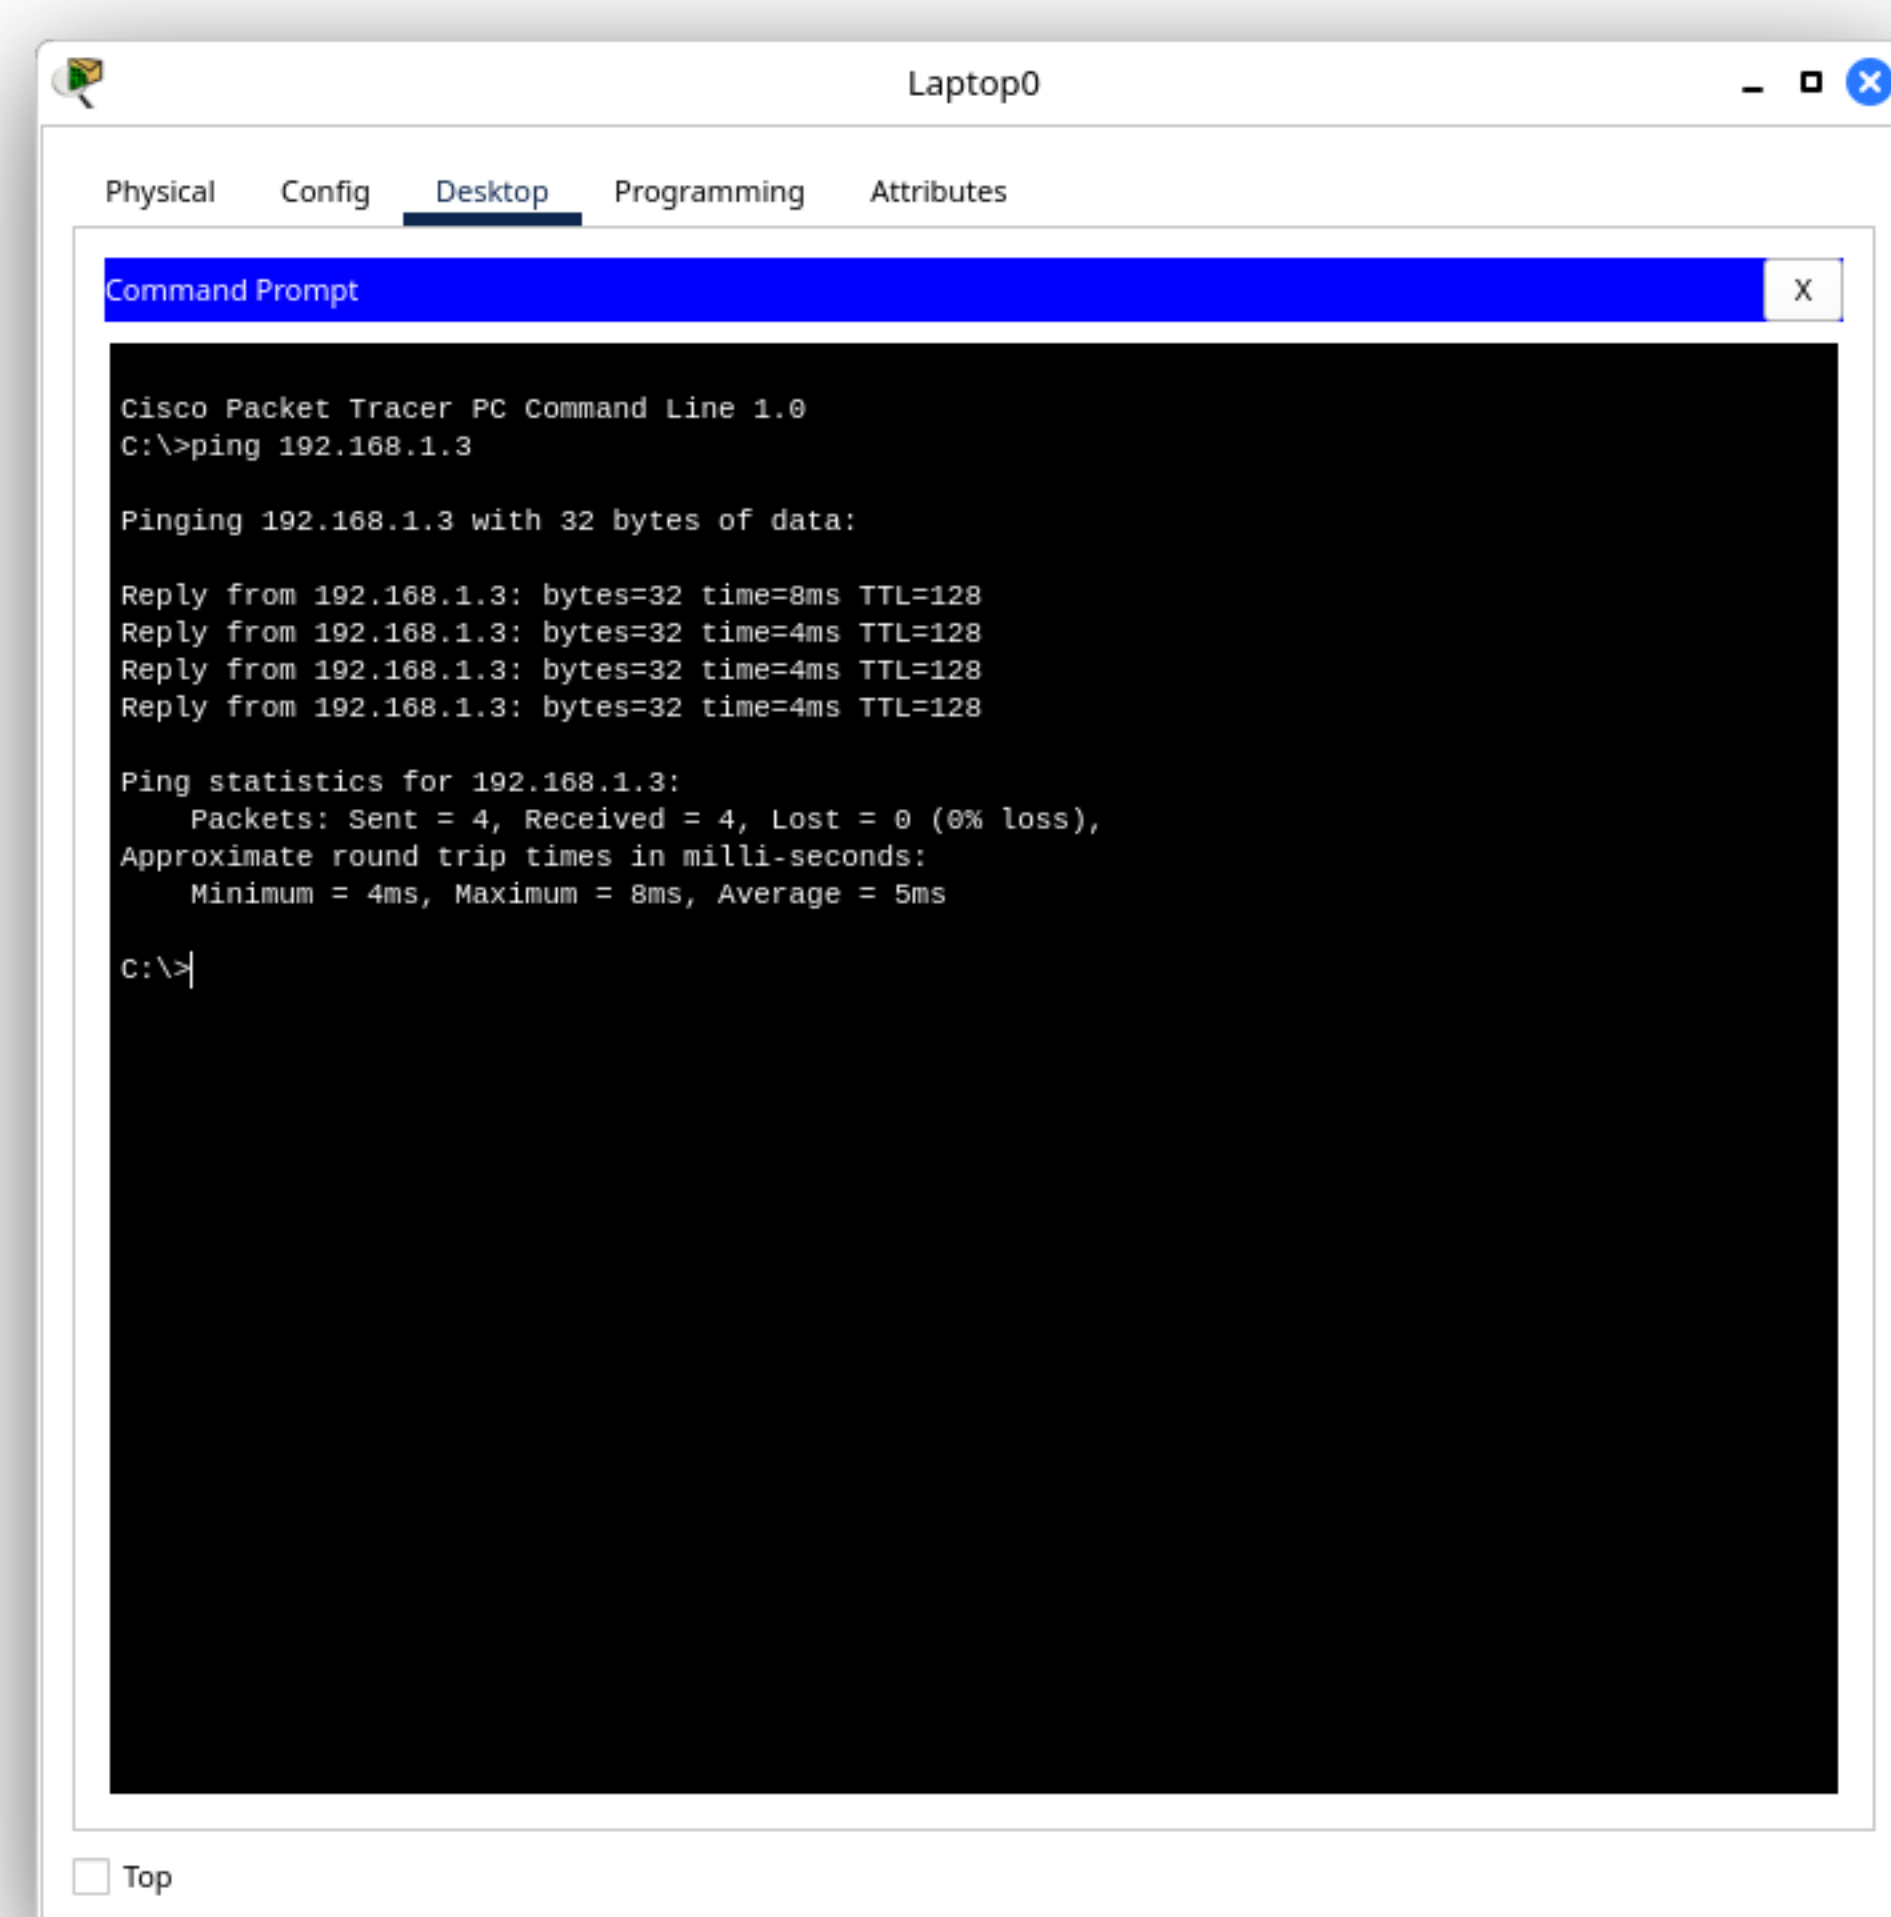

The screenshot shows a Cisco Packet Tracer PC Command Line window for a device named 'Laptop0'. The window has tabs for 'Physical', 'Config', 'Desktop', 'Programming', and 'Attributes', with 'Desktop' currently selected. The Command Prompt displays the following text:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=8ms TTL=128
Reply from 192.168.1.3: bytes=32 time=4ms TTL=128
Reply from 192.168.1.3: bytes=32 time=4ms TTL=128
Reply from 192.168.1.3: bytes=32 time=4ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 4ms, Maximum = 8ms, Average = 5ms

C:\>
```

At the bottom left of the window, there is a 'Top' button.