


ESP-CellCore - Model 500 Cellular Conversion

Service schematic - LilyGO T-A7670G-S3 Standard + Silvertel Ag1171

Drawing: EC-001

Rev B - 2026-07-25

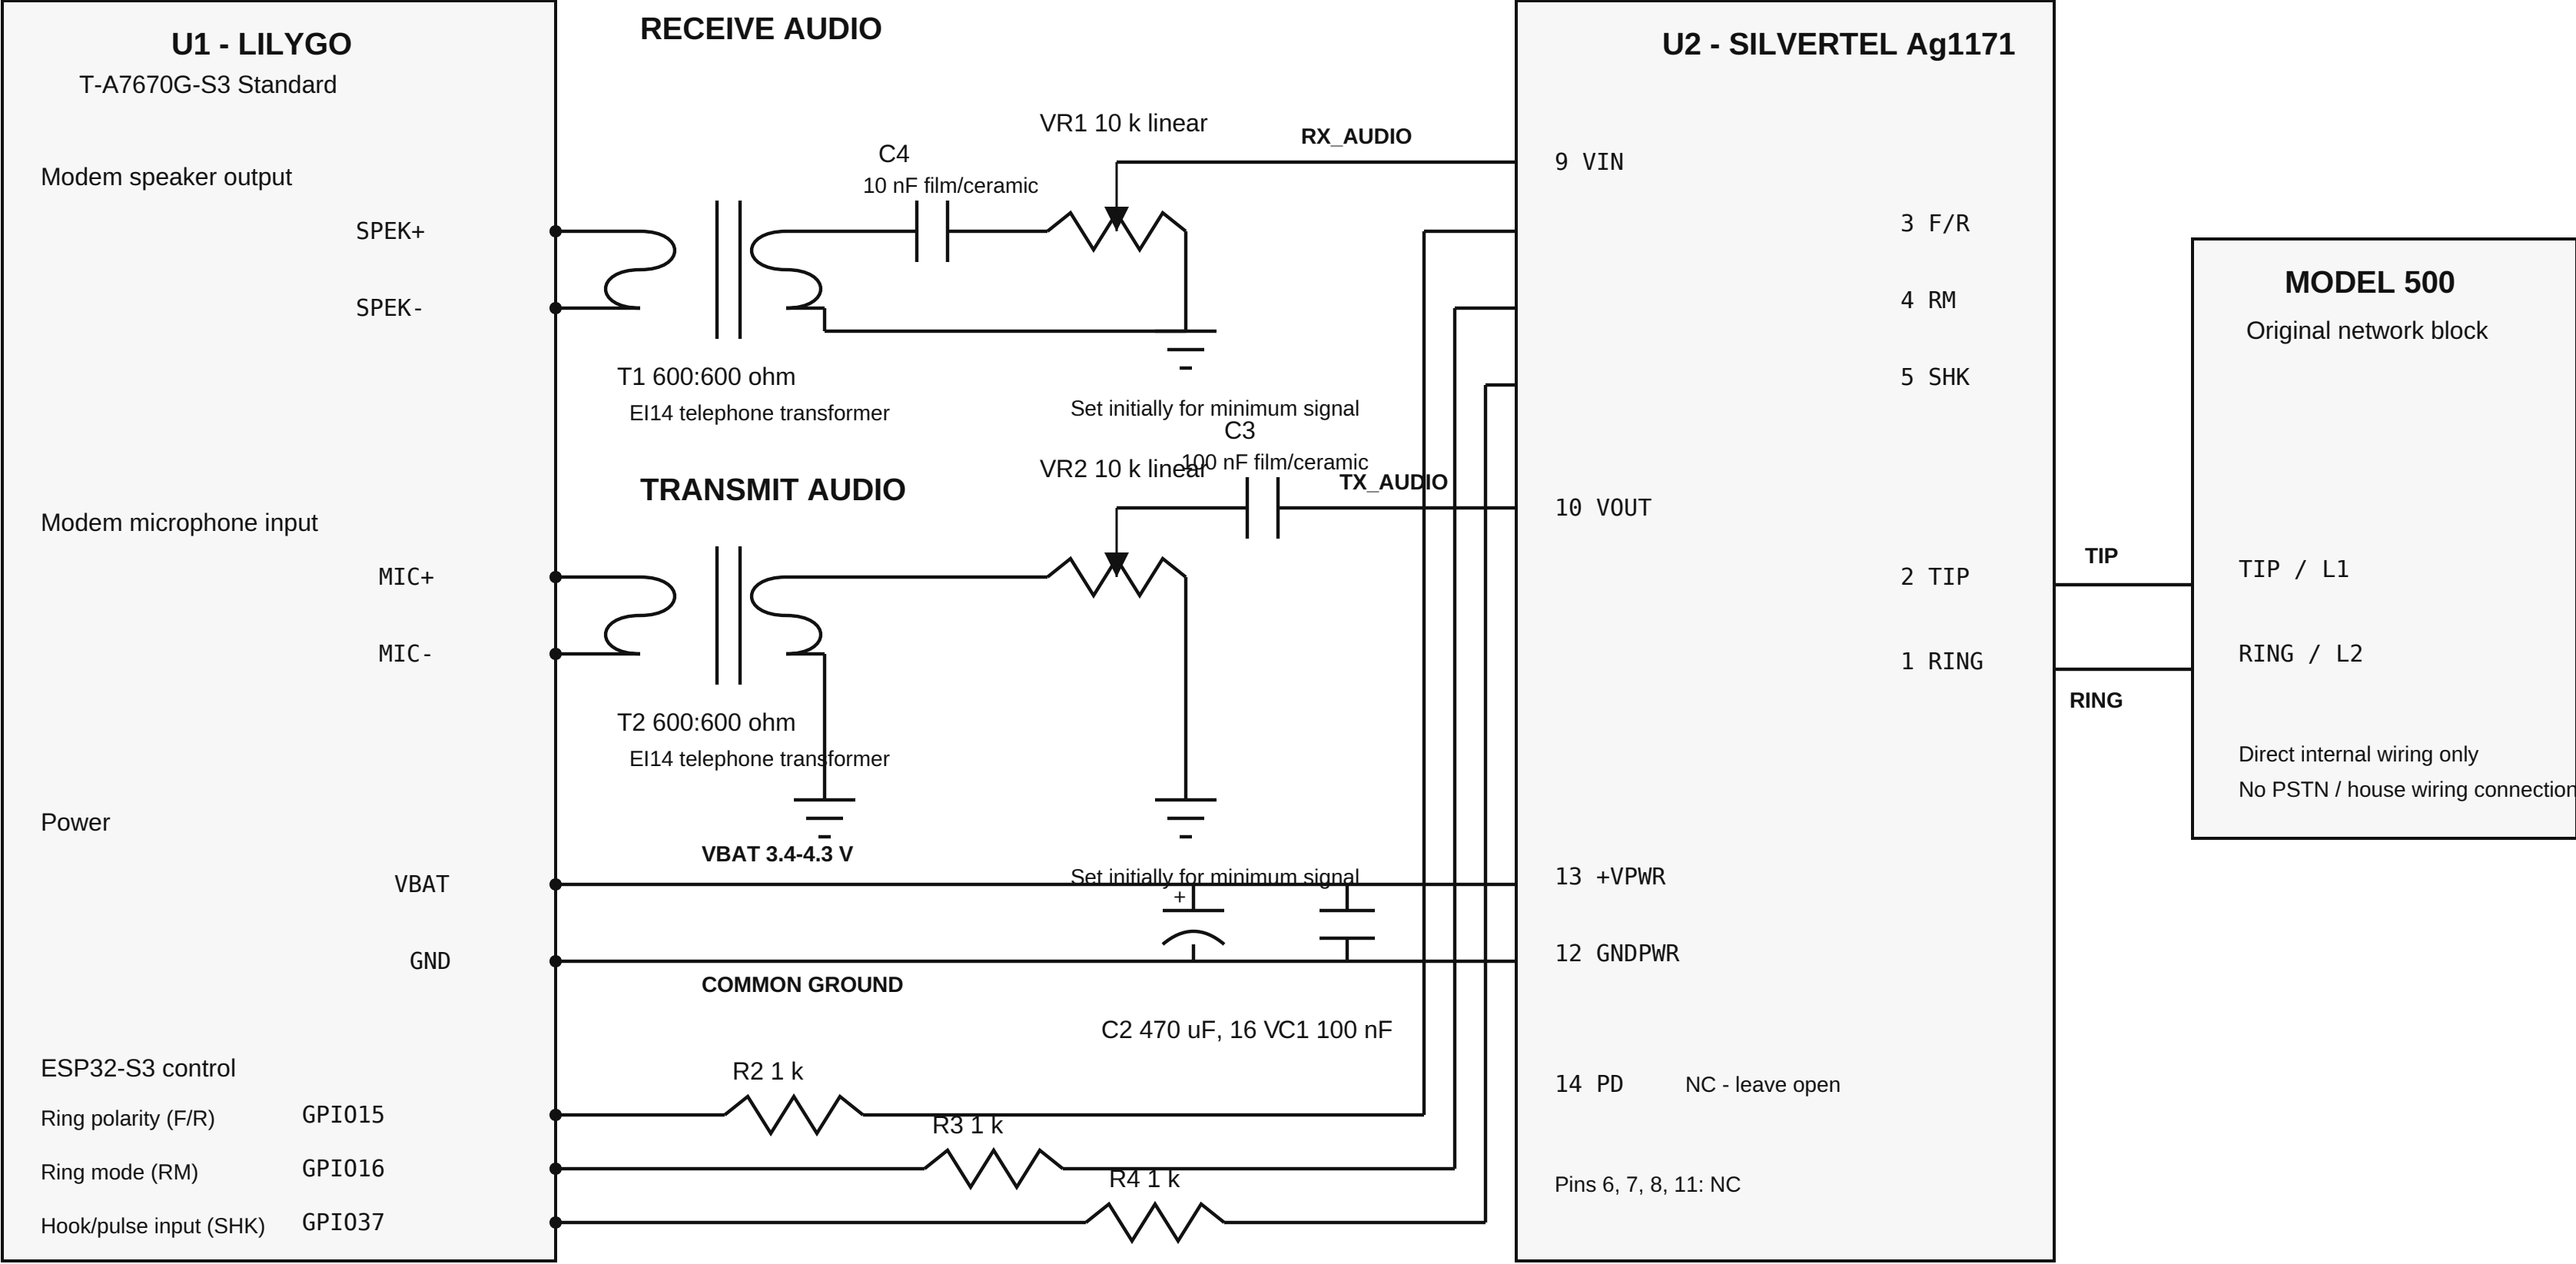

BUILD NOTES

- 1. GPIO15 = F/R output, GPIO16 = RM output, GPIO37 = SHK input. These adjacent header pins are available when the camera interface is unused.
- 2. Do not connect either SPEK or MIC conductor to ground on the LilyGO side. Only the Ag1171-side transformer winding is ground referenced.
- 3. Place C1 and C2 close to U2 pins 13 and 12. Use short, heavy VBAT/GND wiring. Omit the external line-protection network for this self-contained phone.
- 4. The 1 k resistors are protective series resistors. PD stays open. No connection to Ag1171 pins 6, 7, 8, or 11.