


CMPE401 Fall2009 Lab #5 Schematic

NOTES:

The L298 requires both 5V and 12V supplies
 The 74LS04 requires a 5 V supply
 All Grounds must be common
 All Diodes are UG2D High Speed Switching Diodes
 Power pins for the Hex Inverter are given to the right of the part

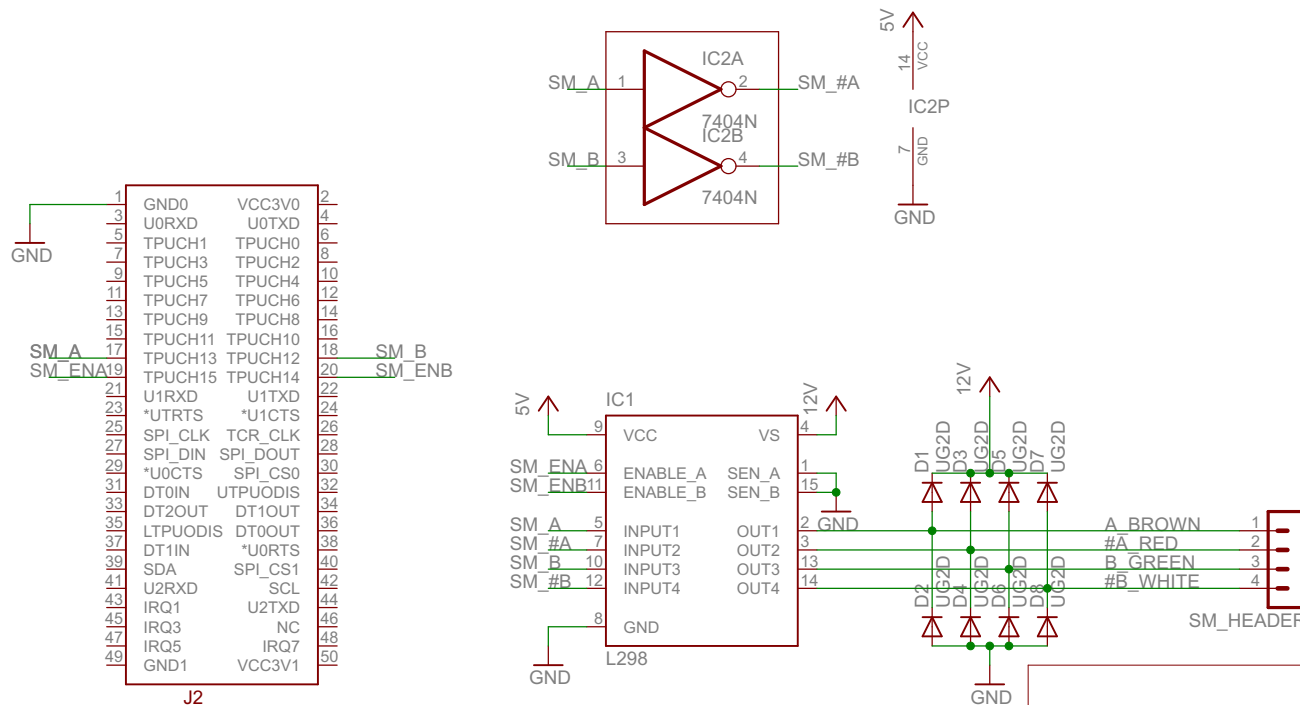

TITLE: motor_fall2009_cmpe401

Document Number:

REV:

Date: 7/29/2009 4:10:41 PM

Sheet: 1/1