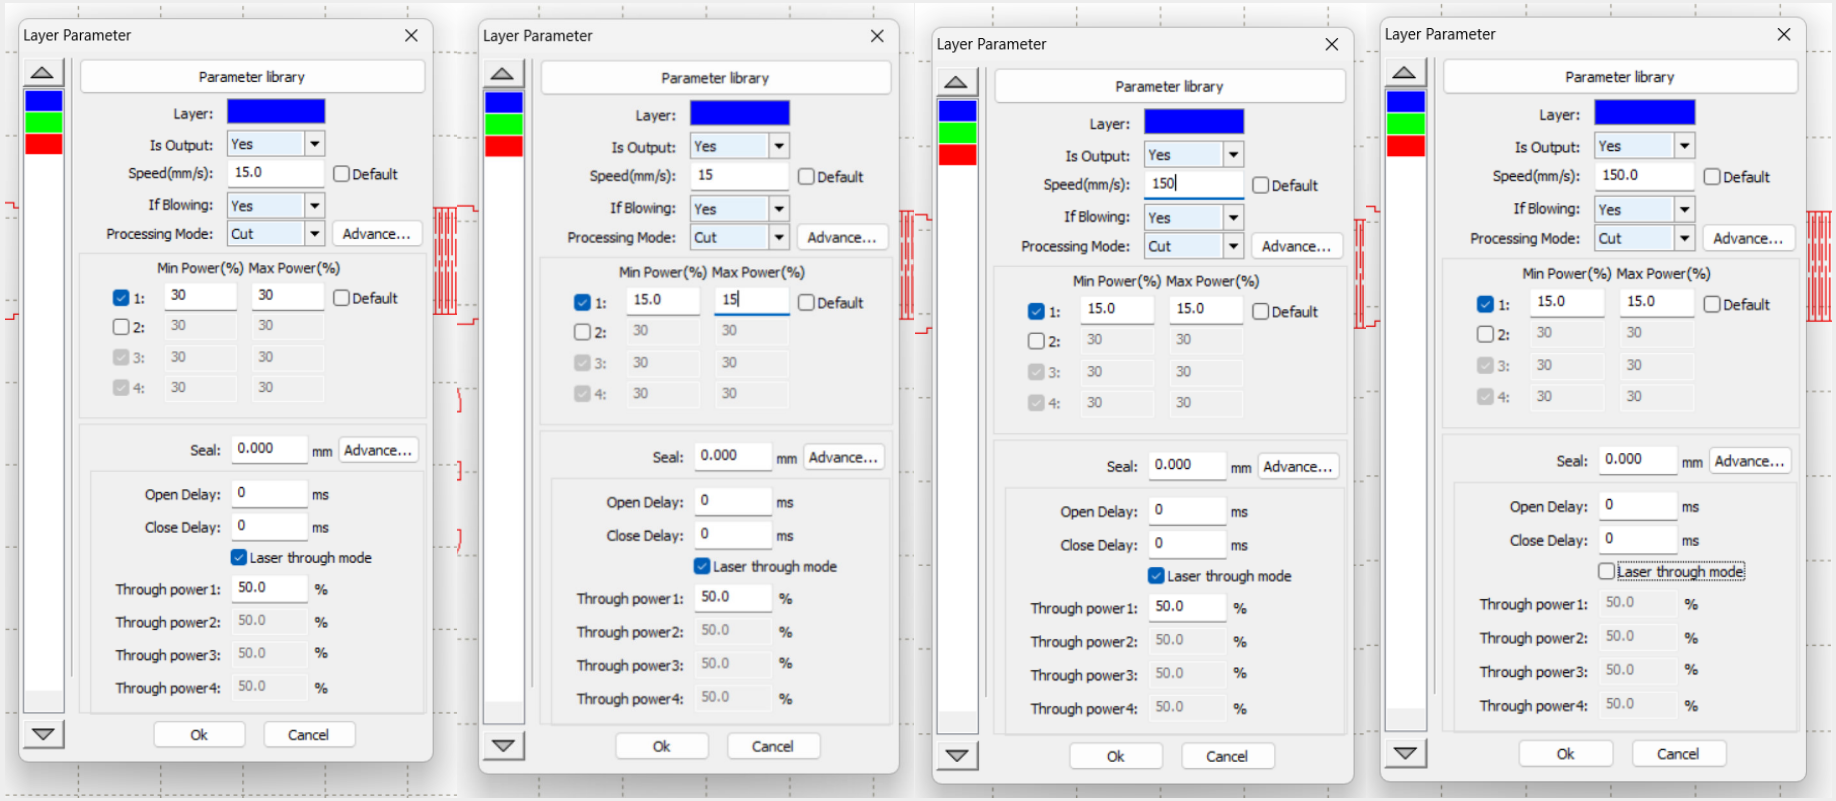
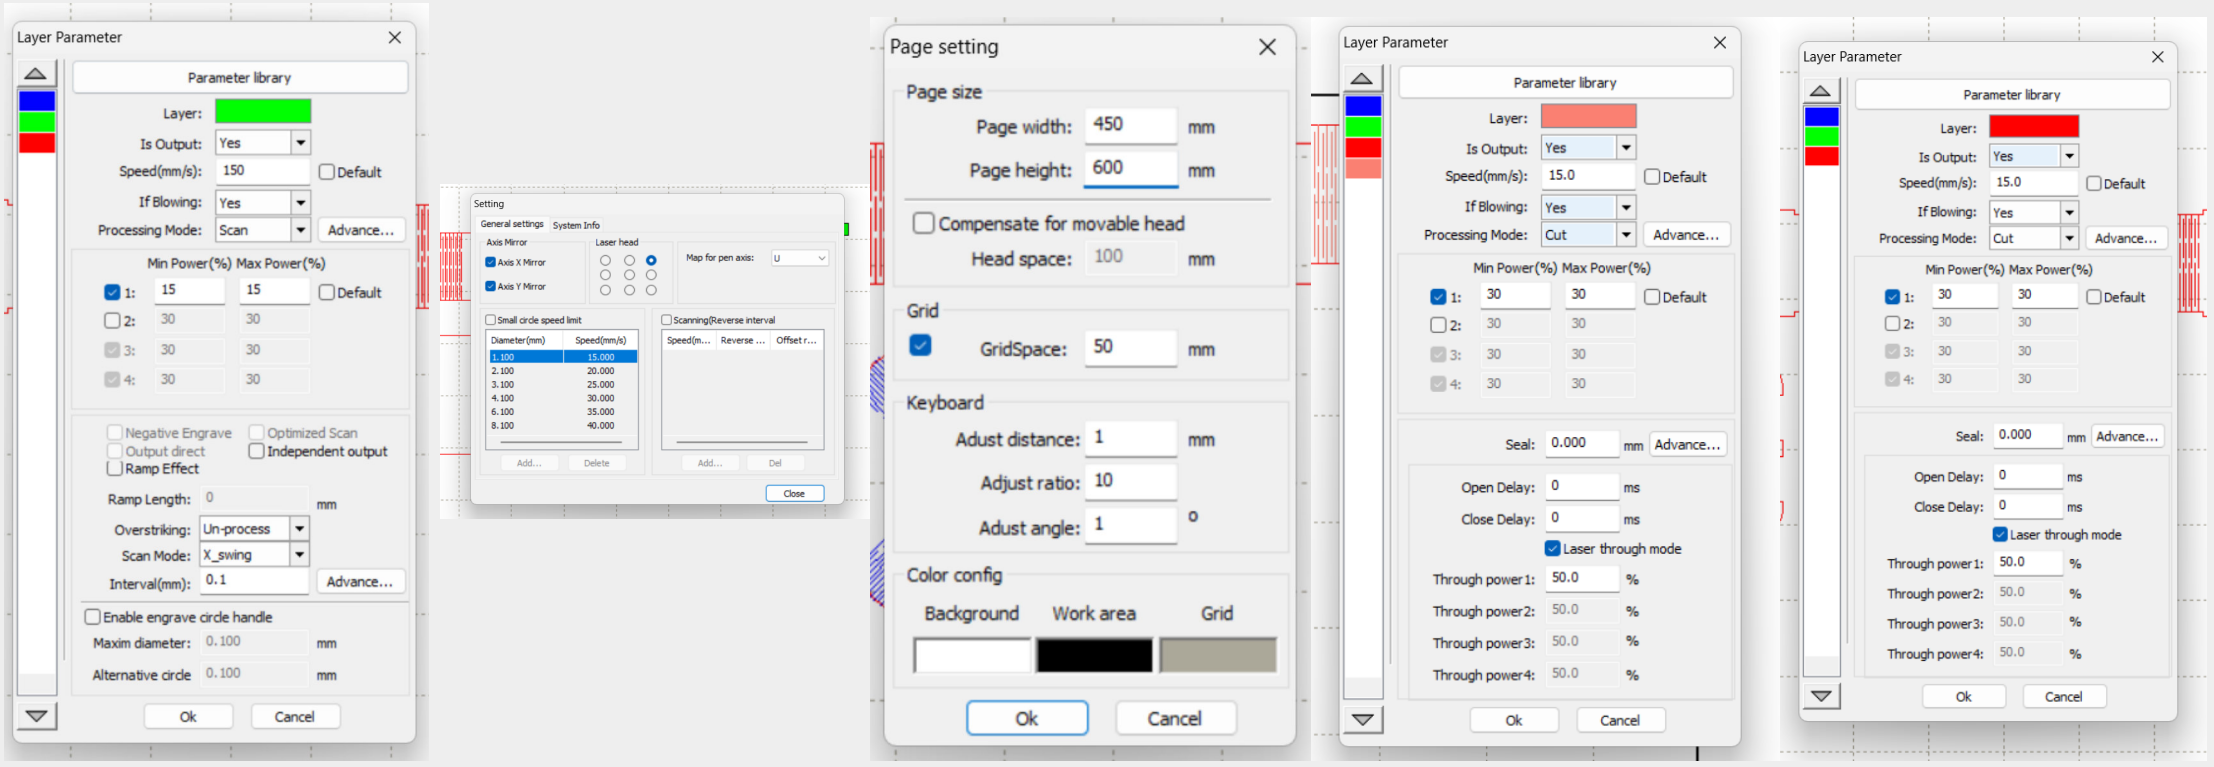

Layer Parameter
Parameter library
Layer:
Is Output: Yes
Speed(mm/s): 15.0 Default
If Blowing: Yes
Processing Mode: Cut Advance...
Min Power(%) Max Power(%)
1: 30 30 Default
2: 30 30
3: 30 30
4: 30 30
Seal: 0.000 mm Advance...
Open Delay: 0 ms
Close Delay: 0 ms
Laser through mode
Through power1: 50.0 %
Through power2: 50.0 %
Through power3: 50.0 %
Through power4: 50.0 %
Ok Cancel
Layer Parameter
Parameter library
Layer:
Is Output: Yes
Speed(mm/s): 15 Default
If Blowing: Yes
Processing Mode: Cut Advance...
Min Power(%) Max Power(%)
1: 15.0 15 Default
2: 30 30
3: 30 30
4: 30 30
Seal: 0.000 mm Advance...
Open Delay: 0 ms
Close Delay: 0 ms
Laser through mode
Through power1: 50.0 %
Through power2: 50.0 %
Through power3: 50.0 %
Through power4: 50.0 %
Ok Cancel
Layer Parameter
Parameter library
Layer:
Is Output: Yes
Speed(mm/s): 150 Default
If Blowing: Yes
Processing Mode: Cut Advance...
Min Power(%) Max Power(%)
1: 15.0 15.0 Default
2: 30 30
3: 30 30
4: 30 30
Seal: 0.000 mm Advance...
Open Delay: 0 ms
Close Delay: 0 ms
Laser through mode
Through power1: 50.0 %
Through power2: 50.0 %
Through power3: 50.0 %
Through power4: 50.0 %
Ok Cancel
Layer Parameter
Parameter library
Layer:
Is Output: Yes
Speed(mm/s): 150.0 Default
If Blowing: Yes
Processing Mode: Cut Advance...
Min Power(%) Max Power(%)
1: 15.0 15.0 Default
2: 30 30
3: 30 30
4: 30 30
Seal: 0.000 mm Advance...
Open Delay: 0 ms
Close Delay: 0 ms
Laser through mode
Through power1: 50.0 %
Through power2: 50.0 %
Through power3: 50.0 %
Through power4: 50.0 %
Ok Cancel


Layer Parameter
Parameter library
Layer:
Is Output: Yes
Speed(mm/s): 150 Default
If Blowing: Yes
Processing Mode: Scan Advance...
Min Power(%) Max Power(%)
1: 15 15 Default
2: 30 30
3: 30 30
4: 30 30
Negative Engrave Optimized Scan
Output direct Independent output
Ramp Effect
Ramp Length: 0 mm
Overstriking: Un-process
Scan Mode: X_swing
Interval(mm): 0.1 Advance...
Enable engrave circle handle
Maxim diameter: 0.100 mm
Alternative circle 0.100 mm
Ok Cancel
Setting
General settings System Info
Axis Mirror
Axis X Mirror
Axis Y Mirror
Laser head
Map for pen axis:
Small circle speed limit
Scanning(Reverse interval
Diameter(mm) Speed(mm/s)
1.100 15.000
2.100 20.000
3.100 25.000
4.100 30.000
6.100 35.000
8.100 40.000
Add... Delete
Close
Page setting
Page size
Page width: 450 mm
Page height: 600 mm
Compensate for movable head
Head space: 100 mm
Grid
GridSpace: 50 mm
Keyboard
Adust distance: 1 mm
Adjust ratio: 10
Adust angle: 1 o
Color config
Background Work area Grid
Ok Cancel
Layer Parameter
Parameter library
Layer:
Is Output: Yes
Speed(mm/s): 15.0 Default
If Blowing: Yes
Processing Mode: Cut Advance...
Min Power(%) Max Power(%)
1: 30 30 Default
2: 30 30
3: 30 30
4: 30 30
Seal: 0.000 mm Advance...
Open Delay: 0 ms
Close Delay: 0 ms
Laser through mode
Through power1: 50.0 %
Through power2: 50.0 %
Through power3: 50.0 %
Through power4: 50.0 %
Ok Cancel
Layer Parameter
Parameter library
Layer:
Is Output: Yes
Speed(mm/s): 15.0 Default
If Blowing: Yes
Processing Mode: Cut Advance...
Min Power(%) Max Power(%)
1: 30 30 Default
2: 30 30
3: 30 30
4: 30 30
Seal: 0.000 mm Advance...
Open Delay: 0 ms
Close Delay: 0 ms
Laser through mode
Through power1: 50.0 %
Through power2: 50.0 %
Through power3: 50.0 %
Through power4: 50.0 %
Ok Cancel