


BIGTREE TECH SKR-PRO-V1.1

WWW.BIGTREE-TECH.COM

TF card reader



OK

MCU




OK

Power selection



OK


Power indicator light



OK


Power DC dropper

Input: 4.5V ~ 28.5V
Max. Output current: 3A

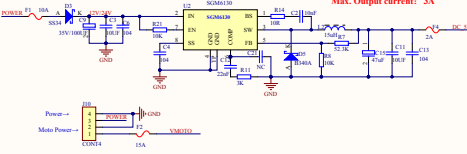


Max. input voltage: 15V
Output Voltage: 3.3V
Max. Output current: 1A

Input Voltage: 14V ~ 35V
Output Voltage: 12V
Max. Output current: 1A



MOS drivers

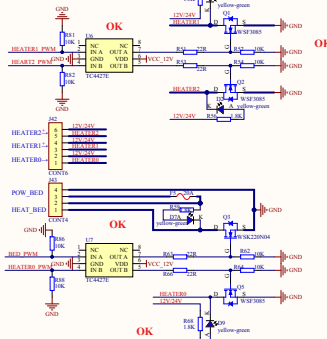


FAN0




FAN1



FAN2



Power expansion ports



Reset



BLTouch




SWD



Crystals





LCD display



TFT display



Limited switches



SPI3



IIC




I/O expansion ports




LOGO

ESP8266



USB disk



USB



Mounting holes



Thermistor ports

