


METER ROOM FRAMING PLAN -1" = 10'-0"

1. 3" THICK CONCRETE REINFORCED W/ 6 x 6 x 16.4 x 16.4 100% OVER 1/4" 26 GA. TYPE UFS PAINTED DECK

MARK	SIZE	REINFORCING
F50	5'-0" x 5'-0" x 1'-0"	6-#5 EACH WAY BOT.
F56	5'-6" x 5'-6" x 2'-0"	6-#6 EACH WAY BOT.
F66	6'-6" x 6'-6" x 1'-4"	7-#6 EACH WAY BOT.

FOUNDATION PLAN -1" = 20'-0"

- SLAB ON GRADE TO BE 6" MIN THICK, 3500 P.S.I. CONCRETE REINFORCED W/ 6 x 6 x 16.4 x 16.4 100% OVER 1/4" 26 GA. TYPE UFS PAINTED DECK.
- MODULUS OF SUBGRADE REACTION SHALL BE VERIFIED TO BE A MINIMUM OF 150 P.S.I.
- ELEVATION TOP OF SLAB ON GRADE TO BE EL. 44.00
- ELEVATION TOP OF FOOTINGS NOTED (43.33) IN PLAN.

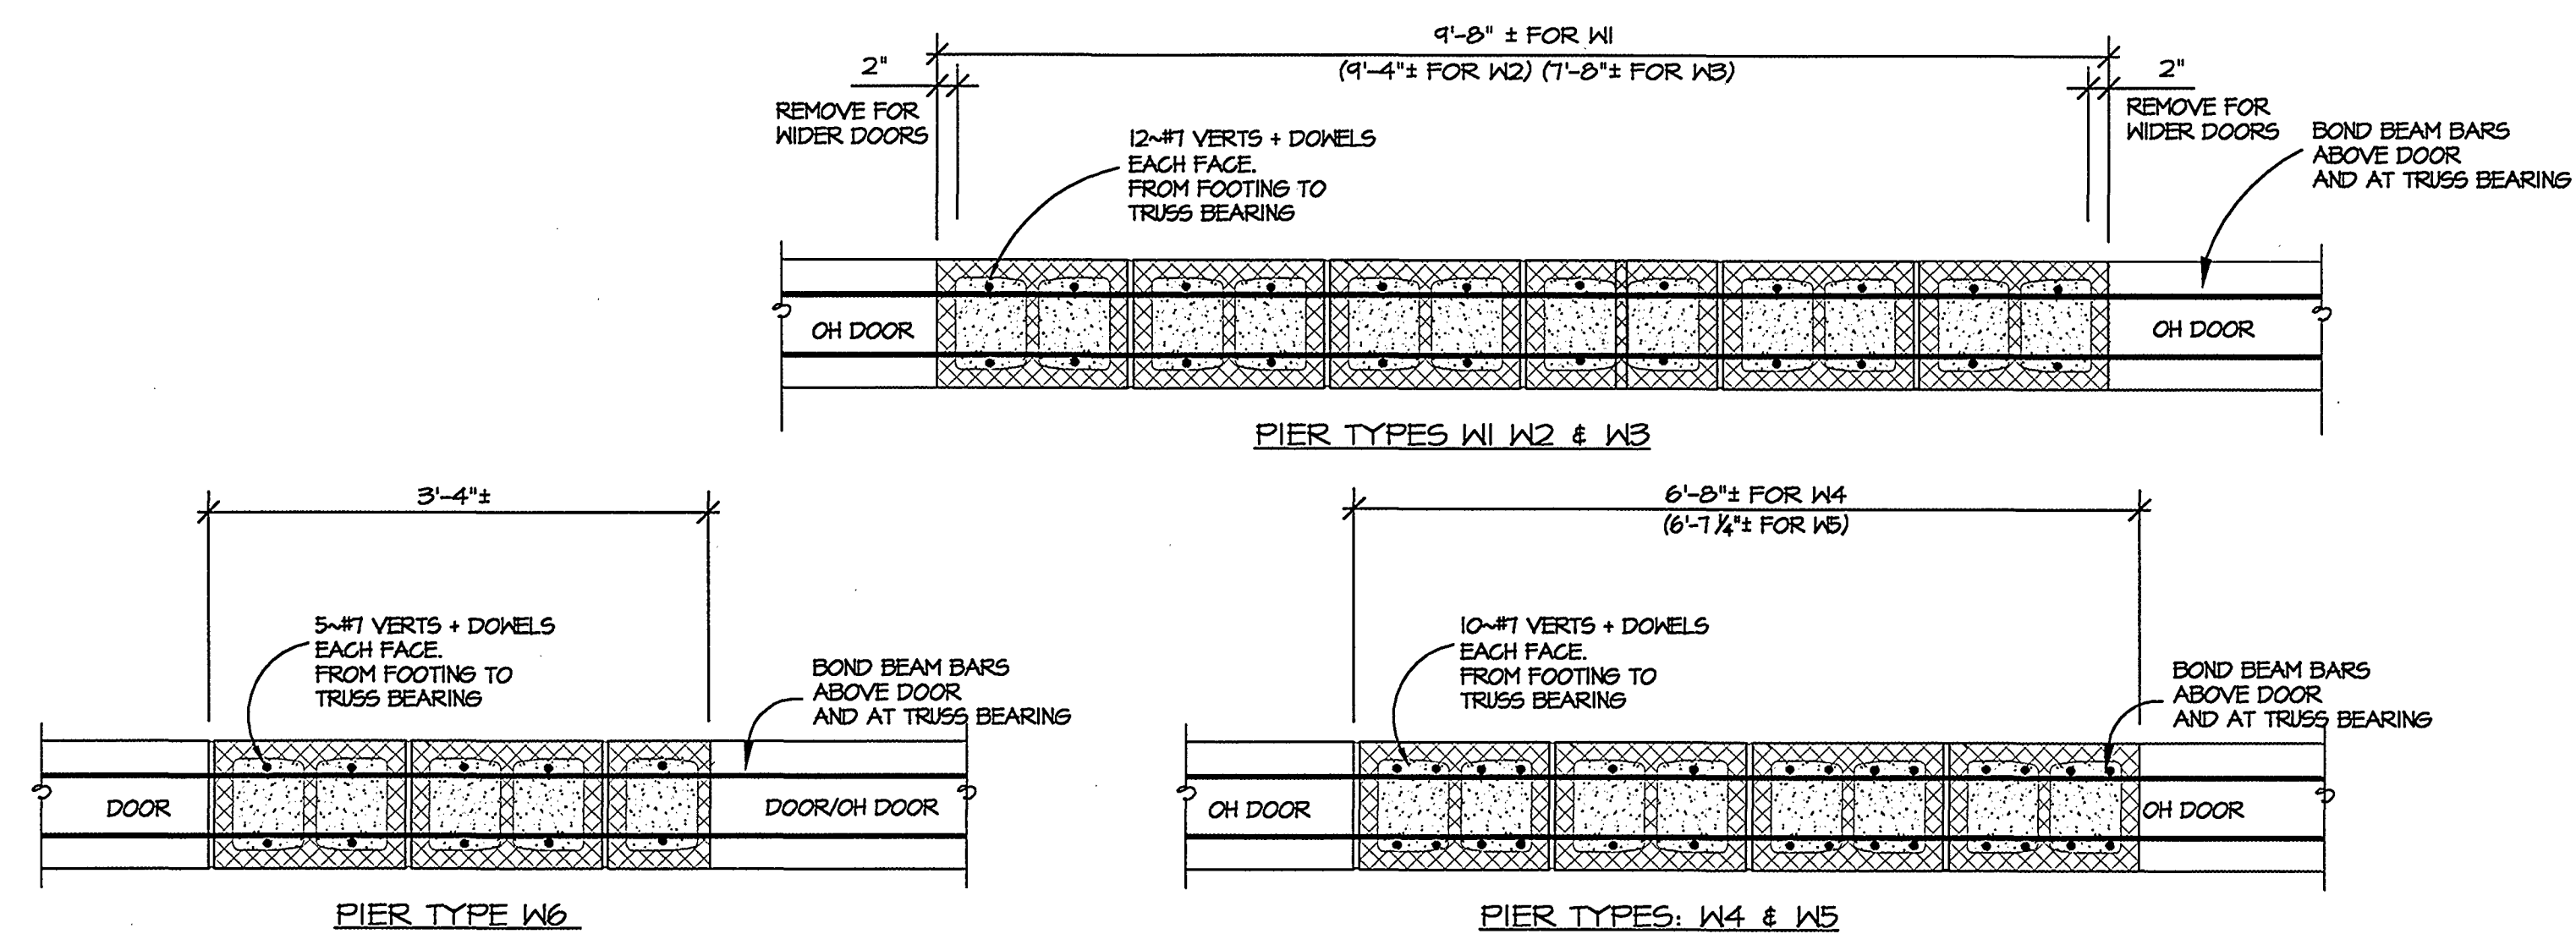

Dunlap Engineering, Inc.
Structural Consultants
14119 Blenheim Road
Phoenix, Maryland 21131
Phone: (410) 817-9900
Fax: (410) 817-9901

FRP DEVELOPMENT CORP.
34 LOVETON CIRCLE, SUITE 100
SPARKS, MARYLAND 21152
410-771-4100

NEW BUILDING FOR LOT #4: AT
2202 LAKESIDE BOULEVARD
ABERDEEN, MARYLAND

NEW WINDOWS	2/28/01
Description	Date
Revisions	
Proj. No.	
Date	10-13-00
Scale	1"=20'-0"
Last Rev.	

FOUNDATION PLAN

Sheet:

S-1

1 OF 5