


METER ROOM FRAMING PLAN - 1/8" = 1'-0"

1. 3" THICK CONCRETE REINFORCED W/ 6 x 6 x W1.4 x W1.4 WWM, OVER 1/16" 26 GA. TYPE UPS PAINTED DECK

FOOTING SCHEDULE		
MARK	SIZE	REINFORCING
F50	5'-0" x 5'-0" x 1'-0"	6-#5 EACH WAY BOTT.
F56	5'-6" x 5'-6" x 2'-0"	6-#6 EACH WAY BOTT.
F66	6'-6" x 6'-6" x 1'-4"	7-#6 EACH WAY BOTT.

FOUNDATION PLAN - 1/8" = 1'-0"

1. SLAB ON GRADE TO BE 6" MIN THICK, 3500 P.S.I. CONCRETE REINF. 6 x 6 x W2.4 x W2.4 WWM, OVER 6 MIL VAPOR BARRIER AND 4" MIN. DEEP STONE BASE.
2. MODULUS OF SUBGRADE REACTION SHALL BE VERIFIED TO BE A MINIMUM OF 100 P.C.I.
3. ELEVATION TOP OF SLAB ON GRADE TO BE EL. = 47.00.
4. ELEVATION TOP OF FOOTINGS NOTED (00.00) IN PLAN.

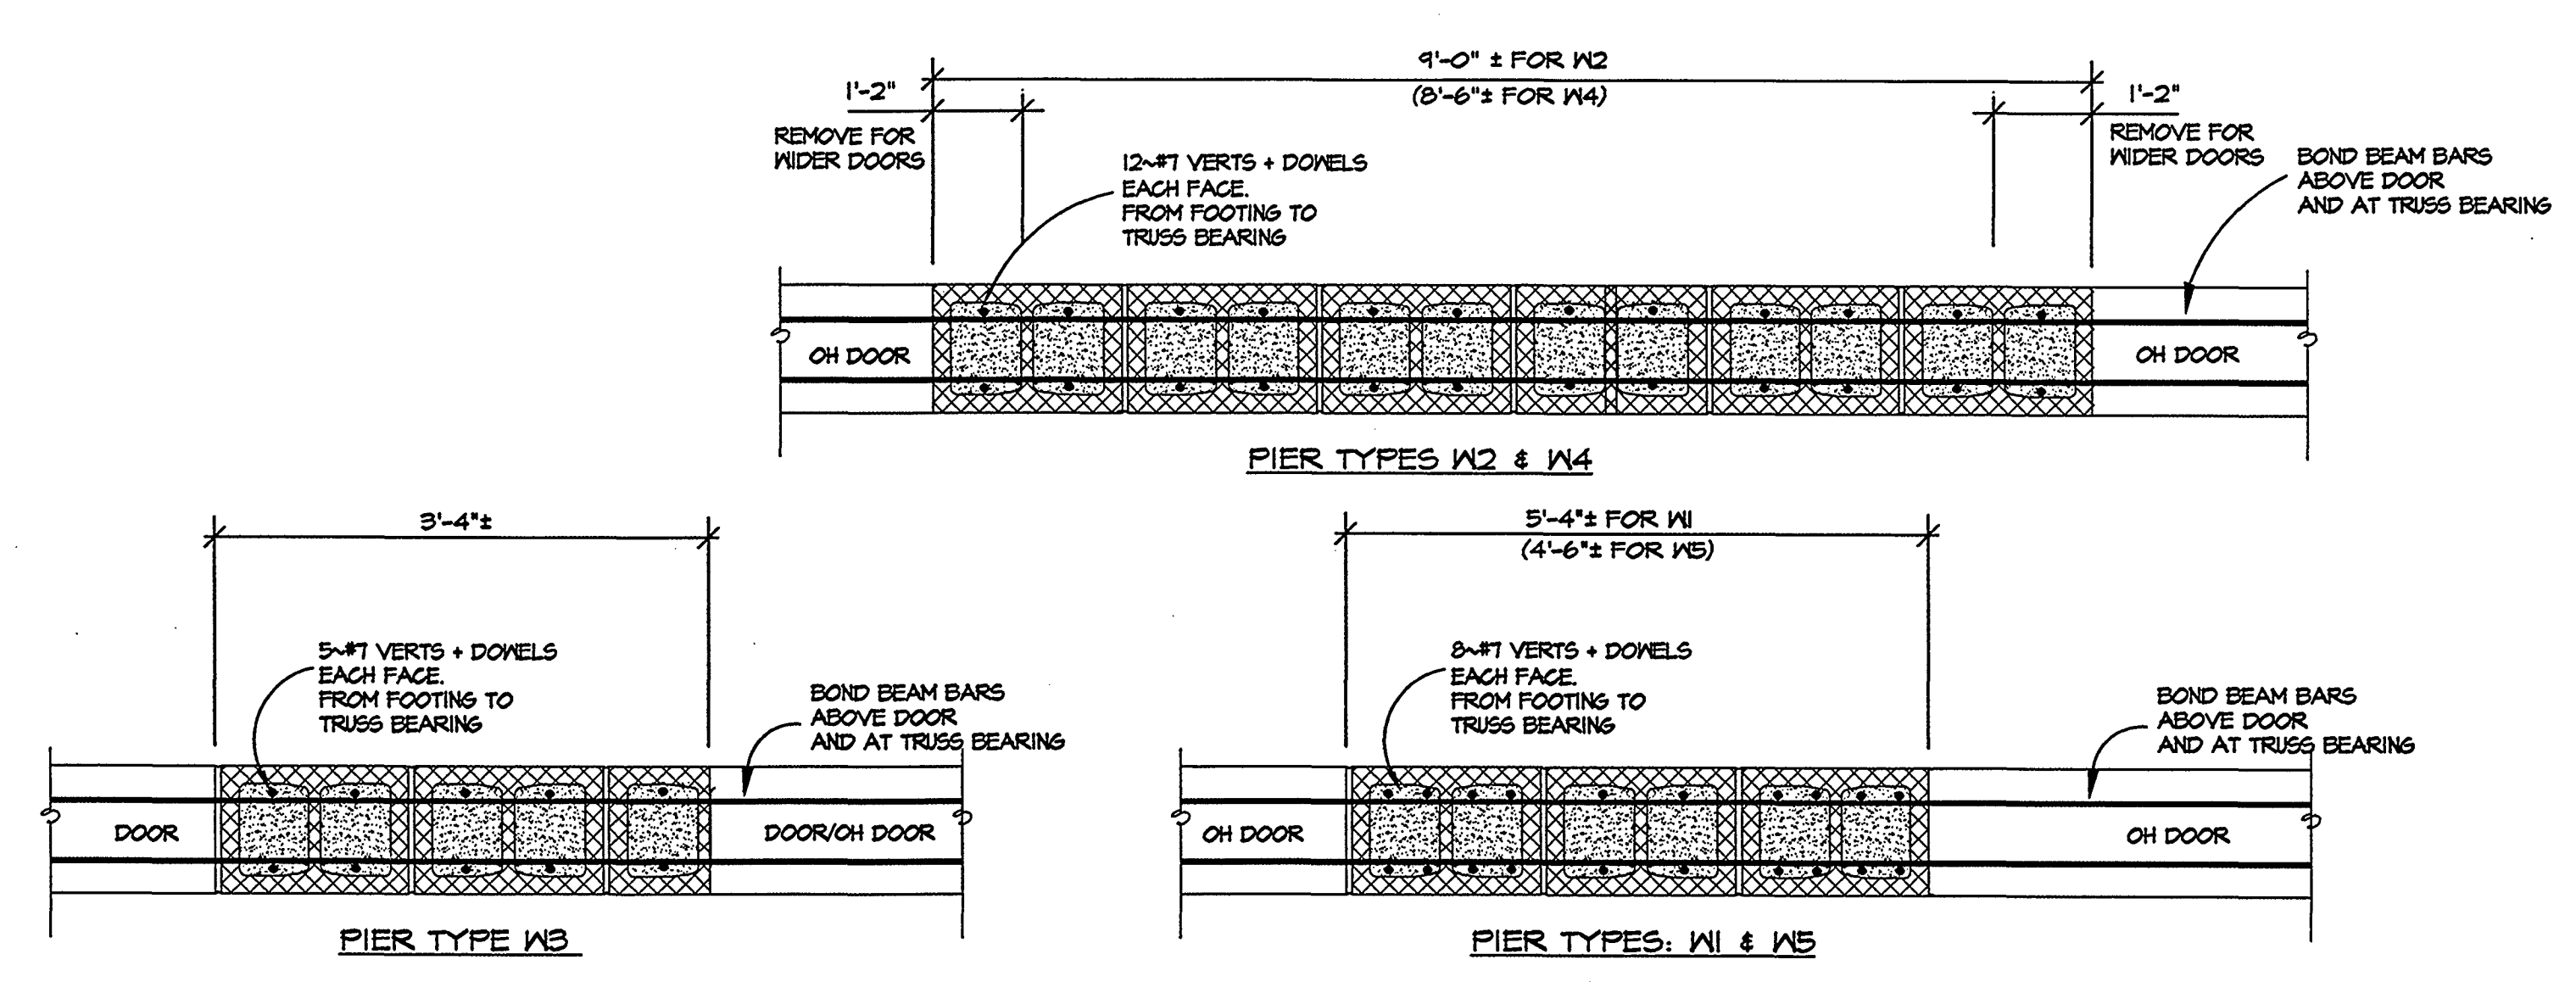

**NEW BUILDING FOR LOT #6, 1506 AT
LAKESIDE BUSINESS PARK
ABERDEEN, MARYLAND**

Dunlap Engineering, Inc.
Structural Consultants
14119 Blenheim Road
Phoenix, Maryland 21131
Phone: (410) 817-9900
Fax: (410) 817-9901

FRP DEVELOPMENT CORP.
34 LOVETON CIRCLE, SUITE 100
SPARKS, MARYLAND 21152
410-771-4100

No.	Description	Date
1	Revisions	
Proj. No.		
Date	9-10-99	
Scale	1/8" = 1'-0"	
Last Rev.		

FOUNDATION PLAN

Sheet: **S-1**