


FOOTING SCHEDULE		
MARK	SIZE	REINFORCING
F56	5'-6" x 5'-6" x 2'-0"	6-#6 EACH WAY BOTT.
F66	6'-6" x 6'-6" x 1'-4"	7-#6 EACH WAY BOTT.
F76	7'-6" x 7'-6" x 1'-4"	8-#7 EACH WAY BOTT.

FOUNDATION PLAN

- SLAB ON GRADE TO BE 6" MIN THICK 3500 P.S.I. CONCRETE. REIN. 6 x 6 x 1/2" x 1/2" x 1/2" MIN. OVER 6 MIL. VAPOR BARRIER AND 4" MIN. DEEP STONE BASE.
- MODULUS OF SUBGRADE REACTION SHALL BE VERIFIED TO BE A MINIMUM OF 180 P.C.I.
- ELEVATION TOP OF SLAB ON GRADE TO BE EL. 145.00'
- ELEVATION TOP OF FOOTINGS NOTED (00.00') IN PLAN.
- MEMBERS NOTED (N50) TO BE ASTM A572 GRADE 50 STEEL.

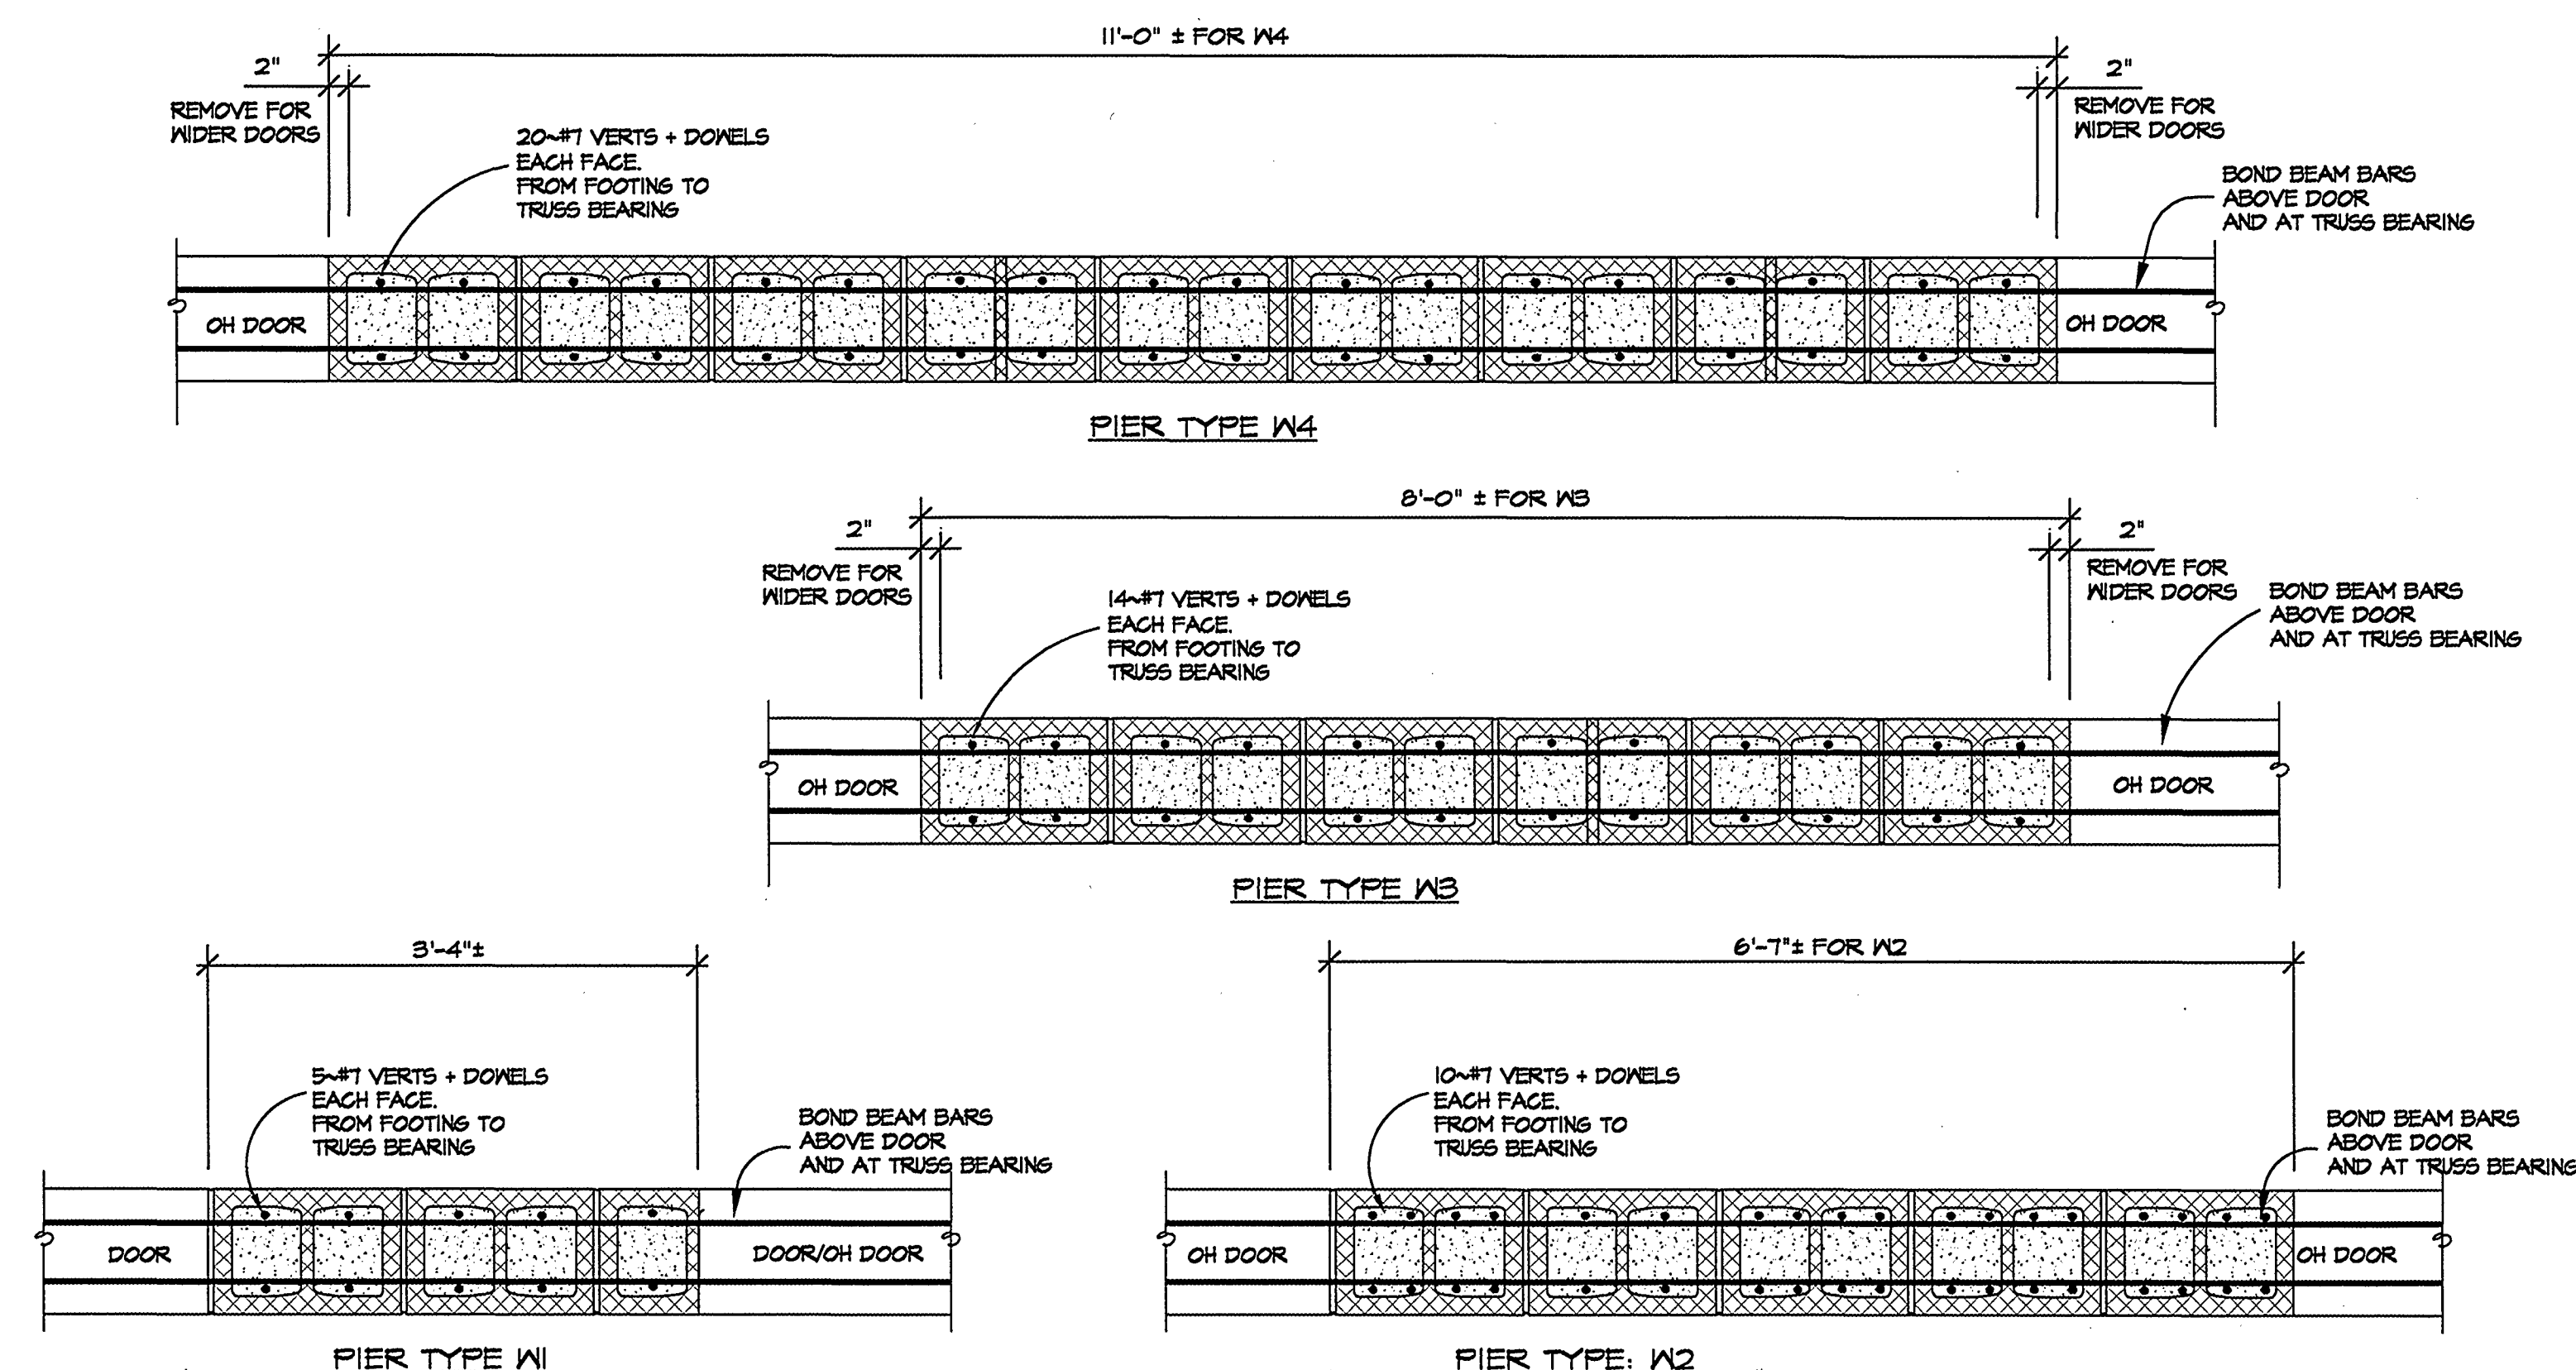

Dunlap Engineering, Inc.
Structural Consultants
14119 Broomfield Road
Phoenix, Maryland 21131
Phone: (410) 817-9900
Fax: (410) 817-9901

FRP DEVELOPMENT CORP.
34 LOVETON CIRCLE, SUITE 100
SPARKS, MARYLAND 21152
410-771-4100

**NEW BUILDING FOR
HILLSIDE BUSINESS PARK
ANNE ARUNDEL COUNTY, MARYLAND**

No.	Description	Date
1	Revisions	
Proj. No.		
Date	3-7-01	
Scale	1/8"=1'-0"	
Last Rev.		
Title:		

FOUNDATION PLAN
Sheet: **S-1**
1 OF 5