


FOOTING SCHEDULE		
MARK	SIZE	REINFORCING
F50	5'-0" x 5'-0" x 1'-0"	6-#5 EACH WAY BOTT.
F56	5'-6" x 5'-6" x 2'-0"	6-#6 EACH WAY BOTT.
F66	6'-6" x 6'-6" x 1'-4"	7-#6 EACH WAY BOTT.
F68	6'-0" x 8'-0" x 1'-4"	7-#6 BOTT. LONG 4-#6 BOTT. SHORT

FOUNDATION PLAN ~1/16" = 1'-0"

- SLAB ON GRADE TO BE 6" MIN THICK, 3500 P.S.I. CONCRETE REINF. 6" X 6" X 12" X 12" W/M, OVER 6 MIL VAPOR BARRIER AND 4" MIN. DEEP STONE BASE.
- MODULUS OF SUBGRADE REACTION SHALL BE VERIFIED TO BE A MINIMUM OF 120 P.C.I.
- ELEVATION TOP OF SLAB ON GRADE TO BE EL. = 46.00'
- ELEVATION TOP OF FOOTINGS NOTED (00.00') IN PLAN.

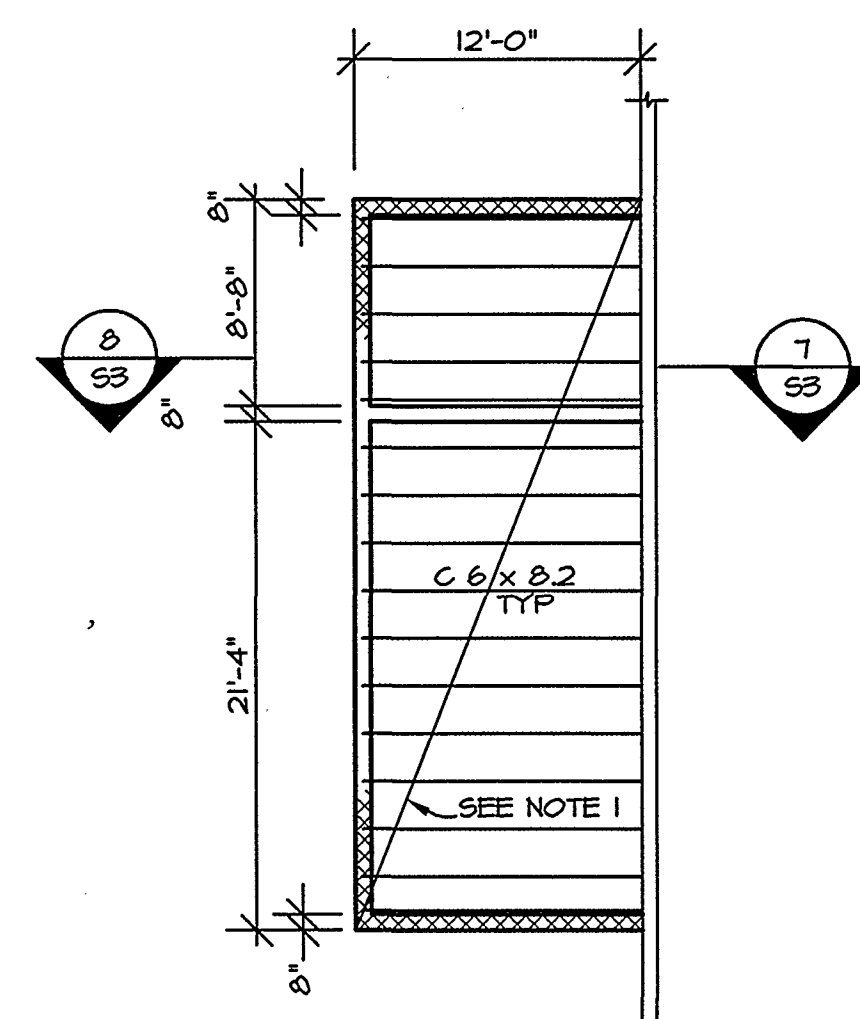

**NEW BUILDING AT 2203 LAKESIDE BLVD.
LAKESIDE BUSINESS PARK
ABERDEEN, MARYLAND**

No.	Description	Date
1	Revisions	
Proj. No.		
Date	6-20-00	
Scale	1/8" = 1'-0"	
Last Rev.		

Title:

FOUNDATION PLAN

Sheet:

S-1

1 OF 5

Dunlap Engineering, Inc.
Structural Consultants
14119 Blenheim Road, Suite 100
Sparks, Maryland 21152
Phone: (410) 817-9801
Fax: (410) 817-9801

FRP DEVELOPMENT CORP.
34 LOVETON CIRCLE, SUITE 100
SPARKS, MARYLAND 21152
410-771-4100