
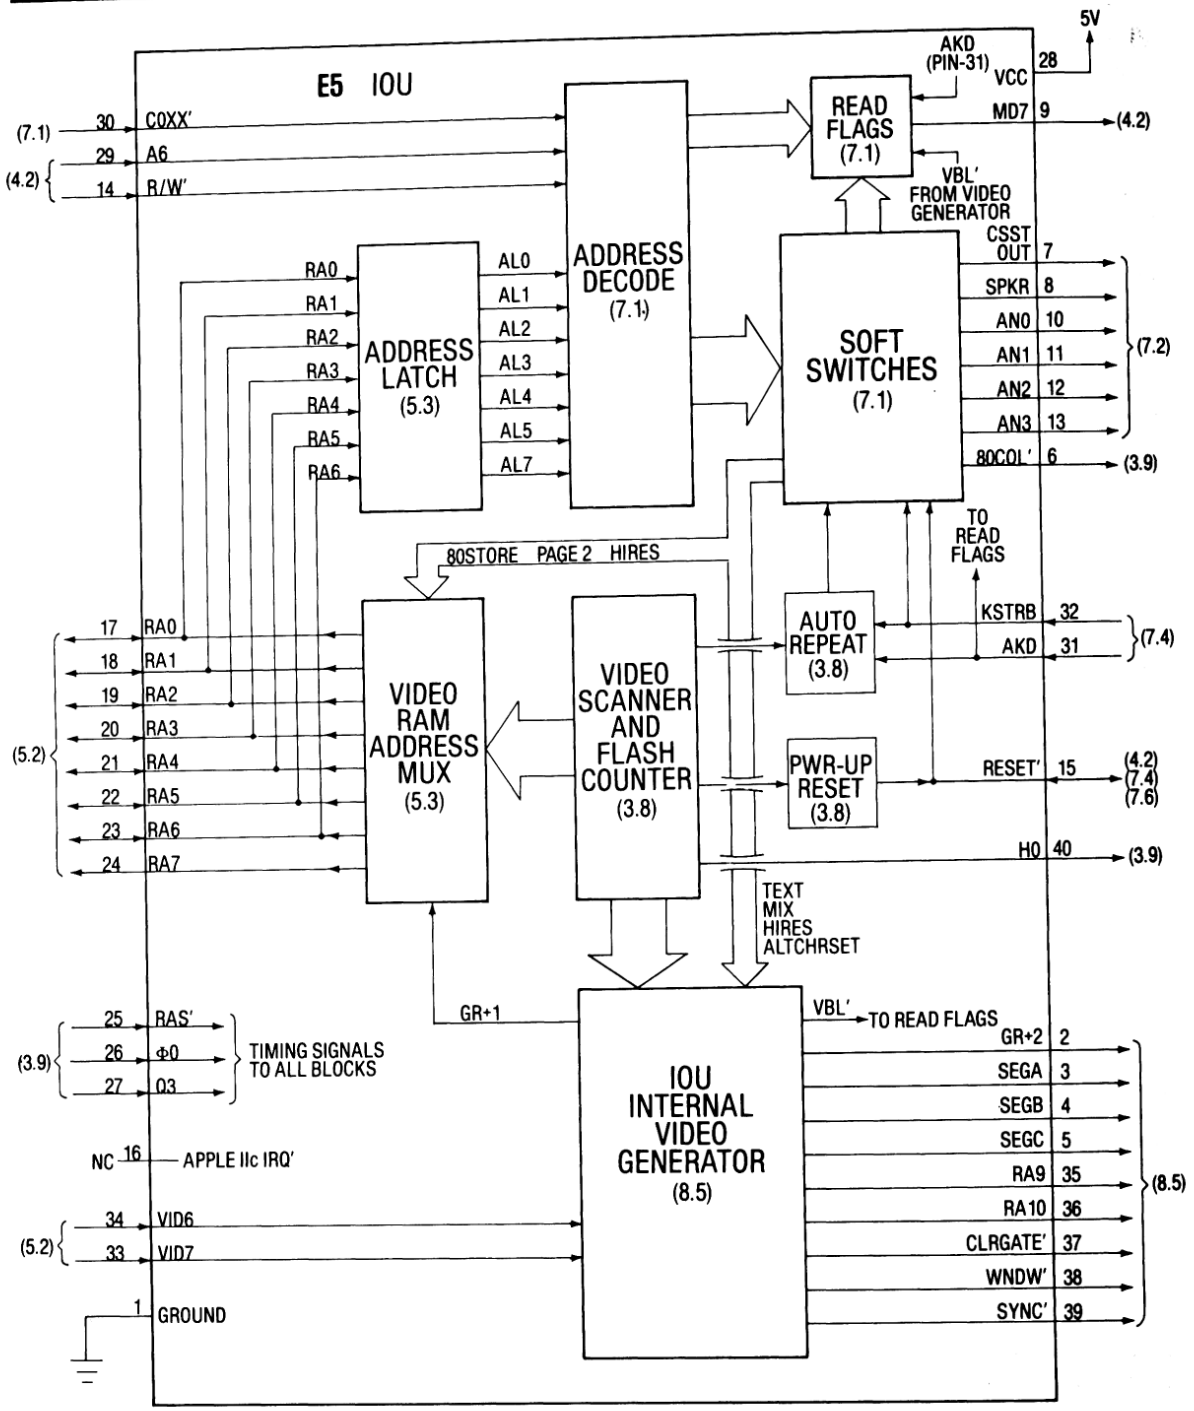


Figure 1.1 IOU Functions and Pin Assignments.

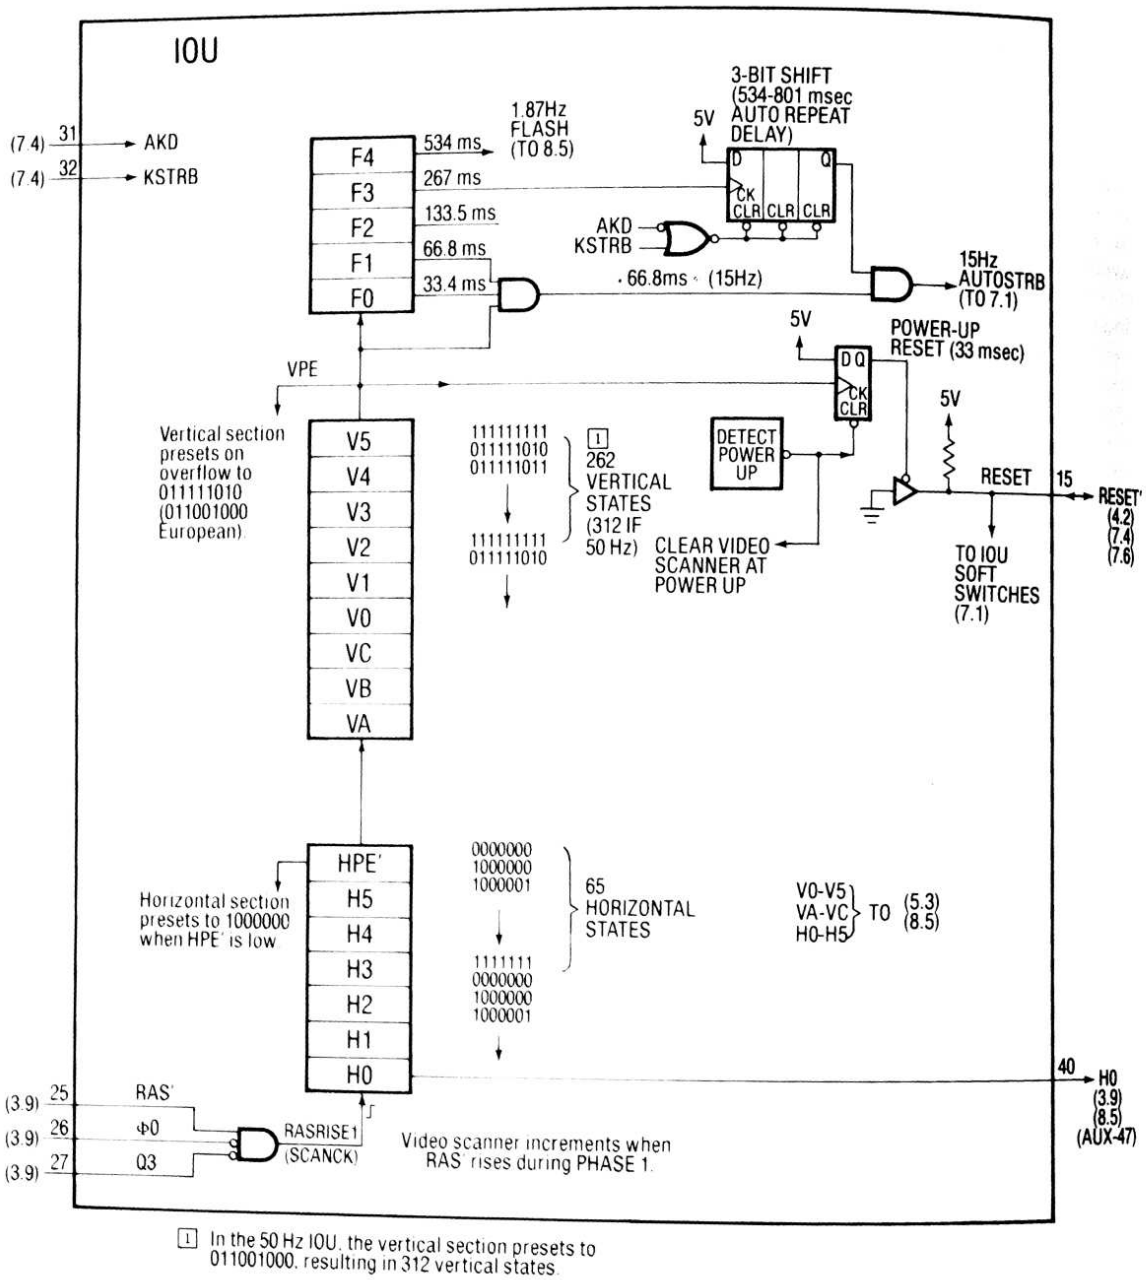

1 In the 50 Hz IOU, the vertical section presets to 011001000, resulting in 312 vertical states.

Figure 3.8 Functional Diagram: The Video Scanner.

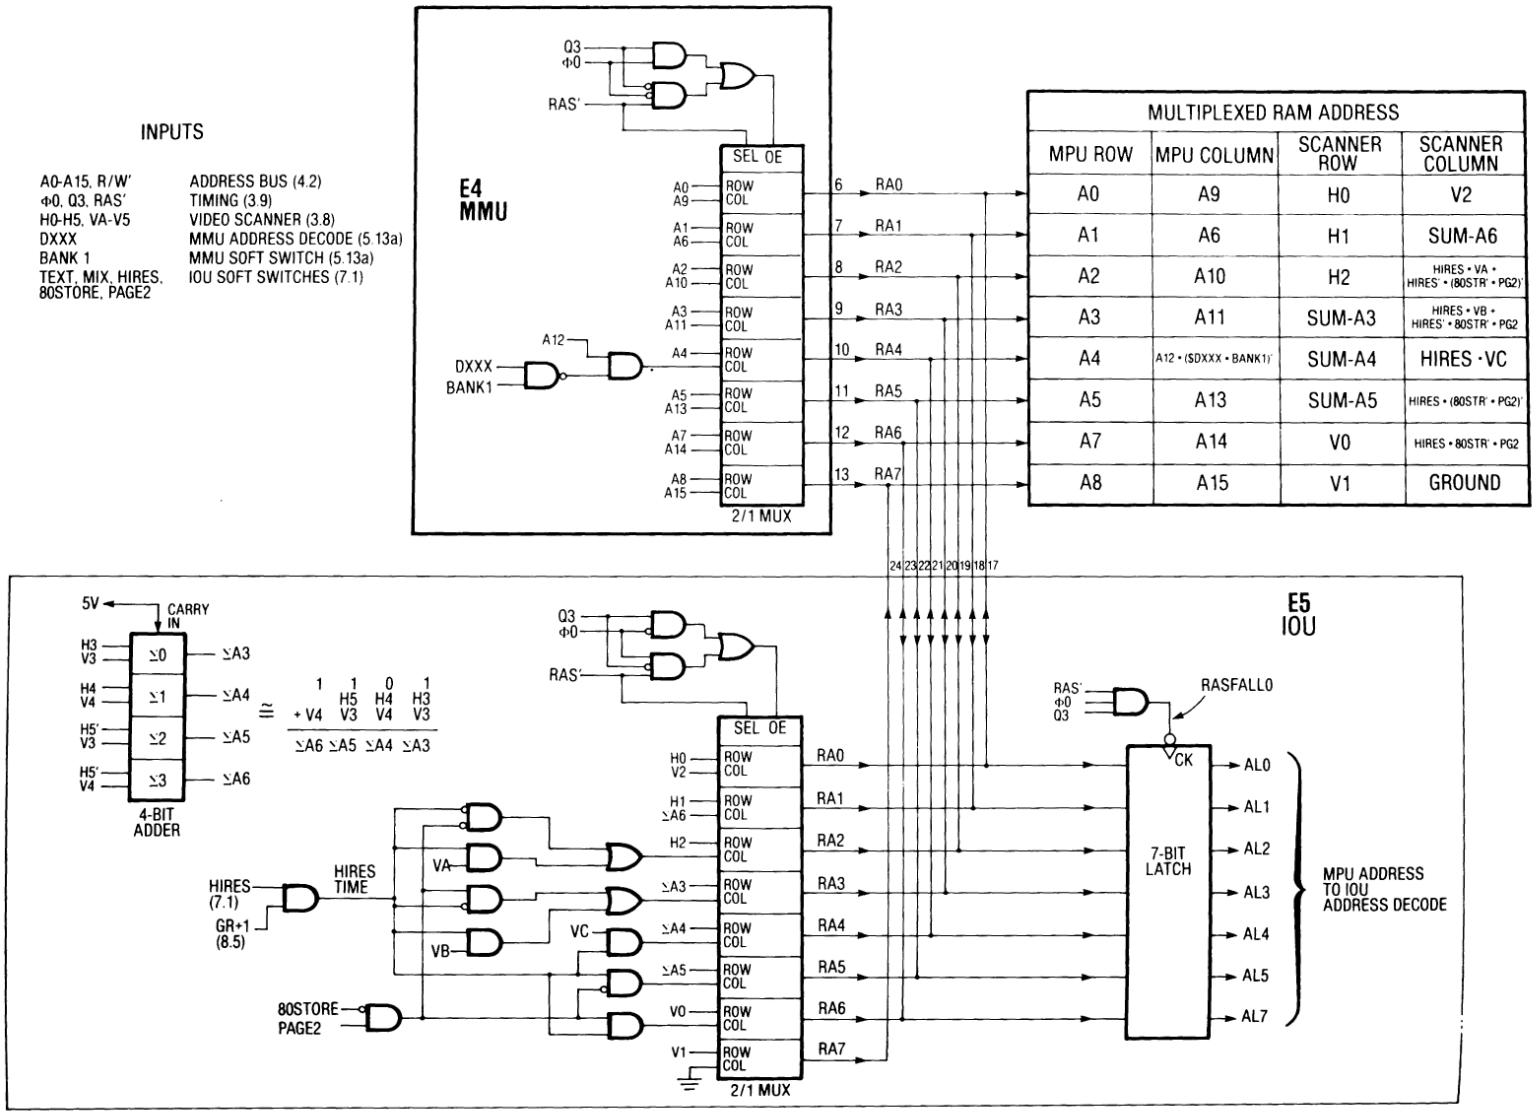


Figure 5.3 Functional Diagram: Apple IIe RAM Address Multiplexing.

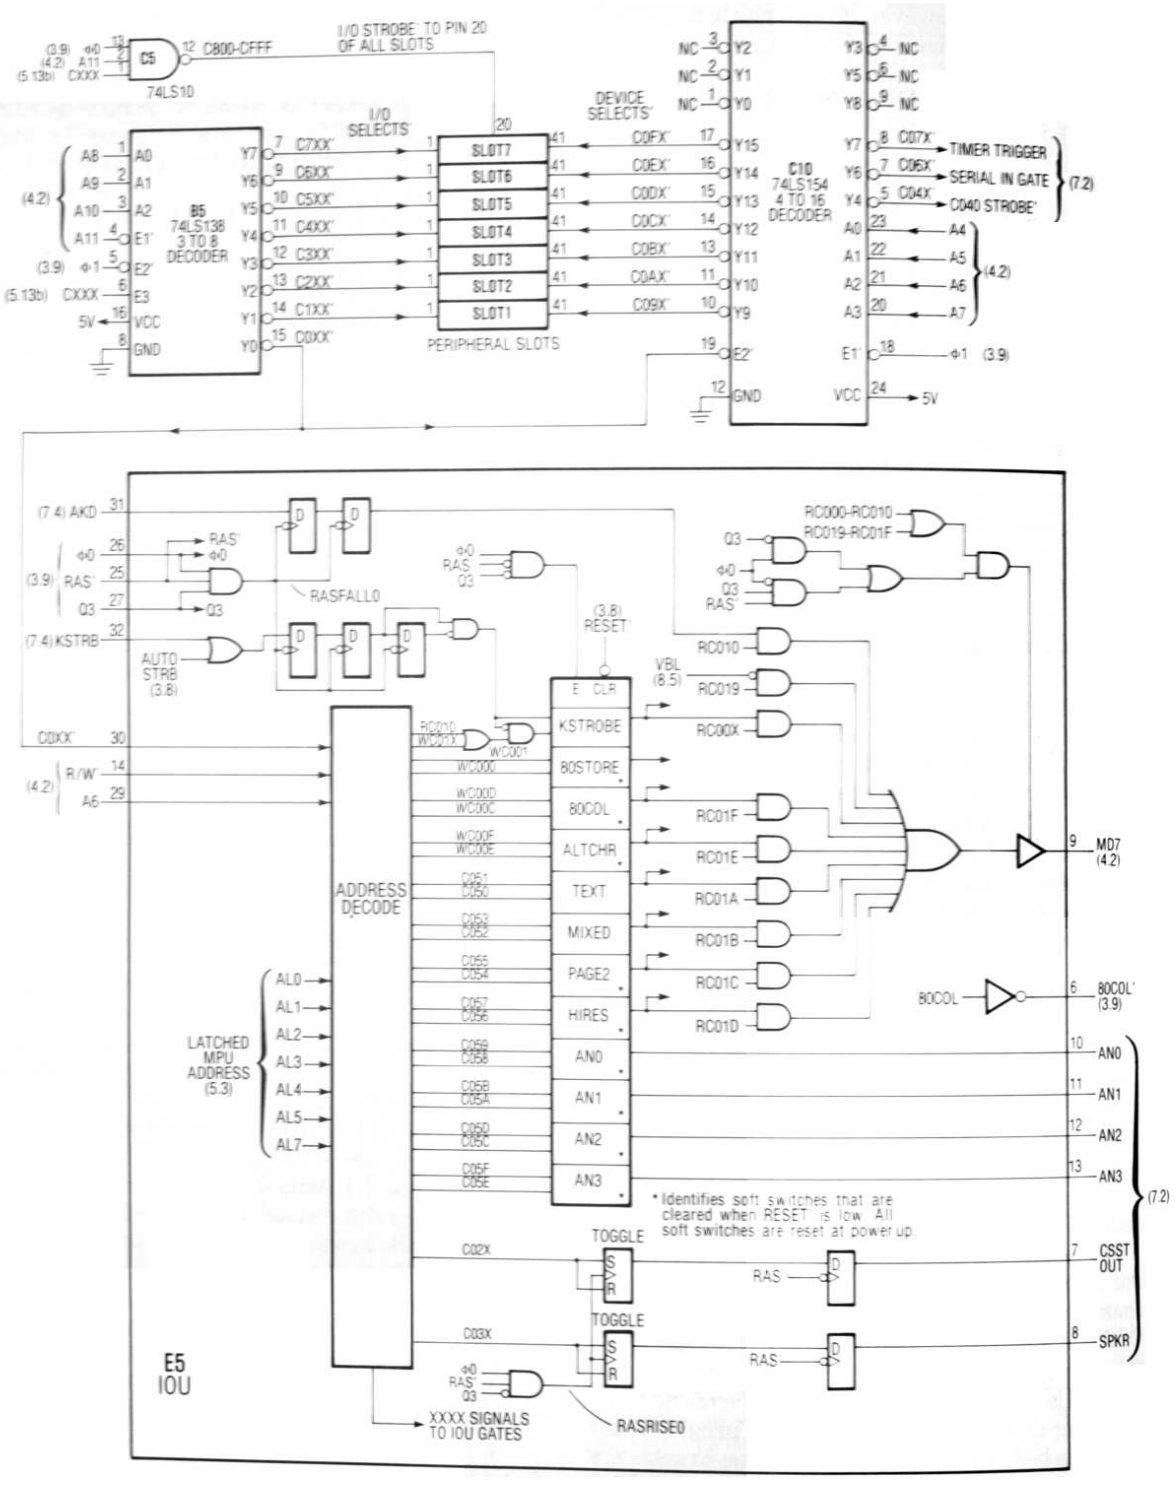


Figure 7.1 Schematic: IOU Soft Switches and Peripheral Address Decoding Circuitry.

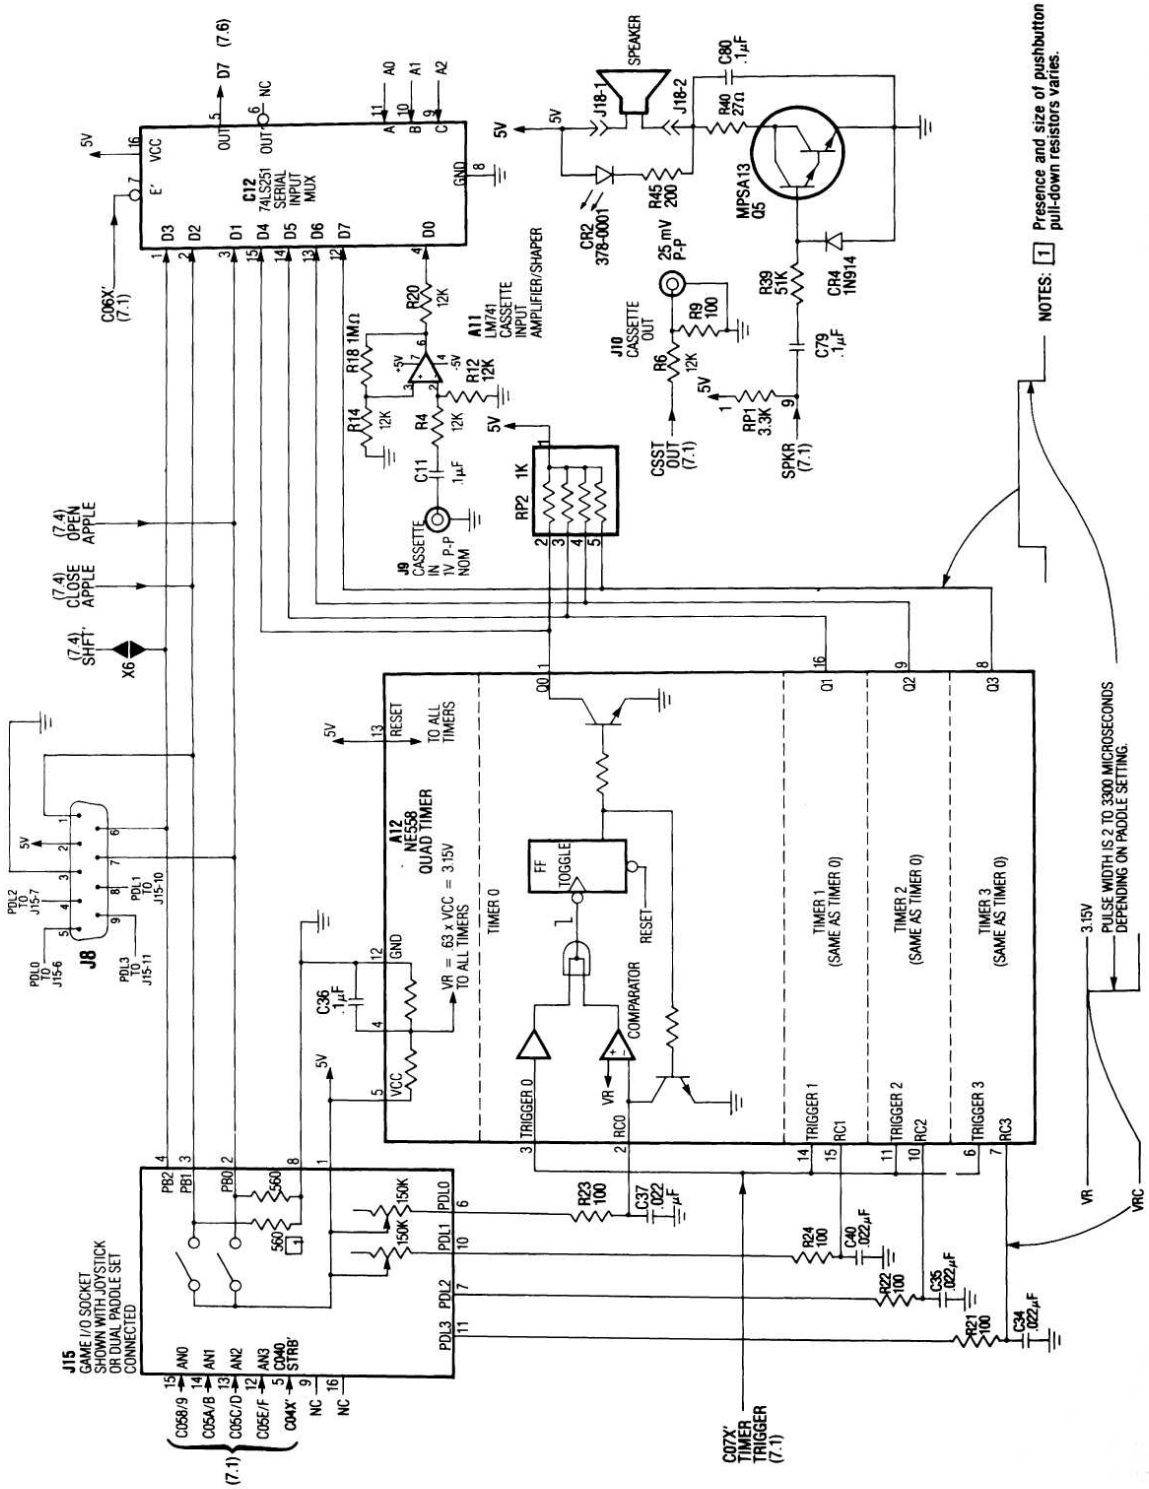


Figure 7.2 Schematic: Serial I/O Devices.

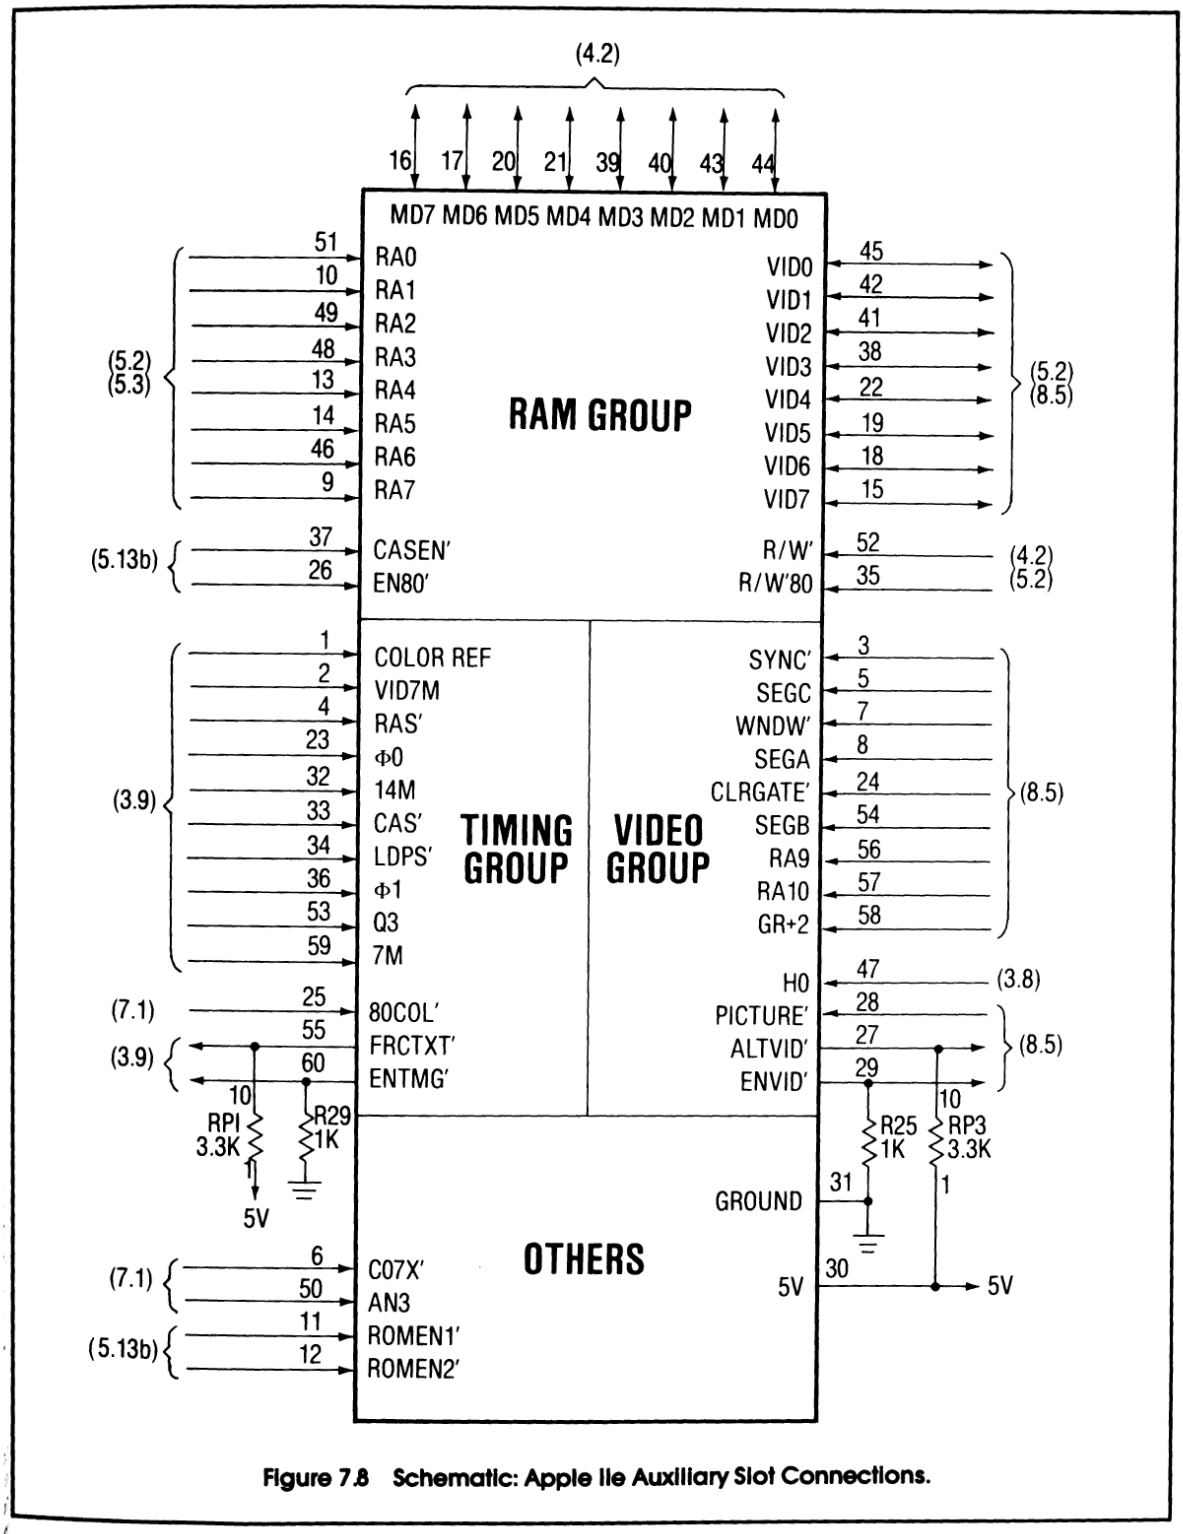


Figure 7.8 Schematic: Apple IIe Auxiliary Slot Connections.


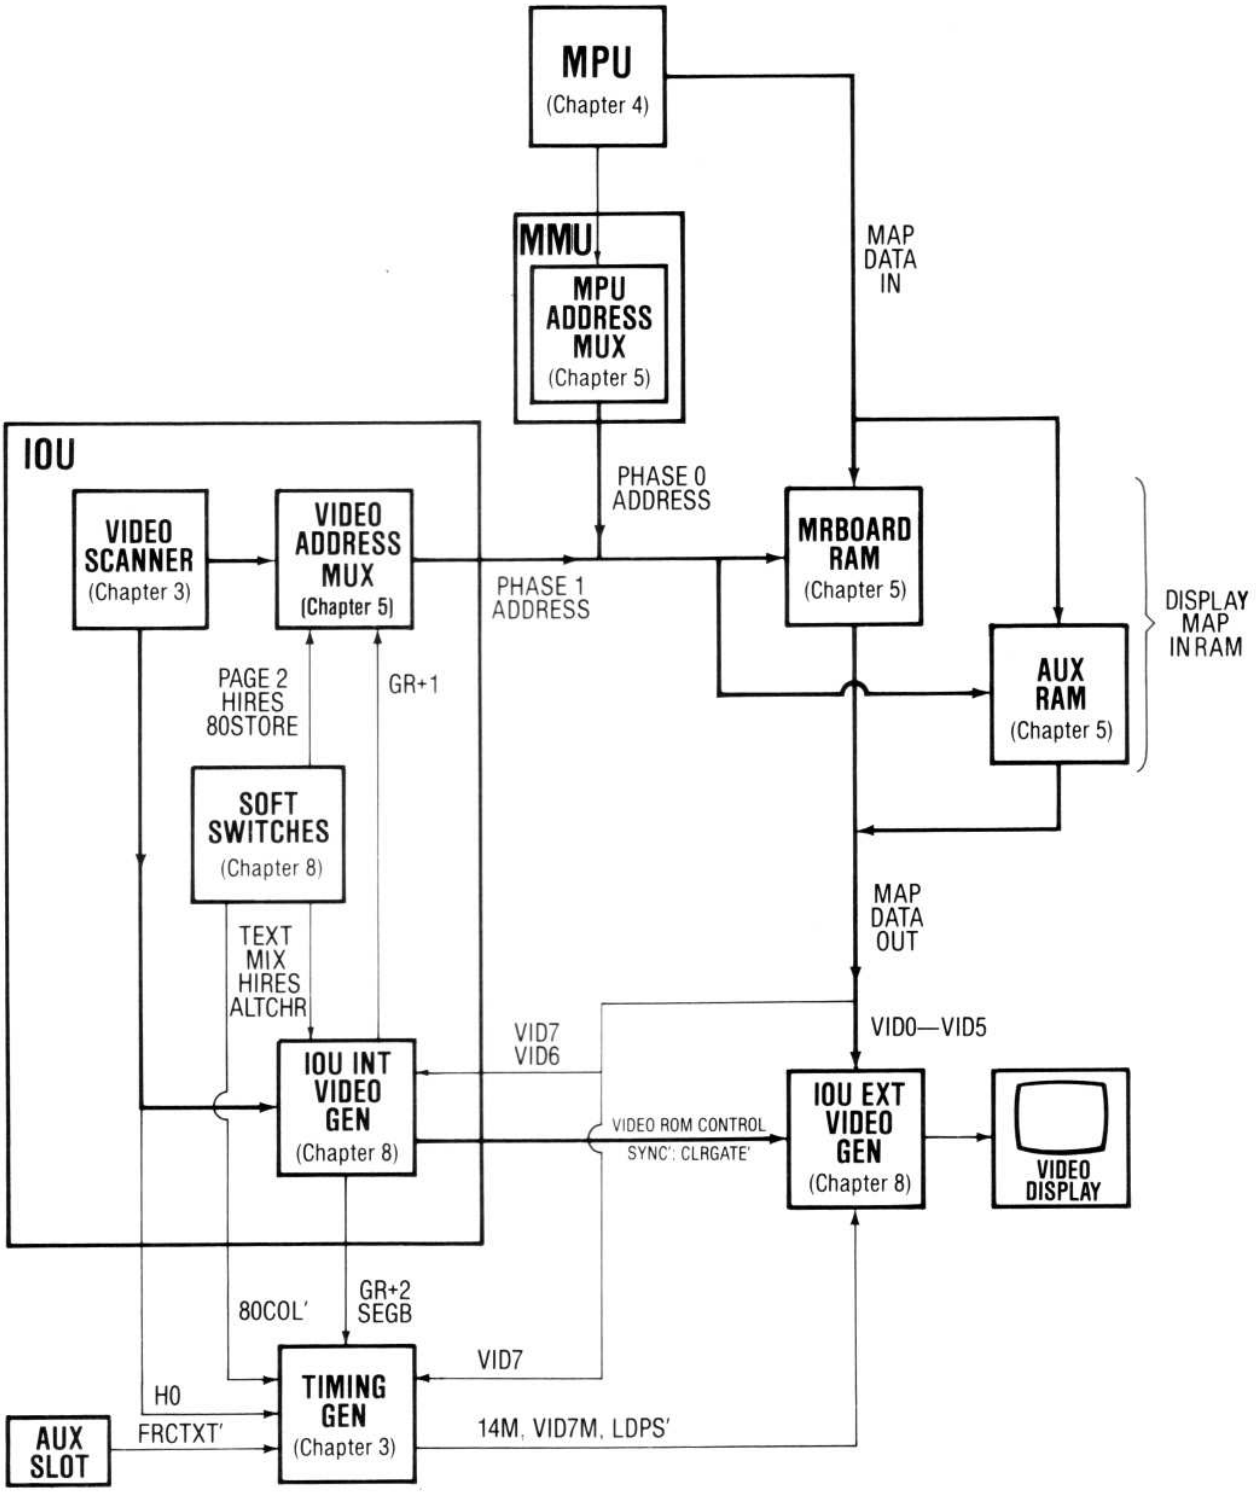


Figure 8.1 Overall Video Generation.

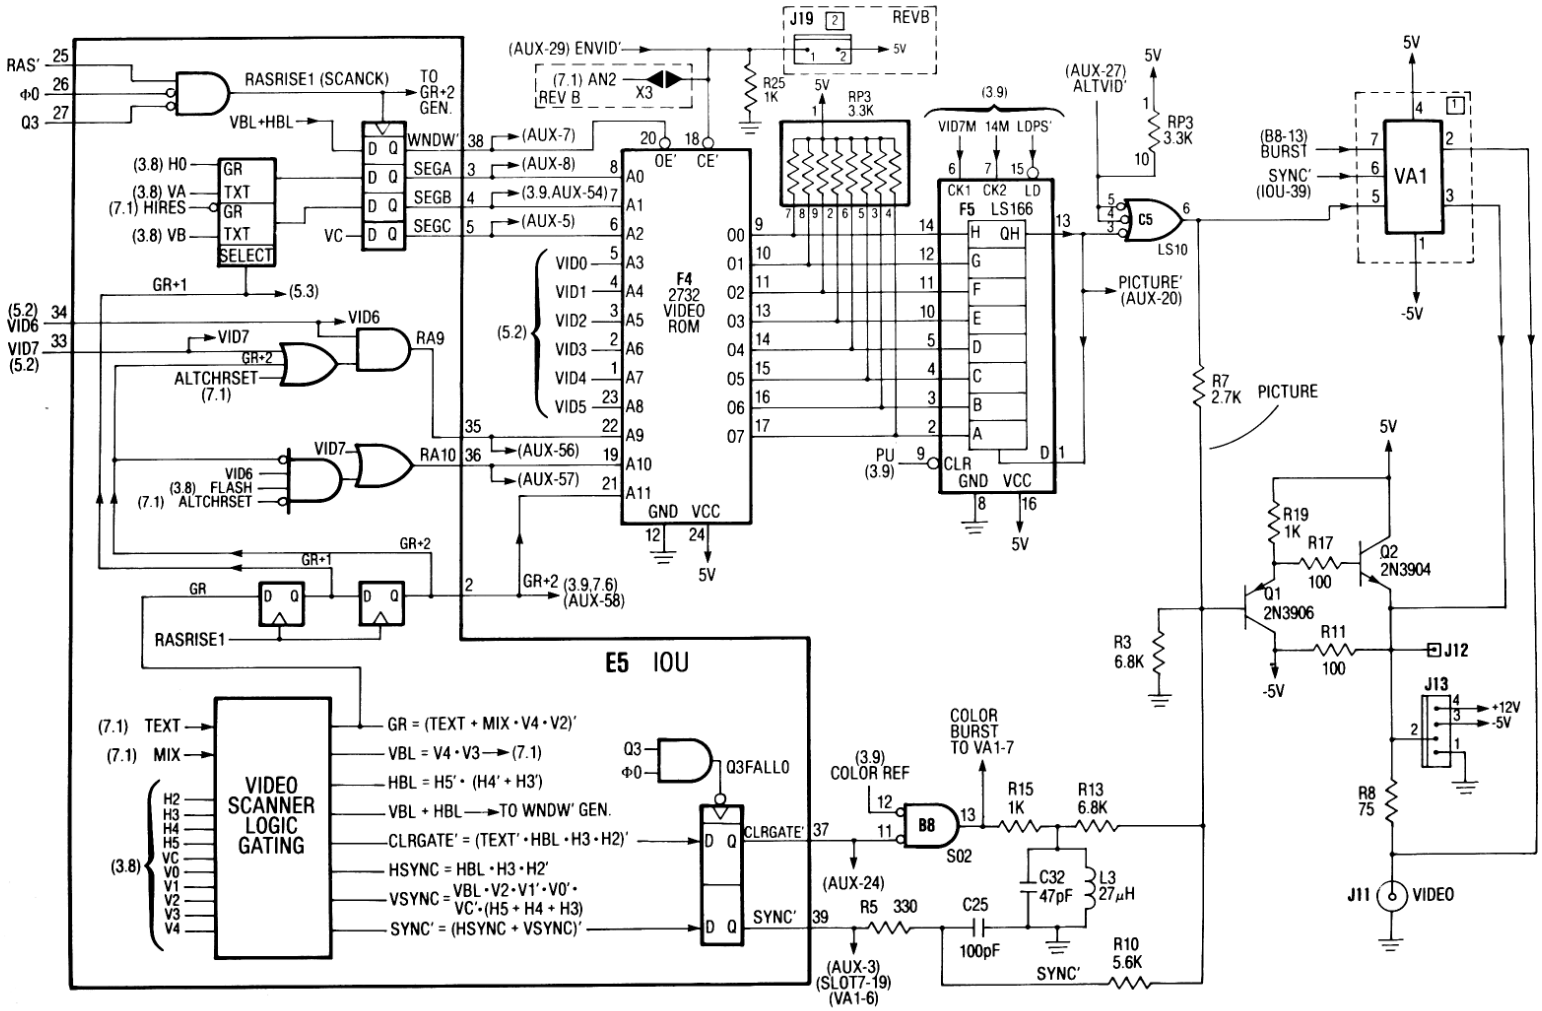

NOTES:

[1] Connections provided for alternate video amplifier.

[2] Connections provided for J19 (remote ENVID' switch) in REV B.

Figure 8.5 Schematic: Apple IIe Video Generation.