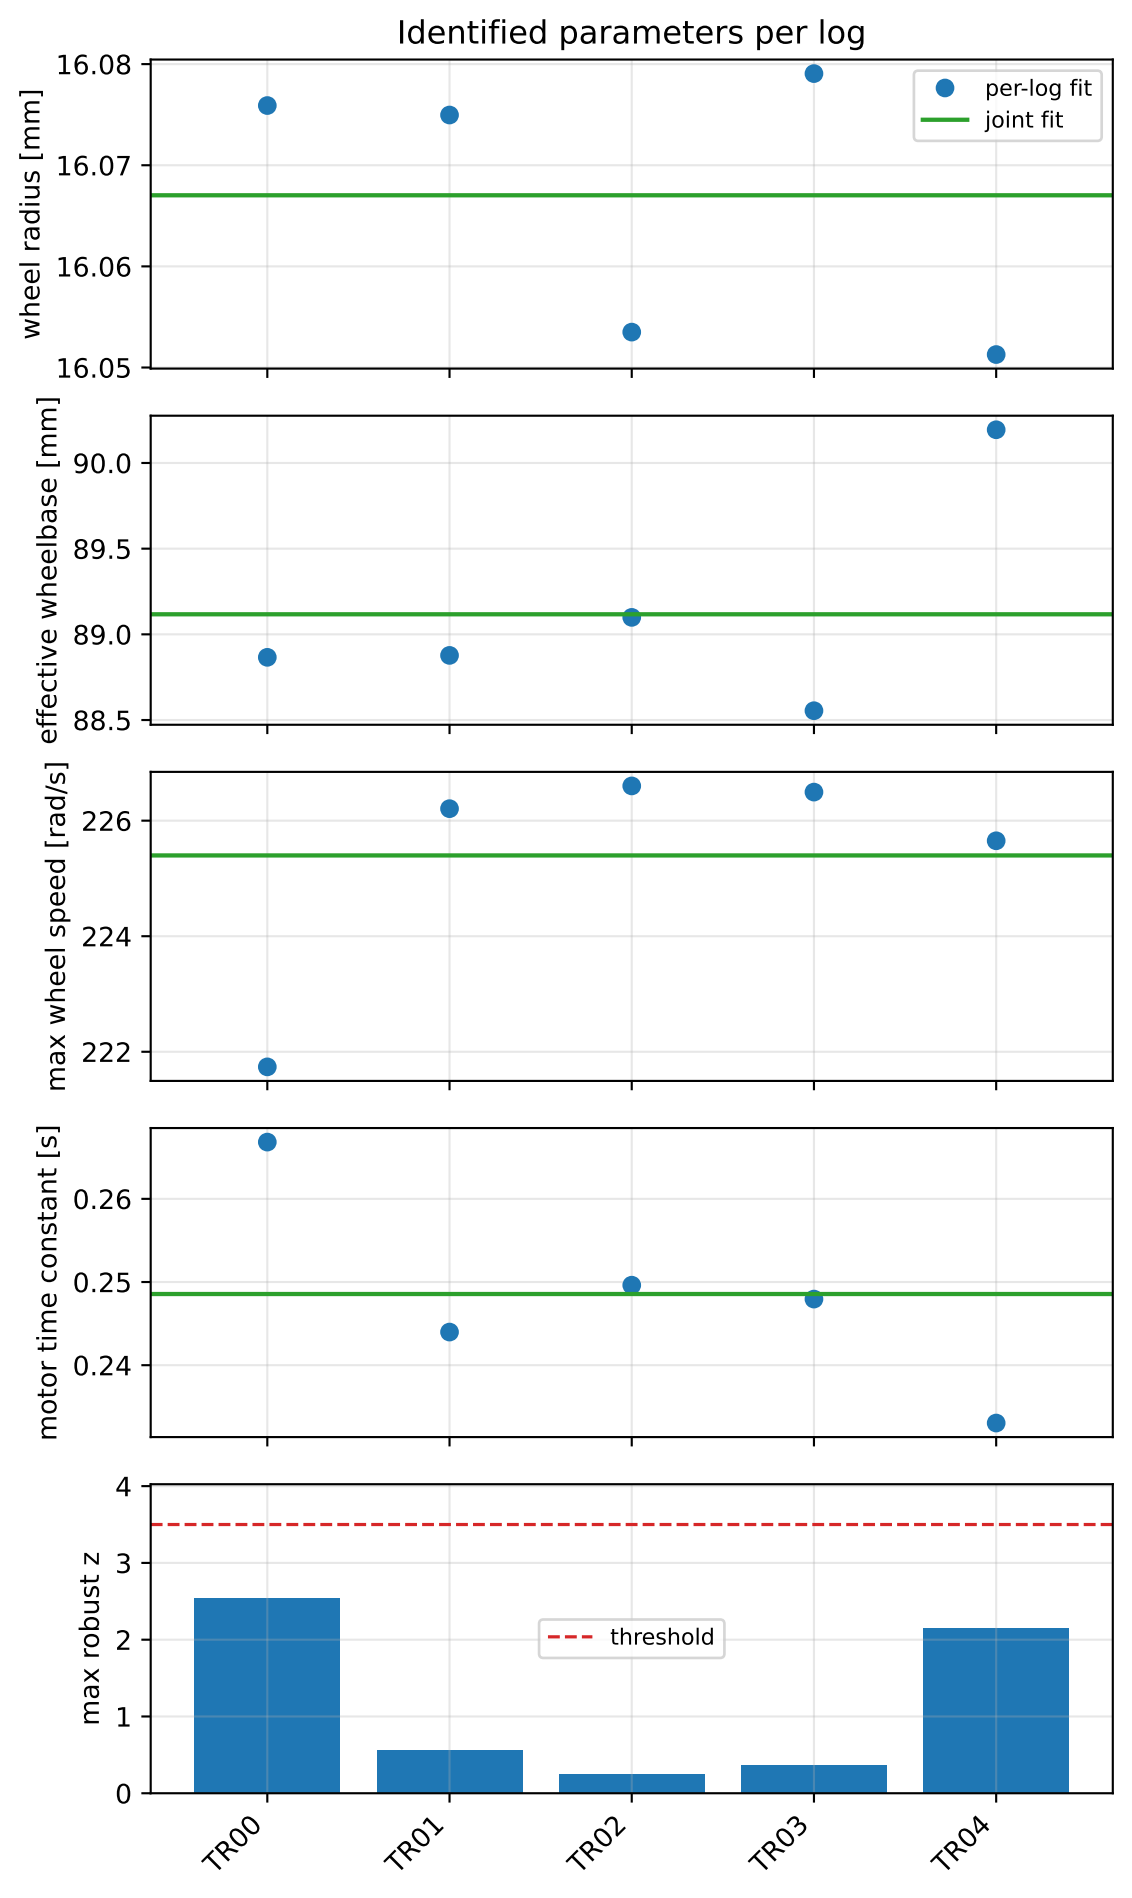
Identified parameters per log
wheel radius [mm]
16.08
16.07
16.06
16.05
per-log fit
joint fit
effective wheelbase [mm]
90.0
89.5
89.0
88.5
max wheel speed [rad/s]
226
224
222
motor time constant [s]
0.26
0.25
0.24
max robust z
4
3
2
1
0
threshold
TR00
TR01
TR02
TR03
TR04