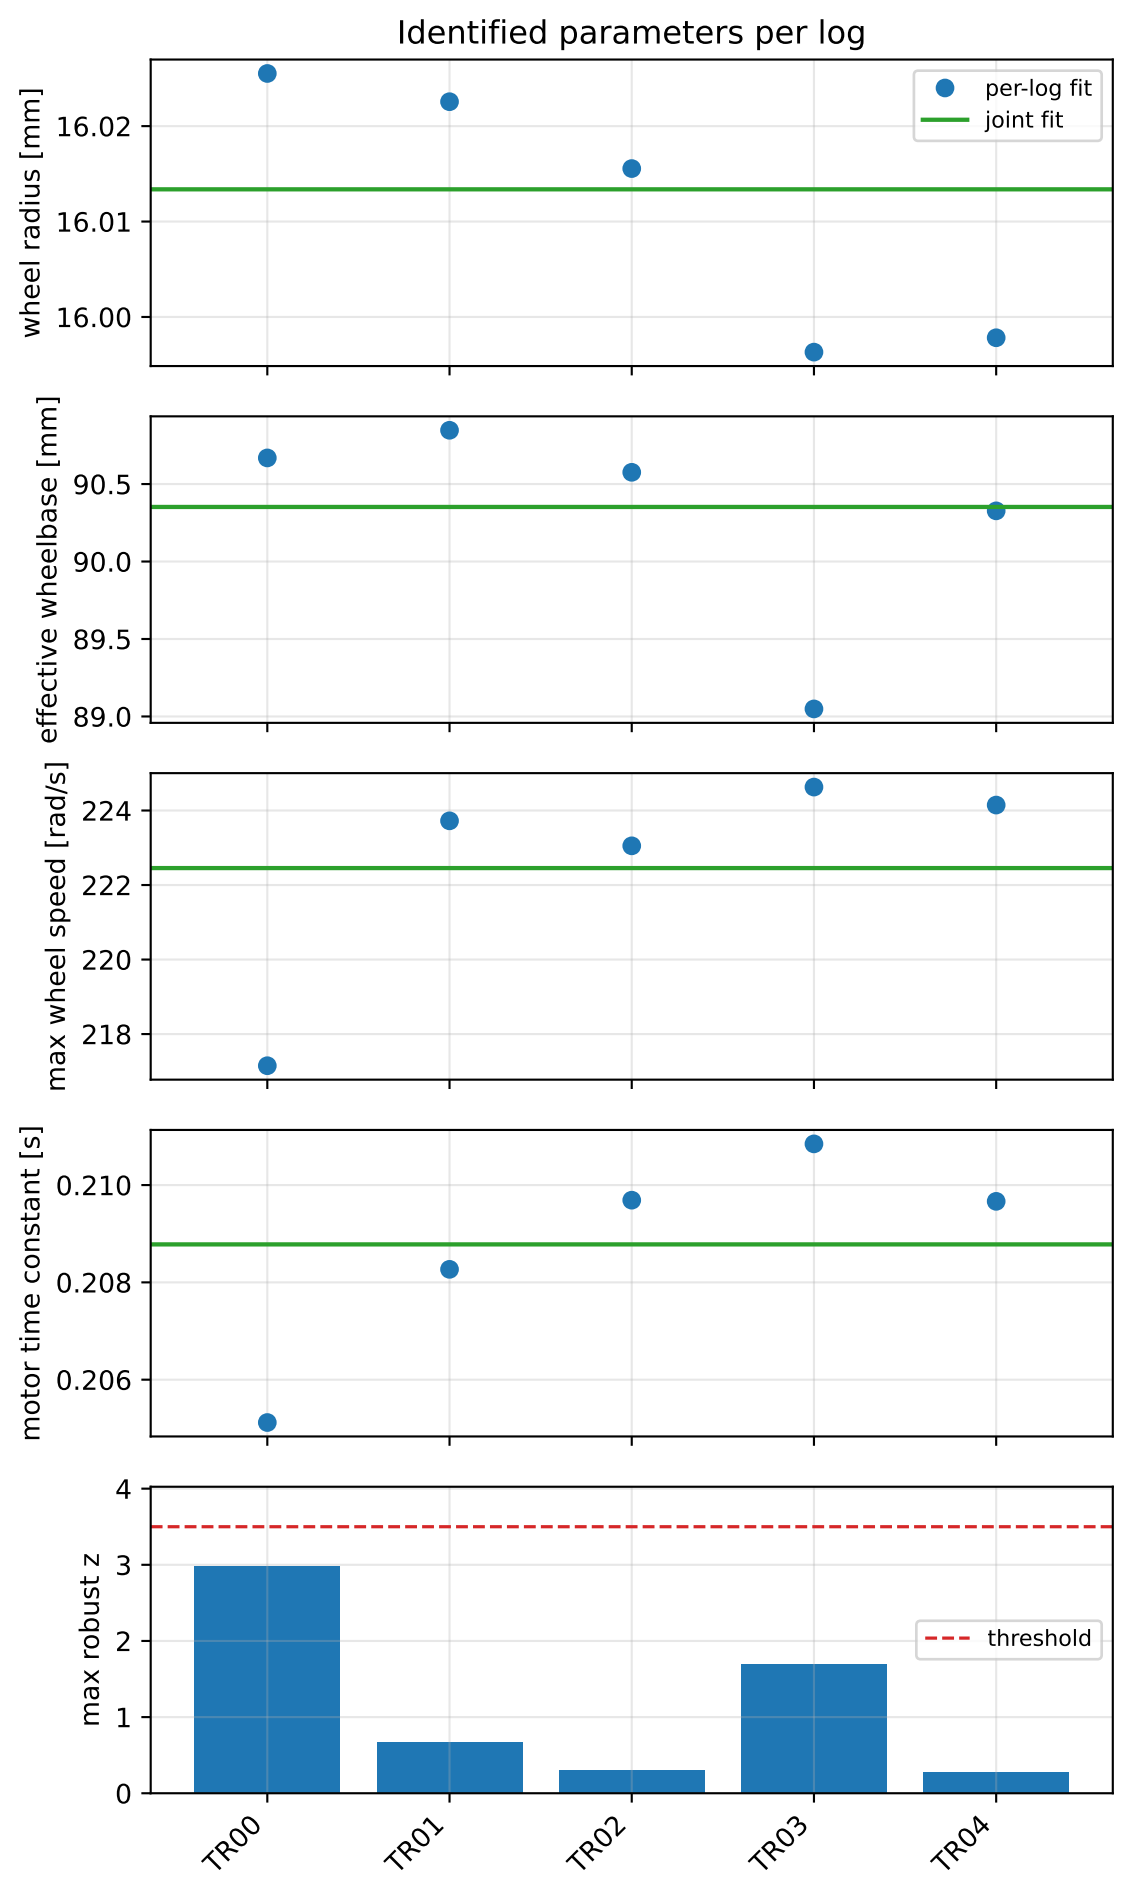
Identified parameters per log
wheel radius [mm]
16.02
16.01
16.00
per-log fit
joint fit
effective wheelbase [mm]
90.5
90.0
89.5
89.0
max wheel speed [rad/s]
224
222
220
218
motor time constant [s]
0.210
0.208
0.206
max robust z
4
3
2
1
0
threshold
TR00
TR01
TR02
TR03
TR04