

**ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR
FOR SELECTED RETAIL FISH VENDOR IN THE
PUBLIC MARKET OF THE CITY OF
SAN PABLO**

A Design Project Presented to the Faculty of College of Engineering
Pamantasan ng Lungsod ng San Pablo
Brgy. San Jose, San Pablo City

In Partial Fulfilment of the Requirements for the Degree of
Bachelor of Science in Computer Engineering

**Samuel R. Hernandez
ZJ Francis Dem F. Estrada
Trixie Jem Nicole L. Lagrimas
Aeron Paul C. Ortiz
Jovel Neile B. Peñaloza
Julius D. Sumilang**

May 2024



PAMANTASAN NG LUNGSOD NG SAN PABLO
Brgy. San Jose, San Pablo City
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION



APPROVAL SHEET

This Design Project entitled "**Arduino-Based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in the Public Market of the City of San Pablo**" prepared and submitted by **Estrada, Z., Hernandez, S., Lagrimas, T., Ortiz, A., Peñaloza, J., and Sumilang, J.** A.Y. 2023-2024, in partial fulfilment of the requirements for the Degree of **Bachelor of Science in Computer Engineering** has been examined and hereby recommended for approval and acceptance.

Engr. Estelita U. Cura, MMEng'g-Mngt
Design Project Adviser

PANEL OF EXAMINERS

Engr. Solita M. Magee, PhD-TM
Member

Engr. Rey A. Orense
Member

Engr. Mario Jr. G. Brucal
Chairperson

Accepted and approved in partial fulfilment of the requirements for the degree of **Bachelor of Science in Computer Engineering**.

Dr. Solita M. Magee
Dean, College of Engineering

Prof. Kristin Anne C. Corcega, MACA
Vice President for Research and Innovation

DEDICATION

This humble work is dedicated to the loving parents of the developers, who have always supported them financially, emotionally, spiritually, and morally. They devoted their design project as an act of gratitude to their beloved research adviser, Engr. Estelita U. Cura and their beloved dean of the College of Engineering, Dr. Solita M. Magee, for unwavering encouragement and guidance;

To their classmates, family, and friends who supported them wholeheartedly in all of their aspirations throughout life. In addition, they are grateful to their Alma Mater, Pamantasan ng Lungsod ng San Pablo, for their unwavering dedication to transforming lives and empowering communities, as well as for their best efforts to mold the developers into God-loving, holistic individuals.

Finally, they are grateful to the Almighty God for reminding them that success in life is based on the tasks they must complete, for providing them with the patience, strength, and knowledge to accomplish their goals, for their excellent guidance in making things possible, and for their discernment in facing all their pursuits and obstacles.

S.R. H.

Z.F.D.F. E.

T.J.N.L. L.

A.P.C. O.

J.N.B. P.

J.D. S.

ACKNOWLEDGMENT

The developers want to express their deepest gratitude and appreciation to all those who have contributed to the successful completion of their design project.

First and foremost, the developers extend their heartfelt thanks to the divine creator **Almighty God**, for showering them with His unending love, blessing, wisdom, and good health;

Hon. Vicente B. Amante, Chairperson of the Board of Regents of PLSP, for the leadership that keeps inspiring us to achieve greater heights and make a significant impact on others' lives;

Dr. Sigfredo C. Adajar, University President and College Administrator, for his unwavering dedication and exemplary leadership. His relentless commitment to advancing education and fostering excellence has been crucial in shaping our institution's vision and direction;

Engr. Estelita U. Cura, Design Project Adviser, for her invaluable guidance, expertise, and constant encouragement during the whole period of the study;

Dr. Solita M. Magee, Design Project Committee Member and Dean of the College of Engineering, for giving them trust, offering advice, and giving them support, leading them to an organized study;

Dr. John Matthew A. Aquino, Chairperson of the Design Project Committee during topic presentation, for sharing his expertise and giving suggestions and advice upon reviewing their study;

Engr. Mario Jr. G. Brucal, Chairperson of the Design Project Committee, for sharing his expertise and giving suggestions and advice upon reviewing their study;

Engr. Rey A. Orense, Design Project Committee Member, for the understanding and patience during the defense and for the suggestions that he contributes to improving their design project;

Engr. Jomar C. Escobido, Design Project Committee Member, for his understanding and encouragement during the defense of our design project. His insightful suggestions proved invaluable in guiding them towards further refinement and improvement of our work.

Mr. Efrain Maranan Jr., client, for agreeing to take on the role of the primary evaluator for the device and for giving the information they needed to carry out the development. This study would not have been feasible without his help;

Retail fish vendors in San Pablo City Public Market, for their willingness to become evaluators of the device, provided us with them necessary data to for the device.

Z.F.D.F. E.

S.R. H.

T.J.N.L. L.

A.P.C. O.

J.N.B. P.

J.D. S.

ABSTRACT

Arduino-Based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in the Public Market of the City of San Pablo

*Estrada, Z.F.D.F., Hernandez, S.R., Lagrimas, T.J.N.L.,
Ortiz, A.P.C., Peñaloza, J.N.B., Sumilang, J.D.*

Efforts to reduce fish waste are vital for food security and sustainable development, particularly in the face of alarming statistics. In the Philippines, where 25 to 30 percent of fish supply is wasted, innovative solutions like an automatic fish dehydrator offer hope. By converting unsold fish into value-added products, such technology not only mitigates waste but also improves economic opportunities for fish vendors.

The project aims to design and develop a device that can help the retail fish vendors in San Pablo City Public Market with their problem regarding unsold fish. The device is capable of monitoring and regulating temperature, displaying real-time temperature, humidity, and fish weight, dehydrating up to 10kg of Tamban or Galunggong, automatically stopping the drying process upon completion, and notifying the user via SMS after drying. This comprehensive device undergoes evaluation using ISO 25010 software standards, ensuring adherence to criteria such as functionality, performance efficiency, usability, reliability, security, compatibility, maintainability, and portability. The evaluation process guarantees the quality and effectiveness of the design project. Additionally, the project includes the preparation of a deployment plan detailing implementation, distribution, and maintenance strategies to ensure the successful integration of the device into the target client.

The project's progress adheres to the agile methodology, facilitating adaptability to evolving circumstances throughout its development. This method fosters a structured approach, ensuring efficient fulfillment of project objectives. Initially, a survey is conducted to collect vital data for problem identification and comprehension of overall solution requirements. Additional insights into these requisites are acquired via interviews with the relevant client. Following this, developers choose suitable IDEs, hardware, and materials customized to match the project's specific needs.

Based on the test results, the device can dry 10kg of fish with an average weight of 16.24 grams in eleven (11) hours and fifty-one (51) minutes. Galunggong, with an average weight of 21.8 grams, was dried in twelve (12) hours and six (6) minutes. Lastly, the larger fish with an average weight of 48 grams was dried for sixteen (16) hours and forty-eight (48) minutes. The device also succeeded in notifying the user through SMS after the drying process.

According to the evaluation, the device garnered a mean score of 4.53 from the CpE Practitioners, indicating a "Highly Acceptable" verbal interpretation. Likewise, it received a "Highly Acceptable" interpretation from the dried fish vendors, achieving a mean score of 4.51. Finally, it achieved a mean of 4.46 with an interpretation of "Very Acceptable" from the evaluation by fresh fish vendors.

Based on the results of the testing and evaluation conducted with the device, several recommendations are proposed. Firstly, to reduce electricity consumption, users may opt for alternative power sources such as solar energy or batteries. Secondly, adjusting the size of the dehydrator to match specific user requirements is suggested, ensuring scalability and customization to accommodate varying fish quantities. For future developers, expanding the functionality to accommodate a wider range of fish species is advised to cater to diverse user needs. Additionally, upgrading the weight sensor platform to more durable materials like corrosion-resistant metals or robust plastics can enhance longevity and reliability. Providing users with customizable options such as adjustable temperature settings or different drying durations is also recommended. Finally, integrating exhaust fans to lower humidity inside the dehydrator can further improve its performance.

*Keywords: Engineering Technology, Dehydration, Dried Fish, Tamban (*Sardinella lemuru*), Galunggong (*Decapterus macrosoma*), Arduino, Automated, Fish Vendors, Agile*

TABLE OF CONTENTS

	Page
Title Page	i
Approval Sheet.....	ii
Dedication	iii
Acknowledgment	iv
Abstract	vi
Table of Contents	viii
List of Tables	xii
List of Figures	xiv
CHAPTERS	
I. THE PROJECT AND ITS BACKGROUND	
Introduction	1
Background of the Project.....	3
Objectives of the Project	4
Scope and Limitations.....	5
Significance of the Project	7
Theoretical Framework	8
Conceptual Framework.....	9
Definition of Terms.....	10
II. REVIEW OF LITERATURE AND RESEARCH PROJECTS	
Review of Conceptual Literature	12
Review of Research Literature.....	21
Review of Research Projects.....	30
Design Synthesis	40
III. DESIGN AND METHODOLOGY	
Project Design	42
Project Development and Testing Procedures.....	50
Project Evaluation/ Validation Criteria.....	56
Design Instruments and Techniques	57
Project Deployment Plan	57

IV. RESULTS AND DISCUSSIONS

Project Technical Feasibility	59
Project Operational Feasibility	68
Testing, Evaluation Results, and Analysis	70
Project Benefits.....	97
Project Economic Feasibility	101
Project Schedule Feasibility.....	105
Deployment Results.....	106

V. SUMMARY OF FINDINGS, CONCLUSIONS AND RECOMMENDATIONS

Summary of Findings.....	109
Conclusions	110
Recommendations	111

REFERENCES

A. Local.....	113
a. Books	113
b. Journals	113
c. Unpublished Theses	116
B. Foreign	115
a. Books	116
b. Journal Article	116
c. Websites	121

APPENDICES

A. Recommendation Letter of the Adviser and the Dean to the Client.....	123
B. Letter of Client's Approval to be the Project's Subject.....	124
C. Letter of Acceptance.....	125
D. Gantt Chart.....	126
E. Informed Consent.....	127
E.1.A. Informed Consent (English Version)	128
E.1.B. Informed Consent (Filipino Version)	130
E.2. Filled-out Informed Consent.....	132
F. Project Evaluation Instrument.....	162

F.1.A. Sample Evaluation Instrument (English Version)	163
F.1.B. Sample Evaluation Instrument (Filipino Version)	165
F.2.A. Raw Data Evaluation Results of CpE Practitioners.....	167
F.2.B. Filled-out Evaluation Instrument of CpE Practitioners	168
F.3.A. Raw Data Evaluation of Fresh Fish Vendors	178
F.3.B. Filled-out Evaluation Instrument of Fresh Fish Vendors	179
F.4.A. Raw Data Evaluation of Dried Fish Vendors.....	193
F.4.B Filled-out Evaluation of Dried Fish Vendors.....	194
G. Total Budget of the Project.....	200
H. Blueprint of the Project	201
H.1. Schematic Diagram of the Project.....	202
H.2. Top, Front, Side and Isometric View of the Project.....	203
I. Hardware/ Technical Manual.....	204
J. User's Manual	226
J.1. User's Manual (Filipino Version).....	227
J.2. User's Manual (English Version).....	234
K. Pictures during Defenses, Evaluation, and Deployment.....	242
K.1. Topic Presentation	243
K.2. Pre-Oral Defense	244
K.3. Final Defense	245
K.4.A. Evaluation of CpE Practitioners	246
K.4.B. Evaluation of Fresh Fish Vendors.....	248
K.4.C. Evaluation of Dried Fish Vendors	251
K.5. Deployment of the Project.....	253
K.6. Memorandum of Understanding.....	254
L. System Source Code.....	256
M. Grammarly Plagiarism Results	265
N. Grammarian's Certificate	271
O. Certificates of Recognition.....	272
O.1 Certificates of Recognition from the College of Engineering.....	273

O.2 Certificates of Recognition from Office of the Vice President for Research and Innovation.....	276
P. Developers' Consent to Access Their Profiles.....	279
Q. Developers' Profile	280

LIST OF TABLES

Table	Title	Page
3.1	Five-Point Likert Scale	56
3.2	Project Deployment Plan.....	58
4.1	Load Sensor Testing Results	70
4.2	Temperature Regulation and Monitoring Testing Results	71
4.3	Drying 10kg of Galunggong Testing Result.....	72
4.4	Drying 10kg of Tamban Testing Result.....	74
4.5	Drying 10kg of Tamban and Galunggong Testing Result.....	76
4.6	Automatic Stopping Function Testing Result	77
4.7	SMS Notification Function Testing Result	78
4.8	Summary of Specific Objectives Testing Result.....	79
4.9	CpE Practitioners' Evaluation Results Based on Functional Suitability	80
4.10	CpE Practitioners' Evaluation Results Based on Reliability	81
4.11	CpE Practitioners' Evaluation Results Based on Performance Efficiency	81
4.12	CpE Practitioners' Evaluation Results Based on Usability	82
4.13	CpE Practitioners' Evaluation Results Based on Security.....	83
4.14	CpE Practitioners' Evaluation Results Based on Compatibility	83
4.15	CpE Practitioners' Evaluation Results Based on Maintainability	84
4.16	CpE Practitioners' Evaluation Results Based on Portability	85
4.17	Fresh Fish Vendors' Evaluation Results Based on Functional Suitability	85
4.18	Fresh Fish Vendors' Evaluation Results Based on Reliability	86
4.19	Fresh Fish Vendors' Evaluation Results Based on Performance Efficiency	86
4.20	Fresh Fish Vendors' Evaluation Results Based on Usability	87
4.21	Fresh Fish Vendors' Evaluation Results Based on Security	88
4.22	Fresh Fish Vendors' Evaluation Results Based on Compatibility	88
4.23	Fresh Fish Vendors' Evaluation Results Based on Maintainability.....	89

4.24	Fresh Fish Vendors' Evaluation Results Based on Portability	90
4.25	Dried Fish Vendors' Evaluation Results Based on Functional Suitability	91
4.26	Dried Fish Vendors' Evaluation Results Based on Reliability.....	91
4.27	Dried Fish Vendors' Evaluation Results Based on Performance Efficiency	92
4.28	Dried Fish Vendors' Evaluation Results Based on Usability	93
4.29	Dried Fish Vendors' Evaluation Results Based on Security	94
4.30	Dried Fish Vendors' Evaluation Results Based on Compatibility.....	94
4.31	Dried Fish Vendors' Evaluation Results Based on Maintainability	95
4.32	Dried Fish Vendors' Evaluation Results Based on Portability	95
4.33	Summary of Evaluation Result	96
4.34	Traditional Fish Drying Result	98
4.35	Observation on Dried Tamban	100
4.36	Observation on Dried Galunggong.....	100
4.37	Total Budget for the Project.....	102
4.38	Project Development Schedule	105

LIST OF FIGURES

Figure	Title	Page
1.1	Innovation Theory of Entrepreneurship Model	8
1.2	Conceptual Framework of the Project	9
2.1	Volume of Fisheries Production by Species.....	13
2.2	Heating Element.....	16
2.3	Arduino UNO Microcontroller	17
2.4	DHT22 Module	19
2.5	Load Cell with HX711 Module	20
2.6	Direct Solar Dryer System.....	31
2.7	Weight Monitoring System for Tilanggit Dried Fish	32
2.8	Automated Squid Dryer Chamber	33
2.9	Actual Prototype of Seaweeds Solar Dryer	34
2.10	Dryer with Installed Temperature and Humidity Sensor	35
2.11	Modified Solar Dryer	36
2.12	Mechanized Fish Paste Maker	36
2.13	Fish Dryer Using Fuzzy Logic	38
2.14	DS18B20 Temperature Sensor Circuit Connections	39
3.1	Current Way of Dealing with Unsold Fish.....	42
3.2	Automated Fish Dehydrator Block Diagram	43
3.3	Flow chart of the Project	45
3.4	Isometric View of the Project.....	47
3.5	Fish Dehydrator Setup Component Design.....	48
3.6	Top, Bottom Front, Side, and Isometric View of the Project.....	49
3.7	Agile Model	50
4.1	Arduino UNO R3	60
4.2	HX711 Amplifier	61
4.3	DHT22 Sensor	61
4.4	Load Cell Sensor.....	62
4.5	Sim800L V2 GSM module.....	62
4.6	Heating Element (Coil)	63

4.7	4x20 Liquid Crystal Display	63
4.8	Solid State Relay.....	64
4.9	Printed Circuit Universal Board (8x12)	65
4.10	Schematic Diagram of the Device	66
4.11	Fish Dehydrator Setup	68
4.12	Liquid Crystal Display.....	69
4.13	Trays Inside the Device.....	69
4.14	Program Testing Results.....	70
4.15	Maximum Power Consumption during Tests.....	101
4.16	Deployment of the Project.....	106

CHAPTER I

THE PROJECT AND ITS BACKGROUND

Introduction

Fresh fish, a food item with a short shelf life, requires careful handling to prevent deterioration, ensure safety from harmful microorganisms, and maintain its attractiveness for market sale. However, the fishing industry faces a significant challenge in managing fish waste. The Food and Agriculture Organization (FAO, 2018) reports that nearly one-third of the 156 million tons of fish produced worldwide for human consumption goes to waste. FAO (2018) expects this number to increase in the future.

Efforts to address fish waste in the fishing industry contribute significantly to multiple United Nations Sustainable Development Goals (UNSDG, 2022). Primarily, by reducing waste, the industry supports SDG 2 (Zero Hunger) through more efficient and responsible utilization of global fish production, fostering food security and alleviating hunger. This approach aligns with the overarching goal of achieving a more sustainable, hunger-free future.

In the Philippines, 25 to 30 percent of the fish supply goes to waste, leading to considerable economic and environmental repercussions. This alarming statistic underscores the urgent requirement for enhanced waste management strategies within the Philippine fishing industry, as emphasized by Islam et al. (2021). The pervasive issue of fish and seafood waste in open markets is worsened by inadequate storage facilities and low demand, as outlined by Montojo et al. (2020).

Unsold fish contribute significantly to fish waste, particularly in wet markets where most fish products are sold. According to a study by De Ungria et al. (2022),

the average daily production of fish waste in Philippine wet markets was 70.3 ± 0.93 kg, with no significant differences across locations. Unsold fish not only contribute to fish waste but also impact sellers' profitability, as they cannot sell poor-quality fish. Even if they manage to sell such fish, it is typically cheaper.

Both local and global, stakeholders have observed innovative approaches to addressing the persistent challenge of unsold fish. Malaysia, during the Movement Control Order (MCO), utilized a solar dryer dome through collaboration between the Malaysian Fisheries Development Authority (LKIM) Sarawak and the Buntal Fishermen Association (PNKB) to tackle the issue of unsold fish by Silong (2020). However, the manual fish drying process, identified by Alvinika (2021), remains time-consuming, taking 4–7 days to achieve a 10% water content.

Fish vendors in the Public Market, located in San Pablo City, Laguna, are grappling with the issue of unsold fish, especially the Tamban and Galunggong. According to the study by Estrada et al. (2023), most fish sellers experience unsold Tamban and Galunggong for three (3) – four (4) days per week, with an average volume ranging from seven (7) to nine (9) kilograms. Seller's cope with this challenge by reducing the prices of unsold fish for the following business day. This predicament impacts their pricing strategies and hampers their supply chain, as they encounter difficulties procuring fresh supplies due to unsold fish.

In response to the challenge of excess unsold Tamban and Galunggong, developers have designed an automatic fish dehydrator. This innovation allows sellers to avoid reducing the price of unsold fish, which could result in losses.

Instead, they can transform the excess fish into a value-added product, potentially increasing their profitability.

The automatic fish dryer creates a value-added product from unsold fish, increasing the storage life of the fish and allowing it to be sold at higher prices later on. An Arduino microcontroller controls the device, ensuring precise regulation of the dehydrator's environment and facilitating an optimal drying process. It also notifies the user when the drying is complete.

Background of the Project

Identifying the problem in San Pablo City's Public Market from the study of Estrada et al. (2023), the developers have developed an innovative solution to address the issue faced by fish vendors, which is the unsold fish, leading to substantial product loss and diminished income potential. Conventional drying methods, often time-consuming, inefficient, and lacking stringent hygiene controls, have inspired the creation of an automated fish dryer.

The creation of automated fish dryers directly tackles these challenges. The envisioned outcome is a market where unsold fish is not a concern but an opportunity, with dried fish as a value-added product. Raynaldo (2021) suggests that the automatic fish drying system, designed for efficient fish dehydration and uniform heat distribution through a palette rotation mechanism, offers a promising solution to the excess fish supply. Beyond its potential to enhance drying effectiveness, this innovation holds economic promise for coastal communities.

In this paper, the developers created a fish dehydrator that automatically stops when it meets specific conditions during drying. One condition is reaching

the desired moisture content of the fish, measured using load sensors. Another condition is the maximum drying time, which is determined through testing. This data helps determine the required drying time and acts as a safeguard against errors in the load sensor. Implementing these two conditions ensures the drying process stops after drying the fish, preventing over-drying.

In the fight against food waste, the developed automatic fish dehydrator for San Pablo City Public Market offers a potential environmental benefit beyond just reducing waste. Dehydration is a natural preservation method that could eliminate the need for chemical preservatives often used with fresh fish. This would not only extend the shelf life of the fish but also reduce the environmental impact associated with the production and disposal of these potentially harmful chemicals.

According to E.M. Rogers' Diffusion of Innovation Theory in 1962, the early adoption of a new idea is crucial. The introduction of this innovative fish preservation method aims to demonstrate its effectiveness. If successful, others facing similar industry challenges could adopt it.

Objectives of the Project

General Objective:

The general objective of the design project is to help retail fish vendors solve the problem of unsold Tamban and Galunggong by transforming them into new products that can increase their shelf life and profitability.

Specific Objectives:

Specifically, it aims to:

1. Design and develop a device that performs the following functions:

- a) Monitoring and regulating the temperature;
 - b) Displaying the current temperature, humidity, and weight of the fish;
 - c) Drying a maximum of 10kg of Tamban or Galunggong;
 - d) Stopping the drying process automatically after completion;
 - e) Notifying the user via SMS the final weight after the drying process.
2. Evaluate using ISO 25010 with the following software standards: functionality, performance efficiency, usability, reliability, security, compatibility, maintainability, and portability, which can ensure the quality of the design project.
 3. Prepare a deployment plan for the device.

Scope and Limitations

This project aims to conceptualize, develop, and implement a solution for the retail fish vendors in the San Pablo City Public Market, addressing the issue of unsold fish while introducing a value-added product. The client for this project is Mr. Efrain Maranan Jr., a retail fish vendor in the San Pablo City Public Market for over 12 years. The proposed initiative involves designing and implementing an automated fish dehydrator that can efficiently dry up to 10kg of Tamban and Galunggong.

The project spans the entire academic year 2023-2024, covering conceptualization, evaluation, testing, and implementation across both semesters.

The project incorporates an Arduino-controlled automatic drying system to ensure an optimal drying process. This feature includes humidity and temperature sensors for continuous monitoring. When the device detects these variables, it

activates the heating element and starts the fan to ensure even heat distribution. The device automatically turns off when the fish reaches the desired moisture level, determined by weight. The detection relies on a load sensor connected to the Arduino. The user can calibrate the load sensor after several uses to ensure that the sensor readings are correct. In case of a load sensor error, the maximum drying time from tests is a safety measure, ensuring the drying process stops appropriately. Additionally, there is a one-way communication through SMS, wherein the device sends a message to the user after the drying process to notify them.

The automated fish dehydrator is designed to optimize the drying process, specifically for Tamban and Galunggong. Drying other types of fish in the dehydrator is not recommended, as its settings was set only for Tamban and Galunggong only. Also, the user must not dry large fish and small ones together as it results to uneven drying. Users are also responsible for brining, and placing the fish inside the dehydrator, as the device's primary function is solely to dry the fish. Moreover, users must clean and maintain the dehydrator after each use to ensure optimal performance and hygiene. Regular cleaning is essential to preserve the quality of dried fish and prevent cross-contamination between batches.

Additionally, there are no features to prevent the smell from emanating from the device, as it has multiple holes on both sides and at the top, through which air automatically exits. During the drying process, a fishy smell is produced, so it is recommended to place the dehydrator away from clothes and other items.

The device is designed to run exclusively on a standard household electrical outlet, which typically provides 220 volts of alternating current (AC). This means that the device will not be able to function during a power outage. It also does not have any built-in backup power systems, such as rechargeable batteries or a solar panel, to keep it running when the main power goes out.

Due to budget and time constraints, only one prototype was produced and provided to the sole client, Mr. Efrain Maranan Jr. The selection criteria for choosing a client focused on factors including need, potential impact, and a willingness to actively participate in the testing and feedback phases of the project.

Significance of the Project

The project is significant for the following:

Fish Vendors. The design project helps them minimize losses by prolonging the shelf life of their fish product and increases profitability by introducing and supplying a value-added product.

Consumers. The additional supply of dried fish from the project contributes to more stable and potentially lower consumer price. This increases the availability of a preserved fish product and makes it more affordable for consumers.

Developers. The project helps developers improve their abilities in their selected programs. Their technical skills and understanding of engineering principles grow as a result.

Future Developers. Future developers interested in working on similar device will benefit from this project. Subsequent developers can draw inspiration and this project a reference while developing their design project.

Theoretical Framework

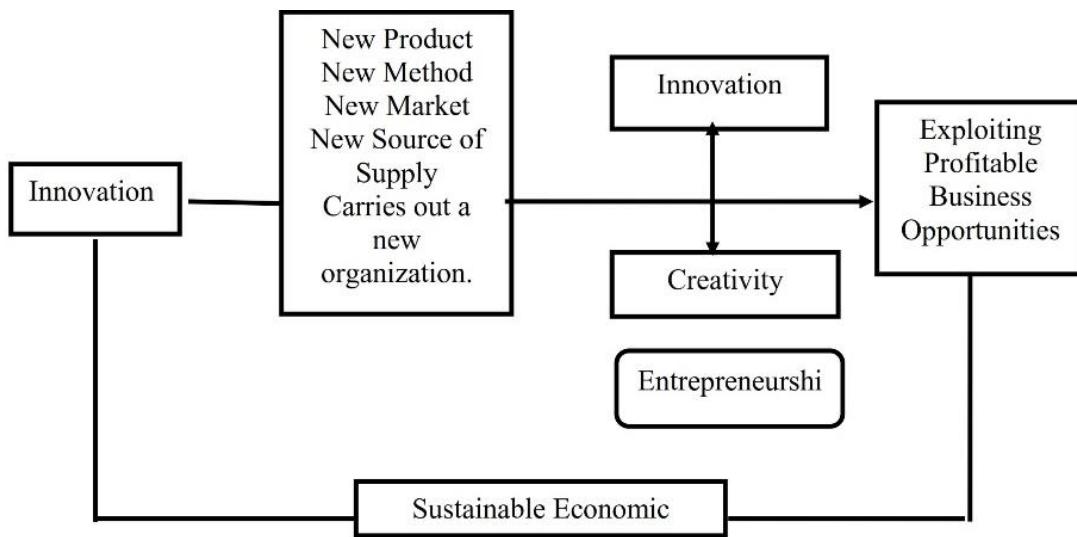


Figure 1.1 Innovation Theory of Entrepreneurship Model

The theoretical basis of this study is Joseph Schumpeter's Innovation Theory of Entrepreneurship. Schumpeter argued that entrepreneurs are willing to take risks and invest resources in developing and commercializing innovations. This process of innovation is often disruptive to existing businesses but is also essential for economic growth (Mehmood, Alzoubi, Alshurideh, Al-Gasaymeh, & Ahmed, 2019).

Turning unsold fish into dried fish using a dehydrator can offer several advantages. Firstly, removing the fish's moisture through osmotic dehydration and evaporative drying aids its preservation and prolongs its lifespan over time (Richa, 2022). This aligns with Schumpeter's idea of entrepreneurs investing resources to develop innovations that can disrupt traditional business models. Secondly, by employing technology to control the drying process, the device can ensure consistent quality and safety standards for the dried fish (Alvinika, Setyohadi, & Sulistyoningsih, 2021). In essence, the Arduino fish dryer addresses the problem

of unsold fresh fish and introduces a novel product to the market, potentially creating a new niche and contributing to economic growth, as Schumpeter's theory suggests.

Besides preserving unsold fish in line with Schumpeter's innovation principles, the Arduino fish dryer also promotes environmental sustainability. Converting unsold fish into dried fish extends shelf life and addresses environmental concerns associated with traditional disposal methods. This innovation reflects a dual impact: economic viability through product and environmental responsibility by reducing food waste.

Conceptual Framework of the Project

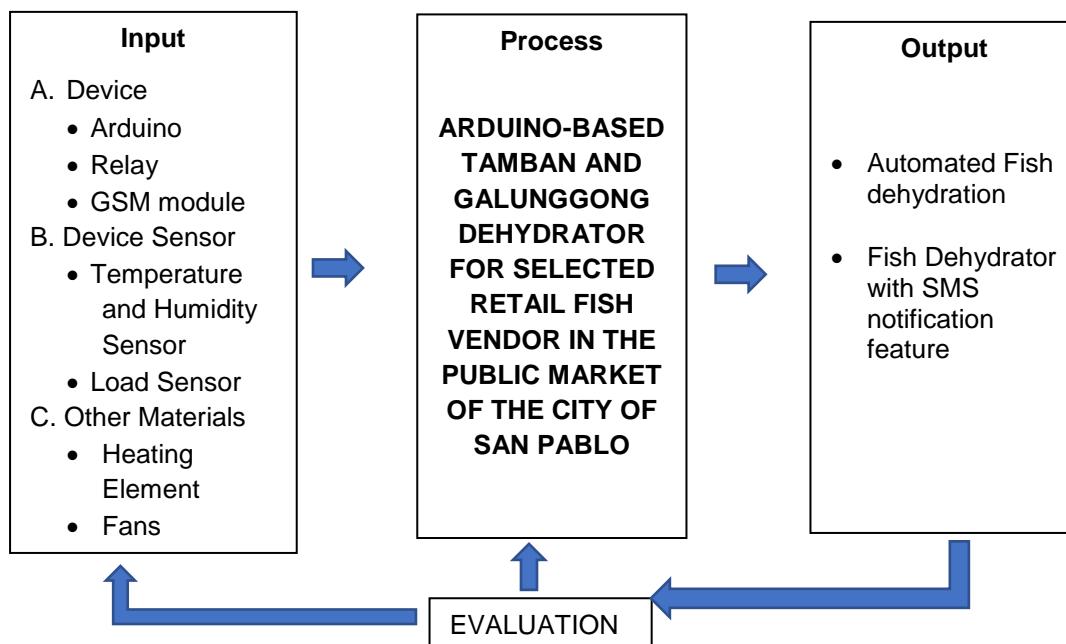


Figure 1.2. The Conceptual Framework of the Project

The first section is "Input." The fish dehydrator was made using an Arduino Uno to control the system, a heating element to raise the required temperature, an aluminum expanded wire for layering the fish, a temperature and humidity sensor

to sense the necessary heat and moisture inside the device, a load cell connected to the HX711 module to measure the weight of the fish, fans for circulating air inside the device, an aluminum stucco sheet for the device's body, and a relay for additional control of the signals.

The project involved the “Process” of building the fish dehydrator for automatic fish drying. The developers design the body of the device and configure the Arduino program to control the hardware components which are the fans and heating elements based on sensor readings.

In the “Output” phase, the project’s culmination is producing dried fish or other food products through the automated fish dehydrator developed by the developers. This output represents the practical application of the fish dehydrator and reflects the success of the design and configuration process. The primary objective of the device is to achieve efficient and uniform drying of Tamban and Galunggong fish that are good enough to be sold in the market.

The evaluation phase is the last step in the design of the Arduino-based fish dehydrator. A group of three project evaluators carried out the evaluation. The critic used the ISO 25010 standard criteria to assess the project, which includes functionality, reliability, performance efficiency, usability, security, compatibility, maintainability, and portability.

Definition of Terms

To provide clarification, the terms listed below are defined in the context of the project:

Arduino is a microcontroller that the developers use to control access to data from sensors and configure the output of fans and the heating element.

Dehydration is a method for removing water from fish bodies.

Fish dryer is a device that efficiently dries fish inside a closed environment, preventing contamination and speeding up the drying process. This ensures high-quality, uniformly dried fish by creating a controlled environment.

Humidity is the amount of water vapor in the air inside the fish dehydrator.

Spoilage is when a food item becomes unsafe for a customer to consume.

Temperature and humidity sensors are integrated into the fish dehydrator to monitor the internal environment and send the data to the microcontroller.

Unsold fish pertains to the fish inventory that remains at the end of a selling day. The unsold fish at the end of a selling day have yet to be purchased or consumed during the daily sales.

CHAPTER II

REVIEW OF LITERATURE AND RESEARCH PROJECTS

This chapter reviews literature, studies, and projects in relation to a design project that takes into account a variety of theories, ideas, and methods supported by current or critically important studies from both domestic and foreign sources. The project's developers were able to better conceptualize and evaluate the work thanks to these reviews. It also includes design synthesis, which aids in selecting and determining the appropriate theoretical analysis for developers.

Review of Conceptual Literature

Fish Preservation

Preserving fish quality and freshness is a significant issue for fish vendors. Given that fish is a highly perishable product, ensuring its freshness throughout the supply chain, from procurement to sale, is crucial.

A study by Estrada et al. (2023) showed that unsold fish pose a problem for the sellers' profitability. The study recommended creating a value-added product out of unsold fish that extend its shelf life. The developers suggested creating dried fish, which can help lessen the loss due to unsold fish products.

In the study of Swami et al. (2018), the drying process for food preservation is very popular for some agricultural and food products. Drying is a better option than refrigeration for food products when it comes to cost and equipment complexity. Since energy consumption is an important issue in the case of food preservation methods, the dryer uses unconventional energy, such as solar energy, to ensure minimum investment and reliability.

Fishing Industry

The study by Bell et al. (2020) confirms that climate change affects fisheries, leading to shifts in the distribution and abundance of fish populations. These changes pose unprecedented challenges to the health, well-being, and livelihoods of people dependent on fishery resources. Additionally, the study suggests that effective, long-term natural resource management is crucial for building resilience to climate variability and change impacts. Key strategies highlighted include ensuring high spawning stock biomass levels, protecting habitat, maintaining ecosystem function, and facilitating responsive management.

Species	Volume of Production (metric tons)			Percent Change (%)		Percent Share to Total Volume of Fisheries Production (%)
	2021	2022	2023 ^P	2022/2021	2023 ^P /2022	
Fisheries	998,925.56	996,317.25	1,017,504.40	-0.3	2.1	100.0
Milkfish (Bangus)	115,858.32	100,280.57	88,281.01	-13.4	-12.0	8.7
Tilapia	59,174.17	53,550.81	57,254.28	-9.5	6.9	5.6
Tiger prawn (Sugpo)	8,010.62	6,371.99	3,250.34	-20.5	-49.0	0.3
Skipjack (Gulyasan)	56,581.52	60,034.92	52,451.59	6.1	-12.6	5.2
Roundscad (Galunggong)	44,069.13	41,694.28	48,853.04	-5.4	17.2	4.8
Seaweed	292,140.29	323,577.15	368,797.89	10.8	14.0	36.2
Yellowfin tuna (Tambakol/Bariles)	17,415.24	22,213.05	28,537.11	27.5	28.5	2.8
Mudcrab (Alimango)	6,240.05	4,209.41	3,027.02	-32.5	-28.1	0.3
Frigate tuna (Tulingan)	22,300.60	21,967.98	20,487.59	-1.5	-6.7	2.0
Big-eyed scad (Matangbaka)	28,179.00	24,782.95	32,900.37	-12.1	32.8	3.2
Bali sardinella (Tamban)	96,876.98	79,916.60	76,441.80	-17.5	-4.3	7.5
Squid (Pusit)	11,019.94	15,643.52	11,521.79	42.0	-26.3	1.1
Blue crab (Alimasag)	8,608.59	6,075.23	4,978.52	-29.4	-18.1	0.5
Bigeye tuna (Tambakol/Bariles)	4,668.26	6,104.27	3,592.93	30.8	-41.1	0.4
Grouper (Lapu-lapu)	6,042.48	5,177.55	4,377.00	-14.3	-15.5	0.4
Indian mackerel (Alumahan)	12,178.05	9,591.67	15,404.70	-21.2	60.6	1.5
Threadfin bream (Bisugo)	8,680.82	8,626.95	6,956.36	-0.6	-19.4	0.7
Slipmouth (Sapsap)	9,721.92	9,229.97	9,426.76	-5.1	2.1	0.9
Cavalla (Talakikot)	7,362.15	7,827.96	5,767.26	6.3	-26.3	0.6
Fimbriated sardines (Tunsoy)	13,199.19	15,598.17	9,694.78	18.2	-37.8	1.0
Others	170,598.25	173,842.28	165,502.26	1.9	-4.8	16.3

P - preliminary

Note: Percent change and percent share may yield different results when computed manually due to rounding.

Sources: Philippine Statistics Authority, Quarterly Commercial Fisheries Survey, Quarterly Municipal Fisheries Survey, Quarterly Inland Fisheries Survey, and Quarterly Aquaculture Survey

<https://psa.gov.ph/statistics/fisheries-situationer>

Figure 2.1. Volume of Fisheries Production by Species

According to the report of the Philippine Statistics and Authority on the Fisheries Situation Report for the third quarter of 2023, the fisheries production volume reached 1,017.50 thousand metric tons, showing a positive trend with a 2.1 percent increase compared to the 996.32 thousand metric tons recorded in the corresponding quarter of the previous year. Commercial fisheries, inland municipal fisheries, and aquaculture subsectors experienced growth in production on an annual basis. Tamban and Galunggong are among the most abundant fish species in the Philippines.

Luceño et al. (2019) stated that one of the top ten species in commercial fishing in the Philippines is *Sardinella Lemuru*. Sardines have made up most of the Philippines landed catch since 1950, making them the most easily obtainable protein source for millions of Filipinos. Important economic uses of *Sardinella Lemuru* can be consumed as fresh fish are dried, processed to make fishmeal, and preserved.

The Philippines is a significant global fish producer, ranking 13th in marine capture and 4th in seaweed production in 2018. The fishing industry comprises aquaculture, municipal, and commercial fisheries, with aquaculture contributing 53% of total production. This industry is vital for providing food security, livelihoods, and export earnings, with fish being the main protein source for Filipinos. Around 2 million coastal residents engage in fishing activities, contributing to approximately US\$1.6 billion in fishery exports in 2018. However, the industry faces pests, diseases, water quality degradation, harmful algal blooms,

overfishing, illegal fishing, climate change, and a lack of capital and government support (Tahiluddin, 2021).

Fish Dehydration

Drying processes play a crucial role as unit operations in the food manufacturing sector by effectively decreasing moisture content. The resulting products usually take the form of powder, flakes, granules, sheets, or particles, tailored to meet the specific needs of manufacturers and determined by the chosen drying technologies employed throughout the production process (Menon, Stojceska, & Tassou, 2020).

The primary objective of the drying process for fish goods is to extend their shelf life, enabling more prolonged periods of storage while minimizing the need for excessive packing and reducing shipping weights. The evaluation of a food product's quality is determined by the extent of physical and biochemical deterioration that takes place during the dehydration procedure. The storage stability of a fish product is enhanced with a decrease in water activity, and fish products that have undergone drying at lower temperatures have favorable storage stability (Okos, 2018).

Air is the predominant gas employed for fish dehydration, and its moisture content plays a crucial role in estimating drying parameters. According to Adeyeye (2019), the moisture content and color of dried fish are influenced by the drying process. Additionally, the drying method employed plays a role in determining the moisture content of the dried fish. Moreover, an inverse relationship is observed between drying power, drying rate, and the time taken for the drying process.

Liu et al. (2023) investigate the advantages and applications of using dehydration techniques in processed and ready-to-eat foods. The study examines current dehydration technologies, investigates emerging advancements, and discusses effective strategies for managing bacteria in food products. They emphasize using advanced food science and technology to enhance the overall quality of processed foods. Notable research areas highlighted in the article include intelligent drying and dehydration-induced modification technology. Furthermore, the article emphasizes the growing interest in advanced drying methods, such as pulsed-spouted microwave freeze-drying and infrared freeze-drying, which provide superior capabilities.



<https://www.superbheater.com/heaters/industrial-tubular-heater/ce-approved-1500w-electric-tubular-heater.html>

Figure 2.2. Heating Element

Heating elements are necessary for drying. Based on the findings of Aboud (2019) on heating food, the main objectives are to enhance the food's shelf life and flavor. Traditional heating methods involve radiation, convection, and conduction for heat transfer. However, a combination of microwave and infrared heating

techniques is utilized to improve energy efficiency, resulting in rapid heating of the food.

Fang et al. (2020) discussed the benefits of electric heating garments for those in cold environments. It highlights the advantages of electrical heating, such as reusability, controlled temperature, and safety. The study covers material preparation, electric-thermal properties, and the pros and cons of flexible heating elements. It also delves into smart garment research and application progress, offering insights into flexible heating elements and smart garment research.



<https://pixabay.com/illustrations/arduino-arduino-uno-technology-2168193/>

Figure 2.3. Arduino Uno Microcontroller

Arduino is an open-source electronics platform that facilitates the development of interactive and programmable projects through hardware and software. The core hardware component is the Arduino board, which houses a microcontroller (typically an Atmel AVR or ARM processor), digital and analog input/output pins, and connectors for external devices like sensors and actuators. The software aspect involves the Arduino IDE (Integrated Development

Environment), a platform for writing, compiling, and uploading code to the Arduino board. Programs, referred to as sketches, are written in a simplified version of C/C++ (Ismailov, 2022).


The Arduino contains everything needed to support the microcontroller; connect it to a computer with a USB cable or power it with an AC-to-DC adapter or battery to get started. Everything required to support the microcontroller is included; the Arduino board needs to connect to a power source. The Arduino UNO can be powered by a USB cable from a computer or a wall power supply (Benjamin, 2020).

Additionally, according to Ismailov (2022), Arduino is widely employed in research for diverse applications, including developing devices that interact with the environment through sensors. Additionally, developers utilize Arduino to establish internet-connected systems, enabling data transmission via HTTP requests or Wi-Fi modules for remote monitoring and control. Its versatility is evident in creating and implementing innovative projects across various domains, such as wearable fashion, space exploration, and robotics. The platform's adaptability makes it a valuable tool for developers exploring creative and interdisciplinary applications in their work.

Temperature and Weight Monitoring

Based on the findings of the study by Li et al. (2022) it is evident that humidity sensors play a vital role in industries such as atmospheric environment management, medical devices, agriculture, aerospace, and industrial production. The study highlights the increasing demand for humidity sensors that surpass the

capabilities of existing models in terms of responsiveness, recovery time, selectivity, stability, and repeatability. To address this demand, the study focuses on the development of a ZnO/SnO₂ humidity sensor using a solvothermal technique. The humidity-sensing mechanism of the sensor is analyzed through the evaluation of the Complex Impedance Spectrum (CIS).

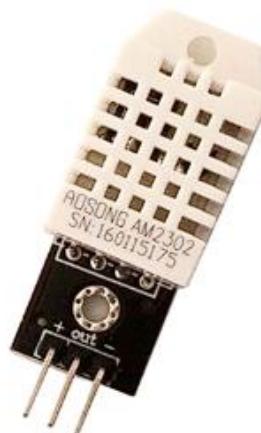

<https://components101.com/sensors/dht22-pinout-specs-datasheet>

Figure 2.4. DHT22 Module

The DHT22 utilizes a capacitive humidity sensor element for precise measurement of relative humidity by detecting changes in capacitance induced by moisture in the air. This feature makes it well-suited for applications requiring critical humidity monitoring, including climate control, agriculture, and environmental research. In terms of temperature measurement, the DHT22 employs an NTC (Negative Temperature Coefficient) thermistor, gauging the resistance of the thermistor as it varies with temperature. This approach enables the sensor to determine the ambient temperature accurately, adding versatility to its applications in various settings (Koestner, 2019).



<https://www.aliexpress.com/item/32817425302.html>

Figure 2.5. Load Cell with HX711 Module

The load sensor is described as a device that measures the weight of an object. Specifically, the study utilizes a load cell sensor, which converts the pressure or force applied to it into an electrical signal. This signal is then amplified and converted using the HX711 module, which interfaces with the Arduino Uno microcontroller. The system aims to enhance baggage weighing processes at airports by automating the measurement and display of baggage weight on an LCD screen and printing out relevant information using a thermal printer. (Ramadhan, 2023).

In the study of Yanti (2022), a load sensor with an HX711 amplifier was used to continuously monitor the weight of the fish during the drying process. The project made the fish lose 50% of its weight in just 4.48 hours. The system demonstrates the utilization of fuzzy logic in controlling fish drying equipment, resulting in a reduction of drying time by approximately ten (10) hours compared to the duration required for sun drying.

Review of Research Literature

Local

The study entitled "*Traditional Fish Processing Techniques Applied in the Philippines and Turkey*" by Tahiluddin et al. (2022) explores the prevalence and characteristics of Traditional Fish Processing Techniques (TFPT) in the Philippines and Turkey. Both countries widely employ TFPTs, including drying, salting, pickling, and smoking methods, especially among low-income coastal communities. Based on a review of literature from 1950 to 2021, the research reveals similarities in the application of TFPTs in the two nations, with variations primarily seen in the finished products. The Philippines stands out for its diverse and unique processed seafood offerings compared to Turkey. The more prosperous and varied fisheries resources in the Philippines contribute to a higher consumption rate of aquatic products among Filipinos. The study highlights the Philippines' exclusive use of fish product fermentation in TFPT, a method not commonly found in Turkey.

Based on the study titled "*Histamine Profile of Dried-Salted Fish Sold in Local Supermarkets of Samar, Philippines*" of Amascual et al. (2020), dried and salted fish are popular fishery products in the Philippines, particularly in Samar. The trade and processing of marine resources provide business opportunities in the region. However, the quality of dried fish products has declined due to various factors, such as unsanitary conditions, improper handling, and histamine contamination. Following the regulatory authorities' set histamine limit, dealers aim to sell their goods in supermarkets. The Food Safety Act of 2013 enhances food

safety regulations to protect consumers from illnesses and ensure product quality. A recent study conducted in Samar analyzed histamine levels in dried and salted fish products available in local supermarkets. The research explored the relationship between fish variety, market location, and histamine formation and concentration. By addressing histamine-related concerns, the study contributes to consumer health and safety.

According to Cain (2019) the appropriate technology for development. Lower-income families in both rural and urban areas of the Philippines commonly use traditional fish preservation techniques such as smoking, drying, and fermenting. Approximately 33 percent of the annual fish catch is processed using these methods. Although not a strong preservative, smoking adds flavor and color to the fish. The smoked and dried fish are sold for approximately US \$0.04 per fish. The study highlights the operational costs, which include fish purchases, labor wages, and fuel. Additionally, it mentions the efforts of the Bureau of Fisheries and Aquatic Research to improve techniques and enhance productivity among municipal fishermen.

Improper solid waste management of fish waste contributes to pollution, leading to the Philippine aquaculture industry being deemed unsustainable by the Comprehensive National Fisheries Industry Development Plan. According to De Ungria et al. (2022), promoting a circular economy by reusing waste can enhance sustainability in the fish industry. This study surveyed and interviewed fish vendors in Metro Manila to identify efficient and feasible methods for reusing and disposing of fish waste. The data collected can inform policies on repurposing fish waste and

fostering a circular economy. Same study results indicated that wet market fish stalls in Metro Manila produce 1.8 tons of fish waste annually. Most waste is collected and segregated by garbage collectors, but practices vary and are inconsistently enforced, making current management methods ineffective. Educating industry workers, implementing recycling methods, and recommending these practices to local governments can help develop a circular economy and provide an additional income source for the fish industry.

According to Uba et al. (2020) , in Iloilo unsold mussels are transformed into value-added products. These products are then distributed to nearby municipalities, utilizing motorcycles for transportation. The majority of itinerant vendors sell their goods within Dumangas and the adjacent municipalities of Barotac Nuevo and Leganes. Some vendors extend their reach to Anilao, Janiuay, Dingle, Banate, and Pototan, which are approximately twenty (20) to thirty (30) kilometers from the collection site.

In Bataan, Tuyo processing and wholesaling are more profitable than tinapa, with tuyo's gross margin at 36% of total returns and 57% of marketing/variable costs, compared to tinapa's 30% and 42%, respectively. Retail margins for both are lower, at 16% of total returns and 19% of marketing/variable costs, indicating that processing/wholesaling is more profitable than retailing. Given the 0.05% bank savings interest rate as the opportunity cost of capital, both tuyo and tinapa processing/wholesaling and retailing are viable enterprises. Tuyo's higher marketing margin of P60/kg over tinapa's P40/kg is due to its longer shelf life from sun drying (De Leon, 2021).

Even though fish processing is a great way to preserve fish, the threat of having bacteria cannot be disregarded. According to Maribao (2022), spoilage bacteria found in both fresh and processed fish and fisheries products. Common spoilage agents in processed fish, such as salted, dried, and hot-smoked varieties, include molds, yeasts, and bacteria. Spoilage molds are most commonly associated with the genera Aspergillus and Penicillium. Yeasts, particularly species of Rhodotorula and Candida, are frequently linked to fish stored at low temperatures. Notable spoilage bacteria include Pseudomonas, Alcaligenes, Aeromonas, Enterobacter, Bacillus, Enterococcus, Psychrobacter, Escherichia coli, Listeria, Brochothrix, and Shewanella. Further research into the microbial ecology of aquatic food products is necessary to fully understand the role microorganisms play in spoilage.

Additionally, the study of Ortega et al. (2024) on the quality and food safety of dried white goby focuses on the demographic profile and drying practices of fish processors. Key safety and quality parameters, including organoleptic, microbiological, and physicochemical characteristics, were evaluated. Results indicated that women predominantly handle fish drying, primarily using traditional sun-drying methods in coastal communities. Organoleptic testing showed no significant quality differences except for flavor, with Socorro receiving the highest acceptance. Microbiological analyses revealed that all samples met the Philippines' quality and safety standards for commercial dried fish.

To meet the increasing food demands due to population growth, fish farmers might produce lower quality fish. Effective fish growth monitoring is crucial

for improving the quality of fish products, which benefits the aquatic animal food production industry. However, manual weighing and measuring can stress the fish, adversely affecting their health and leading to poorer quality or even fish mortality. An automated aquaculture system equipped with weight prediction technology, using image processing techniques and predictive analysis, enhances the growth and survival rates of Nile Tilapia (Tolentino, 2020).

The results of the study of Castro (2021) on "*Analyzing Consumer Preferences for Credence Attributes of Fish and Fishery Products in Davao City, Philippines*" indicated that seafood consumers prioritize food safety over environmental sustainability when selecting policies for their seafood products. This does not reflect a general preference for specific policies among consumers. Instead, consumers showed a stronger inclination towards food safety-related policies, such as food safety certifications and traceability systems. Despite a limited understanding of food safety dimensions, consumers placed greater importance on policies that would enhance their overall trust in the safety of food sold in the market. Across all consumer segments, food safety emerged as the most preferred policy, highlighting it as a major concern for consumers. Consequently, the general preference for food safety information suggests a potential adaptation of food safety product labels.

Foreign

One of the oldest known methods of food preservation is drying. Traditional methods have been used to dry the fish everywhere fish is caught. Fish can be dried using various techniques, from conventional sun-drying to sophisticated

industrial processes managed by computers. It is essential to consider how drying affects the product's nutritional content. A community may profit more from adopting a fish-drying method that produces a more stable and wholesome product and generates employment in other industries than the higher costs associated with the process. However, evaluating the costs and benefits of introducing new technology is only sometimes straightforward. The most popular technique for drying fish is undoubtedly exposing it directly to the sun. Fish from larger types may be split, and some fisheries use brining or salting as a pretreatment before laying their catch out to dry (Doe & Olley, 2020).

The effectiveness of the dehydration process in producing dried and cold-smoked fish is discussed in the article by Ershov et al. (2020). A dry region with low moisture conductivity features close to the surface is the outcome of the dehydration process. The goal of the project is to create a system that can efficiently remove moisture at drying rates that are both constant and decreasing. The suggested approach includes material relaxation and drying processes looped at the drying rate reduction stage. The product's internal moisture causes the dehydrated near-surface area to relax, allowing it to reenter the dehydration process with high conductivity characteristics. It is recommended that the relaxation regime calculation approach be in line with the second critical point on the fish dehydration kinetics curve. The suggested technology reduces electricity consumption by 8–12% compared to conventional approaches.

Based on the study of Sminorva et al. (2019) in energy efficient systems and regimes at fish products drying processes, it was discovered that the choice

of salting technique impacted salt absorption and water loss during the salting process; the drying experiments showed two drying stages with decreasing rates without a constant rate period. The initial drying stage was influenced by the specific salting method employed. To develop modern food processing technologies, it is essential to prioritize technological systems that minimize labor and energy consumption. A heat pump-based technology has been developed to produce dried fish snacks, incorporating a specialized unit for efficient processing of fish mince. This advancement aims to address product quality, uniformity, environmental safety, process productivity, and complexity challenges.

Fish is one of the most demanded foods because of its health benefits, such as its high protein and lower fat content compared to other animals. However, the quality of fish is quickly declining, so one of the solutions to prevent it is preservation, one of which is drying. Fish drying has the principle of reducing the water content of the material so that the growth of microorganisms will stop and be inhibited. There are two methods of fish drying: traditional and modern. Some people still use traditional methods and simple tools that are negligent about hygiene, which can harm the environment. The modern way of drying is by using devices. Temperature, airflow, desired moisture content, drying energy, and drying capacity all significantly impact drying fish. Drying too quickly can cause harm to the surface material being dried, preventing it from being balanced with the speed of air traveling to the surface material. Rapid drying may cause the surface material to harden; clogging may prevent the air in the substance from evaporating; and employing too high a temperature may harm the material (Raja, 2023).

In recent years, there has been an increasing interest in finding uses for fish byproducts deemed unsuitable for direct human consumption but remain in primary production. Fish protein hydrolysate is one of the most effective ways, out of all the potential solutions, to extract essential nutrients from that material. This article aims to provide an overview of the knowledge currently available on the manufacturing of dried fish protein hydrolysates, with particular attention to the equipment used for moisture removal and the process of dehydration during production. Since the drying process is thought to require the most energy, it is explained in great depth. The article highlights issues related to the energy requirements of drying and suggestions for enhancing energy efficiency. This paper also gives valuable details about the state of fish protein hydrolysate in the middle of the process, where the raw material comes from, the main steps of the technology scheme, and the tools that were used (Petrova, Tolstorebrov, & Eikevik, 2018).

According to Rahman (2020) in his study of Osmotic dehydration of foods. Osmotic dehydration of food has potential advantages for the fruit and vegetable processing industries. The technique of removing water from cellular solids by immersing them in a concentrated aqueous solution is known as osmotic dehydration. While solute uptake or leaching occurs solely by diffusion, the osmotic process primarily uses diffusion and capillary movement to remove water. Apple slices treated osmotically showed a shift in their water sorption properties to the right. Analysis using scanning electron microscopy showed that osmotic therapy improved the preservation of the cellular structure. The solute residues were

retained within the product via osmotic pretreatment, which also affected the product's flavor and dielectric characteristics. Because osmotic dehydration may be done at low temperatures, it requires less energy than air- or vacuum-drying. The most widely utilized osmotic agents are sodium chloride for vegetables, seafood, and meat and sugar for fruit.

Abraha et al. (2018) found that fish is a valuable source of protein and nutrients and that several processing techniques are used to maintain the fish's quality and availability. These techniques include canning, cooking, freezing, smoking, and drying. Proteins, lipids, vitamins, minerals, and sensory elements, including color, flavor, texture, and appearance, are the most impacted components. Denaturation, coagulation, decreased protein digestibility, oxidation, and vitamin loss are examples of chemical composition alterations. Texture, color, and yields are physical changes that impact the quality of fish and fishery products.

For the longer shelf life of the products, they came up with this study of dehydration of agricultural products that can reduce shipping and packaging costs as a result of reduced weight and volume; many product developers are attracted to osmotic dehydration due to its sound and quality food preservation (Gallo, 2018). They came up with the design of a shaken tank type without jacketing, constructed in stainless steel AISI 304 caliber 14 with a thickness of 3 mm film, heated using a clamping resistor, and having a control panel with three variables (temperature, stirring rate, and pressure) that can affect the final product.

The study of Natarajan et al. (2022) emphasizes preserving food products in India, a predominantly agricultural country. With agriculture contributing 61% of

income, the paper underscores the need for proper training in preservation technology for India's development. The study identifies a significant issue of post-harvest food losses (60% of total losses) due to ineffective preservation methods.

Review of Research Projects

Local

Sandfish processed and dried using traditional procedures yield low-quality, low-value items for the market. Trondillo et al. (2018) demonstrated that smoking and sun drying are standard methods of drying, which might result in insufficient drying, especially in bad weather, and leave smoke residue and scorch marks. To ascertain the impact on product quality and cost, a combination of hot air drying and solar drying was contrasted with the conventional method of smoke drying followed by sun drying. The findings demonstrated that substantial shrinkage happened irrespective of the drying method applied. Samples that underwent the conventional method shrank more, yet this difference was not statistically significant. Alterations in muscle and collagen fibers were seen using scanning electron microscopy between primary drying (solar or hot air drying) and secondary drying (solar or sun drying). An evaluation of the dried samples conducted by a producer, consolidator, and exporter revealed that the processed sandfish dried under Treatment II was of higher quality and could fetch prices up to 25–89% more than those dried under Treatment I.

The main goal of the project of Paman et al. (2020) was to ascertain the drying behavior of yellowfin tuna (*Thunnus albacares*) skin to provide benchmark data for processing tuna skin into edible material. They utilized airflow speeds of

0.95 m/s and 0.80 m/s and a drying temperature of $47\pm3^{\circ}\text{C}$. From an initial moisture content of 61.86% w.b., the final product's goal moisture content of 10.00% w.b. was reached. The results showed that the drying rate was initially faster at 0.95 m/s air velocity than at 0.80 m/s. Case-hardening was noted at 0.95 m/s at 1.50 hrs, which caused drying to slow down. As a result, it took longer to reach the final moisture content of 0.95 m/s. This resulted in notable variations in drying rates and times, with slower airflow rates of 0.80 m/s producing superior drying properties. The study's conclusions can be applied to developing a mildly drying tuna skin processing method that uses less energy.




https://thesai.org/Downloads/Volume14No7/Paper_26Optimizing_Drying_Efficiency_Through_an_IoT.pdf

Figure 2.6. Direct Solar Dryer System

The project developed by Miano et al. (2023) in coastal areas of the Philippines addresses the challenges of traditional fish drying methods through the implementation of an Internet of Things (IoT)-based Direct Solar Dryer System added that utilizing Arduino Uno and ESP-32, optimizes drying efficiency with a web data logger and SMS notification system. Focusing on drying Sardinella fish in Agusan Del Norte, the research assesses temperature, heat index, humidity, and temperature range alert conditions through a web application portal. The IoT-

based solar dryer effectively accelerates drying while maintaining optimal conditions. The system's monitoring and notification capabilities and remote data visualization offer a reliable solution to the challenges faced by fish-drying farmers. This design could be a model for upgrading traditional drying methods for various food products with IoT technology.

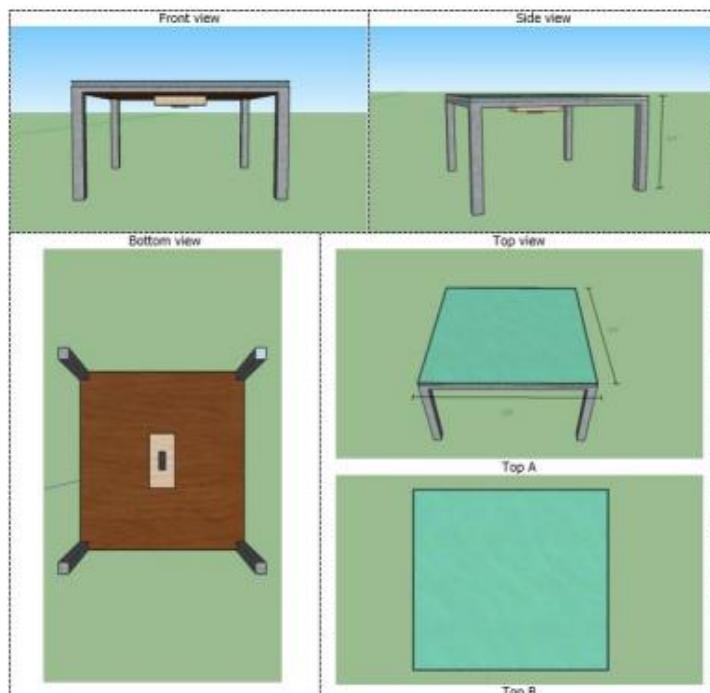

https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3717498

Figure 2.7. Weight Monitoring System for Tilanggit Dried Fish
With SMS Notification

The project developed by Curpoz et al. (2020), focuses on tracking the weight and moisture levels of fish during the drying process. The system collects data via a prototype and displays it in a desktop application, which also calculates moisture levels and shows real-time graphs. Fifty people, including fishermen, consumers, faculty, and businessmen, tested the system. They rated its functionality, reliability, and usability, with overall high scores: 3.97 for functionality,

3.66 for reliability, and 4.55 for usability, all indicating strong approval. The system was deemed successful and satisfactory. Some recommendations for improvement included enhancing the system's design and refining weight measurement accuracy.

Lugnasin et al. (2023) developed an off-grid IoT multilevel solar dryer for fish, focusing on drying anchovies (dilis), a common fish in the region. The new solar dryer was tested against the traditional sun-drying method to compare effectiveness. The solar dryer effectively trapped heat, maintaining higher temperatures inside (38.96 °C on the top rack, 36.47 °C on the middle rack, and 36.86 °C on the bottom rack) compared to the ambient temperature of 30.43 °C. It dried the anchovies four hours faster than traditional sun-drying. Data from the monitoring system confirmed that the solar dryer was efficient in drying the fish.



<http://research.manuscrithub.com/id/eprint/2528/1/Dumaguit2452023AIR101042.pdf>

Figure 2.8. Automated Squid Dryer Chamber

Dumaguit et al. (2023) aimed to develop an indoor dual-source drying system with IoT technology to detect moisture during drying. This automated system was compared to traditional drying methods and saved 34 hours. It monitored humidity and temperature in real-time using image processing

techniques. Conducted over a year in Brgy. Canlanipa, Surigao City, the study involved designing and building the dryer using Arduino Uno, Raspberry Pi 3b, sensors, and a motor. After creating a working prototype, developers tested it with wet squid samples and made improvements based on feedback. The automated dryer dried squid in just 14 hours, compared to 48 hours using traditional methods, while maintaining high quality with 10% moisture content. This indoor system was efficient and reliable, working well regardless of weather conditions and proving to be a significant improvement over traditional drying method.




<https://www.sciencedirect.com/science/article/abs/pii/S0144860919301219>

Figure 2.9. Actual Prototype of Seaweeds Solar Dryer

The project developed by Bertulfo (2022) focused on assessing a solar dryer specifically designed for local seaweeds. It involved examining the drying characteristics of seaweeds and fitting them with various drying models. The Midili-Kucuk model was identified as the most suitable for predicting and describing the seaweeds' drying behavior. A comparative analysis was conducted between traditional sun-drying methods and the newly developed solar dryer in terms of drying rate and drying time. The findings indicated that the solar dryer exhibited

significantly improved performance in both drying rate and overall drying time compared to sun-drying methods.

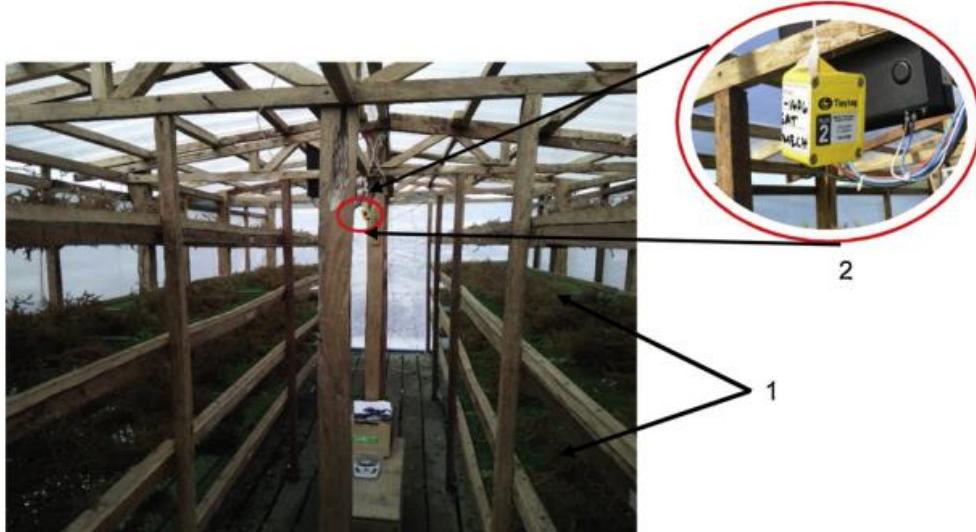

<https://sci-hub.st/https://doi.org/10.1016/j.aquaeng.2020.102068>

Figure 2.10. Dryer with Installed Temperature and Humidity Sensor


Pangan (2020) developed a device focused on optimizing the dryer's settings for different scenarios: sunny days, cloudy or rainy conditions, and nighttime drying. Developers experimented with adjusting the air inlet by varying the height of foldable sidings and timing the operation of exhaust fans to maximize the combined effect of solar and air drying. Significant findings included the effectiveness of fully opening the sidings without exhaust fans for nighttime drying, and partially opening them with exhaust fans for daytime conditions. These adjustments underscored the need to tailor dryer settings based on specific weather conditions to achieve optimal drying efficiency and maintain product quality.



<https://biomech.uplb.edu.ph/wp-content/uploads/2021/06/PJABE-Vol17-No1-2-2021-Pangan-et-al.pdf>

Figure 2.11. Modified Solar Dryer

University of the Philippines Visayas developed a Modified Solar Dryer (MSD) to improve the quality of dried fish. This technology has been extended and transferred to Partido State University. Fish dried using a Modified Solar Dryer (MSD) developed by Bigueja et al. (2022) is of superior quality due to controlled conditions and has the highest sensory acceptability. On rainy days, the MSD needs an additional heat source to prevent spoilage. The MSD is favored for its fast drying time and protection from dust, flies, and rodents. It also shows that drying time for split mullet fish depends on brine concentration and drying conditions, with higher temperatures and lower humidity speeding up the process.

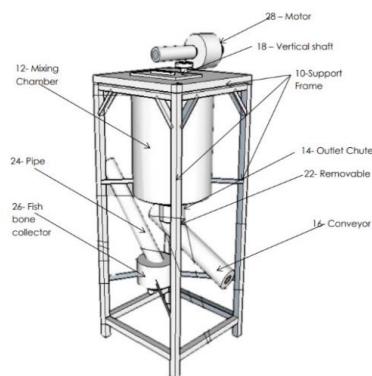

https://www.researchgate.net/publication/358508523_Development_and_Evaluation_of_Mechanized_Fish_Paste_Maker

Figure 2.12. Mechanized Fish Paste Maker

The Mechanized Fish Paste Maker made by Enriquez (2022) reduces manual labor in fish paste production by integrating the mixing and straining processes into a single compartment. Its performance efficiency is rated at 51.02% higher than traditional methods. Test results indicate that the machine significantly shortens the production time, enabling the production of bottled fish paste within one month. Consequently, it eases the workload for fish paste makers. Additionally, the cost-benefit analysis reveals that the machine can boost production by reducing operation time and lowering the number of laborers needed.

Foreign

Moula et al. (2023) aim to create a solar-powered innovative dehydrator using Arduino and the Internet of Things. The system uses solar energy to preserve food by heating the chamber and removing moisture. The Arduino microcontroller controls temperature sensors, an exhaust fan, a Wi-Fi module, and an LCD, allowing users to monitor and control the dehydrator remotely.

Murali et al. (2023) developed an energy-efficient solar hybrid dryer with a biomass-based gasifier heat backup for drying shrimps in sunlight and off-sunshine hours. The hybrid dryer utilized water as heat storage and a biomass gasifier as backup heat. Shrimp samples dried in the hybrid mode achieved the desired moisture content in 6 hours with an average drying rate of 0.47 g/g dm.h. The hybrid mode was economically favorable, with significant annual savings and a low payback period of 0.62 years.

Damayanti et al. (2020) developed a device that automatically detects dehydration and urine pH levels. Equipped with color and pH sensors, the device can measure urine color levels, read pH values, and calculate the required body fluid for treatment. Testing has shown the device to be feasible and accurate, with a percentage error of 3.5% and sensitivity and specificity values of 60% and 70%, respectively. This device offers a potential solution for at-home dehydration detection.




<https://www.semanticscholar.org/paper/Fish-Dryer-With-Temperature-Control-Using-the-Fuzzy-Muradi-Munir/7a9d4e8703e27ec824cc676c8fd9dde44d54521b>

Figure. 2.13. Fish Dryer Using Fuzzy Logic

An Arduino-based fish dryer is a system that uses an Arduino microcontroller to control the temperature and drying process of fish (Raja, 2023). Their system aims to preserve processed fish by reducing its water content and inhibiting spoilage. The temperature and airflow velocity are essential factors in the drying process, with temperatures of 50°C and 60°C being chosen for this study.

In addition, preserving fish through drying is a standard method to extend its shelf life, and temperature and airflow velocity are essential factors in the drying process. This study chose temperatures of 50°C and 60°C to meet nutritional

standards, and an airflow velocity of 1.5–2 m/s was used. The fish dryer system utilized sensors, a heater, a fan, and an Arduino Mega to control temperature and weight, ensuring that the drying temperature did not go beyond the set point using fuzzy logic.

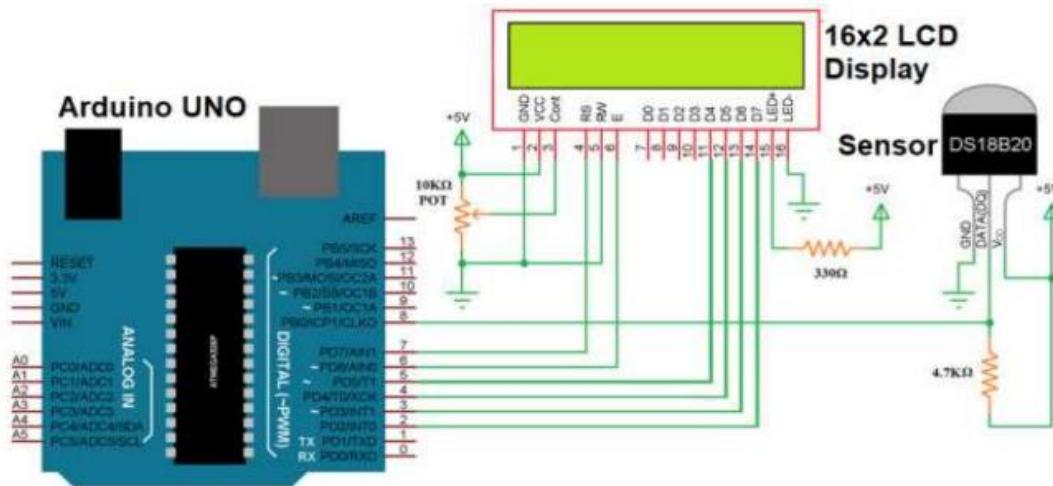

<https://www.ijscia.com/full-text-volume-2-issue-5-sep-oct-2021-810-821/>

Figure. 2.14. DS18B20 Temperature Sensor Circuit Connections

Another type of dryer, a refractance window dryer, also utilizes an Arduino control system to dry food products efficiently on a conveyor belt (Mutumba, Kigozi, Tumutegyereize, & Ssenyimba, 2021). An automated system using an Arduino control system, sensors, a water pump, and a conveyor motor was developed to dry food products effectively using a refractance window dryer. The system was successfully simulated and tested before implementation, achieving a temperature range of $95\pm3^{\circ}\text{C}$ and ensuring high product quality. The Arduino-based system is recommended for the dryer and can be scaled up for larger machines. System simulation using Proteus (ISIS) software. Additionally, a continuous refractance

window dryer has been calibrated for drying temperature using an Arduino-based system, allowing for a wide range of products to be dried.

Lastly, Setiawati et al. (2020), developed and tested a temperature control system for a rotating tray hybrid dryer using an Arduino Mega microcontroller. The system was validated through laboratory experiments and data analysis with Microsoft Excel. The temperature sensor readings corresponding to the exhaust fan and blower conditions, with an electric power consumption of 13.57 watts and an electric current requirement of 0.062 A, demonstrated the system's successful operation.

Design Synthesis

The presentation of various dehydrator projects offers a comprehensive overview of food preservation methods. These projects vary from simple drying domes to sophisticated devices equipped with specific algorithms tailored for efficient drying. Both local and global initiatives showcase remarkable systems that demonstrate significant advancements in expediting the drying process.

The similarities between all of the related project and literature is that their main goal is to preserve food. There are specific devices that are similar to the developers' design project. Some of the noteworthy projects are the Automated Squid Dryer Chamber by Dumaguit et al. (2023), the usage of a weight sensor by Curpoz et al. (2020), and the project by Miano et al. (2023) that adds a GSM module to the designed solar dryer.

There are also differences among the projects. For example, Alvinika et al. (2021) use fuzzy logic, while some projects, such as that of Dumaguit et al. (2023),

rely solely on temperature and a controlled environment, utilizing image processing to effectively dry the fish. Some research projects employ a complete machine dedicated to drying, like those by Raja (2023) and Trondillo et al. (2018). Others use solar energy as the heat source, as seen in the projects by Pangan (2020), Bigueja et al. (2022), and Bertulfo (2022).

On the other hand, this project distinguishes itself through its integration of multiple functionalities derived from various innovations, notably featuring an automatic stopping function. In contrast to many singularly focused projects, the developers prioritize user-centric design and practicality, aiming to assist users in effectively mitigating losses associated with unsold fish.

CHAPTER III

DESIGN AND METHODOLOGY

This chapter encompasses the Arduino-Based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendors in San Pablo City Public Market's project design, development, testing, evaluation/validation criteria, design instruments and procedures, and project deployment plan.

Project Design

In the study by Estrada et al. (2023), it was found that unsold fish pose a profitability challenge for sellers in the San Pablo City Public Market. Sellers often resort to reducing prices for unsold fish in subsequent business days. Currently, the only preservation method employed is placing the fish in containers with ice, leading to increased capital expenditure, as seen in Figure 3.1.



Figure 3.1. Current Way of Dealing with Unsold Fish

Estrada et al. (2023), suggest a practical solution, transforming unsold fish into value-added products. Currently, sellers do not process unsold fish, and the study emphasizes the need for alternative preservation methods. Creating value-added products can not only address the issue of unsold inventory but also extend the fish's shelf life, potentially reducing sellers' losses. One suggested preservation

method is creating dried fish from unsold stock. However, the drying process is time-consuming and relies heavily on ample sunlight. Given that fish sellers cannot afford to miss a business day, sun drying becomes an impractical solution for them.

They are lessening the losses and increasing the profitability of sellers by transforming their unsold fish into dried fish. The developers proposed having a drying system that does not rely on sunlight and speeds up the drying process for fish. This automatic fish dehydrator offers convenience for sellers since it dramatically reduces the time required for the fish to dry, making it ready for sale immediately.

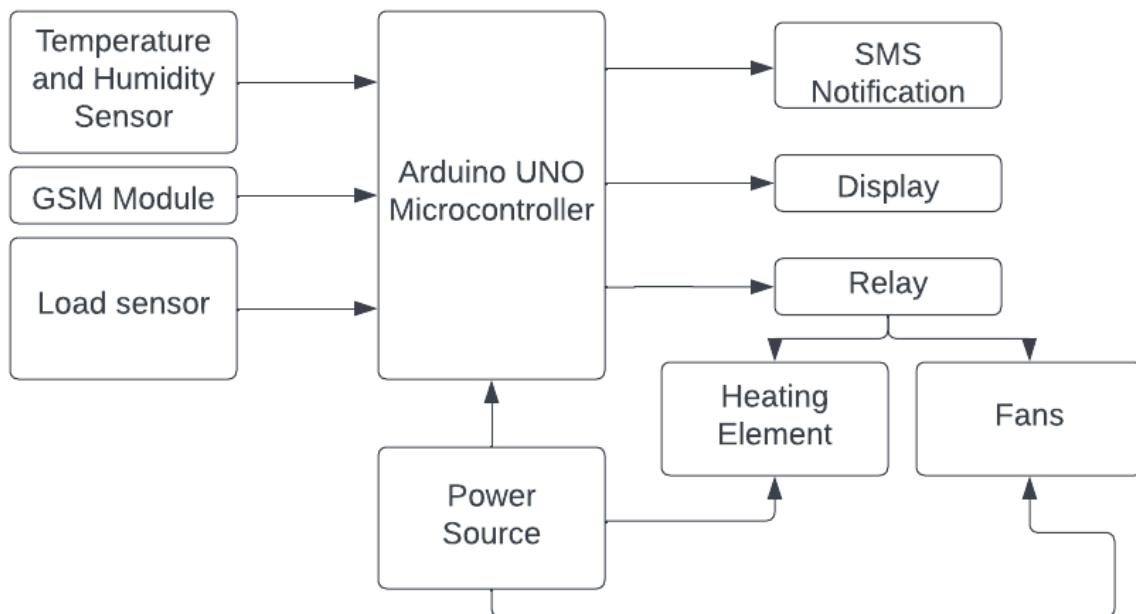


Figure 3.2. Automated Fish Dehydrator Block Diagram

Figure 3.2 represents the block diagram design of the automatic fish dryer. The sensors send data to the microcontroller and use the provided data to display the current values of the temperature, weight of fish, and humidity inside the dryer. Based on the readings, the microcontroller can turn on and off the heating

elements and fans to maintain the required temperature inside the dryer. To ensure the safety of the dried fish for human consumption, the developers employ stainless steel and aluminum to prevent oxidation over time while drying the food.

The following is a thorough explanation of the block diagram.

- A. The Arduino UNO microcontroller controls the dehydrator based on the signals given by the sensors.
- B. In order to automatically turn off the dehydrator after drying, the load sensor is utilized to register the weight of the fish before the drying process and continuously monitor it until it reaches the dry weight of the fish.
- C. The temperature inside the dehydrator is be measured using a temperature sensor. The ideal temperature for drying fish is 37 to 42 °C in the first 5 hours and 53 to 58°C in the succeeding time.
- D. The microcontroller utilizes the relay to control the temperature inside the dehydrator by turning the fans and heater on and off based on the sensors' readings.
- E. The GSM module is used to notify the user after the drying process.
- F. The fan and heating element uses a 220V AC supply, while the Arduino uses a 9V DC supply.

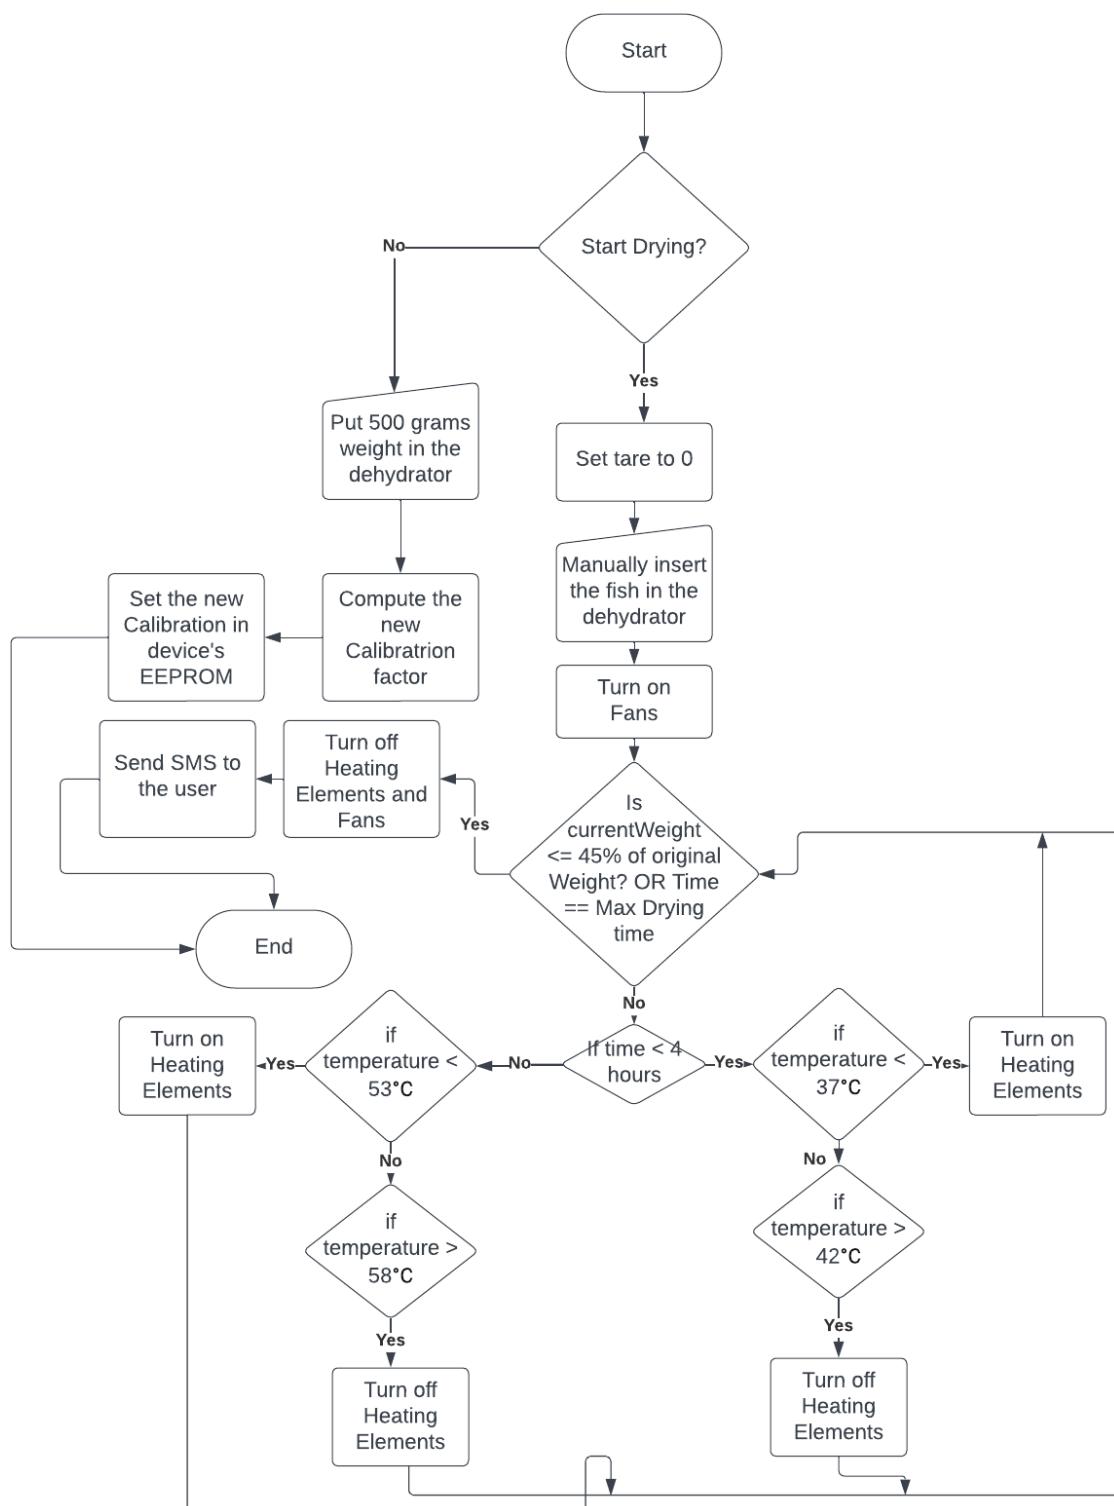


Figure 3.3. Flowchart of the Project

The flowchart detailing the operation of the automatic fish dehydrator illustrates a well-defined program cycle as shown in Figure 3.3. The user can calibrate the load sensor or initiate the drying process when powered up.

If the user chooses to calibrate the weight sensor, they need to place an object with a known weight inside the dryer. The calibration object, provided by the developers, ensures that the weight in the program matches the actual weight of the object. Afterward, the device will automatically compute a new calibration factor and save it to the device's EEPROM for future use.

On the other hand, if the user chooses to start the drying process, the weight sensor is set to tare before the fish is placed inside the dehydrator. The user has to manually load the cleaned and brined fish into the fish dehydrator. The initial weight of the fish is recorded for subsequent comparison with the current weight sensed by the load cell.

Regarding temperature control, during the first 5 hours, the temperature inside the dryer should be around thirty-seven (37) – forty-two (42) degrees Celsius to prevent instantly drying the fish, which may result in cooking the fish. After five (5) hours, the temperature inside the dehydrator should rise to fifty-three (53) – fifty-eight (58) degrees Celsius until the weight of the fish reaches 45% of its original weight.

A fail-safe mechanism is incorporated to prevent prolonged operation in the event of a load cell failure and enhance safety measures. A condition restricts the maximum drying time from the duration required to dry fish during testing effectively.

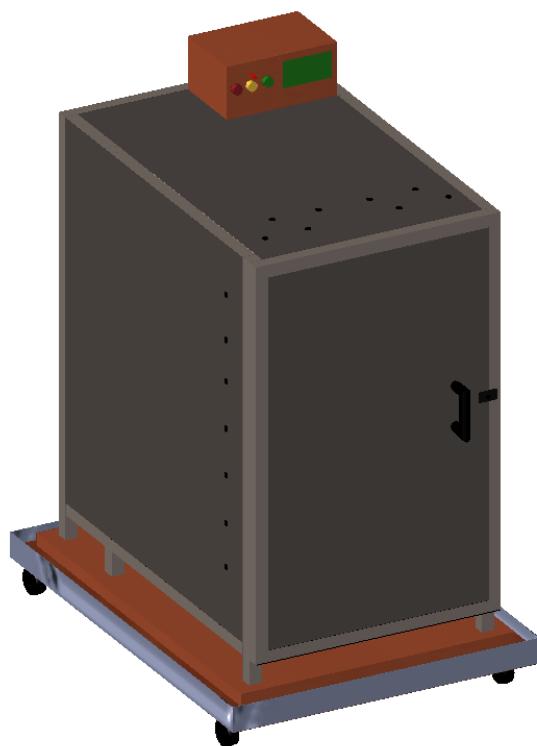


Figure 3.4. Isometric View of the Project

Figure 3.4 represents the image of the fish dehydrator. The fish dehydrator is constructed using aluminum sheets and square bars. According to Hodges (2021), aluminum is a metal widely used to manufacture kitchenware, utensils, and packaging materials for food. The European Food Information Council notes that aluminum naturally occurs in almost all rocks and soils and is present in water, air, and the human body.

The selection of aluminum for the fish dehydrator enclosure is driven by its advantageous combination of cost-effectiveness and resistance to rust. Unlike stainless steel, aluminum is more budget-friendly while offering comparable durability. Additionally, the corrosion-resistant nature of aluminum ensures that the dehydrator remains in optimal condition over time, especially in the moisture-rich environment associated with fish processing.

As seen in Figure 3.4, the dehydrator is equipped with wheels for easy mobility, ensuring convenience, especially considering its weight. Additionally, holes on the side of the dehydrator allow moisture to escape from the inside.

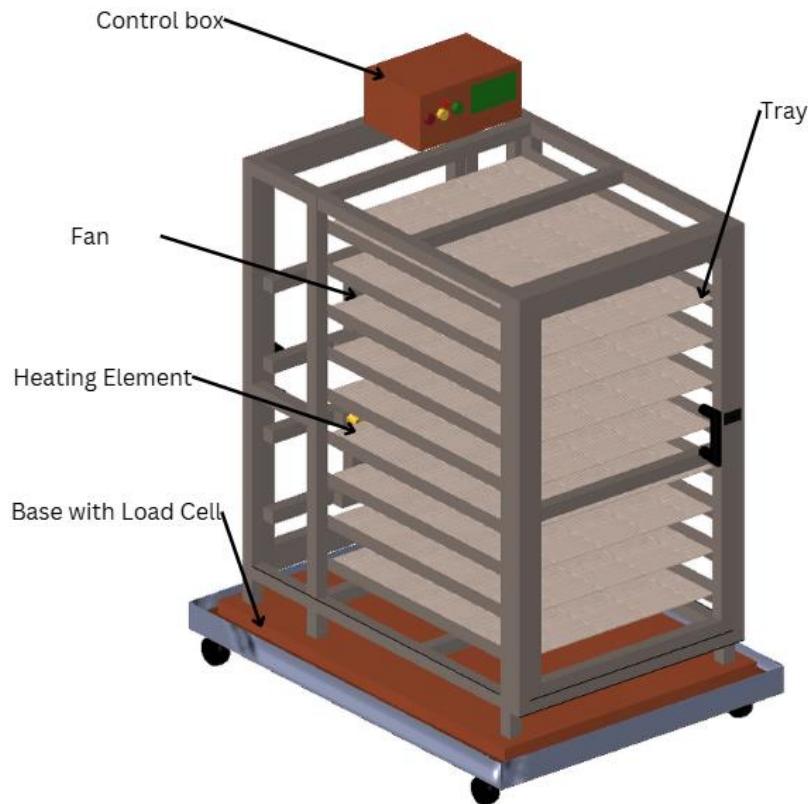


Figure 3.5. Fish Dehydrator Setup Component Design

The device's internal structure, as seen in Figure 3.5, comprises the components needed for dehydration. The fish rack's foundation is made of stainless steel, while the fish rack is made of aluminum. The fish rack is not fixed inside the dehydrator; instead, it is mounted at the top of the base (Marine Plywood). The base has a load sensor at the bottom. The sensor monitors the weight of the fish in the rack. The device has nine (9) fish racks and can dry up to 10kg of Tamban or Galunggong. See *Appendix H.2* for the detailed blueprint of the project.


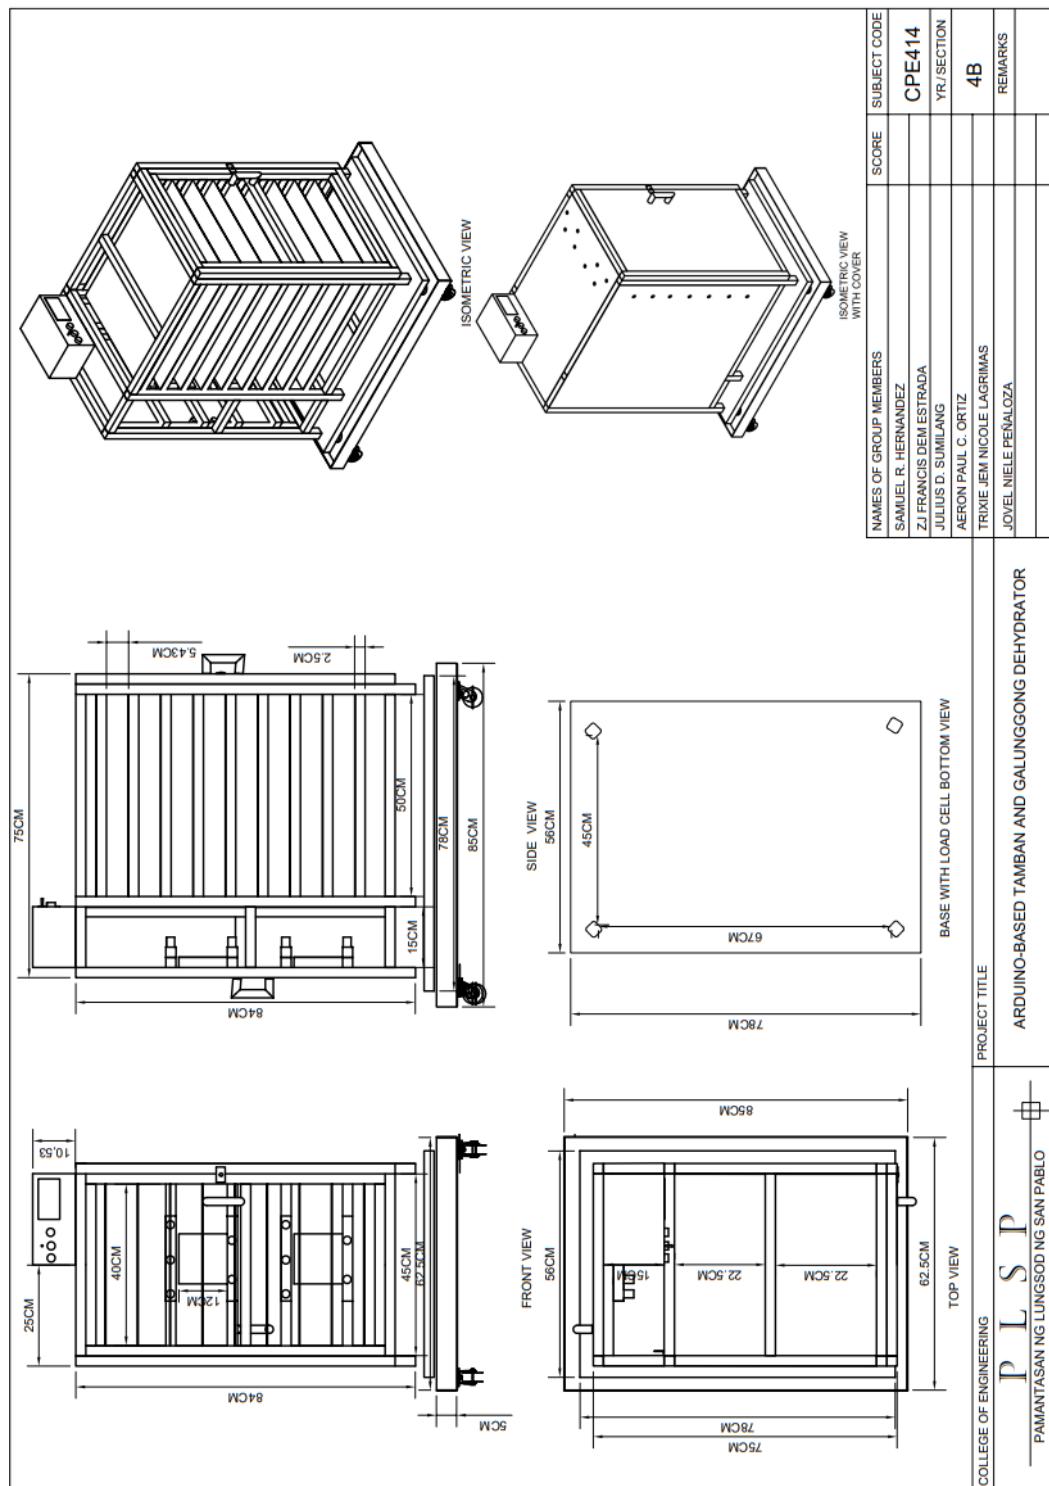


Figure 3.6. Top, Bottom Front, Side, and Isometric View of the Project

Project Development and Testing Procedures

The project is developed using agile project management methodologies, and its testing phase adhere to the ISO25010 standard. The implementation is align closely with the project's designated design.

Following a thorough assessment of the client's specific needs in design, development, testing procedures, and deployment, the decision to adopt the agile methodology was made. This choice is visually represented in Figure 3.7, illustrating a strategic alignment with the client's requirements across various project phases. The agile approach was selected as it offers a dynamic and flexible framework that accommodates iterative development, ensuring a responsive and adaptable strategy to address evolving project demands.

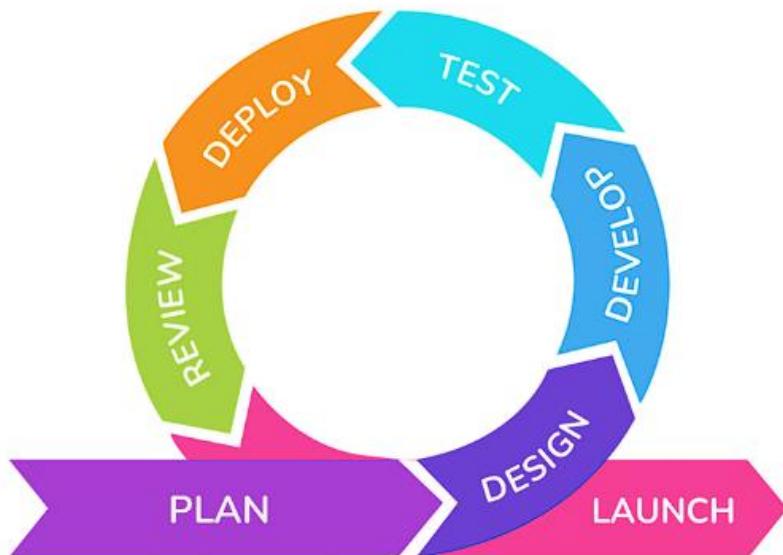

<https://maheshkasbe.hashnode.dev/what-is-software-development-life-cyclesdlc-what-are-agile-methodologies>

Figure 3.7. Agile Model

The Agile Software Development Life Cycle (SDLC) stands out as a widely embraced model in software development. The Agile approach segments the

product into incremental builds and then delivers in iterative cycles. Breaking down each task into manageable time frames ensures the inclusion of functional elements in each build. The ultimate product encompasses all the necessary features (Vu, 2020). Additionally, the agile approach permits the developers to have the freedom to adjust and add additional functionalities to the project.

The initial phase of agile development involves *Planning Phase*. In this context, developers evaluated the feasibility of introducing an automatic fish dehydrator for sellers. Estrada et al. (2023) established the foundation for these requirements through surveys and observations focused on the challenges encountered by retail fish vendors. The developers developed plan by brainstorming ideas on how can they solve the issue of unsold fish using technology.

After identifying the plan, the developers formulated the *Design Phase* of the device. To establish a robust design foundation, the developers researched pertinent data and existing devices and sought advice from their advisors. Visual aids, including the block diagram in Figure 3.2 and the flow chart in Figure 3.3, were employed to visualize the device's structure and necessary components. These visual representations not only assisted the developers in understanding the intricacies of the device but also enabled them to pinpoint potential issues and bugs that might arise during the development process.

The subsequent phase is the *Development Phase*, during which the code for the device is generated by the provided design outlined in the flowchart and block diagram. Here, the teams' programmer meticulously translate the conceptual

design into functional code, while concurrently, the team fabricates the physical body of the device to ensure it adheres to design specifications and fulfills its intended purpose. This stage represents the practical implementation of the conceptualized design, merging software development with constructing the device's tangible components, laying the groundwork for the rigorous testing phase that follows.

During the *Testing Phase*, the device prototype undergoes comprehensive testing, evaluating each of its modules and components for functionality and performance. This critical stage involves the collaborative efforts of three key roles: the Project Manager, Programmer, and Tester. The Project Manager oversees the testing strategy, ensuring alignment with project objectives and requirements. The Programmer plays a crucial role in validating the code's functionality, while the Tester systematically assesses the device's performance against predetermined criteria. Through this rigorous process, potential issues are identified and addressed early in the development cycle, preventing costly rework and ensuring a high-quality prototype.

The *Deployment Phase* represents the stage in which the device has undergone thorough testing and is now prepared for use by its intended users. In this phase, the automated fish dehydrator is ready for use by the intended users. The complete deployment phase of the device can be seen in the project deployment plan part of this paper.

Following the successful deployment of the device, the developers' transition into the *Review Phase*. During this phase, they ensure that the device is

functioning as intended and that the end users are employing it correctly. This comprehensive review is essential for identifying any potential issues, as well as opportunities for refining and enhancing the prototype. By closely monitoring user interaction and device performance, the developers can gather valuable feedback, which is instrumental in guiding future improvements and ensuring the device meets all desired specifications and user needs.

Once the review process is completed, the *Launch Phase* commence, marking the stage when the device is fully prepared for its intended user. During the launch, a memorandum of understanding was signed by both parties—the school and the client—to formalize the understanding and ensure the device will be utilized for the client's benefit. This agreement underscores the commitment of both parties to the successful and beneficial use of the device.

Testing Procedures

Software Testing

The primary objective of software testing is to ensure that a software application or system functions correctly and meets its specified requirements. It involves systematically evaluating the software to identify defects, errors, or bugs to ensure the software's reliability, functionality, and performance.

The teams' programmer conducts software testing to ensure the code functions correctly according to its intended purpose. The team systematically tests the code and makes necessary adjustments based on the output of the sensors. This iterative process of testing and refining the code helps identify and

address potential issues, ensuring that the software aligns effectively with the system's intended functionality.

Hardware Testing

All developers test the hardware parts of the automated fish dehydrator. Each module is tested to see if they are all working and functional. Below are thorough explanation of the testing procedures for each piece of hardware used.

Load Sensor Testing

The load sensor used in this project has a precision of ten (10) grams for each cell, with a total tolerance of plus or minus forty (40) grams. To ensure the accuracy of the sensor output and verify that the device can determine the weight of the fish as 45% of its original weight, the following test are performed:

1. Measure the initial weight of an item using a weighing scale.
2. Compare the readings of the device with the original weight.
3. Calculate the error.
4. Record the gathered data in a table

Specific Objectives Testing

This test aims to ensure all functionalities of the device operate as intended. The following details the comprehensive testing procedures designed to achieve the objectives of the device.

Temperature Monitoring and Regulation Testing

The device employs fans and a heating element to warm and disperse air inside the dehydrator, utilizing relays to control its operation based on specific conditions. The DHT22 is used for temperature monitoring, and the following test

outlines the procedures developers used to verify the device's capability to monitor and regulate temperature:

1. Initiate the drying process by turning on the device and pressing green button.
2. Check whether the relay connected to the heating element and fan is activated, when the temperature displayed on the LCD falls below 53°C.
3. Verify if the relay connected to the heating element is deactivated when the temperature displayed on the LCD reaches 58°C.
4. Record the gathered data in a table.

Drying of 10kg of Tamban or Galunggong Testing

To validate the device's capability to dry +-10kg of Tamban or Galunggong, specific testing procedures are conducted. These tests ensure that the device can effectively perform its core function. The following test procedures are performed:

1. Start the device by turning it on.
2. Put 10kg of Tamban or Galunggong inside;
3. Record the data every 1 hour until the weight of the fish reach 45%.
4. Put the data in a table.

Automatic Stopping Function Testing

The device features an automatic stopping function with two conditions: reaching the maximum drying time as a safety feature and attaining the desired fish weight. To test it, developers observe if the device shuts off upon meeting either of the two conditions and record the data in the table.

SMS Notification Function Testing

The device is equipped to send information to the user when the drying process is complete. To test this, developers wait for the drying process to conclude and verify the functionality of the GSM module by receiving an SMS through the installed SIM card.

Project Evaluation

The project evaluators are five (5) CpE practitioners, seven (7) retail fresh fish vendors in San Pablo City Public Market, and three (3) dried fish vendors for a total of fifteen (15) evaluators. The evaluators used ISO 25010 with the following software standards: functionality, reliability, performance efficiency, useability, security, compatibility, maintainability, and portability.

Validation Criteria

This project used a five-point Likert scale to evaluate the device's acceptability. As shown in Table 3.1, the Likert scale offers a range of response options with corresponding descriptive equivalents that capture evaluators' opinions or attitudes. A structured rating system, Likert scales allow evaluators to choose the response that best aligns with their viewpoint after a statement or question is presented.

Table 3.1. Five-Point Likert Scale

Likert Scale	Interval	Adjectival Rating
5	4.51-5.00	Highly Acceptable
4	3.51-4.50	Very Acceptable
3	2.51-3.50	Acceptable
2	1.51-2.50	Fairly Acceptable
1	1.50 and below	Not Acceptable

After gathering the data, the arithmetic mean is utilized to evaluate and assess it. The arithmetic mean, the average, is the most straightforward and commonly employed mean measure. It entails adding up a set of numbers and dividing that sum by the total count of numbers in the series (Chen, 2021).

The formula is as follows:

$$A = \frac{\sum fx}{N}$$

Where:

A = Arithmetic mean

fx = All the items in the group

N = Total number of items in the group

Design Instruments and Techniques

The design instrument used in the project design is the ISO 25010 evaluation model for the device software. The evaluation is a mix of close-ended, as they choose their response based on the given evaluation questions, and open-ended, as the developers seek the evaluators' review regarding the device that can be found in *Appendix F*. The evaluation is composed of the following parts:

Part I includes evaluating the device's functionality, performance efficiency, compatibility, usability, reliability, security, maintainability, and portability.

Part II asks the evaluators to evaluate and provide feedback on the device's overall performance.

Project Deployment Plan

After the completion of the device prototype, the developers sent it to Mr. Efrain Maranan Jr., a fish vendor at San Pablo City Public Market, as the project's

beneficiary after final approval as part of the deployment plan. The device is responsible for the dehydration of unsold fish to lessen the probability of losing profit. The developers provided a user manual to the designated device operator, a reference for maintaining the device modules and addressing system issues after the handover.

Table 3.2. Project Deployment Plan

Strategy	Activities	Persons Involved	Duration
Approval from Beneficiaries	Letters for the PLSP	Client and Developers	5 minutes
Setting up the Device	Assembly and reviewing for potential problem	Developers	30 minutes
Handover of the Device	User Manual Discussion	Developers	10 minutes
Training	Hands-on Basic Fundamentals of Handling of the Device	Client and Developers	1 hour

The procedures for deploying and utilizing the device in Barangay San Gabriel, City of San Pablo, are outlined in Table 3.2. The initial step involves obtaining approval from the client by providing a letter of acceptance. Following this, the device is set up and reviewed for any potential issues. Subsequently, the device is handed over to the client. The final step is to train the client on how to operate the device.

CHAPTER IV

RESULTS AND DISCUSSIONS

This chapter covers the project's economic and schedule feasibility as well as the technical and operational feasibility, testing, evaluation results and analysis, and deployment results. The evaluation's findings suggest more improvements to the device.

Project Technical Feasibility

Project Design Technical Discussion

The device aims to help retail fish vendors lessen their losses and increase their profitability due to the large amount of unsold fish, especially during summer when there is too much supply. Arduino Uno Microcontroller controls the device. It can turn the fans and heating elements on and off using a relay depending on the readings of the DHT22 sensor that senses the temperature and humidity inside the dehydrator. Moreover, a load sensor is integrated into the system to monitor the weight of the fish within the dehydrator continuously. Once the fish reaches 45% of its original weight, the Arduino Uno automatically turns off the relay, controlling the fans and heating element. Additionally, it sends an SMS notification to the user, indicating that the drying process has been completed. This automated process helps to streamline operations and ensure efficient fish drying while minimizing manual intervention.

Software Specification

The device's control system is implemented on an Arduino Uno microcontroller. The Arduino Integrated Development Environment (IDE) and

Arduino Command Line Interface (CLI) are used for software development and simulation. The microcontroller serves as the core unit, orchestrating all device functionalities. The software directly controls relays, managing the drying process.

Programming Environment

The Arduino Uno microcontroller that runs the device uses the C++ programming language and has been programmed using the Arduino IDE version 2.3.2. It uses multiple libraries, including SoftwareSerial, LiquidCrystal I2C, DHT sensor library, HX711, and the EEPROM.

The Components of Dehydrator


The Arduino fish dehydrator is constructed using an Arduino Uno R3 microcontroller as the central unit. Additional hardware includes 220V fans and heating elements, an HX711 amplifier with a 50kg load cell, a SIM800L V2 module for potential remote communication, a 20x4 LCD for user interface, an LM2596 step-down power supply module for voltage regulation, buttons for user input, jumper wires for connections, and a PCB board to house and connect some of the components.



<https://store.arduino.cc/products/arduino-uno-wifi-rev2>

Figure 4.1. Arduino Uno R3

The project utilized the Arduino Uno R3 microcontroller as its central processing unit. This board boasts a 16 MHz clock speed, 6 analog inputs for sensor data, and 14 digital pins for controlling various functions. Notably, 6 of these pins can generate pulse-width modulated (PWM) signals for precise control. The Arduino Uno is programmed using the Arduino IDE software via a USB connection. For this project, a 9V, 2A power supply was chosen. While the Arduino itself can operate within a 5V to 24V range, the higher voltage ensures sufficient power delivery to the entire system, including the LCD display connected to the board.



<https://botland.store/pressure-sensors/12479-hx711-amplifier-for-tensometers-5904422319366.html>

Figure 4.2. HX711 Amplifier

The HX711 is a specialized 24-bit analog-to-digital converter (ADC) designed to interface directly with bridge sensors in weighing scales and industrial control systems. Its main job is to amplify load cell signals and send them to another microcontroller so it can process them.



<https://www.makerlab-electronics.com/products/dht22-temperature-humidity-sensor-module>

Figure 4.3. DHT22 Sensor

The DHT22 sensor, sometimes referred to as the DHT22 or AM2302, is a digital temperature and humidity sensor that has an excellent reputation for accuracy and reliability. It uses a thermistor and a capacitive humidity sensor to monitor temperature and relative humidity, respectively, very precisely. The DHT22 sensor provides real-time data for precise temperature and humidity inside the dehydrator



<https://proto-pic.co.uk/product/load-cell-sensor-50kg>

Figure 4.4. Load Cell Sensor

The device utilizes four strain gauge load cells, which are transducers that convert applied force into a measurable electrical signal. These sensors are typically constructed from high-strength alloy steel designed to deflect proportionally under load. This deflection alters the electrical resistance within the strain gauges, resulting in a corresponding change in voltage or current output. By employing four load cells, the device achieves a maximum capacity of 200kg when the weight is evenly distributed across the platform.



<https://www.dev.faranux.com/product/sim800l-v2-0-5v-wirelessgsm-gprs-module-quad-band>

Figure 4.5. Sim800L V2 GSM module

The SIM800 GSM module is a cellular modem commonly used for embedded systems and Internet of Things (IoT) applications due to its versatility in cellular communication. It requires a stable power supply of 5V and 2A to function correctly. Insufficient power can lead to operational issues such as frequent restarts, as experienced with the SIM800L v2 module.



<https://homeplusexpress.com/heating-element-restring-coil/>

Figure 4.6. Heating Element (Coil)

The device employs a dual-coil heating system for optimized temperature distribution. The lower portion utilizes a 300-watt coil, while the upper portion features a 200-watt coil. This configuration addresses the natural tendency of hot air to rise within the device. By incorporating a higher wattage heater element in the lower section, the developers aim to achieve a more uniform temperature profile throughout the drying chamber



Figure 4.7. 4x20 Liquid Crystal Display

The device incorporates a 4x20 character Liquid Crystal Display (LCD) for user interaction. This display format allows for the presentation of information on


up to four lines, with each line accommodating a maximum of 20 characters. The LCD serves as the primary interface, providing real-time data on crucial parameters such as weight, humidity, and internal temperature of the dehydrator chamber.



[https://www.makerlab-electronics.com/products/fotek-solid-state-relay-module\(ssr-40da](https://www.makerlab-electronics.com/products/fotek-solid-state-relay-module(ssr-40da)

Figure 4.8. Solid State Relay

The device employs Solid-State Relays (SSRs) for control of its heating element and ventilation fans. SSRs are electronic switches that utilize semiconductors for silent, high-speed operation and extended lifespans compared to traditional electromechanical relays. This specific SSR model features a DC control input range of 3-32VDC and can handle AC loads from 24VAC to 380VAC. In this application, the SSRs feature a DC control input range of 3-32VDC. They are responsible for controlling the AC power delivered to the heating element (rated for 500W) and the fans (rated for 70W) within the dehydrator. Notably, the maximum current rating of these specific SSRs is 30A, providing ample headroom for the dehydrator's operational requirements.

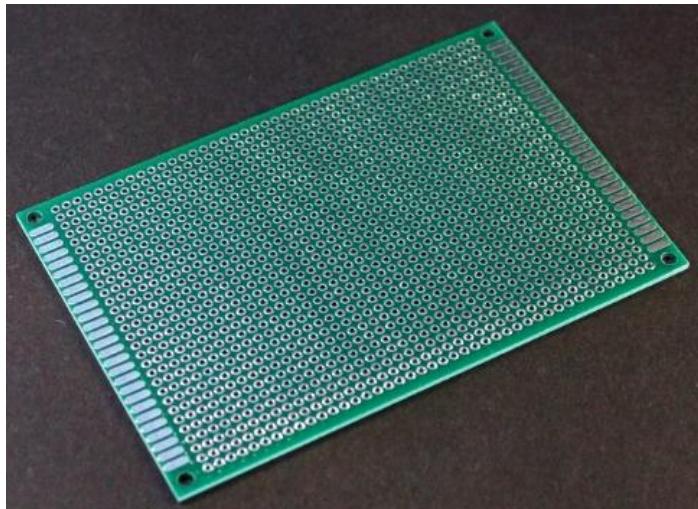

<https://protosupplies.com/product/pcb-8-x-12-cm-universal-prototype-board/>

Figure 4.9. Printed Circuit Universal Board (8x12)

The PCB board plays a crucial role in integrating the buck converter and the SIM800L module, serving as a vital bridge between them. Its intricate network of copper traces functions like electrical highways, designed to carry power from the buck converter at the precise voltage required by the SIM800L module. These traces not only deliver the necessary power but also facilitate the seamless flow of communication signals between the SIM800L and other interconnected components within the system.

Furthermore, the PCB provides a robust and secure mounting platform for both the buck converter and the SIM800L module. This stability is essential for maintaining a reliable and well-functioning system, as it minimizes the risk of disconnections or damage that could disrupt operation.

Schematic Diagram of the device

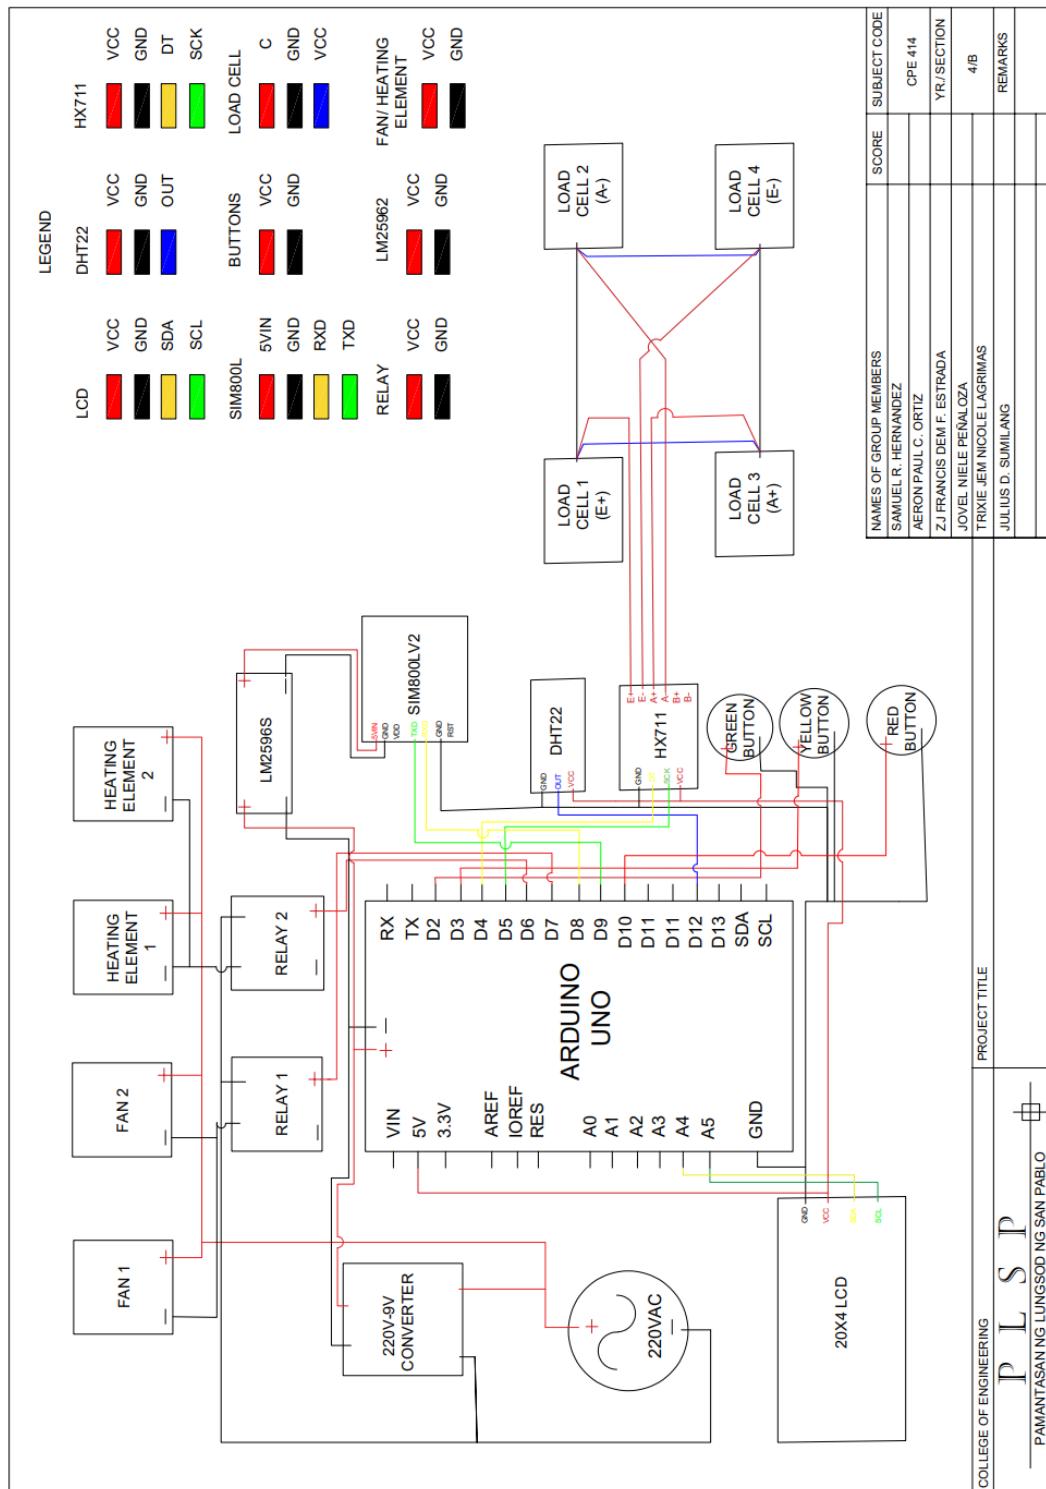


Figure 4.10. Schematic Diagram of the Device

This schematic diagram represents a control system built around an Arduino Uno microcontroller, designed for Arduino-based fish dehydrator. The Arduino Uno is powered by 9v while the SIM800L V2 is powered by 5v that came from the step-down converter.

On the input side, a DHT22 sensor is used for measuring temperature and humidity, connected to digital pin D12, and powered by the Arduino's 5V and GND pins. Additionally, an HX711 load cell amplifier, connected to four load cells arranged in a wheatstone bridge configuration, measures weight and connects to digital pins D4 and D5. Three buttons, a green button on digital pin D2, yellow button on digital pin D3, and red button on digital pin D10 provide manual user input.

The output side includes two relays connected to digital pins D7 and D8, which control two fans and two heating elements, allowing the system to regulate temperature and airflow. The system also features a SIM800L V2 GSM module, connected to the RX and TX pins (D8 and D9), for sending data remotely, and a 20x4 LCD display connected via I2C to analog pins A4 (SDA) and A5 (SCL), providing a user interface to display system information.

The entire setup is powered and regulated carefully, ensuring that each component operates at its required voltage level, with appropriate connections to the Arduino's voltage references and ground. This control system integrates temperature, humidity, and weight measurements with user inputs and remote communication capabilities, making it suitable for applications requiring precise environmental control and monitoring.

Project Operational Feasibility

Design of Project

Figure 4.11 shows the actual image of the Arduino-based Tamban and Galunggong dehydrator. Constructed from aluminum, the device is designed to resist rust over time, making it more cost-effective than using stainless steel. Insulation is utilized between two aluminum sheets to prevent heat loss through the cover, ensuring optimal energy efficiency. Additionally, several strategically placed holes on the sides allow moisture to escape, preventing it from returning to the food and ensuring a more effective dehydration process. This thoughtful design enhances the device's overall performance and durability, making it a practical solution for long-term use.



Figure 4.11. Fish Dehydrator Setup

The LCD enables users to monitor the current status of the drying process, as depicted in Figure 4.12. It provides real-time information and offers insights into

its progress. It gives information about the current temperature, humidity and weight of the fish inside the dehydrator.



Figure 4.12. Liquid Crystal Display

The dehydrator described has a significant capacity for processing fish, specifically Tamban or Galunggong, during its operation. Figure 4.13 show the details of its design, the dehydrator is equipped with a total of 9 trays. Each tray is capable of holding more than 1 kg of fish at a time, allowing for efficient and high-volume processing.



Figure 4.13. Trays Inside the Device

Testing, Evaluation Results, and Analysis

Program Testing Results


```
Output
Sketch uses 15828 bytes (49%) of program storage space. Maximum is 32256 bytes.
Global variables use 1193 bytes (58%) of dynamic memory, leaving 855 bytes for local variables. Maximum is 2048 bytes.
```

Figure 4.14. Program Testing Results

The program was error-free and capable of satisfying the specific objectives of the device, as illustrated in Figure 4.14. The program was tested through the use of the LCD screen to see if the device was working as it should be.

Load Sensor Testing Results

Table 4.1. Load Sensor Testing Results

Load Sensor Readings Image	Weighing Scale Image	Load Sensor Readings	Actual Weight using a weighing scale	Error
		0.18kg	183g or 0.18kg	0%
		0.51kg	518.7g or 0.52kg	1.96%
		0.22kg	221g or 0.22kg	0%

To ensure the load sensor's accuracy in weight measurement, a calibration and testing procedure was implemented. This step is crucial for the device's successful operation and program execution. During testing, a high-precision weighing scale capable of gram-level readings was used as a reference as seen in Table 4.1. The developers employed objects with varying low weights to evaluate the load sensor's accuracy across its measurement range.

Temperature Regulation and Monitoring Testing Results

Table 4.2. Temperature Regulation and Monitoring Testing Results

Actual Picture of Display	Actual Picture of Relays	Expected Result		Actual Result		Analysis
		Fans	Heating Element	Fans	Heating Element	
		On	Off	On	Off	The relay functioned properly
		On	On	On	On	The relay functioned properly
		On	On	On	Off	The relay functioned properly

Table 4.2 represents the results of temperature regulation and monitoring testing. Based on the results, the device is capable of regulating the temperature by turning the relay on and off where the heating element is connected based on the readings of the DHT22 sensor.

Drying Tamban and Galunggong Fish Testing Result

An initial experiment evaluated the dehydrator's performance in drying Galunggong fish as seen in Table 4.3. It follows Raja's (2023) study, at temperatures between 50 °C and 60 °C. Developers placed 9.96 kg of fish in the

dehydrator at 7:10 PM. The average initial weight per fish was 21.80 grams, which decreased to 9.37 grams after 12 hours and 6 minutes, representing a 57% weight reduction.

Fish were weighed before and after dehydration. Initially, the scale showed 10.04 kg, decreasing to 4.31 kg after drying. The dehydrator initially read 9.96 kg, showing an error of 0.8%, and finally read 4.48 kg, with a 3.79% error, indicating slight discrepancies in its weight measurements. However, the quality of the dried fish was poor, indicating that the temperatures between 50 °C and 60 °C were not suitable in the device.

Table 4.3. Drying 10kg of Galunggong Testing Result

Actual Photo	Hours	Time	Weight	Humidity
	0	7:10 pm	9.96 kg	81.60%
	1	8:10 pm	9.78 kg	90.80%
	2	9:10 pm	9.23 kg	87.60%
	3	10:10 pm	8.73 kg	85.20%
	4	11:10 pm	8.21 kg	83.80%
	5	12:10 am	7.71 kg	81.60%

	6	1:10 am	7.06 kg	79.30%
	7	2:10 am	6.63 kg	76.40%
	8	3:10 am	6.22 kg	73.30%
	9	4:10 am	5.79 kg	69.70%
	10	5:10 am	5.38 kg	66.00%
	11	6:10 am	5.01 kg	61.60%
	12	7:10 am	4.63 kg	57.50%
	12.01	7:16 am	4.48 kg	54.60%

The second test involved drying 10.20 kg of Tamban fish, starting at 10:36 PM as seen in Table 4.4. It follows Ramos' (2021) technique of beginning with low heat and then increasing to over 45 °C. The average weight of each fish before dehydration was 16.74 grams, which decreased to 7.27 grams after 11 hours and 51 minutes, a 56.5% weight reduction.

Measured with a weighing scale, the overall weight of the fish was 10.23 kg initially and 4.39 kg after drying. The dehydrator readings were 10.20 kg initially (0.29% discrepancy) and 4.59 kg after drying (4.56% discrepancy), the latter considered acceptable due to debris on the tray.

Table 4.4. Drying 10kg of Tamban Testing Result

Actual Photo	Hours	Time	Weight	Humidity
	0	10:36 pm	10.20 kg	78.00%
	1	11:36 pm	9.94 kg	90.10%
	2	12:36 am	9.48 kg	87.60%
	3	1:36 am	8.86 kg	85.20%
	4	2:36 am	8.23 kg	82.90%
	5	3:36 am	7.63 kg	80.80%
	6	4:36 am	7.10 kg	78.90%
	7	5:36 am	6.74 kg	77.20%

	8	6:36 am	6.32 kg	77.90%
	9	7:36 am	5.91 kg	69.20%
	10	8:36 am	5.43 kg	63.60%
	11	9:36 am	4.95 kg	58.00%
	12	10:27 am	4.59 kg	54.30%

The final test involved drying 4.13 kg of Tamban and 5.49 kg of Galunggong fish with a total of 9.61kg of fish, starting at 10:36 pm which can be seen at Table 4.5. The average weight of each fish before dehydration was 48 grams. After 16 hours and 48 minutes, the average dry weight of each fish reached 20.35 grams, representing a weight removal of 57.6%.

The total weight of all fish, measured with a weighing scale, was 9.62 kg. However, the dehydrator readings indicated 9.61 kg, with a slight discrepancy of 0.10%. Following dehydration, the device displayed a reading of 4.32 kg, while the actual weight of the fish, measured with a weighing scale, was 4.17 kg. This resulted in a difference of 3.47%.

Table 4.5. Drying 10kg of Tamban and Galunggong Testing Result

Actual Picture	Hours	Time	Weight	Humidity
	0	4:00 pm	9.61 kg	80.00%
	1	5:00 pm	9.34 kg	90.40%
	2	6:00 pm	9.13 kg	92.40%
	3	7:00 pm	8.94 kg	93.30%
	4	8:00 pm	8.64 kg	91.50%
	5	9:00 pm	8.23 kg	89.00%
	6	10:00 pm	7.83 kg	85.40%
	7	11:00 pm	7.40 kg	78.10%
	8	12:00 am	6.95 kg	74.00%
	9	1:00 am	6.52 kg	69.20%
	10	2:00 am	6.11 kg	63.30%

	11	3:00 am	5.79 kg	60.10%
	12	4:00 am	5.47 kg	59.40%
	13	5:00 am	5.17 kg	63.80%
	14	6:00 am	4.84 kg	56.40%
	15	7:00 am	4.50 kg	53.60%
	16	8:00 am	4.40 kg	54.20%
	16.7	8:48 am	4.32 kg	54.30%

Automatic Stopping Function Testing

Table 4.6. Automatic Stopping Function Testing Result




Initial weight	Expected Result	Actual Result	Analysis
9.96 kg	The fan and heating element will turn off at 4.48kg	The fan and heating element turned off at 4.48kg	The device functioned properly
10.20 kg	The fan and heating element will turn off at 4.59kg	The fan and heating element turned off at 4.59kg	The device functioned properly
9.61	The fan and heating element will turn off at 4.32 kg	The fan and heating element turned off at 4.32kg	The device functioned properly

The device should stop the dehydration process when it reaches 45% of its original weight. Based on the testing on Table 4.6, the fans and heating elements automatically turn off after reaching the desired weight of the fish inside the dehydrator.

SMS Notification Function Testing

To minimize the human effort constantly checking the dehydrator, an SMS notification feature has been added to notify the user when the drying is done along with the weight of the dried fish. Based on the results below, the SMS Notification function of the device is working as expected.

Table 4.7. SMS Notification Function Testing Result

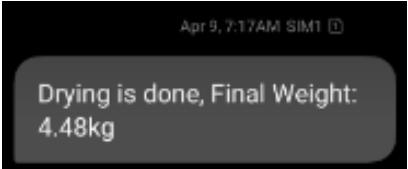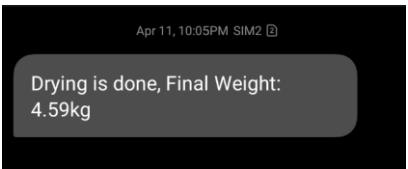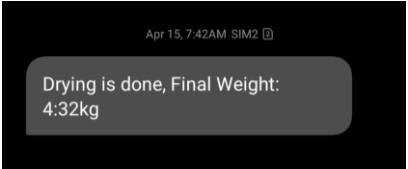Screenshot of Message	Expected Result	Actual Result	Analysis
	The device will send a message at 4.48kg	The device sends a message at 4.48kg	The device functioned properly
	The device will send a message at 4.59kg	The device sends a message at 4.59kg	The device functioned properly
	The device will send a message at 4.32 kg	The device sends a message at 4.32kg	The device functioned properly

Summary of Testing

Based on the summary of testing in Table 4.8 the device successfully achieved all of its specific objectives. The temperature monitoring and regulation

were effective, facilitated by the use of a DHT22 sensor. This is a critical component, as noted by Moula et al. (2023), who emphasized that a temperature sensor is essential for monitoring and controlling a dehydrator. Regarding the drying of Tamban and Galuggong, the device's performance was slower compared to the one developed by Alvinika (2021), which can dry fish in 9 hours. However, it's important to note that Alvinika (2021) conducted tests using only one kilogram of fish, whereas the developers tested their device with ten kilograms of fish, which naturally leads to longer drying times. Despite this, both devices significantly outperformed traditional drying methods, which can take up to three days to reduce the fish to 45% of its original weight, as shown in Table 4.33. Thus, while there are differences in drying times based on the amount of fish processed, the device still demonstrates a marked improvement over traditional techniques.

Table 4.8. Summary of Specific Objectives Testing

Testing	Expected Output	Actual Result
Temperature monitoring and regulation testing	The relay connected to the heating element turns on and off based on the output given by the sensor.	The relay connected to the heating element turns on and off based on the output given by the sensor.
Drying Tamban and Galunggong testing	Tamban and Galunggong will be dried	The Tamban and Galunggong was dried.
Automatic stop testing	The device will stop when the weight reaches 45%,	The device stopped when 45% of the weight was reached.
SMS Notification Function Testing	The device will send text message to the user after drying process.	The device sends text message to the user after drying process.

Evaluation Results

The Arduino-based Tamban and Galunggong dehydrator underwent evaluation by five (5) CPE Practitioners, seven (7) fresh fish vendors, and three (3) dried fish vendors. They assessed whether the system met the International Organization for Standardization (ISO) software quality standards, including functional suitability, reliability, performance efficiency, usability, security, compatibility, maintainability, and portability of the overall device. The developers prepared a video presentation demonstrating the device's functionality and appearance to aid in evaluation. The video presentation was utilized to get the evaluation of the fresh fish sellers, dried fish sellers, and the four (4) CpE Practitioners.

CpE Practitioners' Evaluation Result

Table 4.9. CPE Practitioners' Evaluation Results Based on

Functional Suitability

Criteria	Mean	Verbal Interpretation
Functional Completeness	5.00	Highly Acceptable
Functional Correctness	4.20	Very Acceptable
Functional Appropriateness	5.00	Highly Acceptable
Overall Mean	4.73	Highly Acceptable

The functional suitability evaluation results for CpE Practitioners are summarized in Table 4.9. The device fulfills all designated duties and user objectives, scoring a mean of 5.00 for both functional completeness and functional appropriateness, which means that the device is "Highly Acceptable". The functional correctness achieves a score of 4.20, with the verbal interpretation of

“Very Acceptable.” Overall, with a mean score of 4.73, the evaluation indicates that the device’s functional suitability is “Highly Acceptable.”

Table 4.10. CpE Practitioners’ Evaluation Results Based on Reliability

Criteria	Mean	Verbal Interpretation
Maturity	5.00	Highly Acceptable
Availability	5.00	Highly Acceptable
Fault Tolerance	4.00	Very Acceptable
Recoverability	4.80	Highly Acceptable
Overall Mean	4.70	Highly Acceptable

The evaluation findings of the CpE Practitioners based on reliability are shown in Table 4.10. The highest mean scores went to maturity and availability, both at 5.00 with the verbal interpretation of “Highly Acceptable,” meaning that the device meets standard reliability requirements under normal operation, is accessible when needed, and continues to function. The fault tolerance score is 4.00, which is “Very Acceptable”, and the recoverability score is 4.80, which is “Highly acceptable.” The device’s reliability overall mean score was 4.70 overall, which indicates that the device’s reliability is “Highly Acceptable”.

Table 4.11. CpE Practitioners’ Evaluation Results Based on Performance Efficiency

Criteria	Mean	Verbal Interpretation
Time Behavior	4.00	Very Acceptable
Resource Utilization	4.80	Highly Acceptable
Capacity	4.20	Very Acceptable
Overall Mean	4.33	Very Acceptable

Table 4.11 displays the evaluation findings for the performance efficiency of the device. Resource Utilization received the highest mean score of 4.80. It was verbally interpreted as “Highly Acceptable” meaning that the device satisfy the requirements when operating with a specific set of resources. Capacity has a mean of 4.20 with the verbal interpretation of “Very Acceptable”. The mean score for time behavior is 4.00, which means “Very Acceptable”. Lastly, the with an overall mean of 4.33, the device’s performance efficiency is “Highly Acceptable,” indicating that it performs well in relation to the amount of resources required under the given circumstances.

Table 4.12. CpE Practitioners’ Evaluation Results Based on Usability

Criteria	Mean	Verbal Interpretation
Appropriateness Recognizability	4.80	Highly Acceptable
Learnability	4.80	Highly Acceptable
Operability	4.80	Highly Acceptable
User Error Protection	4.00	Very Acceptable
User Interface Aesthetics	5.00	Highly Acceptable
Accessibility	4.00	Very Acceptable
Overall Mean	4.33	Very Acceptable

The one with the highest mean based in usability in Table 4.12 is the user interface aesthetics, which has a mean score of 5.00 and is “Highly Acceptable.” This means that the device’s user interface is excellent and easy to follow. The appropriateness of recognizability, learnability, and operability has a mean score of 4.80 with a verbal interpretation of “Highly Acceptable.” The user error protection and accessibility have a mean score of 4.00, which means “Very Acceptable.”

Table 4.12 makes it apparent that the device's usability was evaluated as "Very Acceptable" by the CpE Practitioners, with an overall mean score of 4.33. This measure pertains to the efficacy, effectiveness, and contentment that designated users can have when using the device in a drying fish.

Table 4.13. CpE Practitioners' Evaluation Results Based on Security

Criteria	Mean	Verbal Interpretation
Confidentiality	4.00	Very Acceptable
Integrity	4.00	Very Acceptable
Non-repudiation	4.20	Very Acceptable
Authenticity	4.00	Very Acceptable
Accountability	3.80	Very Acceptable
Overall Mean	4.00	Very Acceptable

The evaluation of CpE Practitioners based on security is detailed in Table 4.13. Non-repudiation has the highest mean score of 4.20, which means "Very Acceptable". Confidentiality, integrity, and authenticity have a mean score of 4.00, with verbal interpretation of "Very Acceptable". Accountability, scoring 3.80, is the lowest interpreted as "Very Acceptable." The device's overall security mean score is 4.00 which indicates that the verbal interpretation of "Very Acceptable."

Table 4.14. CpE Practitioners' Evaluation Results Based on Compatibility

Criteria	Mean	Verbal Interpretation
Co-existence	5.00	Highly Acceptable
Interoperability	4.80	Highly Acceptable
Overall Mean	4.90	Highly Acceptable

Table 4.14 presents evaluation results for CpE Practitioners based on Compatibility, focusing on criteria like co-existence and interoperability. Co-existence has a mean score of 5.00 which means “Highly Acceptable”, indicating excellent compatibility with other systems. Interoperability also scores highly at 4.80 with a verbal interpretation of “Highly Acceptable”, suggesting strong interaction with other components. The overall mean of 4.90 with the verbal interpretation of “Highly Acceptable” across the device’s Compatibility.

Table 4.15. CpE Practitioners’ Evaluation Results Based on Maintainability

Criteria	Mean	Verbal Interpretation
Modularity	4.00	Very Acceptable
Reusability	4.80	Highly Acceptable
Analyzability	4.80	Highly Acceptable
Modifiability	4.00	Very Acceptable
Testability	4.80	Highly Acceptable
Overall Mean	4.48	Very Acceptable

Table 4.15 presents the evaluation results of CpE Practitioners based on maintainability. Reusability, analyzability, and testability stand out with scores of 4.80 each, indicating the device components can be effectively reused in various contexts and with the verbal interpretation of “Highly Acceptable”. Modularity and modifiability both achieve a score of 4.00, interpreted as “Very Acceptable” in terms of organization and adaptability to changes. The overall mean score of 4.48 consolidates these findings, suggesting that while the system excels particularly in reusability, analyzability, and testability, it maintains a “Very Acceptable” interpretation based on maintainability.

Table 4.16. CpE Practitioners' Evaluation Results Based on Portability

Criteria	Mean	Verbal Interpretation
Adaptability	4.80	Highly Acceptable
Installability	5.00	Highly Acceptable
Replaceability	3.80	Very Acceptable
Overall Mean	4.53	Very Acceptable

Table 4.16 displays the evaluation findings for the portability of the device. Installability achieves a mean score of 5.00, denoting it as "Highly Acceptable" for its ease of installation. Adaptability scoring 4.80, meaning it is "Highly Acceptable" for its flexibility and ability to adjust. Replaceability, scoring 3.80 means "Very Acceptable" for its capability to be replaced when needed. The device's portability has an overall mean of 4.53 with a verbal interpretation of "Very Acceptable" performance across all criteria evaluated in the device.

Fresh Fish Vendors' Evaluation Result

Table 4.17. Fresh Fish Vendors' Evaluation Results Based on Functional Suitability

Criteria	Mean	Verbal Interpretation
Functional Completeness	4.57	Highly Acceptable
Functional Correctness	4.71	Highly Acceptable
Functional Appropriateness	4.71	Highly Acceptable
Overall Mean	4.67	Highly Acceptable

Table 4.17 shows the evaluation result of fresh fish vendor based on device's functional suitability. The evaluation table shows that functional completeness and functional correctness scores 4.71, which means that the

device is “Highly Acceptable” for its comprehensive coverage of functionalities. Functional completeness has a mean of 4.57 verbally interpreted as “Highly Acceptable”. The overall mean of 4.67 reflects a “Highly Acceptable” interpretation across all criteria evaluated.

Table 4.18. Fresh Fish Vendors’ Evaluation Results Based on Reliability

Criteria	Mean	Verbal Interpretation
Maturity	4.14	Very Acceptable
Availability	4.43	Very Acceptable
Fault Tolerance	4.57	Highly Acceptable
Recoverability	4.14	Very Acceptable
Overall Mean	4.32	Very Acceptable

The evaluation table in Table 4.18 indicates that maturity and recoverability of the device both scores 4.14 with a verbal interpretation of “Very Acceptable”. Fault Tolerance scores 4.57, indicating it is “Highly Acceptable” for its capability to maintain operation despite faults or disruptions Availability achieves a mean of 4.43, also has a verbal interpretation of “Very Acceptable” for its consistency in being accessible when needed. The overall mean of 4.32 reflects a verbal interpretation of “Very Acceptable” performance across all criteria evaluated.

Table 4.19. Fresh Fish Vendors’ Evaluation Results Based on Performance Efficiency

Criteria	Mean	Verbal Interpretation
Time Behavior	4.57	Highly Acceptable
Resource Utilization	4.57	Highly Acceptable
Capacity	4.86	Highly Acceptable
Overall Mean	4.67	Highly Acceptable

The evaluation of the Fresh Fish Vendors based on Table 4.19, shows that the device's system is highly suitable when it comes to Performance Efficiency. The evaluation table reveals that time behavior and resource utilization both score 4.57, which means that the device is "Highly Acceptable" for its efficiency and effectiveness in managing time and resources, respectively. Capacity achieves a score of 4.86, denoting it as "Highly Acceptable" for its capability to handle 10kg of fish. The overall mean of 4.67 reflects a "Highly Acceptable" performance across all criteria evaluated.

Table 4.20. Fresh Fish Vendors' Evaluation Results Based on Usability

Criteria	Mean	Verbal Interpretation
Appropriateness Recognizability	4.86	Highly Acceptable
Learnability	4.86	Highly Acceptable
Operability	4.57	Highly Acceptable
User Error Protection	4.14	Very Acceptable
User Interface Aesthetics	4.57	Highly Acceptable
Accessibility	4.43	Very Acceptable
Overall Mean	4.57	Highly Acceptable

The evaluation of the fresh fish vendors reveals the usability of the system's device, as displayed in Table 4.20. Fish vendors evaluates usability criteria including appropriateness recognizability and learnability, both scoring 4.86, denoting them as "Highly Acceptable" for their ease of recognition and learning capability. Operability and user interface aesthetics follows closely with a mean score of 4.57 with a verbal interpretation of "Highly Acceptable". Accessibility scores 4.43, which means "Very Acceptable" for ease of access. User error

protection scores 4.14, also “Very Acceptable” for safeguarding against user errors. The overall mean score of 4.57 has a verbal interpretation of “Highly Acceptable” performance across all usability criteria, emphasizing strong usability and user interface design in the evaluation.

Table 4.21. Fresh Fish Vendors’ Evaluation Results Based on Security

Criteria	Mean	Verbal Interpretation
Confidentiality	4.00	Very Acceptable
Integrity	4.29	Very Acceptable
Non-repudiation	4.43	Very Acceptable
Authenticity	4.43	Very Acceptable
Accountability	4.29	Very Acceptable
Overall Mean	4.29	Very Acceptable

Table 4.21 presents the evaluation results for Fresh Fish Vendors based on security. Non-repudiation and Authenticity both score 4.43, indicating they are “Very Acceptable” for ensuring messages cannot be denied and verifying data origin, respectively. Integrity and Accountability both achieve a score of 4.29, noted as “Very Acceptable” for maintaining data accuracy and traceability. Confidentiality scores 4.00, deemed “Very Acceptable” for data privacy assurance. The overall mean score of 4.29 with the verbal interpretation of “Very Acceptable” performance across all criteria.

Table 4.22. Fresh Fish Vendors’ Evaluation Results Based on Compatibility

Criteria	Mean	Verbal Interpretation
Co-existence	4.57	Highly Acceptable
Interoperability	4.43	Very Acceptable
Overall Mean	4.50	Very Acceptable

Table 4.22 presents the evaluation results for Fresh Fish Vendors based on compatibility, focusing on criteria such as co-existence and interoperability. The vendors scored the device's co-existence with a mean of 4.57, with a verbal interpretation of "Highly Acceptable". Similarly, their interoperability garnered a mean of 4.43, with a "Very Acceptable" verbal interpretation. Notably, the overall mean of 4.50 which means that the device is "Very Acceptable" in terms of Project's compatibility. In this evaluation, co-existence emerged as the highest-rated aspect, while interoperability obtained the lowest mean score.

Table 4.23. Fresh Fish Vendors' Evaluation Results Based on Maintainability

Criteria	Mean	Verbal Interpretation
Modularity	4.29	Very Acceptable
Reusability	4.86	Highly Acceptable
Analyzability	4.29	Very Acceptable
Modifiability	4.43	Very Acceptable
Testability	4.71	Highly Acceptable
Overall Mean	4.51	Highly Acceptable

Table 4.23 presents the evaluation results of Fresh Fish Vendors based on Maintainability. Reusability achieves the highest mean score of 4.86, marking it as "Highly Acceptable" for its effective reuse across different contexts. Testability follows closely with a score of 4.71, indicating it is also "Highly Acceptable" for its ease and effectiveness in testing components. Modifiability has a mean score of 4.43, with a verbal interpretation of "Very Acceptable" for its ability to be modified as needed. Modularity and Analyzability both score 4.29, interpreted as "Very Acceptable" for their structured organization and ease of analysis. The overall

mean score of 4.51 with a verbal interpretation of “Highly Acceptable” performance across all criteria evaluated, emphasizing the device’s reusability, effective testing capability, and strong adaptability through modification and structured organization.

Table 4.24. Fresh Fish Vendors’ Evaluation Results Based on Portability

Criteria	Mean	Verbal Interpretation
Adaptability	4.71	Highly Acceptable
Installability	4.29	Very Acceptable
Replaceability	3.57	Very Acceptable
Overall Mean	4.19	Very Acceptable

Table 4.24 presents the evaluation results of fresh fish vendors based on portability, encompassing adaptability, installability, and replaceability criteria. Among the evaluated criteria, Adaptability stands out with a mean score of 4.71, marking it as “Highly Acceptable” for its capability to adjust to different conditions or requirements effectively. Installability follows with a score of 4.29, which is “Very Acceptable,” indicating ease of installation for the system. Replaceability scores 3.57, also has a verbal interpretation of “Very Acceptable,” demonstrating the device’s ability to be replaced when necessary.

The overall mean score of 4.19 reflects a verbal interpretation of “Very Acceptable” performance across all criteria assessed, highlighting the system’s strong adaptability, satisfactory installability, and reliable replaceability in various operational contexts.

Dried Fish Vendors' Evaluation Result

Table 4.25. Dried Fish Vendors' Evaluation Results Based on
 Functional Suitability

Criteria	Mean	Verbal Interpretation
Functional Completeness	5.00	Highly Acceptable
Functional Correctness	4.67	Highly Acceptable
Functional Appropriateness	4.67	Highly Acceptable
Overall Mean	4.78	Highly Acceptable

The results of the functional suitability-based evaluation of the dried fish vendors are shown in Table 4.25. The device's system functions to a degree that covers all the designated duties and user objectives, with a mean of 5.00 for functional completeness, which is interpreted as "Highly Acceptable." The average mean score for both functional correctness and functional appropriateness is 4.67, with a verbal interpretation of "Highly Acceptable," meaning that the device's system produces accurate results with the necessary level of precision and makes it easier to do its function. The overall mean of 4.78 for functional suitability indicates that the results are "Highly Acceptable."

Table 4.26. Dried Fish Vendors' Evaluation Results Based on Reliability

Criteria	Mean	Verbal Interpretation
Maturity	4.67	Highly Acceptable
Availability	4.33	Very Acceptable
Fault Tolerance	4.67	Highly Acceptable
Recoverability	4.33	Very Acceptable
Overall Mean	4.50	Highly Acceptable

The evaluation findings of the dried fish vendors based on reliability are shown above in Table 4.26. The highest average mean scores went to fault tolerance and maturity, both at 4.67 with a verbal interpretation of "Highly Acceptable". This means that the device meets standard reliability requirements under normal operation and continues to function as intended even in the event of hardware or software faults. The average mean score for availability and recoverability was 4.33, with the verbal interpretation of "Very Acceptable". The device's reliability score was 4.50 overall, which means "Highly Acceptable," indicating that the system operates as intended within the allotted period.

Table 4.27. Dried Fish Vendors' Evaluation Results Based on
Performance Efficiency

Criteria	Mean	Verbal Interpretation
Time Behavior	4.67	Highly Acceptable
Resource Utilization	4.67	Highly Acceptable
Capacity	5.00	Highly Acceptable
Overall Mean	4.78	Highly Acceptable

Table 4.27 displays the evaluation findings for the performance efficiency of the device. Capacity received the highest mean score of 5.00 and was verbally interpreted as "Highly Acceptable," meaning that the device's system's maximum limits satisfy the requirements. The average mean score for both time behavior and resource utilization is 4.67, which is interpreted as "Highly Acceptable." This indicates that the device's system response, processing time, and throughput rates meet the requirements and that they also satisfy the requirements when operating with a specific set of resources. With an overall mean of 4.78, the device's

performance efficiency is considered “Highly Acceptable,” indicating that it performs well in relation to the amount of resources required under the given circumstances

Table 4.28. Dried Fish Vendors’ Evaluation Results Based on Usability

Criteria	Mean	Verbal Interpretation
Appropriateness Recognizability	4.67	Highly Acceptable
Learnability	5.00	Highly Acceptable
Operability	4.67	Highly Acceptable
User Error Protection	4.67	Highly Acceptable
User Interface Aesthetics	4.67	Highly Acceptable
Accessibility	4.00	Very Acceptable
Overall Mean	4.61	Highly Acceptable

The device’s learnability achieved the highest average mean of 5.00, interpreted as “Highly Acceptable,” meaning that users may learn how to operate the equipment effectively. The evaluation results show that the average mean score for Appropriateness Recognizability, Operability, User Error protection, and user interface aesthetics is 4.67 with “Highly Acceptable” rating. The users can determine if the device is appropriate for their needs and has features that facilitate control and ease of use. In addition, the system has protections that prevent users from making mistakes, and the user interface makes it possible for users to interact in a way that is satisfying and pleasant. The evaluation’s findings show that accessibility received a “Very Acceptable” rating with an average mean score of 4.00. As seen above, makes it apparent that the device’s usability was evaluated as “Highly Acceptable” by the Dried Fish Vendors, with an overall mean score of

4.61. This measure pertains to the efficiency, effectiveness, and contentment that designated users can have when using the device.

Table 4.29. Dried Fish Vendors' Evaluation Results Based on Security

Criteria	Mean	Verbal Interpretation
Confidentiality	4.33	Very Acceptable
Integrity	4.00	Very Acceptable
Non-repudiation	4.00	Very Acceptable
Authenticity	4.67	Highly Acceptable
Accountability	4.33	Very Acceptable
Overall Mean	4.27	Very Acceptable

The results of the security-based evaluation of the dried fish vendors are shown in Table 4.29. The highest mean of the device for security is authenticity with mean of 4.67, which has a verbal interpretation of "Highly acceptable," meaning that device and system identity can be proved to be the one claimed. The device and system ensure that the data are accessible only to authorized users, with an average mean of 4.33 for confidentiality and accountability, which means "Very Acceptable." The average mean score for both integrity and non-repudiation is 4.00, with a verbal interpretation of "Very Acceptable". The device's security overall mean of 4.27 indicates that the results are "Very Acceptable".

Table 4.30. Dried Fish Vendors' Evaluation Results Based on Compatibility

Criteria	Mean	Verbal Interpretation
Co-existence	4.67	Highly Acceptable
Interoperability	4.33	Very Acceptable
Overall Mean	4.50	Very Acceptable

The results of the compatibility evaluation of the dried fish vendors are shown in Table 4.30. Device perform its functions efficiently while sharing a typical

resources with other products, with an average mean of 4.67 for co-existence, with verbal interpretation of “Highly Acceptable.” The mean score for Interoperability is 4.33, which is “Very Acceptable,” meaning the device’s components can exchange information to and use it. The overall mean of compatibility is 4.50 with verbal interpretation of “Very acceptable”.

Table 4.31. Dried Fish Vendors’ Evaluation Results Based on Maintainability

Criteria	Mean	Verbal Interpretation
Modularity	4.33	Very Acceptable
Reusability	5.00	Highly Acceptable
Analyzability	4.67	Highly Acceptable
Modifiability	4.33	Very Acceptable
Testability	5.00	Highly Acceptable
Overall Mean	4.67	Highly Acceptable

In Table 4.31, the device scored highest in reliability and testability with a mean score of 5.00, which means “Highly Acceptable.” The device’s analyzability received a score of 4.67, also classified as “Highly Acceptable,” showing its effectiveness in the system. For modularity and modifiability, the device scored 4.33, with verbal interpretation of “Very Acceptable,” meaning it can be modified effectively without compromising product quality. Overall its maintainability has an overall mean of 4.67 which means that the device is “Highly Acceptable”.

Table 4.32. Dried Fish Vendors’ Evaluation Results Based on Portability

Criteria	Mean	Verbal Interpretation
Adaptability	4.67	Highly Acceptable
Installability	4.00	Very Acceptable
Replaceability	3.33	Acceptable
Overall Mean	4.00	Very Acceptable

Table 4.32 displays the evaluation findings for the portability of the device. Adaptability received the highest mean score of 4.67 with a verbal interpretation of "Highly Acceptable," indicating the device can adapt to different or evolving hardware, software, or other operational or usage environments. The average mean score for installability is 4.00, which indicates that the evaluated result of dried fish vendors are "Very Acceptable," suggesting this device can be easily installed and uninstalled. The dried fish vendor evaluates the category of replaceability and has a mean score of 3.33, which means "Acceptable". With an overall mean of 4.00, the device's portability has a verbal interpretation of "Very Acceptable".

Table 4.33. Summary of Evaluation Results

Criteria	CpE Practitioners	Fresh Fish Vendors	Dried Fish Vendors
Functional Suitability	4.73	4.67	4.78
Reliability	4.70	4.32	4.50
Performance Efficiency	4.33	4.67	4.78
Usability	4.57	4.57	4.61
Security	4.00	4.29	4.27
Compatibility	4.90	4.50	4.50
Maintainability	4.48	4.51	4.67
Portability	4.53	4.19	4.00
Overall Mean	4.53	4.46	4.51
Verbal Interpretation	Highly Acceptable	Very Acceptable	Highly Acceptable

The Table 4.33 compares the evaluation scores given by CpE Practitioners, Fresh Fish Sellers, and Dried Fish Vendors across various criteria for a system or

product. CpE Practitioners generally rate the system highest in reliability (4.7), compatibility (4.9), and portability (4.53). Fresh Fish Vendors find functional suitability most satisfactory (4.67), while Dried Fish Vendors give the highest scores in functional suitability (4.78), performance efficiency (4.78), and maintainability (4.67).

Overall, CpE Practitioners have the highest mean score of 4.53, interpreting the system as “Highly Acceptable”. Dried Fish Sellers closely follow with an overall mean of 4.51, also “Highly Acceptable”. Fresh Fish Sellers have the lowest overall mean at 4.46, still rating the system as “Very Acceptable”. This means that while all groups find the system satisfactory, CpE Practitioners are the most satisfied, particularly valuing reliability, compatibility, and portability, whereas Dried Fish Sellers highlight functional suitability and performance efficiency.

Project Benefits

Traditionally, fish sellers grappled with the dilemma of either selling their fish at reduced prices to prevent losses or storing excess supply for the following day, particularly during periods of oversupply like during summer. With the automatic fish dehydrator, sellers can efficiently dry their fish, mitigating the need for constant monitoring. Its capacity to dry up to 10kg of fish enables them to dry unsold fish conveniently within the device.

Automated fish dehydrators offer several advantages over traditional sun-drying methods, as shown in Table 4.34. The most significant benefit is the faster drying time. The device can dry an average twenty-one (21) gram fish within twelve (12) hours, whereas traditional drying can take up to three (3) days. Dehydrators

also reduce the effort required for drying fish. Unlike traditional methods, which necessitate constant monitoring and flipping of the fish, dehydrators allow the user to set the drying process and walk away. Additionally, the device eliminates the need to worry about weather conditions, as the device provide a controlled environment.

Table 4.34. Traditional Fish Drying Result

Day	Picture		Weight	
	Tamban	Galungongg	Tamban	Galungongg
0			21 grams	19 grams
1			14 grams	13 grams
2			10 grams	11 grams
3			9 grams	8 grams

In addition to faster drying times and reduced effort, fish dehydrators offer enhanced hygiene and food safety. Traditional sun-drying exposes fish to dust, insects, and other contaminants, which can compromise the quality and safety of

the dried product. Dehydrators, on the other hand, operate in a closed environment, minimizing contamination risks. Furthermore, the consistent and controlled drying conditions ensure uniform drying, which can enhance the texture and flavor of the dried fish. Dehydrators also consume less space compared to traditional drying methods, making them ideal for small-scale operations or limited storage areas.

Moreover, the device offers an automated shutdown after the dehydration process, ensuring convenience and peace of mind for sellers. Additionally, it provides real-time notifications via SMS, eliminating the need for frequent manual checks on the drying progress. Following the drying process, fish sellers can expand their market opportunities by selling the dried fish directly to customers or by specializing in dried fish sellers in the market, thereby maximizing their revenue potential.

A significant advantage of the device is its ability to extend the shelf life of dried fish. The developers undertook a detailed study to mimic the traditional storage practices employed by dried fish vendors, specifically by replicating the method of stacking the product in boxes.

As demonstrated in Tables 4.35 and 4.36, both Tamban and Galunggong varieties stored using this method exhibit a maximum shelf life of two weeks under optimal conditions. This represents a notable improvement over conventional storage methods, which often result in a shorter shelf life. The extended shelf life not only allows for a longer sales window for vendors but also significantly reduces the likelihood of spoilage.

Table 4.35. Observation on Dried Tamban Using the Device

Photo	Day	Observation
	1 - 11	No significant changes
	12	Salt begins to form on the surface, especially around the areas where starts accumulate moisture.
	14	Salt crystals become more prominent, especially at the top surface of the fish.
	20	The dried fish become more brittle and fragile.

Table 4.36. Observation on Dried Galunggong Using the Device

Photo	Day	Observation
	1 - 10	No significant changes
	11	Salt begins to form on the surface, especially around the areas where starts accumulate moisture.
	14	Salt crystals become more prominent, especially at the top surface of the fish.
	18	The dried fish become more brittle and fragile.

Project Economic Feasibility

Fish vendors can utilize this innovative device after business hours to efficiently dry unsold fish inventory. This not only reduces waste but also allows them to potentially command slightly higher prices when reselling the dried fish. The initial investment for constructing the device, including electronic components and miscellaneous expenses, is ₱10,379.00. Additionally, fabrication by a professional aluminum worker would add ₱3,000.00 to the initial cost.



Figure 4.15. Maximum Power Consumption during Tests

The price of Tamban during April 2024 ranges from ₱40.00-₱60.00 per kilo in the afternoon, down from their original price of ₱70.00-₱80.00 in the morning. On the other hand, the price of Galunggong in the same season ranges from ₱70.00-₱100.00 per kilo in the afternoon, down from its original price of ₱100.00-₱120.00 in the morning. This indicates that the prices decrease as the day progresses and the fish remains unsold. If the fish is not sold by the end of the business day, its price the following day will be significantly lower due to the reduced quality of the fish.

Table 4.37. Total Budget for the Project

Expenses				
Item	Price	No of items	Shipping	Total
Heating Element(200W)	₱ 180.00	1	₱ 0.00	₱ 180.00
Heating Element(300W)	₱ 250.00	1	₱ 50.00	₱ 300.00
DHT22 sensor	₱ 191.00	1	₱ 0.00	₱ 191.00
Load Cell	₱ 29.00	4	₱ 0.00	₱ 116.00
HX711 amplifier	₱ 45.00	1	₱ 0.00	₱ 45.00
Porcelain Insulator	₱ 10.00	10	₱ 0.00	₱ 100.00
LCD Screen	₱ 273.00	1	₱ 0.00	₱ 273.00
SSR Relay	₱ 156.00	2	₱ 0.00	₱ 312.00
Buttons	₱ 5.00	3	₱ 0.00	₱ 15.00
Arduino Uno	₱ 449.00	1	₱ 0.00	₱ 449.00
Fans	₱ 200.00	2	₱ 0.00	₱ 400.00
Plywood (1/2 inch)	₱ 580.00	1	₱ 0.00	₱ 580.00
Aluminum Stucco Sheet	₱ 550.00	2	₱ 0.00	₱ 1,100.00
Aluminum Angle bar	₱ 350.00	3	₱ 0.00	₱ 1,050.00
Aluminum Tubular	₱ 350.00	4	₱ 0.00	₱ 1,400.00
Blind Rivet	₱ 200.00	1	₱ 0.00	₱ 200.00
Expanded Wire	₱ 576.00	1	₱ 0.00	₱ 576.00
Wheels	₱ 25.00	4	₱ 0.00	₱ 100.00
Stainless Round bar	₱ 180.00	5	₱ 0.00	₱ 900.00
Male and Female pins	₱ 8.00	4	₱ 0.00	₱ 32.00
Door handle(double)	₱ 29.00	1	₱ 0.00	₱ 29.00
Wire (24awg)	₱ 80.00	1	₱ 0.00	₱ 80.00
Insulation	₱ 240.00	1	₱ 0.00	₱ 240.00
Jumper wires	₱ 40.00	2	₱ 0.00	₱ 80.00
wire insulator	₱ 35.00	2	₱ 0.00	₱ 70.00
2x2(GI) angle bar	₱ 540.00	1	₱ 0.00	₱ 540.00
2.54mm wire cable Connector	₱ 22.00	1	₱ 0.00	₱ 22.00
PCB universal Board(8x12)	₱ 48.00	1	₱ 0.00	₱ 48.00
Wire (16AWG)	₱ 120.00	1	₱ 0.00	₱ 120.00
Sim800l V2 module	₱ 349.00	1	₱ 0.00	₱ 349.00
Simcard	₱ 60.00	1	₱ 0.00	₱ 60.00
Aluminum tape	₱ 113.00	1	₱ 0.00	₱ 113.00
Varnish	₱ 50.00	1	₱ 0.00	₱ 50.00
Lead	₱ 50.00	1	₱ 0.00	₱ 50.00
9v Adapter	₱ 118.00	1	₱ 58.00	₱ 176.00
LM25962 buck Converter	₱ 39.00	1	₱ 0.00	₱ 39.00
Hinges with screw	₱ 5.00	8	₱ 0.00	₱ 40.00
Cable Connector	₱ 25.00	1	₱ 0.00	₱ 25.00
Shrinkable tube	₱ 20.00	1	₱ 0.00	₱ 20.00
Cable Tie	₱ 39.00	1	₱ 0.00	₱ 39.00
Moldex	₱ 45.00	1	₱ 0.00	₱ 45.00
			Total	₱ 10,379.00

Operational Cost Analysis

The operational cost of the fish dehydrator primarily comprises electricity consumption and fish salting. During testing conducted in April 2024, the device reached a maximum power draw of 6.7 kWh. With an electricity price of ₱11.03 per kWh (as of April 2024), the cost of drying 10.20kg of fish would be ₱73.90. The cost of salt for fish salting is ₱40.00 for two (2) kilogram. Considering no additional factors like water usage, the total operational cost per drying cycle is ₱113.09.

Potential Profitability Analysis

A sample profitability calculation was performed for drying 10.20kg of Tamban fish. The initial cost of the fish was ₱50 per kg, resulting in a total cost of ₱500. After dehydration, the final weight of the dried fish is 4.59kg, with weight reduction of 55% of its original weight. Given a market price of ₱200 per kg for dried Tamban fish, the total revenue from this drying cycle would be ₱918. Subtracting the operational cost (₱113.09) and initial fish cost (₱500.00) from the revenue (₱918.00) yields a potential profit of ₱304.10 per drying cycle. This calculation is based on specific assumptions about fish prices and dehydration efficiency, and further research is needed to validate these across various fish size and market conditions.

Drying to Cover Investment

This calculation helps determine how many drying cycles are needed to recover an initial investment. This means that approximately 63.11 drying cycles are required to cover the initial investment of ₱13,379.00 with a profit of ₱304.10

per drying cycle. Since it can't complete a fraction of a drying cycle in practical terms, the user would need 44 cycles to fully cover the investment.

$$\text{Drying to Cover investment} = \frac{\text{Initial Investment}}{\text{Profit per Drying}}$$

$$\text{Drying to Cover Investment} = \frac{\text{₱13,379}}{\text{₱304.10}} \approx 44$$

Time to Cover Investment

Using the earlier calculation where 44 drying cycles are needed to cover the investment with a profit of ₱304.10 per cycle, and the number of drying per week is three (3) times, the calculation would be:

$$\text{Weeks to Cover Investment} = \frac{\text{Drying to Cover Investment}}{\text{Dryings per Week}}$$

$$\text{Weeks to Cover Investment} = \frac{44}{3} = 14.67 \text{ weeks}$$

It would take approximately 14.37 weeks to cover the initial investment of ₱13,379.00 if three (3) drying cycles are completed per week with 10kg of fish, with a profit of ₱304.10 per cycle.

Months to Cover Investment

$$\text{Months to Cover Investment} = \frac{\text{Weeks to Cover Investment}}{\text{Average Weeks per Month}}$$

$$\text{Months to Cover Investment} = \frac{14.67}{4.345} \approx 4 \text{ months}$$

Assuming a constant drying efficiency and fish weight and with profit of ₱304.10 per drying cycle, it would take approximately forty-four (44) drying cycles for the dehydrator to recover its initial investment cost of ₱13,379.00. This translates to 14.67 weeks or 4 months of operation. It's important to consider

additional factors that might influence profitability, such as electricity cost, fish availability, and potential variations in drying efficiency for different fish sizes.

Project Schedule Feasibility

Table 4.38. Project Development Schedule

Description	Activity	Date Started	Date Finished	Duration
Plan	User Requirements	10/02/2023	10/17/2023	11 Days
	Software Requirements	10/17/2023	11/10/2023	25 Days
	Hardware Requirements	10/17/2023	11/10/2023	25 Days
Design	Design of Device	11/10/2023	11/28/2023	19 Days
	System Design	11/10/2023	12/10/2023	31 Days
Development	Materials Gathering	12/11/2023	01/12/2024	33 Days
	Building the Body	12/27/2023	01/25/2024	30 Days
	Wiring of modules	01/20/2024	02/15/2024	27 Days
	Programming	02/15/2024	03/06/2024	21 Days
Testing	Hardware Testing	03/06/2024	03/12/2024	7 Days
	Software Testing	03/12/2024	03/20/2024	9 Days
	Drying Testing	03/20/2024	04/19/2024	31 Days
Deployment	Deploying the Prototype	06/18/2024	06/18/2024	1 Day
Review	Visiting the Client	06/24/2024	06/24/2024	1 Day
Launch	Signing of MOU with the client	06/24/2024	06/24/2024	1 Day

The project development follows the agile methodology as seen in Table 4.38 above, which enables flexibility in adapting to changes during the development process. This approach allows for a more systematic approach and ensures that the project meets its requirements effectively. Initially, developers survey to gather essential data necessary for identifying the problem and understanding the general requirements for the solution. Further insight into the requirements is gained through interviews with the specific client. Subsequently, developers select the appropriate IDE, hardware, and other materials tailored to the project's requirements.

Deployment Result



Figure 4.16. Deployment of the Project

Approval from the Client

The initial phase of deployment involves obtaining client approval, which is crucial to ensuring support and collaboration between the school and community. This was done through securing a formal letters and talking with the beneficiary. This process took less than 30 minutes, along with the explanation of the device's function and how can it help them in their business.

Setting up the Device

The developers installed the device while explaining its functionalities to the beneficiaries. They conducted a thorough review of the device's functionality to ensure it was operating correctly and performing its intended tasks accurately. Each sensor was individually tested to verify the accuracy of the data it provided. Furthermore, during the setup process, the developers programmed the client's mobile number into the device, enabling it to send SMS notifications directly to the client.

Training

The developers then conducted a training session, explaining the necessary steps to use the device. This session lasted only one hour, as the device is designed for easy use and had been previously discussed during the evaluation. During the training, the developers demonstrated how to calibrate the device using the provided 500-gram weight, ensuring the user understood the proper calibration procedure.

Following the calibration training, the developers instructed the users on how to utilize the device for drying purposes. They emphasized the importance of following the manual and the on-screen instructions.

The next part of the training is giving the clients advice about how can they marinate the fish before the drying process. The client and his family were given chance to ask question to clarify everything before the end of the training. The client acknowledged the significance of using the device responsibly, recognizing the students' efforts to address the issue of unsold fish.

Handover of the Device

The handover of the device was overseen by Engr. Jomar C. Escobido, a representative from the College of Engineering. He discussed the agreement concerning the collaboration between the students and the clients, outlining the cooperation as part of the university's community extension program. This collaboration aims to enhance community engagement and support local initiatives through innovative solutions developed by the students. See *Appendix K.4* for additional documentation during deployment and *Appendix K.5* for the Memorandum of Understanding (MOU).

CHAPTER V

SUMMARY OF FINDINGS, CONCLUSIONS AND RECOMMENDATIONS

This chapter presents an in-depth summary of the results that the developer carefully analyzed. It includes a careful examination, well-recorded findings, and perceptive suggestions gathered after cautious research and examination.

Summary of Findings

The Arduino-based Tamban and Galunggong dehydrator has been completed. It was developed to address the challenges faced by retail fish vendors regarding unsold fish. Following tests of the device's functionality, it performed satisfactorily. In the evaluation using ISO 25010, the device was assessed by five (5) CpE practitioners, seven (7) fresh fish vendors, and three (3) dried fish vendors. These evaluators were selected based on their expertise and experience in their respective fields relevant to the device.

Based on the tests conducted, the device accurately measures the weight of fish when they are inserted into the dehydrator. However, after the drying process, there is an average of 3.93% discrepancy where the device reads a weight slightly heavier than the actual weight of the fish. This issue has been addressed by adjusting the final required weight for completing the drying process. Additionally, the drying time for Tamban varies based on the weight of each fish, with lighter fish drying more quickly.

Based on the drying tests, the device can dry 10kg of fish with an average weight of 16.24 grams in eleven (11) hours and fifty-one (51) minutes of drying. Fishes with an average of 21.8 grams were dried in twelve (12) hours and six (6)

minutes. Lastly, the larger fish with an average weight of forty-eight (48) grams is dried for sixteen (16) hours and forty-two (42) minutes. The device also succeeded in notifying the user through SMS after the drying process.

Based on the evaluation, the device received a mean score of 4.53 from the CpE Practitioners, with an adjectival rating of “Highly Acceptable.” Similarly, it was appraised as “Highly Acceptable” by the dried fish vendors, achieving a mean score of 4.51. Lastly, the device was rated by the fresh fish vendors with a mean score of 4.26 with a verbal interpretation of “Very Acceptable”.

Conclusions

Based on the project findings, the following conclusions can be inferred:

1. The Arduino-based Tamban and Galunggong Dehydrator has shown functionality in accomplishing the subsequent functions:
 - a) Monitored and regulated the temperature;
 - b) Displayed the current temperature, humidity, and weight of the fish;
 - c) Dried a maximum of 10kg of Tamban or Galunggong;
 - d) Stopped the drying process automatically after completion;
 - e) Notified the user the final weight of fish via SMS after the drying process.
2. The device obtained a highly acceptable evaluation among CpE practitioners and dried fish vendors, and a very acceptable evaluation among retail fish vendors with regard to the ISO 25010 criteria, which include functional suitability, reliability, performance efficiency, usability, security, compatibility, maintainability, and portability.

3. After deployment, the device met its intended goal. As a result, the client has accepted the device and is ready to use it in their business. The developers also received an acceptance letter from the client indicating that the device is an excellent solution for managing unsold fish in their business.

Recommendations

Based on the results of the testing and evaluation conducted with the device, the following recommendations are at this moment recommended:

1. To encourage fish sellers to adopt automated fish dehydrators within San Pablo City, aiming to minimize the impact of having unsold fish. This approach allows them to turn unsold fish into a value-added product instead of selling it for a lower price or disposing of it.
2. For future developers:
 - a) Expand the functionality of the dehydrator to accommodate a wider range of fish species, catering to the diverse needs of users;
 - b) Adjust the size of the dehydrator to ensure it fits the specific requirements of the user. By making the design scalable and customizable, users can accommodate varying amounts of fish beyond the prototype's capacity of 10kg;
 - c) Introduce additional options for users to customize the drying process according to their preferences. For example, different drying settings for different fish;

- d) Install an exhaust fan on one side of the device to reduce humidity, eliminate foul odors, and improve the efficiency of airflow direction;
- e) Employ other sources of electricity, such as solar power and batteries to lessen electric consumption. This can also act as an emergency power supply in case of power outage.

REFERENCES

LOCAL

A. BOOKS

Cain, M. L. (2019). The Philippines: Fish Preservation Techniques. In M. L. Cain, *Appropriate Technology for Development* (pp. 343-357). Retrieved from <https://www.taylorfrancis.com/chapters/edit/10.4324/9780429051418-19/philippines-fish-preservation-techniques-melinda-cain>

Islam, J., Yap, E., Krongpong, L., Toppe, J., & Peñarubia, O. (2021). *Fish Waste Management –An Assessment On Potential Production and Utilization of Fish Silage in Bangladesh, Philippines And Thailand*. FAO Fisheries and Aquaculture Circular No. 1216. doi:10.4060/cb3694en

B. JOURNALS

Amascual, R. H. (2020). Histamine Profile of Dried-Salted Fish Sold in Local Supermarkets of Samar, Philippines. *Italian Journal of Food Safety*, 9(1). doi:10.4081/ijfs.2020.8322

Bertulfo, J. O., Roluna, A. A., Carillo, J. G., & Silong, L. B. (2022). Design and Development of Solar Dryer for Local Seaweeds (*Kappaphycus spp.*). *Proceedings of International Exchange and Innovation Conference on Engineering Sciences*. doi:10.5109/5909071

Bigueja, M. C. (2022). Effectiveness of Modified Solar Dryer's Facility and Sensory Properties of brined Split Mullet fish. *Multidisciplinary International Journal of Research and Development (MIJRD)*, 26-33. Retrieved from <https://www.mijrd.com/papers/v1/i3/MIJRDV1I30004.pdf>

Castro, M. M., Pabuayon, I. M., Catelo, S. P., & Camacho Jr, J. V. (2021). Analyzing Consumer Preferences for Credence Attributes of Fish and Fishery Products in Davao City, Philippines. *Asian Journal of Agriculture and Development*, 84-103. doi:10.37801/ajad2021.18.1.6

- Curpoz, K. M. (2020). *Weight Monitoring System for Tilanggit Dried Fish with SMS Notification*. Retrieved from
https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3717498
- De Leon, P. C. (2021). Processing and Marketing of Salinas Tuyo and Tinapa in Balanga City, Bataan. *Journal of Management and Development Studies*, 18–29. Retrieved from
<https://jmds.upou.edu.ph/index.php/journal/article/view/39>
- De Ungria, S., Fernandez, L. T., Sabado, S. E., Santos, J. P., Sararaña, A. R., & Abeledo, C. C. (2022). Circular Economy in Fisheries: How is Fish Market Waste Managed in the Philippines? *Research Square*.
doi:10.21203/rs.3.rs-1413739/v1.
- Dumaguit F. A. M., C. L.-U. (2023). Automated Dual-Source Squid Dryer with Image Processing Monitoring. *Advances in research*, 89-99.
doi:https://www.researchgate.net/publication/371827989_Automated_Dual-Source_Squid_Dryer_with_Image_Processing_Monitoring
- Enriquez, M. D., & Ballo, C. J. (2022). Development and Evaluation of Mechanized Fish Paste Maker. *Food Science and Technology Vol. 10*, 9-16. doi:10.13189/fst.2022.100102
- Luceño, A. J., Torres, M. A., Tabugo, S. R., & Demayo, C. G. (2019). Describing the Body Shapes of Three Populations of *Sardinella Lemuru* (Bleeker, 1853) From Mindanao Island, Philippines Using Relative Warp Analysis. *International Research Journal of Biological Sciences*, 6-17.
- Lugnasin, J. V., Pena, R. A., & Macabebe. (2023). IoT-Enabled Multilevel Solar Dryer for Agriculture. *2023 IEEE International Conference on Internet of Things and Intelligence Systems*. IEEE.
doi:10.1109/IoTais60147.2023.10346050
- Miano, J. I., Nabua, M. A., Gaw, A. R., Alce, A. R., Ecleo, C. A., Repulle, J. V., & Omar, J. J. (2023). Optimizing Drying Efficiency Through an IoT-based

- Direct Solar Dryer System: Integration of Web Data Logger and SMS Notification. *International Journal of Advanced Computer Science and Applications*. doi:10.14569/IJACSA.2023.0140726
- Montojo, U. M., Delos Santos, V. H., Narida, C. M., Febreo, I. Y., Peralta, D. M., Banicod, R. J., & Sabal, O. M. (2020). Estimation of Post-Harvest Losses of Fish Transported Using Ice-chilled Carrier Boats from High Seas Pocket 1. *Philippine Journal of Fisheries*, 83-92.
doi:10.31398/tpjf/27.1.2019A0018
- Paman, M. J., Pantuhan, G. P., Serviñas, M. O., & Malasador, J. S. (2020). Drying Behavior and Sensory Quality of Yellowfin Tuna (*Thunnus albacares*) Skin Using Vertical-type Mechanical Dryer. *Journal of Engineering, Environment and Agriculture Research*.
doi:<https://doi.org/10.34002/jeear.v2i0.45>
- Pangan, R. S., Ampo, M. V., & Barredo, Y. E. (2020). Optimization of the Floating-Type Seaweed Dryer. *Aquacultural Engineering*, 1-5.
doi:10.1016/j.aquaeng.2020.102068
- Tahiluddin, A. &. (2022). Traditional Fish Processing Techniques Applied in the Philippines and Turkey. *Menba Kastamonu Üniversitesi Su Ürünleri Fakültesi Dergisi*, 8(1), 50-58.
- Tahiluddin. (2021). An Overview of Fisheries and Aquaculture in the Philippines. *Journal of Anatolian Environmental and Animal Sciences*. 6.
10.35229/jaes.944292.
- Tolentino, L. K. (2020). Weight Prediction System for Nile Tilapia Using Image Processing and Predictive Analysis. *International Journal of Advanced Computer Science and Applications*, 11.8.
- Trondillo, M. J. (2018). Improved Quality of Dried Philippine Sandfish (*Holothuria scabra*) using a combination of hot-air drying and solar drying. *Philipp. J. Agric. Biosyst. Eng.*, 14, 45-53.

Uba, K. I., Monteclaro, H., Noblezada-Payne, M. M., & Quintio, G. J. (2020).

Value Chain Analysis of the Horse Mussel *Modiolus Maculatus* fishery in Iloilo Philippines. *Asian Fish Sci*, 106-117.

C. UNPUBLISHED THESES

Estrada, Z., Hernandez, S., Lagrimas, T., Ortiz, A., Peñaloza, J., & Sumilang, J. (2023). Impact of Unsold Tamban (*Sardinella Lemuru*) and Galunggong (*Decapterus Macrosoma*) on Retail Fish Vendors in San Pablo City Public Market: Basis for Alternative Plan.

FOREIGN

A. BOOKS

Doe, P., & Olley, J. (2020). Drying and Dried Fish Products. In *Seafood: Resources, Nutritional Composition, and Preservation* (pp. 125-145). doi:10.1201/9781003068419-10

Rahman, M. S. (2020). Osmotic Dehydration of Foods. *Handbook of food preservation*, 459-472.

Swami, V. M. (2018). Experimental Analysis Of Solar Fish Dryer Using Phase Change Material. *Journal Of Energy Storage*. 310-315.

Okos, M. R. (2018). Food dehydration. In *Handbook of food engineering*. 799-950.

B. JOURNALS

Aboud, S. A., Altemimi, A. B., RS Al-Hilphy, A., Yi-Chen, L., & Cacciola, F. (2019). A Comprehensive Review on Infrared Heating Applications in Food Processing. *Molecules*. 24(22), 4125. Retrieved from <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6891297/>

Abraha, B., Admassu, H., Mahmud, A., Tsighe, N., Shui, X. W., & Fang, Y. (2018). Effect of processing methods on nutritional and physico-chemical composition of fish: a review. *MOJ Food Process Technology*, 376-82.

- https://www.researchgate.net/publication/344805398_Effect_of_processing_methods_on_nutritional_and_physico-chemical_composition_of_fish_a_review
- Adeyeye, S. (2019). An Overview of Fish Drying Kinetics. *Nutrition and Food Science*, 886-902. doi:10.1108/NFS-10-2018-0296
- Alvinika, Y., Setyohadi, D. B., & Sulistyoningsih, M. (2021). IoT-Based Monitoring and Design of Automatic Fish Drying Equipment Using Fuzzy Logic. *IOP Conference Series: Earth and Environmental Science* (pp. Vol. 704, No. 1, p. 012042). IOP Publishing. doi:10.1088/1755-1315/704/1/012042
- Bell, R. J., Odell, J., Kirchner, G., & Lomonico, S. (2020). Actions to Promote and Achieve Climate-Ready Fisheries: Summary of Current Practice. *Marine and Coastal Fisheries*, 166-190. doi:10.1002/mcf2.10112
- Benjamin, A. K. (2020). Design and Implementation of a Low-Cost Ultrasonic Radar System using an Arduino Microcontroller. Retrieved from https://www.academia.edu/43759051/Design_and_Implementation_of_a_Low_Cost_Ultrasonic_Radar_System_using_an_Arduino_Microcontroller
- Damayanti, D., Ariswati, H., Wisana, I. D., & Winarno, H. (2020). Automatic Dehydration Level Detection Devices. *Indonesian Journal of Electronics, Electromedical Engineering, and Medical Informatics*, 87-94. doi:10.35882/ijeeemi.v2i2.5
- Ershov, M. A. (2020). Optimization of Mass-Transfer Processes of Fish Convective Dehydration. In IOP Conference Series: . *Earth and Environmental Science* , (Vol. 539, No. 1, p. 012190).
- Fang, S., Wang, R., Ni, H., Liu, H., & Liu, L. (2020). A Review of Flexible Electric Heating Element and Electric Heating Garments. *Journal of Industrial Textiles*, 101-136. doi:10.1177/1528083720968278.
- FAO. (2018). *The State of World Fisheries and Aquaculture 2018*. United Nations: FAO. Retrieved from <http://www.fao.org/3/i9540en/I9540EN.pdf>

- Gallo, L. A.-C. (2018). Design and Construction of a Vacuum Osmotic Dehydrator Applied to Tropical Fruits. *Contemporary Engineering Sciences*. doi:10.12988/ces.2018.8248.
- Ismailov, A. S. (2022). Study of Arduino Microcontroller Board. Science and Education. 172-179. Retrieved from https://www.researchgate.net/publication/359502443_Study_of_arduino_microcontroller_board
- Koestoer, R. A. (2019). A Simple Calibration Methods of Relative Humidity Sensor DHT22 For Tropical Climates Based on Arduino Data Acquisition System. *AIP Conference Proceedings*. doi:10.1063/1.5086556
- Li, F., Li, P., & Zhang, H. (2022). Preparation and Research of a High-Performance ZnO/SnO₂Humidity Sensor. 293. doi:10.3390/s22010293
- Liu, W., Zhang, M., Mujumdar, A. S., & Chen, J. (2023). Role of Dehydration Technologies in Processing for Advanced Ready-To-Eat Foods:. A comprehensive review. *Critical Reviews in Food Science and Nutrition*, 5506-5520. doi:10.1080/10408398.2021.2021136
- Maribao, I. P., Tahiluddin, A. B., Amlani, M. Q., & Sarri, J. H. (2022). A Review on Spoilage Microorganisms in Fresh and Processed Aquatic Food Products. *Food Bulletin*, 21-36. doi:10.29329/foodb.2022.495.05
- Mehmood, T., Alzoubi, H. M., Alshurideh, M., Al-Gasaymeh, A., & Ahmed, G. (2019). *Schumpeterian entrepreneurship theory: Evolution and relevance*. *Academy of Entrepreneurship Journal*, 25(4), 1-10. Retrieved from Semantic Scholar: <https://www.semanticscholar.org/paper/Schumpeterian-Entrepreneurship-Theory-Evolution-and-Mehmood-Alzoubi/658d9637672b51dfee44597e67c43e0947841c33>
- Menon, A., Stojceska, V., & Tassou, S. A. (2020). A Systematic Review on the Recent Advancesof the Energy Efficiency Improvements in Non-

- conventional Food Drying Technologies. *Trends in Food Science & Technology*, 67-76. doi:10.1016/j.tifs.2020.03.014
- Moula, C., Saheb, S. K., & Kanth, D. R. (2023). Smart Solar Dehydrator. *Journal of Data Acquisition and Processing*. Retrieved from https://sjcjycl.cn/article/view-2023/pdf/03_1628.pdf
- Murali, S., Delfiya, D. A., Alfiya, P. V., Samuel, M. P., & Ninan, G. (2023). Development of Sensible Heat Storage Based Solar Hybrid Dryer with Evacuated Tube Collector and Biomass Gasifier for Shrimp Drying. *Solar Energy*, 262, 111836. doi:10.1016/j.solener.2023.111836
- Mutumba, R., Kigozi, J., Tumutegyereize, P., & Ssenyimba, S. M. (2021). Arduino Based Control of the Food and Water Conveyance Systems of a Refractance Window Dryer. *International Journal of Scientific Advances*. doi:10.51542/ijscia.v2i5.25
- Natarajan, S. K., Elangovan, E., Elavarasan, R. M., Balaraman, A., & Sundaram, S. (2022). Review on Solar Dryers for Drying Fish, Fruits, and Vegetables. *Environmental Science and Pollution Research*. doi:10.1007/s11356-022-19714-w
- Ortega, J. T. (2024). Quality and Safety Assessment of Dried White Goby (*Glossogobius giuris*, Hamilton) from Naujan Lake, Philippines. *Food Research*, 201-208.
- Petrova, I., Tolstorebrev, I., & Eikevik, T. M. (2018). Production of Fish Protein Hydrolysates Step by Step: Technological Aspects, Equipment Used, Major Energy Costs and Methods of their Minimizing. *International Aquatic Research*, 223-241. doi:10.1007/s40071-018-0207-4
- Raja, M. K. (2023). Fish Dryer With Temperature Control Using the Fuzzy Logic Method. *International Journal of Engineering, Science and Information Technology*, 3(1):1-8.

- Ramadhan, A. D. (2023). Design of Conveyor Scale Control and Monitoring Systems using HX711 Module Based On Arduino. In Proceeding of International Conference of Advance Transportation, Engineering, and Applied Social Science . 147-150.
- Rasul, M., Majumdar, B., Afrin, F., Bapary, M., & Shah, A. (2018). Biochemical, Microbiological, and Sensory Properties of Dried Silver Carp (*Hypophthalmichthys molitrix*) Influenced by Various Drying Methods. *Fishes*, 3, 25. doi:10.3390/fishes3030025
- Raynaldo, K., Andrianto, R., & Darmawan, S. (2021). Design and Analysis of Automatic Fish Dryer Prototype. *Lecture Notes in Mechanical Engineering*. doi:10.1007/978-981-16-0736-3_10
- Richa, R. S. (2022). Design and Development of Resistance Heating Apparatus-cum-solar Drying System for Enhancing Fish Drying Rate. *Journal of Food Process Engineering*, 45(6), e13839.
- Rizal, T. A. (2018). Fabrication and Testing of Hybrid Solar-Biomass Dryer for Drying Fish. *Case studies in thermal engineering*, , 12, 489-496.
- Setiawati.D., A., L., H. M., & Sukmawaty. (2020). Design of Drying Room Temperature Control System on Rotating Tray Type Hybrid Dryer Based on Arduino Mega Microcontroller. *Jurnal Teknik Pertanian Lampung*, 1-9. Retrieved from
<https://www.cabidigitallibrary.org/doi/full/10.5555/20203235825>
- Sminorva (2019). Energy Efficient Systems and Regimes at Fish Products Drying Processes. *IOP Conference Series: Earth and Environmental Science*. doi:10.1088/1755-1315/302/1/012027
- Tsironi, T. H. (2020). Hurdle Technology for Fish Preservation. *Aquaculture and Fisheries*, 65-71. doi:10.1016/j.aaf.2020.02.001
- Yanti, N. (2022). The Implementation of Fuzzy Logic in Fish Dryer Design. *Ilkom Jurnal Ilmiah*, 39-51. doi:10.33096/ilkom.v14i1.1092.39-51

C. WEBSITES

- Chen, J. (2021). *Arithmetic Mean: Definition, Limitations, and Alternatives*. Retrieved from Investopedia.com:
<https://www.investopedia.com/terms/a/arithmeticmean.asp>
- Hodges, D. (2021). *Metals in Foodservice*. Retrieved from katom:
<https://www.katom.com/learning-center/food-grade-metals.html>
- Silong, I. (2020). *Solar dome used to dry unsold fish*. Malaysia: Malaysia: New Sarawak Tribune. Retrieved from
<https://www.newsarawaktribune.com.my/solar-dome-used-to-dry-unsold-fish/>
- UNSDG. (2022). *End hunger, achieve food security and improved nutrition and promote sustainable agriculture*. Retrieved from United Nation Department of Economic and Social Affairs Sustainable Development:
<https://sdgs.un.org/goals/goal2>
- Vu, M. (2020). *Top 6 Software Development Life Cycle (SDLC) Models & Methodologies*. Retrieved from agiletech: <https://agiletech.vn/top-software-development-life-cycle-models/>

APPENDICES

Appendix A: Recommendation Letter of the Adviser and the Dean to the Client



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
COLLEGE OF ENGINEERING

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pstpcce@plsp.edu.ph



website: pstpcce@plsp.edu.ph

October 13, 2023

MR. EFRAIN MARANAN JR.
San Gabriel San Pablo City
4000 Laguna

Dear Mr. Maranan

Greetings!

The Pamantasan ng Lungsod ng San Pablo, a local university run and operated by the Government of the City of San Pablo, offers courses at very minimal expense to the deserving youth of the city as well as the other towns. The university established the College of Engineering that aimed to design and build products in response to the market demand using scientific principles.

We would like to formally request your approval for the Bachelor of Science and Computer Engineering students in Section 4B, specifically *Mr. Samuel R. Hernandez, Mr. ZJ Francis Dem F. Estrada, Mr. Aeron Paul C. Ortiz, Mr. Julius D. Sumilang, Mr. Jovel Neile B. Peñaloza, and Ms. Trixie Jem Nicole L. Lagrimas*, to proceed with the development and design of their final project. The project, titled Arduino-Based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market, this initiative serves as a crucial component of their CPE Practice and Design 2 course, fulfilling a requirement in their program.

Your approval of this will be greatly appreciated.

Very truly yours,

Noted by:

Engr. Estelita U. Cura, MMEngg Mngt.
Design Project Adviser

Approved by:

Engr. Sohila M. Magee, PhD-TM
Dean, College of Engineering

Accepted by:

Name :
Designation :
Date :

"Primed to Lead and Serve for Progress"

Appendix B: Letter of Client's Approval to be the Project's Subject



Honesty • Leadership • Service • Professionalism

**PAMANTASAN NG LUNGSOD NG SAN PABLO
COLLEGE OF ENGINEERING**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pameng.pj@pams.psu.edu.ph



website: pams.psu.edu.ph

October 13, 2023

To the Respondents,
Greetings!

We, the students of the Pamantasan ng Lungsod ng San Pablo, are pursuing a degree of Bachelor of Science in Computer Engineering and are currently having a Design Project entitled "ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET" as part of our bachelor's degree requirements.

In line with this, we, the developers, are seeking permission for you to be part of our client and CPE practitioner evaluators for our design project. Your input is incredibly valuable to us, and we genuinely hope you'll consider this request and spare some time to collaborate. If you have any questions or need more details, please do not hesitate to contact us at 09771961258 or via email at cpe.estrada.zj@gmail.com. Your active participation would significantly enhance the development of our project.

We guarantee you that all the data and information that we gather will be treated with the utmost confidentiality.

Thank you for considering our request. We look forward to the possibility of working together.

Respectfully yours,

Estrada, ZJ Francis Dem F.
Hernandez, Samuel R.
Lagrimas, Trixie Jem Nicole L.

Ortiz, Aeron Paul C.
Sumilang, Julius D.
Peñaloza, Jovel Neile B.

Noted by:

Engr. Estelita U. Cura, MMEngg Mingt.
Design Project Adviser

Approved by:

Engr. Solita M. Magee, PhD-TM
Dean, College of Engineering

Accepted by:

Name : EPRAIN MARANON JR
Designation : _____
Date : _____

"Primed to Lead and Serve for Progress"

Appendix C: Letter of Acceptance



PAMANTASAN NG LUNGSOD NG SAN PABLO
COLLEGE OF ENGINEERING

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pamengcse@pnsu.edu.ph



website: pamengcse.pnsu.edu.ph

June 19, 2024

College of Engineering

Pamantasan ng Lungsod ng San Pablo
Brgy. San Jose, San Pablo City, 4000

Ma'am/Sir,

This is to certify the acceptance of the design project entitled "**Arduino-Based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendors in San Pablo City Public Market**," developed by the following engineering students: **Mr. Samuel R. Hernandez, Mr. ZJ Francis Dem F. Estrada, Mr. Aeron Paul G. Ortiz, Mr. Julius D. Sumilang, Mr. Jovel Neile B. Peñaloza, and Ms. Trixie Jem Nicole L. Legrimas.**

We are grateful for the developed technology, as it would greatly assist them in offering an automated fish dehydrator that can convert unsold fish into dried fish. Rest assure that we will make use of the device, to address the problems and challenges with having an unsold fish.

Accepted by,

Mr. Efrain Maranan Jr.

Fish Vendor

Brgy. San Gabriel San Pablo City
4000 Laguna

"Primed to Lead and Serve for Progress"

Appendix D: Gantt Chart

Appendix E:

Informed Consent

Appendix E.1.A: Informed Consent (English Version)



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

The developers currently enrolled in the course CPE Practice and Design 2 are conducting an evaluation of their project design titled "Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market." The purpose of the developed device is to dry the unsold fish at the end of each business day of the fish vendor, specifically, the Tamban and Galunggong Fish.

The developed device offers several functions including drying maximum of 10kg of Tamban or Galunggong, temperature regulation, SMS notification after drying and automatic stopping function.

During this evaluation you will be asked if the device satisfies your need based on the software quality standards based on ISO 25010. Please note that you will NOT be asked to buy or adopt the device. You will answer it in theory but with a realistic situation in mind. This will take five (5) to ten (10) minutes of your time.

We believe you are an ideal candidate for this evaluation as you may be a Computer Engineering Practitioner, a potential end-user of the system, a fresh fish retail vendor or a dried fish vendor who wants to have a fish dehydrator device.

Participation in this study is voluntary, participants will not receive payments beyond reimbursements for expenses incurred because of their participation, and participants are free to withdraw at any point without penalty. All information provided in this study will remain anonymous, with names not linked to responses. Codes will be used instead to maintain confidentiality, and adequate safeguards will be implemented to protect participants' privacy.

Before agreeing to participate, participants will have the opportunity to have any questions about the study answered. Additionally, they will receive a copy of this form for their records.

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pisofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

I have read the foregoing information, or it has been read to me. I have had the opportunity to ask questions about it and any questions I have been asked have been answered to my satisfaction. I consent voluntarily to be a participant in this study.

Print Name of Participant: _____

Signature of Participant: _____

Date: [MM/DD/YYYY]: _____

If Illiterate a literate witness must sign (if possible, this person should be selected by the participant and should have no connection to the research team). Participants who are illiterate should include their thumb print as well.

I have witnessed the accurate reading of the consent form to the potential participant, and the individual has had the opportunity to ask questions. I confirm that the individual has given consent freely.

Print Name of Witness: _____

Thumb Print of Participant

Signature of Witness: _____

Date: [MM/DD/YYYY]: _____

I confirm that the participant was given an opportunity to ask questions about the study, and all the questions asked by the participant have been answered correctly and to the best of my ability. I confirm that the individual has not been coerced into giving consent, and the consent has been given freely and voluntarily.

Print Name of Researcher: _____

Signature of Researcher: _____

Date: [MM/DD/YYYY]: _____

Reviewed by:

Mr. Paul Adrian S. Ayecilla, Rpm
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"

Appendix E.1.B: Informed Consent (Filipino Version)



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pispofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

Ang mga developer sa kasalukuyan na nagaaral sa kursong CPE Practice at Design 2 ay nagsasagawa ng pagsusuri ukol sa disenyo ng proyekto na may pamagat na "Arduino-based Tamban at Galunggong Dehydrator para sa Piling Retail Fish Vendor sa Sanpablo City Public Market". Ang layunin ng nabuong makina ay patuyuin ang hindi nabili na isda sa araw-araw ng pagtitinda bilang isang karaniwang negosyo, partikular na, ang Tamban at Galunggong.

Ang nabuong makina ng nasabing proyekto ay may higit na kakayahang magpatuyo ng pangunahing produkto gaya ng isda na maaaring umaabot hanggang sampung kilo ng tamban o galunggong, tamang regulasyon ng temperatura, pagabiso sa parating na SMS matapos ang isinagawang pagpapatuyo at awtomatikong paghinto ng makina.

Sa panahon ng pagsusuri, maaring ikaw ay mabigyan ng mga katanungan may kaugnayan sa nabuong makina ukol sa sapat ng iyong pangangailangan batay sa kalidad ng programa ng ISO 25010. Mangyaring tandaan na hindi hinihiling na sapilitang bilihin o akuin ang makabuluhang makina bagkus ay iyong bibigyang kasagutan ang mga teoryang nakalatag ngunit sa isang makatotohanang pagiiisip. Ang nasabing pangangalap ay magkokonsume ng lima hanggang sampung minuto ng iyong oras.

kami bilang tagapangalap ng pagsusuri ay lubusang naniniwala na ikaw ay isang akma at perpetkong kandidato para sa nasabing pagsusuri na maaring mabigyang pagkilala bilang isang dalubhasang inhinyero ng teknolohiya, isang potensyal na enduser at isang nagtitinda ng mga sariwa na tuyong isda na nagnanais na magkaroon ng isang kapakipakinabang na makinang magpapatuyo sa mga ito.

Ang kabuuang partisipasyon ay boluntaryo lamang at walang anumang halagang natatanggap na higit pa sa mga nalikom na halaga para sa kanilang pagdalo upang masagawa ito ng mahusay at malayang magbahagi ng anumang punto ng walang kapalit na kaparusahan. Ang lahat ng impormasyong ibinahagi sa pananaliksik na ito ay mananatiling sagrado at ang mga taong kabilang sa pagbuo nito ay hindi masasangkot sa mga tagatugon. Minabuting gumamit ng mga code sa halip na direktang salita upang panatilihin ang kumpindensyal at sapat na kaligtasang ipinatutupad upang maprotektahan ang pagkapribado ng mga kasapi.

Bago sumang-ayon sa paglahok, ang mga kalahok ay magkakaroon ng pagkakataon na magbahagi ng anumang katanungan tungkol sa pag-aaral na binigyang tugon. Bilang karagdagan, sila makatanggap ng isang kopya ng form na ito para sa kanilang rekord.

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

Aking nabasa o nabanggit sa akin ang mga paunang impormasyon. Ako ay may pagkakataong sagutin ang nakalatag na mga katanungan patungkol dito na sya namang aking kaluguran. Ako ay boluntaryong makikilahok sa pananaliksik.

Pangalan ng Kalahok: _____

Lagda ng Kalahok: _____

Petsa: [MM/DD/YYYY]: _____

Kung hindi marunong bumasa o sumulat ang saksi ay marapating lumagda (Kung maaari, ang taong ito ay marapating pilin ng kalahok at dapat ay walang koneksyon sa pangkat ng mananaliksik). Ang mga kalahok na hindi marunong bumasa o sumulat ay marapating isama ang marka ng kanilang hinlalaki.

Aking nasaksisan ang wastong pagbabasa ng nakalatag na pahintulot sa potensyal na mga kalahok, at ang bawat indibidwal ay mayroong pagkakataon na magtanong. Aking kinukumpirma na ang indibidwal ay malayang mabigyan ng nasabing pahintulot.

Pangalan ng Saksi: _____

Marka ng Hinlalaki ng Kalahok

Lagda ng Saksi: _____



Petsa: [MM/DD/YYYY]: _____

Aking kinukumpirma na ang mga kalahok ay mabigyan ng pagkakataong magbahagi ng mga katanungan ukol sa pagaaral at ang lahat ng mga katanungan mula sa mga kalahok ay malinaw at wasto na bibigyang tugon hanggang sa abot ng aking makakaya. Aking kinukumpirma na ang bawat indibidwal ay hindi sapilitang hinihihikayat na makatanggap ng nakatalang pahintulot bagkus ito ay malaya at boluntaryong pagbabahagi.

Pangalan ng Tagapagpaunlad: _____

Lagda ng Tagapagpaunlad: _____

Petsa: [MM/DD/YYYY]: _____

Reviewed by:


Mr. Paul Adrian S. Aveilla, RPm
Intellectual Property Unit Head
OVPRI

Approved by:


Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"

Appendix E.2: Filled-out Informed Consent



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pisofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

The developers currently enrolled in the course CPE Practice and Design 2 are conducting an evaluation of their project design titled "Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market." The purpose of the developed device is to dry the unsold fish at the end of each business day of the fish vendor, specifically, the Tamban and Galunggong Fish.

The developed device offers several functions including drying maximum of 10kg of Tamban or Galunggong, temperature regulation, SMS notification after drying and automatic stopping function.

During this evaluation you will be asked if the device satisfies your need based on the software quality standards based on ISO 25010. Please note that you will NOT be asked to buy or adopt the device. You will answer it in theory but with a realistic situation in mind. This will take five (5) to ten (10) minutes of your time.

We believe you are an ideal candidate for this evaluation as you may be a Computer Engineering Practitioner, a potential end-user of the system, a fresh fish retail vendor or a dried fish vendor who wants to have a fish dehydrator device.

Participation in this study is voluntary, participants will not receive payments beyond reimbursements for expenses incurred because of their participation, and participants are free to withdraw at any point without penalty. All information provided in this study will remain anonymous, with names not linked to responses. Codes will be used instead to maintain confidentiality, and adequate safeguards will be implemented to protect participants' privacy.

Before agreeing to participate, participants will have the opportunity to have any questions about the study answered. Additionally, they will receive a copy of this form for their records.

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



CONSENT

I have read the provided information, or it has been read to me. I have had the opportunity to ask questions about and any questions I asked have been answered to my satisfaction. I understand that I will be given a copy of this form, and the researcher will keep another copy on file. I gave my consent voluntarily to be a participant in this study.

(This section is mandatory)

Name of participant: Ben Marc M. Amista (optional)

Signature of Participants: [Signature]

Date: April 21, 2024

(This section is mandatory)

Name of the researcher: J FRANCIS DEMF. ESTRADA (optional)

Signature the researcher: [Signature]

Date: April 21, 2024

(This section is mandatory)

Name of Impartial Witness: _____ (optional)

Signature the Impartial Witness: _____

Date: _____

[If the participant is illiterate]

I have witnessed the accurate reading of the consent form to the participant, and the individual has had the opportunity to ask questions. I confirm that the individual has given consent freely.

Name of the witness: _____

Signature of the witness: _____

Date: _____

[A literate witness must sign, if possible, this person should be selected by the participant and should have no connection to the researcher]

Approved by:

MR. DENNIS S. GAMBUTA
University Data Privacy Officer

Reviewed by:

MR. PAUL ADRIAN S. AVECILLA, RPM
Intellectual Property Rights Head/OVPRI

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO

**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

The developers currently enrolled in the course CPE Practice and Design 2 are conducting an evaluation of their project design titled "Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market." The purpose of the developed device is to dry the unsold fish at the end of each business day of the fish vendor, specifically, the Tamban and Galunggong Fish.

The developed device offers several functions including drying maximum of 10kg of Tamban or Galunggong, temperature regulation, SMS notification after drying and automatic stopping function.

During this evaluation you will be asked if the device satisfies your need based on the software quality standards based on ISO 25010. Please note that you will NOT be asked to buy or adopt the device. You will answer it in theory but with a realistic situation in mind. This will take five (5) to ten (10) minutes of your time.

We believe you are an ideal candidate for this evaluation as you may be a Computer Engineering Practitioner, a potential end-user of the system, a fresh fish retail vendor or a dried fish vendor who wants to have a fish dehydrator device.

Participation in this study is voluntary, participants will not receive payments beyond reimbursements for expenses incurred because of their participation, and participants are free to withdraw at any point without penalty. All information provided in this study will remain anonymous, with names not linked to responses. Codes will be used instead to maintain confidentiality, and adequate safeguards will be implemented to protect participants' privacy.

Before agreeing to participate, participants will have the opportunity to have any questions about the study answered. Additionally, they will receive a copy of this form for their records.

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

I have read the foregoing information, or it has been read to me. I have had the opportunity to ask questions about it and any questions I have been asked have been answered to my satisfaction. I consent voluntarily to be a participant in this study.

Print Name of Participant: James Bala

Signature of Participant: 

Date: [MM/DD/YYYY]: April 21, 2024

If Illiterate a literate witness must sign (if possible, this person should be selected by the participant and should have no connection to the research team). Participants who are illiterate should include their thumb print as well.

I have witnessed the accurate reading of the consent form to the potential participant, and the individual has had the opportunity to ask questions. I confirm that the individual has given consent freely.

Print Name of Witness: _____

Signature of Witness: _____

Date: [MM/DD/YYYY]: _____

Thumb Print of Participant 


I confirm that the participant was given an opportunity to ask questions about the study, and all the questions asked by the participant have been answered correctly and to the best of my ability. I confirm that the individual has not been coerced into giving consent, and the consent has been given freely and voluntarily.

Print Name of Researcher: ZJ ESTRADA

Signature of Researcher: 

Date: [MM/DD/YYYY]: _____

Reviewed by:


Mr. Paul Adrian S. Ayecilla, RPPm
Intellectual Property Unit Head
OVPRI

Approved by:


Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO

**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

The developers currently enrolled in the course CPE Practice and Design 2 are conducting an evaluation of their project design titled "Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market." The purpose of the developed device is to dry the unsold fish at the end of each business day of the fish vendor, specifically, the Tamban and Galunggong Fish.

The developed device offers several functions including drying maximum of 10kg of Tamban or Galunggong, temperature regulation, SMS notification after drying and automatic stopping function.

During this evaluation you will be asked if the device satisfies your need based on the software quality standards based on ISO 25010. Please note that you will NOT be asked to buy or adopt the device. You will answer it in theory but with a realistic situation in mind. This will take five (5) to ten (10) minutes of your time.

We believe you are an ideal candidate for this evaluation as you may be a Computer Engineering Practitioner, a potential end-user of the system, a fresh fish retail vendor or a dried fish vendor who wants to have a fish dehydrator device.

Participation in this study is voluntary, participants will not receive payments beyond reimbursements for expenses incurred because of their participation, and participants are free to withdraw at any point without penalty. All information provided in this study will remain anonymous, with names not linked to responses. Codes will be used instead to maintain confidentiality, and adequate safeguards will be implemented to protect participants' privacy.

Before agreeing to participate, participants will have the opportunity to have any questions about the study answered. Additionally, they will receive a copy of this form for their records.

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

I have read the foregoing information, or it has been read to me. I have had the opportunity to ask questions about it and any questions I have been asked have been answered to my satisfaction. I consent voluntarily to be a participant in this study.

Print Name of Participant: Daniel Christopher G. Gonzales

Signature of Participant:

Date: [MM/DD/YYYY]: April 25, 2024

If Illiterate a literate witness must sign (if possible, this person should be selected by the participant and should have no connection to the research team). Participants who are illiterate should include their thumb print as well.

I have witnessed the accurate reading of the consent form to the potential participant, and the individual has had the opportunity to ask questions. I confirm that the individual has given consent freely.

Print Name of Witness: _____

Thumb Print of Participant

Signature of Witness: _____

Date: [MM/DD/YYYY]: _____

I confirm that the participant was given an opportunity to ask questions about the study, and all the questions asked by the participant have been answered correctly and to the best of my ability. I confirm that the individual has not been coerced into giving consent, and the consent has been given freely and voluntarily.

Print Name of Researcher: J FRANCIS DEM ESTRADA

Signature of Researcher:

Date: [MM/DD/YYYY]: April 26, 2024

Reviewed by:

Mr. Paul Adrian S. Avecilla, RPrm
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO

**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

The developers currently enrolled in the course CPE Practice and Design 2 are conducting an evaluation of their project design titled "Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market." The purpose of the developed device is to dry the unsold fish at the end of each business day of the fish vendor, specifically, the Tamban and Galunggong Fish.

The developed device offers several functions including drying maximum of 10kg of Tamban or Galunggong, temperature regulation, SMS notification after drying and automatic stopping function.

During this evaluation you will be asked if the device satisfies your need based on the software quality standards based on ISO 25010. Please note that you will NOT be asked to buy or adopt the device. You will answer it in theory but with a realistic situation in mind. This will take five (5) to ten (10) minutes of your time.

We believe you are an ideal candidate for this evaluation as you may be a Computer Engineering Practitioner, a potential end-user of the system, a fresh fish retail vendor or a dried fish vendor who wants to have a fish dehydrator device.

Participation in this study is voluntary, participants will not receive payments beyond reimbursements for expenses incurred because of their participation, and participants are free to withdraw at any point without penalty. All information provided in this study will remain anonymous, with names not linked to responses. Codes will be used instead to maintain confidentiality, and adequate safeguards will be implemented to protect participants' privacy.

Before agreeing to participate, participants will have the opportunity to have any questions about the study answered. Additionally, they will receive a copy of this form for their records.

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

I have read the foregoing information, or it has been read to me. I have had the opportunity to ask questions about it and any questions I have been asked have been answered to my satisfaction. I consent voluntarily to be a participant in this study.

Print Name of Participant: Jhee anne B. Lagrimas

Signature of Participant:

Date: [MM/DD/YYYY]: April 21, 2024

If Illiterate a literate witness must sign (if possible, this person should be selected by the participant and should have no connection to the research team). Participants who are illiterate should include their thumb print as well.

I have witnessed the accurate reading of the consent form to the potential participant, and the individual has had the opportunity to ask questions. I confirm that the individual has given consent freely.

Print Name of Witness: _____

Signature of Witness: _____

Date: [MM/DD/YYYY]: _____

Thumb Print of Participant

I confirm that the participant was given an opportunity to ask questions about the study, and all the questions asked by the participant have been answered correctly and to the best of my ability. I confirm that the individual has not been coerced into giving consent, and the consent has been given freely and voluntarily.

Print Name of Researcher: ZJ ESTRADA

Signature of Researcher:

Date: [MM/DD/YYYY]: April 22, 2024

Reviewed by:

Mr. Paul Adrian S. Ayecilla, RPh
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO

**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

The developers currently enrolled in the course CPE Practice and Design 2 are conducting an evaluation of their project design titled "Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market." The purpose of the developed device is to dry the unsold fish at the end of each business day of the fish vendor, specifically, the Tamban and Galunggong Fish.

The developed device offers several functions including drying maximum of 10kg of Tamban or Galunggong, temperature regulation, SMS notification after drying and automatic stopping function.

During this evaluation you will be asked if the device satisfies your need based on the software quality standards based on ISO 25010. Please note that you will NOT be asked to buy or adopt the device. You will answer it in theory but with a realistic situation in mind. This will take five (5) to ten (10) minutes of your time.

We believe you are an ideal candidate for this evaluation as you may be a Computer Engineering Practitioner, a potential end-user of the system, a fresh fish retail vendor or a dried fish vendor who wants to have a fish dehydrator device.

Participation in this study is voluntary, participants will not receive payments beyond reimbursements for expenses incurred because of their participation, and participants are free to withdraw at any point without penalty. All information provided in this study will remain anonymous, with names not linked to responses. Codes will be used instead to maintain confidentiality, and adequate safeguards will be implemented to protect participants' privacy.

Before agreeing to participate, participants will have the opportunity to have any questions about the study answered. Additionally, they will receive a copy of this form for their records.

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

I have read the foregoing information, or it has been read to me. I have had the opportunity to ask questions about it and any questions I have been asked have been answered to my satisfaction. I consent voluntarily to be a participant in this study.

Print Name of Participant: Rodny S. Salvador


Signature of Participant: 

Date: [MM/DD/YYYY]: April 21, 2024

If Illiterate a literate witness must sign (if possible, this person should be selected by the participant and should have no connection to the research team). Participants who are illiterate should include their thumb print as well.

I have witnessed the accurate reading of the consent form to the potential participant, and the individual has had the opportunity to ask questions. I confirm that the individual has given consent freely.

Print Name of Witness: _____


Thumb Print of Participant 

Signature of Witness: _____

Date: [MM/DD/YYYY]: _____


I confirm that the participant was given an opportunity to ask questions about the study, and all the questions asked by the participant have been answered correctly and to the best of my ability. I confirm that the individual has not been coerced into giving consent, and the consent has been given freely and voluntarily.

Print Name of Researcher: J FRANCIS ODEM F. ESTRADA

Signature of Researcher: 

Date: [MM/DD/YYYY]: April 22, 2024

Reviewed by:


Mr. Paul Adrian S. Avecilla, RPrm
Intellectual Property Unit Head
OVPRI

Approved by:


Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pispoofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

Ang mga developer sa kasalukuyan na nagaaral sa kursong CPE Practice at Design 2 ay nagsasagawa ng pagsusuri ukol sa disensyo ng proyekto na may pamagat na "Arduino-based Tamban at Galunggong Dehydrator para sa Piling Retail Fish Vendor sa Sanpablo City Public Market". Ang layunin ng nabuong makina ay patuyuin ang hindi nabili na isda sa araw-araw ng pagtitinda bilang isang karaniwang negosyo, partikular na, ang Tamban at Galunggong.

Ang nabuong makina ng nasabing proyekto ay may higit na kakayahang magpatuyo ng pangunahing produkto gaya ng isda na maaaring umaabot hanggang sampung kilo ng tamban o galunggong, tamang regulasyon ng temperatura, pagabiso sa parating na SMS matapos ang isinagawang pagpapatuyo at awtomatikong paghinto ng makina.

Sa panahon ng pagsusuri, maaring ikaw ay mabigyan ng mga katanungan may kaugnayan sa nabuong makina ukol sa sapat ng iyong pangangailangan batay sa kalidad ng programa ng ISO 25010. Mangyaring tandaan na hindi hinihiling na sapilitang bilihin o akuin ang makabuluhang makina bagkus ay iyong bibigyang kasagutan ang mga teoryang nakalatag ngunit sa isang makatotohanang pagiiisip. Ang nasabing pangangalap ay magkokonsume ng lima hanggang sampung minuto ng iyong oras.

kami bilang tagapangalap ng pagsusuri ay lubusang naniniwala na ikaw ay isang akma at perpetkong kandidato para sa nasabing pagsusuri na maaring mabigyang pagkilala bilang isang dalubhasang inhinyero ng teknolohiya, isang potensyal na enduser at isang nagtitinda ng mga sariwa na tuyong isda na nagnanais na magkaroon ng isang kapakipakinabang na makinang magpapatuyo sa mga ito.

Ang kabuuang partisipasyon ay boluntaryo lamang at walang anumang halagang natatanggap na higit pa sa mga nalikom na halaga para sa kanilang pagdalo upang masagawa ito ng mahusay at malayang magbahagi ng anumang punto ng walang kapalit na kaparusan. Ang lahat ng impormasyong ibinahagi sa pananaliksik na ito ay mananatiling sagrado at ang mga taong kabilang sa pagbuo nito ay hindi masasangkot sa mga tagatugon. Minabuting gumamit ng mga code sa halip na direktang salita upang panatilihin ang kumpindensyal at sapat na kaligtasan ng ipinatutupad upang maprotektahan ang pagkapribado ng mga kasapi.

Bago sumang-ayon sa paglahok, ang mga kalahok ay magkakaroon ng pagkataon na magbahagi ng anumang katanungan tungkol sa pag-aaral na binigyang tugon. Bilang karagdagan, sila makakatanggap ng isang kopya ng form na ito para sa kanilang rekord.

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

Aking nabasa o nabanggit sa akin ang mga paunang impormasyon. Ako ay may pagkakataong sagutin ang nakalatag na mga katanungan patungkol dito na sya namang aking kaluguran. Ako ay boluntaryong makikilahok sa pananaliksik.

Pangalan ng Kalahok: Efrayim Maraña
Lagda ng Kalahok: _____
Petsa: [MM/DD/YYYY]: _____

Kung hindi marunong bumasa o sumulat ang saksi ay marapating lumagda (Kung maaari, ang taong ito ay marapating piliin ng kalahok at dapat ay walang koneksyon sa pangkat ng mananaliksik). Ang mga kalahok na hindi marunong bumasa o sumulat ay marapating isama ang marka ng kanilang hinlalaki.

Aking nasaksisan ang wastong pagbabasa ng nakalatag na pahintulot sa potensyal na mga kalahok, at ang bawat indibidwal ay mayroong pagkakataon na magtanong. Aking kinukumpirma na ang indibidwal ay may malayang mabigyan ng nasabing pahintulot.

Pangalan ng Saksi: _____
Lagda ng Saksi: _____
Petsa: [MM/DD/YYYY]: _____

Marka ng Hinlalaki ng Kalahok

Aking kinukumpirma na ang mga kalahok ay mabibigyan ng pagkakataong magbahagi ng mga katanungan ukol sa pagaaral at ang lahat ng mga katanungan mula sa mga kalahok ay malinaw at wasto na bibigyang tugon hanggang sa abot ng aking makakaya. Aking kinukumpirma na ang bawat indibidwal ay hindi sapilitang hinihikayat na makatanggap ng nakatalang pahintulot bagkus ito ay malaya at boluntaryong pagbabahagi.

Pangalan ng Tagapagaunlad: Trixie Jeanne L. Logrimas
Lagda ng Tagapagaunlad: Jen
Petsa: [MM/DD/YYYY]: 05-01-2029

Reviewed by:

Mr. Paul Adrian S. Aveilla, RPrm
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pispoofficial@plsp.edu.ph



INFORMED CONSENT FORM

**Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San
Pablo City Public Market**

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

Ang mga developer sa kasalukuyan na nagaaral sa kursong CPE Practice at Design 2 ay nagsasagawa ng pagsusuri ukol sa disensyo ng proyekto na may pamagat na "Arduino-based Tamban at Galunggong Dehydrator para sa Piling Retail Fish Vendor sa Sanpablo City Public Market". Ang layunin ng nabuong makina ay patuyuin ang hindi nabili na isda sa araw-araw ng pagtitinda bilang isang karaniwang negosyo, partikular na, ang Tamban at Galunggong.

Ang nabuong makina ng nasabing proyekto ay may higit na kakayahang magpatuyo ng pangunahing produkto gaya ng isda na maaaring umaabot hanggang sampung kilo ng tamban o galunggong, tamang regulasyon ng temperatura, pagabiso sa parating na SMS matapos ang isinagawang pagpapatuyo at awtomatikong paghinto ng makina.

Sa panahon ng pagsusuri, maaring ikaw ay mabigyan ng mga katanungan may kaugnayan sa nabuong makina ukol sa sapat ng iyong pangangailangan batay sa kalidad ng programa ng ISO 25010. Mangyaring tandaan na hindi hinihiling na sapilitang bilihin o akuin ang makabuluhang makina bagkus ay iyong bibigyang kasagutan ang mga teoryang nakalatag ngunit sa isang makatotohanang pagiiisip. Ang nasabing pangangalap ay magkokonsume ng lima hanggang sampung minuto ng iyong oras.

kami bilang tagapangalap ng pagsusuri ay lubusang naniniwala na ikaw ay isang akma at perpetkong kandidato para sa nasabing pagsusuri na maaring mabigyang pagkilala bilang isang dalubhasang inhinyero ng teknolohiya, isang potensyal na enduser at isang nagtitinda ng mga sariwa na tuyong isda na nagnanais na magkaroon ng isang kapakipakinabang na makinang magpapatuyo sa mga ito.

Ang kabuuang partisipasyon ay boluntaryo lamang at walang anumang halagang natatanggap na higit pa sa mga nalikom na halaga para sa kanilang pagdalo upang masagawa ito ng mahusay at malayang magbahagi ng anumang punto ng walang kapalit na kaparusan. Ang lahat ng impormasyong ibinahagi sa pananaliksik na ito ay mananatiling sagrado at ang mga taong kabilang sa pagbuo nito ay hindi masasangkot sa mga tagatugon. Minabuting gumamit ng mga code sa halip na direktang salita upang panatilihin ang kumpindensyal at sapat na kaligtasan ng ipinatutupad upang maprotektahan ang pagkapribado ng mga kasapi.

Bago sumang-ayon sa paglahok, ang mga kalahok ay magkakaroon ng pagkataon na magbahagi ng anumang katanungan tungkol sa pag-aaral na binigyang tugon. Bilang karagdagan, sila makakatanggap ng isang kopya ng form na ito para sa kanilang rekord.

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pispoofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

Aking nabasa o nabanggit sa akin ang mga paunang impormasyon. Ako ay may pagkakataong sagutin ang nakalatag na mga katanungan patungkol dito na sya namang aking kaluguran. Ako ay boluntaryong makikilahok sa pananaliksik.

Pangalan ng Kalahok: MICHAEL AGUILAR
Lagda ng Kalahok: Aguilas
Petsa: [MM/DD/YYYY]: 10/07/2024

Kung hindi marunong bumasa o sumulat ang saksi ay marapating lumagda (Kung maaari, ang taong ito ay marapating piliin ng kalahok at dapat ay walang koneksyon sa pangkat ng mananaliksik). Ang mga kalahok na hindi marunong bumasa o sumulat ay marapating isama ang marka ng kanilang hinlalaki.

Aking nasaksinan ang wastong pagbabasa ng nakalatag na pahintulot sa potensyal na mga kalahok, at ang bawat indibidwal ay mayroong pagkakataon na magtanong. Aking kinukumpirma na ang indibidwal ay may malayang mabigyan ng nasabing pahintulot.

Pangalan ng Saksi: _____
Lagda ng Saksi: _____
Petsa: [MM/DD/YYYY]: _____

Marka ng Hinlalaki ng Kalahok

Aking kinukumpirma na ang mga kalahok ay mabigyan ng pagkakataong magbahagi ng mga katanungan ukol sa pagaaral at ang lahat ng mga katanungan mula sa mga kalahok ay malinaw at wasto na bibigyang tugon hanggang sa abot ng aking makakaya. Aking kinukumpirma na ang bawat indibidwal ay hindi sapilitang hinihikayat na makatanggap ng nakatalang pahintulot bagkus ito ay malaya at boluntaryong pagbabahagi.

Pangalan ng Tagapagaunlad: Pauline Neile Penabalo
Lagda ng Tagapagaunlad: Penabalo
Petsa: [MM/DD/YYYY]: 10/07/2024

Reviewed by:

Mr. Paul Adrian S. Avequia, RPh
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pispoofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejennicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

Ang mga developer sa kasalukuyan na nagaaral sa kursong CPE Practice at Design 2 ay nagsasagawa ng pagsusuri ukol sa disenyo ng proyekto na may pamagat na "Arduino-based Tamban at Galunggong Dehydrator para sa Piling Retail Fish Vendor sa Sanpablo City Public Market". Ang layunin ng nabuong makina ay patuyuin ang hindi nabili na isda sa araw-araw ng pagtitinda bilang isang karaniwang negosyo, partikular na, ang Tamban at Galunggong.

Ang nabuong makina ng nasabing proyekto ay may higit na kakayahang magpatuyo ng pangunahing produkto gaya ng isda na maaaring umaabot hanggang sampung kilo ng tamban o galunggong, tamang regulasyon ng temperatura, pagabiso sa parating na SMS matapos ang isinagawang pagpapatuyo at awtomatikong paghinto ng makina.

Sa panahon ng pagsusuri, maaring ikaw ay mabigyan ng mga katanungan may kaugnayan sa nabuong makina ukol sa sapat ng iyong pangangailangan batay sa kalidad ng programa ng ISO 25010. Mangyaring tandaan na hindi hinihiling na sapilitang bilihin o akuin ang makabuluhang makina bagkus ay iyong bibigyang kasagutan ang mga teoryang nakalatag ngunit sa isang makatotohanang pagiiisip. Ang nasabing pangangalap ay magkokonsume ng lima hanggang sampung minuto ng iyong oras.

kami bilang tagapangalap ng pagsusuri ay lubusang naniniwala na ikaw ay isang akma at perpetkong kandidato para sa nasabing pagsusuri na maaring mabigyang pagkilala bilang isang dalubhasang inhinyero ng teknolohiya, isang potensyal na enduser at isang nagtitinda ng mga sariwa na tuyong isda na nagnanais na magkaroon ng isang kapakipakinabang na makinang magpapatuyo sa mga ito.

Ang kabuuang partisipasyon ay boluntaryo lamang at walang anumang halagang natatanggap na higit pa sa mga nalikom na halaga para sa kanilang pagdalo upang masagawa ito ng mahusay at malayang magbahagi ng anumang punto ng walang kapalit na kaparusan. Ang lahat ng impormasyong ibinahagi sa pananaliksik na ito ay mananatiling sagrado at ang mga taong kabilang sa pagbuo nito ay hindi masasangkot sa mga tagatugon. Minabuting gumamit ng mga code sa halip na direktang salita upang panatilihin ang kumpindensyal at sapat na kaligtasan ng ipinatutupad upang maprotektahan ang pagkapribado ng mga kasapi.

Bago sumang-ayon sa paglahok, ang mga kalahok ay magkakaroon ng pagkataon na magbahagi ng anumang katanungan tungkol sa pag-aaral na binigyang tugon. Bilang karagdagan, sila makakatanggap ng isang kopya ng form na ito para sa kanilang rekord.

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

Aking nabasa o nabanggit sa akin ang mga paunang impormasyon. Ako ay may pagkakataong sagutin ang nakalatag na mga katanungan patungkol dito na sya namang aking kaluguran. Ako ay boluntaryong makikilahok sa pananaliksik.

Pangalan ng Kalahok: FATIMA DOOT
Lagda ng Kalahok: Gttn Doot
Petsa: [MM/DD/YYYY]: 4/27/2024

Kung hindi marunong bumasa o sumulat ang saksi ay marapating lumagda (Kung maaari, ang taong ito ay marapating piliin ng kalahok at dapat ay walang koneksyon sa pangkat ng mananaliksik). Ang mga kalahok na hindi marunong bumasa o sumulat ay marapating isama ang marka ng kanilang hinlalaki.

Aking nasaksinan ang wastong pagbabasa ng nakalatag na pahintulot sa potensyal na mga kalahok, at ang bawat indibidwal ay mayroong pagkakataon na magtanong. Aking kinukumpirma na ang indibidwal ay may malayang mabigyan ng nasabing pahintulot.

Pangalan ng Saksi: _____
Lagda ng Saksi: _____
Petsa: [MM/DD/YYYY]: _____

Marka ng Hinlalaki ng Kalahok

Aking kinukumpirma na ang mga kalahok ay mabigyan ng pagkakataong magbahagi ng mga katanungan ukol sa pagaaral at ang lahat ng mga katanungan mula sa mga kalahok ay malinaw at wasto na bibigyang tugon hanggang sa abot ng aking makakaya. Aking kinukumpirma na ang bawat indibidwal ay hindi sapilitang hinihikayat na makatanggap ng nakatalang pahintulot bagkus ito ay malaya at boluntaryong pagbabahagi.

Pangalan ng Tagapagaunaad: Joyel Neke Penaloza
Lagda ng Tagapagaunaad: Joyel Neke
Petsa: [MM/DD/YYYY]: 04/27/2024

Reviewed by:

Mr. Paul Adrian S. Aveilla, RPh
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pispoofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

Ang mga developer sa kasalukuyan na nagaaral sa kursong CPE Practice at Design 2 ay nagsasagawa ng pagsusuri ukol sa disensyo ng proyekto na may pamagat na "Arduino-based Tamban at Galunggong Dehydrator para sa Piling Retail Fish Vendor sa Sanpablo City Public Market". Ang layunin ng nabuong makina ay patuyuin ang hindi nabili na isda sa araw-araw ng pagtitinda bilang isang karaniwang negosyo, partikular na, ang Tamban at Galunggong.

Ang nabuong makina ng nasabing proyekto ay may higit na kakayahang magpatuyo ng pangunahing produkto gaya ng isda na maaaring umaabot hanggang sampung kilo ng tamban o galunggong, tamang regulasyon ng temperatura, pagabiso sa parating na SMS matapos ang isinagawang pagpapatuyo at awtomatikong paghinto ng makina.

Sa panahon ng pagsusuri, maaring ikaw ay mabigyan ng mga katanungan may kaugnayan sa nabuong makina ukol sa sapat ng iyong pangangailangan batay sa kalidad ng programa ng ISO 25010. Mangyaring tandaan na hindi hinihiling na sapilitang bilihin o akuin ang makabuluhang makina bagkus ay iyong bibigyang kasagutan ang mga teoryang nakalatag ngunit sa isang makatotohanang pagiiisip. Ang nasabing pangangalap ay magkokonsume ng lima hanggang sampung minuto ng iyong oras.

kami bilang tagapangalap ng pagsusuri ay lubusang naniniwala na ikaw ay isang akma at perpetkong kandidato para sa nasabing pagsusuri na maaring mabigyang pagkilala bilang isang dalubhasang inhinyero ng teknolohiya, isang potensyal na enduser at isang nagtitinda ng mga sariwa na tuyong isda na nagnanais na magkaroon ng isang kapakipakinabang na makinang magpapatuyo sa mga ito.

Ang kabuuang partisipasyon ay boluntaryo lamang at walang anumang halagang natatanggap na higit pa sa mga nalikom na halaga para sa kanilang pagdalo upang masagawa ito ng mahusay at malayang magbahagi ng anumang punto ng walang kapalit na kaparusan. Ang lahat ng impormasyong ibinahagi sa pananaliksik na ito ay mananatiling sagrado at ang mga taong kabilang sa pagbuo nito ay hindi masasangkot sa mga tagatugon. Minabuting gumamit ng mga code sa halip na direktang salita upang panatilihin ang kumpindensyal at sapat na kaligtasan ng ipinatutupad upang maprotektahan ang pagkapribado ng mga kasapi.

Bago sumang-ayon sa paglahok, ang mga kalahok ay magkakaroon ng pagkataon na magbahagi ng anumang katanungan tungkol sa pag-aaral na binigyang tugon. Bilang karagdagan, sila makakatanggap ng isang kopya ng form na ito para sa kanilang rekord.

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

Aking nabasa o nabanggit sa akin ang mga paunang impormasyon. Ako ay may pagkakataong sagutin ang nakalatag na mga katanungan patungkol dito na sya namang aking kaluguran. Ako ay voluntaryong makikilahok sa pananaliksik.

Pangalan ng Kalahok: MA. WAAH G. DE Leon
Lagda ng Kalahok: PLSP
Petsa: [MM/DD/YYYY]: 09/27/24

Kung hindi marunong bumasa o sumulat ang saksi ay marapating lumagda (Kung maaari, ang taong ito ay marapating piliin ng kalahok at dapat ay walang koneksyon sa pangkat ng mananaliksik). Ang mga kalahok na hindi marunong bumasa o sumulat ay marapating isama ang marka ng kanilang hinlalaki.

Aking nasaksisan ang wastong pagbabasa ng nakalatag na pahintulot sa potensyal na mga kalahok, at ang bawat indibidwal ay mayroong pagkakataon na magtanong. Aking kinukumpirma na ang indibidwal ay may malayang mabigyan ng nasabing pahintulot.

Pangalan ng Saksi: _____
Lagda ng Saksi: _____
Petsa: [MM/DD/YYYY]: _____

Marka ng Hinlalaki ng Kalahok

Aking kinukumpirma na ang mga kalahok ay mabigyan ng pagkakataong magbahagi ng mga katanungan ukol sa pagaaral at ang lahat ng mga katanungan mula sa mga kalahok ay malinaw at wasto na bibigyang tugon hanggang sa abot ng aking makakaya. Aking kinukumpirma na ang bawat indibidwal ay hindi sapilitang hinihikayat na makatanggap ng nakatalang pahintulot bagkus ito ay malaya at voluntaryong pagbabahagi.

Pangalan ng Tagapagaunlad: Jovel Neile Pendua
Lagda ng Tagapagaunlad: CJ
Petsa: [MM/DD/YYYY]: 04-04-2024

Reviewed by:

Mr. Paul Adrian S. Aveilla, RPm
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pispoofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

Ang mga developer sa kasalukuyan na nagaaral sa kursong CPE Practice at Design 2 ay nagsasagawa ng pagsusuri ukol sa disensyo ng proyekto na may pamagat na "Arduino-based Tamban at Galunggong Dehydrator para sa Piling Retail Fish Vendor sa Sanpablo City Public Market". Ang layunin ng nabuong makina ay patuyuin ang hindi nabili na isda sa araw-araw ng pagtitinda bilang isang karaniwang negosyo, partikular na, ang Tamban at Galunggong.

Ang nabuong makina ng nasabing proyekto ay may higit na kakayahang magpatuyo ng pangunahing produkto gaya ng isda na maaaring umaabot hanggang sampung kilo ng tamban o galunggong, tamang regulasyon ng temperatura, pagabiso sa parating na SMS matapos ang isinagawang pagpapatuyo at awtomatikong paghinto ng makina.

Sa panahon ng pagsusuri, maaring ikaw ay mabigyan ng mga katanungan may kaugnayan sa nabuong makina ukol sa sapat ng iyong pangangailangan batay sa kalidad ng programa ng ISO 25010. Mangyaring tandaan na hindi hinihiling na sapilitang bilihin o akuin ang makabuluhang makina bagkus ay iyong bibigyang kasagutan ang mga teoryang nakalatag ngunit sa isang makatotohanang pagiiisip. Ang nasabing pangangalap ay magkokonsume ng lima hanggang sampung minuto ng iyong oras.

kami bilang tagapangalap ng pagsusuri ay lubusang naniniwala na ikaw ay isang akma at perpetkong kandidato para sa nasabing pagsusuri na maaring mabigyang pagkilala bilang isang dalubhasang inhinyero ng teknolohiya, isang potensyal na enduser at isang nagtitinda ng mga sariwa na tuyong isda na nagnanais na magkaroon ng isang kapakipakinabang na makinang magpapatuyo sa mga ito.

Ang kabuuang partisipasyon ay boluntaryo lamang at walang anumang halagang natatanggap na higit pa sa mga nalikom na halaga para sa kanilang pagdalo upang masagawa ito ng mahusay at malayang magbahagi ng anumang punto ng walang kapalit na kaparusan. Ang lahat ng impormasyong ibinahagi sa pananaliksik na ito ay mananatiling sagrado at ang mga taong kabilang sa pagbuo nito ay hindi masasangkot sa mga tagatugon. Minabuting gumamit ng mga code sa halip na direktang salita upang panatilihin ang kumpindensyal at sapat na kaligtasan ng ipinatutupad upang maprotektahan ang pagkapribado ng mga kasapi.

Bago sumang-ayon sa paglahok, ang mga kalahok ay magkakaroon ng pagkataon na magbahagi ng anumang katanungan tungkol sa pag-aaral na binigyang tugon. Bilang karagdagan, sila makakatanggap ng isang kopya ng form na ito para sa kanilang rekord.

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

Aking nabasa o nabanggit sa akin ang mga paunang impormasyon. Ako ay may pagkakataong sagutin ang nakalatag na mga katanungan patungkol dito na sya namang aking kaluguran. Ako ay voluntary makikilahok sa pananaliksik.

Pangalan ng Kalahok: Jaslene P. de Chavez
Lagda ng Kalahok: J. Chavez
Petsa: [MM/DD/YYYY]: _____

Kung hindi marunong bumasa o sumulat ang saksi ay marapating lumagda (Kung maaari, ang taong ito ay marapating piliin ng kalahok at dapat ay walang koneksyon sa pangkat ng mananaliksik). Ang mga kalahok na hindi marunong bumasa o sumulat ay marapating isama ang marka ng kanilang hinlalaki.

Aking nasaksisan ang wastong pagbabasa ng nakalatag na pahintulot sa potensyal na mga kalahok, at ang bawat indibidwal ay mayroong pagkakataon na magtanong. Aking kinukumpirma na ang indibidwal ay may malayang mabigyan ng nasabing pahintulot.

Pangalan ng Saksi: _____
Lagda ng Saksi: _____
Petsa: [MM/DD/YYYY]: _____

Marka ng Hinlalaki ng Kalahok

Aking kinukumpirma na ang mga kalahok ay mabigyan ng pagkakataong magbahagi ng mga katanungan ukol sa pagaaral at ang lahat ng mga katanungan mula sa mga kalahok ay malinaw at wasto na bibigyang tugon hanggang sa abot ng aking makakaya. Aking kinukumpirma na ang bawat indibidwal ay hindi sapilitang hinihihikayat na makatanggap ng nakatalang pahintulot bagkus ito ay malaya at voluntary pagbabahagi.

Pangalan ng Tagapagaunlad: Jewel Neile Rinola
Lagda ng Tagapagaunlad: Ginger
Petsa: [MM/DD/YYYY]: 04/27/2023

Reviewed by:

Mr. Paul Adrian S. Aveilla, RPrm
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO

**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejennicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

Ang mga developer sa kasalukuyan na nagaaral sa kursong CPE Practice at Design 2 ay nagsasagawa ng pagsusuri ukol sa disenyo ng proyekto na may pamagat na "Arduino-based Tamban at Galunggong Dehydrator para sa Piling Retail Fish Vendor sa Sanpablo City Public Market". Ang layunin ng nabuong makina ay patuyuin ang hindi nabili na isda sa araw-araw ng pagtitinda bilang isang karoniwang negosyo, partikular na, ang Tamban at Galunggong.

Ang nabuong makina ng nasabing proyekto ay may higit na kakayahang magpatuyo ng pangunahing produkto gaya ng isda na maaaring umaabot hanggang sampung kilo ng tamban o galunggong, tamang regulasyon ng temperatura, pagabiso sa parating na SMS matapos ang isinagawang pagpapatuyo at awtomatikong paghinto ng makina.

Sa panahon ng pagsusuri, maaring ikaw ay mabigyan ng mga katanungan may kaugnayan sa nabuong makina ukol sa sapat ng iyong pangangailangan batay sa kalidad ng programa ng ISO 25010. Mangyaring tandaan na hindi hinihiling na sapilitang bilhin o akuin ang makabuluhang makina bagkus ay iyong bibigyang kasagutan ang mga teoryang nakalatag ngunit sa isang makatotohanang pagiiisip. Ang nasabing pangangalap ay magkokonsume ng lima hanggang sampung minuto ng iyong oras.

kami bilang tagapangalap ng pagsusuri ay lubusang naniniwala na ikaw ay isang akma at perkpektong kandidato para sa nasabing pagsusuri na maaring mabigyang pagkilala bilang isang dalubhasang inhinyero ng teknolohiya, isang potensyal na enduser at isang nagtitinda ng mga sariwa na tuyong isda na nagnanais na magkaroon ng isang kapakipakinabang na makinang magpapatuyo sa mga ito.

Ang kabuuang partisipasyon ay boluntaryo lamang at walang anumang halagang natatanggap na higit pa sa mga nalikom na halaga para sa kanilang pagdalo upang masagawa ito ng mahusay at malayang magbahagi ng anumang punto ng walang kapalit na kaparusan. Ang lahat ng impormasyong ibinahagi sa pananaliksik na ito ay mananatiling sagrado at ang mga taong kabilang sa pagbuo nito ay hindi masasangkot sa mga tagatugon. Minabuting gumamit ng mga code sa halip na direktang salita upang panatilihin ang kumpindensyal at sapat na kaligtasan ipinatutupad upang maprotektahan ang pagkapribado ng mga kasapi.

Bago sumang-ayon sa paglahok, ang mga kalahok ay magkakaroon ng pagkakataon na magbahagi ng anumang katanungan tungkol sa pag-aaral na binigyang tugon. Bilang karagdagan, sila makatanggap ng isang kopya ng form na ito para sa kanilang rekord.

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

Aking nabasa o nabanggit sa akin ang mga paunang impormasyon. Ako ay may pagkakataong sagutin ang nakalatag na mga katanungan patungkol dito na sya namang aking kaluguran. Ako ay voluntaryong makikilahok sa pananaliksik.

Pangalan ng Kalahok: JOMAR P. CENTENO
Lagda ng Kalahok: [Signature]
Petsa: [MM/DD/YYYY]: [Signature]

Kung hindi marunong bumasa o sumulat ang saksi ay marapating lumagda (Kung maaari, ang taong ito ay marapating piliin ng kalahok at dapat ay walang koneksyon sa pangkat ng mananaliksik). Ang mga kalahok na hindi marunong bumasa o sumulat ay marapating isama ang marka ng kanilang hinlalaki.

Aking nasaksisan ang wastong pagbabasa ng nakalatag na pahintulot sa potensyal na mga kalahok, at ang bawat indibidwal ay mayroong pagkakataon na magtanong. Aking kinukumpirma na ang indibidwal ay may malayang mabigyan ng nasabing pahintulot.

Pangalan ng Saksi: _____
Lagda ng Saksi: _____
Petsa: [MM/DD/YYYY]: _____

Marka ng Hinlalaki ng Kalahok



Aking kinukumpirma na ang mga kalahok ay mabigyan ng pagkakataong magbahagi ng mga katanungan ukol sa pagaaral at ang lahat ng mga katanungan mula sa mga kalahok ay malinaw at wasto na bibigyang tugon hanggang sa abot ng aking makakaya. Aking kinukumpirma na ang bawat indibidwal ay hindi sapilitang hinihikayat na makatanggap ng nakatalang pahintulot bagkus ito ay malaya at voluntaryong pagbabahagi.

Pangalan ng Tagapagaunlad: Joyce Neile Penabas
Lagda ng Tagapagaunlad: [Signature]
Petsa: [MM/DD/YYYY]: 09/20/2024

Reviewed by:

Mr. Paul Adrian S. Aveilla, RPm
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO

**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejennicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

Ang mga developer sa kasalukuyan na nagaaral sa kursong CPE Practice at Design 2 ay nagsasagawa ng pagsusuri ukol sa disenyo ng proyekto na may pamagat na "Arduino-based Tamban at Galunggong Dehydrator para sa Piling Retail Fish Vendor sa Sanpablo City Public Market". Ang layunin ng nabuong makina ay patuyuin ang hindi nabili na isda sa araw-araw ng pagtitinda bilang isang karoniwang negosyo, partikular na, ang Tamban at Galunggong.

Ang nabuong makina ng nasabing proyekto ay may higit na kakayahang magpatuyo ng pangunahing produkto gaya ng isda na maaaring umaabot hanggang sampung kilo ng tamban o galunggong, tamang regulasyon ng temperatura, pagabiso sa parating na SMS matapos ang isinagawang pagpapatuyo at awtomatikong paghinto ng makina.

Sa panahon ng pagsusuri, maaring ikaw ay mabigyan ng mga katanungan may kaugnayan sa nabuong makina ukol sa sapat ng iyong pangangailangan batay sa kalidad ng programa ng ISO 25010. Mangyaring tandaan na hindi hinihiling na sapilitang bilhin o akuin ang makabuluhang makina bagkus ay iyong bibigyang kasagutan ang mga teoryang nakalatag ngunit sa isang makatotohanang pagiiisip. Ang nasabing pangangalap ay magkokonsume ng lima hanggang sampung minuto ng iyong oras.

kami bilang tagapangalap ng pagsusuri ay lubusang naniniwala na ikaw ay isang akma at perkpektong kandidato para sa nasabing pagsusuri na maaring mabigyang pagkilala bilang isang dalubhasang inhinyero ng teknolohiya, isang potensyal na enduser at isang nagtitinda ng mga sariwa na tuyong isda na nagnanais na magkaroon ng isang kapakipakinabang na makinang magpapatuyo sa mga ito.

Ang kabuuang partisipasyon ay boluntaryo lamang at walang anumang halagang natatanggap na higit pa sa mga nalikom na halaga para sa kanilang pagdalo upang masagawa ito ng mahusay at malayang magbahagi ng anumang punto ng walang kapalit na kaparusan. Ang lahat ng impormasyon ibinahagi sa pananaliksik na ito ay mananatiling sagrado at ang mga taong kabilang sa pagbuo nito ay hindi masasangkot sa mga tagatugon. Minabuting gumamit ng mga code sa halip na direktang salita upang panatilihin ang kumpindensyal at sapat na kaligtasan ipinatutupad upang maprotektahan ang pagkapribado ng mga kasapi.

Bago sumang-ayon sa paglahok, ang mga kalahok ay magkakaroon ng pagkakataona na magbahagi ng anumang katanungan tungkol sa pag-aaral na binigyang tugon. Bilang karagdagan, sila makatanggap ng isang kopya ng form na ito para sa kanilang rekord.

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



F.

PART II: CERTIFICATE OF CONSENT

Aking nabasa o nabanggit sa akin ang mga paunang impormasyon. Ako ay may pagkakataong sagutin ang nakalatag na mga katanungan patungkol dito na sya namang aking kaluguran. Ako ay boluntaryong makikilahok sa pananaliksik.

Pangalan ng Kalahok: Linda T. Avedilla
Lagda ng Kalahok: Tanda
Petsa: [MM/DD/YYYY]: _____

Kung hindi marunong bumasa o sumulat ang saksi ay marapating lumagda (Kung maaari, ang taong ito ay marapating piliin ng kalahok at dapat ay walang koneksyon sa pangkat ng mananaliksik). Ang mga kalahok na hindi marunong bumasa o sumulat ay marapating isama ang marka ng kanilang hinlalaki.

Aking nasaksisan ang wastong pagbabasa ng nakalatag na pahintulot sa potensyal na mga kalahok, at ang bawat indibidwal ay mayroong pagkakataon na magtanong. Aking kinukumpirma na ang indibidwal ay may malayang mabigyan ng nasabing pahintulot.

Pangalan ng Saksi: _____
Lagda ng Saksi: _____
Petsa: [MM/DD/YYYY]: _____

Marka ng Hinlalaki ng Kalahok

Aking kinukumpirma na ang mga kalahok ay mabigyan ng pagkakataong magbahagi ng mga katanungan ukol sa pagaaral at ang lahat ng mga katanungan mula sa mga kalahok ay malinaw at wasto na bibigyang tugon hanggang sa abot ng aking makakaya. Aking kinukumpirma na ang bawat indibidwal ay hindi sapilitang hinihikayat na makatanggap ng nakatalang pahintulot bagkus ito ay malaya at boluntaryong pagbabahagi.

Pangalan ng Tagapagaunlad: Joyce Nelle Penalosa
Lagda ng Tagapagaunlad: Tanda
Petsa: [MM/DD/YYYY]: _____

Reviewed by:

Mr. Paul Adrian S. Avedilla, RPh
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO

**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



INFORMED CONSENT FORM

**Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San
Pablo City Public Market**

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejennicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

Ang mga developer sa kasalukuyan na nagaaral sa kursong CPE Practice at Design 2 ay nagsasagawa ng pagsusuri ukol sa disenyo ng proyekto na may pamagat na "Arduino-based Tamban at Galunggong Dehydrator para sa Piling Retail Fish Vendor sa Sanpablo City Public Market". Ang layunin ng nabuong makina ay patuyuin ang hindi nabili na isda sa araw-araw ng pagtitinda bilang isang karoniwang negosyo, partikular na, ang Tamban at Galunggong.

Ang nabuong makina ng nasabing proyekto ay may higit na kakayahang magpatuyo ng pangunahing produkto gaya ng isda na maaaring umaabot hanggang sampung kilo ng tamban o galunggong, tamang regulasyon ng temperatura, pagabiso sa parating na SMS matapos ang isinagawang pagpapatuyo at awtomatikong paghinto ng makina.

Sa panahon ng pagsusuri, maaring ikaw ay mabigyan ng mga katanungan may kaugnayan sa nabuong makina ukol sa sapat ng iyong pangangailangan batay sa kalidad ng programa ng ISO 25010. Mangyaring tandaan na hindi hinihiling na sapilitang bilihin o akuin ang makabuluhang makina bagkus ay iyong bibigyang kasagutan ang mga teoryang nakalatag ngunit sa isang matakotohanang pagiiisip. Ang nasabing pangangalap ay magkokonsume ng lima hanggang sampung minuto ng iyong oras.

Kami bilang tagapangalap ng pagsusuri ay lubusang naniniwala na ikaw ay isang akma at perpetkong kandidato para sa nasabing pagsusuri na maaring mabigyang pagkilala bilang isang dalubhasang inhinyero ng teknolohiya, isang potensyal na enduser at isang nagtitinda ng mga sariwa na tuyong isda na nagnanais na magkaroon ng isang kapakipakinabang na makinang magpapatuyo sa mga ito.

Ang kabuuang partisipasyon ay boluntaryo lamang at walang anumang halagang natatanggap na higit pa sa mga nalikom na halaga para sa kanilang pagdalo upang masagawa ito ng mahusay at malayang magbahagi ng anumang punto ng walang kapalit na kaparusahan. Ang lahat ng impormasyong ibinahagi sa pananaliksik na ito ay mananatiling sagrado at ang mga taong kabilang sa pagbuo nito ay hindi masasangkot sa mga tagatugon. Minabuting gumamit ng mga code sa halip na direktang salita upang panatilihin ang kumpindensyal at sapat na kaligtasang ipinatutupad upang maprotektahan ang pagkapribado ng mga kasapi.

Bago sumang-ayon sa paglahok, ang mga kalahok ay magkakaroon ng pagkakataon na magbahagi ng anumang katanungan tungkol sa pag-aaral na binigyang tugon. Bilang karagdagan, sila makakatanggap ng isang kopya ng form na ito para sa kanilang rekord.

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

Aking nabasa o nabanggit sa akin ang mga paunang impormasyon. Ako ay may pagkakataong sagutin ang nakalatag na mga katanungan patungkol dito na sya namang aking kaluguran. Ako ay voluntaryong makikilahok sa pananaliksik.


Pangalan ng Kalahok: BABY MENDOZA
Lagda ng Kalahok: 30
Petsa: [MM/DD/YYYY]: _____

Kung hindi marunong bumasa o sumulat ang saksi ay marapating lumagda (Kung maaari, ang taong ito ay marapating piliin ng kalahok at dapat ay walang koneksyon sa pangkat ng mananaliksik). Ang mga kalahok na hindi marunong bumasa o sumulat ay marapating isama ang marka ng kanilang hinlalaki.

Aking nasaksisan ang wastong pagbabasa ng nakalatag na pahintulot sa potensyal na mga kalahok, at ang bawat indibidwal ay mayroong pagkakataon na magtanong. Aking kinukumpirma na ang indibidwal ay may malayang mabigyan ng nasabing pahintulot.

Pangalan ng Saksi: _____
Lagda ng Saksi: _____
Petsa: [MM/DD/YYYY]: _____

Marka ng Hinlalaki ng Kalahok



Aking kinukumpirma na ang mga kalahok ay mabigyan ng pagkakataong magbahagi ng mga katanungan ukol sa pagaaral at ang lahat ng mga katanungan mula sa mga kalahok ay malinaw at wasto na bibigyang tugon hanggang sa abot ng aking makakaya. Aking kinukumpirma na ang bawat indibidwal ay hindi sapilitang hinihihayat na makatanggap ng nakatalang pahintulot bagkus ito ay malaya at voluntaryong pagbabahagi.

Pangalan ng Tagapagpaunlad: Thyle Ann Nicole L. Lagrimas
Lagda ng Tagapagpaunlad: 30
Petsa: [MM/DD/YYYY]: 09/21/2024

Reviewed by:

Mr. Paul Adrian S. Avecilla, RPm
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO
**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortizaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemnicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

Ang mga developer sa kasalukuyan na nagaaral sa kursong CPE Practice at Design 2 ay nagsasagawa ng pagsusuri ukol sa disenyo ng proyekto na may pamagat na "Arduino-based Tamban at Galunggong Dehydrator para sa Piling Retail Fish Vendor sa Sanpablo City Public Market". Ang layunin ng nabuong makina ay patuyuin ang hindi nabili na isda sa araw-araw ng pagtitinda bilang isang karoniwang negosyo, partikular na, ang Tamban at Galunggong.

Ang nabuong makina ng nasabing proyekto ay may higit na kakayahang magpatuyo ng pangunahing produkto gaya ng isda na maaaring umaabot hanggang sampung kilo ng tamban o galunggong, tamang regulasyon ng temperatura, pagabiso sa parating na SMS matapos ang isinagawang pagpapatuyo at awtomatikong paghinto ng makina.

Sa panahon ng pagsusuri, maaring ikaw ay mabigyan ng mga katanungan may kaugnayan sa nabuong makina ukol sa sapat ng iyong pangangailangan batay sa kalidad ng programa ng ISO 25010. Mangyaring tandaan na hindi hinihiling na sapilitang bilhin o akuin ang makabuluhang makina bagkus ay iyong bibigyang kasagutan ang mga teoryang nakalatag ngunit sa isang makatotohanang pagiisip. Ang nasabing pangangalap ay magkokonsume ng lima hanggang sampung minuto ng iyong oras.

Kami bilang tagapangalap ng pagsusuri ay lubusang naniniwala na ikaw ay isang akma at perpetkong kandidato para sa nasabing pagsusuri na maaring mabigyang pagkilala bilang isang dalubhasang inhinyero ng teknolohiya, isang potensyal na enduser at isang nagtitinda ng mga sariwa na tuyong isda na nagnanais na magkaroon ng isang kapakipakinabang na makinang magpapatuyo sa mga ito.

Ang kabuuang partisipasyon ay boluntaryo lamang at walang anumang halagang natatanggap na higit pa sa mga nalikom na halaga para sa kanilang pagdalo upang masagawa ito ng mahusay at malayang magbahagi ng anumang punto ng walang kapalit na kaparusahan. Ang lahat ng impormasyong ibinahagi sa pananaliksik na ito ay mananatiling sagrado at ang mga taong kabilang sa pagbuo nito ay hindi masasangkot sa mga tagatugon. Minabuting gumamit ng mga code sa halip na direktang salita upang panatilihin ang kumpindensyal at sapat na kaligtasan ipinutupad upang maprotektahan ang pagkapribado ng mga kasapi.

Bago sumang-ayon sa paglahok, ang mga kalahok ay magkakaroon ng pagkataon na magbahagi ng anumang katanungan tungkol sa pag-aaral na binigyang tugon. Bilang karagdagan, sila makatanggap ng isang kopya ng form na ito para sa kanilang rekord.

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

Aking nabasa o nabanggit sa akin ang mga paunang impormasyon. Ako ay may pagkakataong sagutin ang nakalatag na mga katanungan patungkol dito na sya namang aking kaluguran. Ako ay voluntaryong makikilahok sa pananaliksik.

Pangalan ng Kalahok: Ana Kristin Santos

Lagda ng Kalahok: Handwritten signature

Petsa: [MM/DD/YYYY]: _____

Kung hindi marunong bumasa o sumulat ang saksi ay marapating lumagda (Kung maaari, ang taong ito ay marapating piliin ng kalahok at dapat ay walang koneksyon sa pangkat ng mananaliksik). Ang mga kalahok na hindi marunong bumasa o sumulat ay marapating isama ang marka ng kanilang hinlalaki.


Aking nasaksisan ang wastong pagbabasa ng nakalatag na pahintulot sa potensyal na mga kalahok, at ang bawat indibidwal ay mayroong pagkakataon na magtanong. Aking kinukumpirma na ang indibidwal ay may malayang mabigyan ng nasabing pahintulot.

Pangalan ng Saksi: _____

Marka ng Hinlalaki ng Kalahok

Lagda ng Saksi: _____

Petsa: [MM/DD/YYYY]: _____



Aking kinukumpirma na ang mga kalahok ay mabigyan ng pagkakataong magbahagi ng mga katanungan ukol sa pagaaral at ang lahat ng mga katanungan mula sa mga kalahok ay malinaw at wasto na bibigyang tugon hanggang sa abot ng aking makakaya. Aking kinukumpirma na ang bawat indibidwal ay hindi sapilitang hinihikayat na makatanggap ng nakatalang pahintulot bagkus ito ay malaya at voluntaryong pagbabahagi.

Pangalan ng Tagapagaunlad: Therese Jean Nicanor L. Lagrimas

Lagda ng Tagapagaunlad: Handwritten signature

Petsa: [MM/DD/YYYY]: 14/27/2024

Reviewed by:

Mr. Paul Adrian S. Aveilla, RPh
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO

**OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION**

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plspofficial@plsp.edu.ph



INFORMED CONSENT FORM

Arduino-based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market

Hernandez, Samuel R.	cpe.hernandez.samuel@gmail.com
Estrada, ZJ Francis Dem F.	cpe.estrada.zj@gmail.com
Sumilang, Julius D.	cpe.sumilang.julius@gmail.com
Ortiz, Aeron Paul C.	cpe.ortazaeronpaulc@gmail.com
Lagrimas, Trixie Jem Nicole L.	cpe.lagrimastrixiejemnicole@gmail.com
Peñaloza, Jovel Neile B.	cpe.penalozajovelneile@gmail.com

PART I. Information Sheet

Dear Respondent,

Ang mga developer sa kasalukuyan na nagaaral sa kursong CPE Practice at Design 2 ay nagsasagawa ng pagsusuri ukol sa disenyo ng proyekto na may pamagat na "Arduino-based Tamban at Galunggong Dehydrator para sa Piling Retail Fish Vendor sa Sanpablo City Public Market". Ang layunin ng nabuong makina ay patuyuin ang hindi nabili na isda sa araw-araw ng pagtitinda bilang isang karoniwang negosyo, partikular na, ang Tamban at Galunggong.

Ang nabuong makina ng nasabing proyekto ay may higit na kakayahang magpatuyo ng pangunahing produkto gaya ng isda na maaaring umaabot hanggang sampung kilo ng tamban o galunggong, tamang regulasyon ng temperatura, pagabiso sa parating na SMS matapos ang isinagawang pagpapatuyo at awtomatikong paghinto ng makina.

Sa panahon ng pagsusuri, maaring ikaw ay mabigyan ng mga katanungan may kaugnayan sa nabuong makina ukol sa sapat ng iyong pangangailangan batay sa kalidad ng programa ng ISO 25010. Mangyaring tandaan na hindi hinihiling na sapilitang bilihin o akuin ang makabuluhang makina bagkus ay iyong bibigyang kasagutan ang mga teoryang nakalatag ngunit sa isang makatotohanang pagiiisip. Ang nasabing pangangalap ay magkokonsume ng lima hanggang sampung minuto ng iyong oras.

Kami bilang tagapangalap ng pagsusuri ay lubusang naniniwala na ikaw ay isang akma at perpetkong kandidato para sa nasabing pagsusuri na maaring mabigyang pagkilala bilang isang dalubhasang inhinyero ng teknolohiya, isang potensyal na enduser at isang nagtitinda ng mga sariwa na tuyong isda na nagnanais na magkaroon ng isang kapakipakinabang na makinang magpapatuyo sa mga ito.

Ang kabuuang partisipasyon ay boluntaryo lamang at walang anumang halagang natatanggap na higit pa sa mga nalikom na halaga para sa kanilang pagdalo upang masagawa ito ng mahusay at malayang magbahagi ng anumang punto ng walang kapalit na kaparusahan. Ang lahat ng impormasyong ibinahagi sa pananaliksik na ito ay mananatiling sagrado at ang mga taong kabilang sa pagbuo nito ay hindi masasangkot sa mga tagatugon. Minabuting gumamit ng mga code sa halip na direktang salita upang panatilihin ang kumpindensyal at sapat na kaligtasang ipinatutupad upang maprotektahan ang pagkapribado ng mga kasapi.

Bago sumang-ayon sa paglahok, ang mga kalahok ay magkakaroon ng pagkakataon na magbahagi ng anumang katanungan tungkol sa pag-aaral na binigyang tugon. Bilang karagdagan, sila makatanggap ng isang kopya ng form na ito para sa kanilang rekord.

"Primed to Lead and Serve for Progress"



PAMANTASAN NG LUNGSOD NG SAN PABLO
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH AND INNOVATION
Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: plsofficial@plsp.edu.ph



PART II: CERTIFICATE OF CONSENT

Aking nabasa o nabanggit sa akin ang mga paunang impormasyon. Ako ay may pagkakataong sagutin ang nakalatag na mga katanungan patungkol dito na sya namang aking kaluguran. Ako ay voluntaryong makikilahok sa pananaliksik.


Pangalan ng Kalahok: Zoewna PANTOJA
Lagda ng Kalahok: Pantona
Petsa: [MM/DD/YYYY]: _____

Kung hindi marunong bumasa o sumulat ang saksi ay marapating lumagda (Kung maaari, ang taong ito ay marapating piliin ng kalahok at dapat ay walang koneksyon sa pangkat ng mananaliksik). Ang mga kalahok na hindi marunong bumasa o sumulat ay marapating isama ang marka ng kanilang hinlalaki.

Aking nasaksisan ang wastong pagbabasa ng nakalatag na pahintulot sa potensyal na mga kalahok, at ang bawat indibidwal ay mayroong pagkakataon na magtanong. Aking kinukumpirma na ang indibidwal ay may malayang mabigyan ng nasabing pahintulot.

Pangalan ng Saksi: _____
Lagda ng Saksi: _____
Petsa: [MM/DD/YYYY]: _____

Marka ng Hinlalaki ng Kalahok



Aking kinukumpirma na ang mga kalahok ay mabigyan ng pagkakataong magbahagi ng mga katanungan ukol sa pagaaral at ang lahat ng mga katanungan mula sa mga kalahok ay malinaw at wasto na bibigyang tugon hanggang sa abot ng aking makakaya. Aking kinukumpirma na ang bawat indibidwal ay hindi sapilitang hinihiikayat na makatanggap ng nakatalang pahintulot bagkus ito ay malaya at voluntaryong pagbabahagi.

Pangalan ng Tagapagpaunlad: Time Jim Nicols L. Lagrimas
Lagda ng Tagapagpaunlad: Jim
Petsa: [MM/DD/YYYY]: 06/27/2024

Reviewed by:

Mr. Paul Adrian S. Aveilla, RPP
Intellectual Property Unit Head
OVPRI

Approved by:

Mr. Dennis S. Gambuta
University Data Privacy Officer

"Primed to Lead and Serve for Progress"

Appendix F:

Project Evaluation Instrument

Appendix F.1.A: Sample Evaluation Instrument (English Version)

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Name: _____
 Company: _____
 Position: _____

Instructions: Please put a check under the corresponding statistical rating

5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability	Functional Completeness	The device and system cover all the specified tasks and user objectives.					
	Functional Correctness	The device and system provide the correct results with the needed degree of precision.					
	Functional Appropriateness	The device and system facilitate the accomplishment of specified tasks and objectives.					
Reliability	Maturity	The device and system meet the needs for reliability under regular operation.					
	Availability	The device and system perform specified function in a time and are accessible when required.					
	Fault Tolerance	The device and system can operate as intended despite hardware/software faults.					
	Recoverability	The device and system can recover the data directly affected and re-establish the desired state.					
Performance Efficiency	Time Behavior	When performing its function, the device and system's response, processing times, and throughout rates meet the requirements.					
	Recourse Utilization	The device and system amount and types of resources used when performing its functions meet the requirements.					
	Capacity	The device and system's maximum limits of the product and system parameters meet the requirements.					
Usability	Appropriateness Recognizability	The device and system allow users to recognize if it is appropriate for their needs.					
	Learnability	The device functions can be easily learned by the users.					
	Operability	The device and system have the attributes that make it easy to operate and control.					
	User Error Protection	The device and system protect the users against making errors.					
	User Interface Aesthetics	The device and system enable good and satisfying interaction for the user.					
	Accessibility	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use.					
Security	Confidentiality	The device and system ensure that the data are accessible only to authorized users.					
	Integrity	The device and system prevent unauthorized access to modify the programs or data.					
	Non-repudiation	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later.					
	Authenticity	A subject or resource's device and system identity can be proved to be the one claimed.					
	Accountability	An entity's device and system actions can be traced uniquely to the entity.					
Compatibility	Co-existence	The device and system perform their functions efficiently while sharing a typical environment and resources with other products.					
	Interoperability	The device and system's two or more products or components can exchange information and use the information that has been exchanged.					
	Modularity	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts.					
	Reusability	The device and system asset can be used in multiple systems or in building other assets.					

Maintainability	Analyzability	The device and system effectiveness and efficiency with which it is possible to assess the impact on a product or system of an intended change to one or more parts.				
	Modifiability	The device and system are effectively modified without introducing defects in existing product quality.				
	Testability	Test criteria can be established for a system, product, or component and can be performed to determine whether those criteria have been met.				
Portability	Adaptability	It is adapted for different or evolving hardware, software, or other operational or usage environments				
	Instability	The device and system can be successfully installed and uninstalled.				
	Replaceability	The device and system can replace another specified product for the same purpose.				

Comment/Suggestions: _____

Functional Suitability:	Average	Certified true copy and correct by:
Reliability:	_____	
Performance Efficiency:	_____	
Usability:	_____	
Security:	_____	
Compatibility:	_____	
Maintainability:	_____	
Portability:	_____	
Totality:	_____	

Signature Over Printed Name of Evaluator
 Date: _____

Appendix F.1.B: Sample Evaluation Instrument (Filipino Version)

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Pangalan: _____
 Kumpanya: _____
 Katungkuluan: _____

Instructions: Please put a check under the corresponding statistical rating
5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability (Kaangkupan sa Paggana)	Functional Completeness (Kumpletong Paggana)	The device and system covers all the specified tasks and user objectives. (Nagagawa nito ang mga gawain at nais ng gumagamit)					
	Functional Correctness (Wastong Paggana)	The device and system provide correct results with the needed degrees of precision. (Naghribigay ito ng tamang resulta na kailangan)					
	Functional Appropriateness (Angkop na Paggana)	The device and system facilitate the accomplishment of specified tasks and objectives (Nagagawa nito ang dapat nitong gawin)					
Reliability	Maturity (Kapanahunan)	The device and system meet the need for reliability under regular operation (Reliable ang device sa regular na paggamit)					
	Availability (Kakayahang Gumana)	The device and system are designed to perform specified functions efficiently in a over time. (Ito ay gumagana kapag kinakailangan)					
	Fault Tolerance (Toleransiya sa Pagkakamali)	The device and system can operate as intended despite hardware/software faults (Gumagana ito kahit may problema sa hardware o software)					
	Recoverability (Kakayahang Makabawi)	The device and system have the capability to recover the data when encountering errors (Ang aparato at Sistema ay maaaring mabawi ang data na direktan apektado at muling maitatag ang nais na estado)					
Performance Efficiency	Time Behavior (Pag-uugali ng oras)	When performing its functions, the device and systems response processing times, and throughout rates meet the requirements. (Tumutugma ito sa pangangailangan ng user tuwing ginagamit)					
	Resource Utilization (Pag gamit ng mapagkukunan)	The device and system resources amount and types used when performing its functions meet the requirements. (Ang mga kailangang resources nito ay nameet ang mga kinakailangan.)					
	Capacity (Kapasidad)	The device and system's maximum limits of the product and system parameters meet the requirements. (Natutugunan nito ang kapasidad na kinakailangan)					
Usability	Appropriateness Recognizability (kaangkupan)	It allow users to recognize if it is appropriate for their needs. (Naangkop ito sa pangangailangan ng gumagamit)					
	Learnability (Kakayahang matuto)	The device and system can be used to achieve the goals of learning to use the product. (Matututuran itong gamitin upang magawa ang dapat gawin)					
	Operability (Paggamit)	The device and system have the attributes that make it easy to operate and control. (Ang aparato at sistema ay mga katangian na ginagawang mapadali ang pag papatakbo at pag control)					
	User Error Protection (Protekson ng Gagamit sa Error)	The device and system protect the users against making errors. (Pinoprotektahan nito ang user sa paggawa ng mali sa device)					
	User Interface Aesthetics (Kagandahan ng device)	The device and system enable good and satisfying interaction for the user. (May maganda at nakakaaliw itong gamitin)					
	Accessibility (Paggamit)	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use. (Magagamit ito ng mga tao para sa dapat paggamitan)					

Security	Confidentiality (Pagkukumpidensyal)	The device and system ensure that the data are accessible only to authorized users. (Authorized user lamang ang maaaring gumamit nito)			
	Integrity (Integridad)	The device and system prevent unauthorized access to modify the programs or data. (Ang aparato at Sistema ay pumipigi sa hindi autorisadong pag access upang baguhin ang mga programa o data)			
	Non-repudiation (Hindi Pagtanggili)	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later. (Mapapatunayang ginawa ng device ang kanyang function at hindi maitatanggili)			
	Authenticity (Pagiging Tunay)	A subject or resource's device and system identity can be proved to be the one claimed. (Ito ay kung anong sinasabing kayang gawin nito)			
	Accountability (Panaganutan)	An entity's device and system actions can be traced uniquely to the entity. (Ang aparato at mga pagkilos ng system ng isang entity ay maaaring masubaybayan nang natatangi sa entity)			
Compatibility	Co-existence (Pagsasama sama)	The device and system perform their functions efficiently while sharing a typical environment and resources with other products. (Mayos gumagana kasabay ng ibang produkto o system)			
	Interoperability (Kakayahang Mapagsabay)	The device interacts with other product or system (Maaring itong gamitin kasabay ng ibang system o sa ibang produkto)			
Maintainability	Modularity (kakayahang mapalitan)	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts. (Wala masyadong epekto ang pagpalit ng parts)			
	Reusability (Muling Paggamit)	The device and system asset can be used in multiple systems or in building other assets. (Ito ay maaring gamitin sa ibang Sistema o pagbuo ng iba pang device)			
	Analyzability (Kakayahang Masuri)	The device and system ability to assess the impact of changes on a product or system of an intended change to one or more parts. (Mapalitan ang parte nito gamit ang ibang bagay para sa kaperhong layunin)			
	Modifiability (Kakayahang Mabago)	The device and system are effectively modified without introducing defects in existing product quality. (Maaring baguhin nang walang nagiging sira dito)			
	Testability (Kakayahang Subukan)	Test criteria can be set for a system, product, or component and can be performed to verify whether those criteria have been met. (Maaring i-test upang mapatunayang nakamit nito ang mga criteria)			
Portability	Adaptability (Kakayahang Umangkop)	It is design to adapt for changing or evolving hardware, software, and operational or usage environments. (Ito ay iniangkop para sa iba't ibang o umuunlad na hardware, software, o iba pang mga operasyon o paggamit ng kapaligiran)			
	Installability (Kakayahang Ma-install)	The device and system can be successfully installed and uninstalled. (Ito ay maaring i-install at i-uninstall)			
	Replaceability (Kakayahang Mapaltan)	The device and system can replace another specified product for the same purpose. (Maaaring palitan ang ibang parte nito para sa kaparehong paggagamitan)			

Comment/Suggestions: _____

Average
 Functional Suitability: _____
 Reliability: _____
 Performance Efficiency: _____
 Usability: _____
 Security: _____
 Compatibility: _____
 Maintainability: _____
 Portability: _____
 Totality: _____

Certified true copy and correct by:

Signature Over Printed Name of Evaluator
 Date: _____

Appendix F.2.A: Raw Data Evaluation Results of the CpE Practitioners

Factors and Criteria	E1	E2	E3	E4	E5	MEAN
Functional Stability						
Functional Completeness	5	5	5	5	5	5.00
Functional Correctness	5	4	4	4	4	4.20
Functional Appropriateness	5	5	5	5	5	5.00
Subtotal	5.00	4.67	4.67	4.67	4.67	4.73
Reliability						
Maturity	5	5	5	5	5	5.00
Availability	5	5	5	5	5	5.00
Fault Tolerance	4	4	4	4	4	4.00
Recoverability	4	5	5	5	5	4.80
Subtotal	4.50	4.75	4.75	4.75	4.75	4.70
Performance Efficiency						
Time Behavior	4	4	4	4	4	4.00
Resource Utilization	4	5	5	5	5	4.80
Capacity	5	4	4	4	4	4.20
Subtotal	4.33	4.33	4.33	4.33	4.33	4.33
Usability						
Appropriateness Recognizability	4	5	5	5	5	4.80
Learnability	4	5	5	5	5	4.80
Operability	4	5	5	5	5	4.80
User Error Protection	4	4	4	4	4	4.00
User Interface Aesthetics	5	5	5	5	5	5.00
Accessibility	4	4	4	4	4	4.00
Subtotal	4.17	4.67	4.67	4.67	4.67	4.57
Security						
Confidentiality	3	5	4	5	3	4.00
Integrity	3	5	4	5	3	4.00
Non-repudiation	3	5	5	5	3	4.20
Authenticity	4	4	4	4	4	4.00
Accountability	3	4	4	4	4	3.80
Subtotal	3.20	4.60	4.20	4.60	3.40	4.00
Compatibility						
Co-existence	5	5	5	5	5	5.00
Interoperability	4	5	5	5	5	4.80
Subtotal	4.50	5.00	5.00	5.00	5.00	4.90
Maintainability						
Modularity	4	4	4	4	4	4.00
Reusability	4	5	5	5	5	4.80
Analyzability	4	5	5	5	5	4.80
Modifiability	4	4	4	4	4	4.00
Testability	4	5	5	5	5	4.80
Subtotal	4.00	4.60	4.60	4.60	4.60	4.48
Portability						
Adaptability	4	5	5	5	5	4.80
Installability	5	5	5	5	5	5.00
Replaceability	4	4	4	4	3	3.80
Subtotal	4.33	4.67	4.67	4.67	4.33	4.53
SOFTWARE EVAL. TOTAL						
	4.25	4.66	4.61	4.66	4.47	4.53

Appendix F.2.A: Filled-out Evaluation Instrument of CpE Practitioners

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Name: Bien Marc M. Anista
 Company: FDS Asia Philippines Inc.
 Position: Developer

Instructions: Please put a check under the corresponding statistical rating

5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability	Functional Completeness	The device and system cover all the specified tasks and user objectives.					/
	Functional Correctness	The device and system provide the correct results with the needed degree of precision.					/
	Functional Appropriateness	The device and system facilitate the accomplishment of specified tasks and objectives.					/
Reliability	Maturity	The device and system meet the needs for reliability under regular operation.					/
	Availability	The device and system perform specified function in a time and are accessible when required.					/
	Fault Tolerance	The device and system can operate as intended despite hardware/software faults.				/	
	Recoverability	The device and system can recover the data directly affected and re-establish the desired state.				/	
Performance Efficiency	Time Behavior	When performing its function, the device and system's response, processing times, and throughout rates meet the requirements.				/	
	Recourse Utilization	The device and system amount and types of resources used when performing its functions meet the requirements.				/	
	Capacity	The device and system's maximum limits of the product and system parameters meet the requirements.					/
Usability	Appropriateness Recognizability	The device and system allow users to recognize if it is appropriate for their needs.				/	
	Learnability	The device functions can be easily learned by the users.				/	
	Operability	The device and system have the attributes that make it easy to operate and control.				/	
	User Error Protection	The device and system protect the users against making errors.				/	
	User Interface Aesthetics	The device and system enable good and satisfying interaction for the user.					/
	Accessibility	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use.					/
Security	Confidentiality	The device and system ensure that the data are accessible only to authorized users.			/		
	Integrity	The device and system prevent unauthorized access to modify the programs or data.			/		
	Non-repudiation	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later.			/		
	Authenticity	A subject or resource's device and system identity can be proved to be the one claimed.				/	
	Accountability	An entity's device and system actions can be traced uniquely to the entity.				/	
Compatibility	Co-existence	The device and system perform their functions efficiently while sharing a typical environment and resources with other products.					/
	Interoperability	The device and system's two or more products or components can exchange information and use the information that has been exchanged.				/	

Maintainability	Modularity	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts.				/
	Reusability	The device and system asset can be used in multiple systems or in building other assets.				/
	Analyzability	The device and system effectiveness and efficiency with which it is possible to assess the impact on a product or system of an intended change to one or more parts.				/
	Modifiability	The device and system are effectively modified without introducing defects in existing product quality.				/
	Testability	Test criteria can be established for a system, product, or component and can be performed to determine whether those criteria have been met.				/
Portability	Adaptability	It is adapted for different or evolving hardware, software, or other operational or usage environments				/
	Instability	The device and system can be successfully installed and uninstalled.				/
	Replaceability	The device and system can replace another specified product for the same purpose.				/

Comment/Suggestions: _____

Software	Average
Functional Suitability:	<u>5</u>
Reliability:	<u>4.5</u>
Performance Efficiency:	<u>4.33</u>
Usability:	<u>4.17</u>
Security:	<u>3.2</u>
Compatibility:	<u>4.5</u>
Maintainability:	<u>4</u>
Portability:	<u>4.33</u>
Totality:	<u>4.25</u>

Certified true copy and correct by:


 BIERN MARC M. ANISTA
 Signature Over Printed Name of Evaluator

Date: _____

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Name: James Bala
 Company: _____
 Position: _____

Instructions: Please put a check under the corresponding statistical rating

5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable


Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability	Functional Completeness	The device and system cover all the specified tasks and user objectives.					/
	Functional Correctness	The device and system provide the correct results with the needed degree of precision.				/	
	Functional Appropriateness	The device and system facilitate the accomplishment of specified tasks and objectives.					/
Reliability	Maturity	The device and system meet the needs for reliability under regular operation.					/
	Availability	The device and system perform specified function in a time and are accessible when required.					/
	Fault Tolerance	The device and system can operate as intended despite hardware/software faults.				/	
	Recoverability	The device and system can recover the data directly affected and re-establish the desired state.					/
Performance Efficiency	Time Behavior	When performing its function, the device and system's response, processing times, and throughout rates meet the requirements.				/	
	Recourse Utilization	The device and system amount and types of resources used when performing its functions meet the requirements.					/
	Capacity	The device and system's maximum limits of the product and system parameters meet the requirements.				/	
Usability	Appropriateness Recognizability	The device and system allow users to recognize if it is appropriate for their needs.					/
	Learnability	The device functions can be easily learned by the users.					/
	Operability	The device and system have the attributes that make it easy to operate and control.					/
	User Error Protection	The device and system protect the users against making errors.				/	
	User Interface Aesthetics	The device and system enable good and satisfying interaction for the user.					/
	Accessibility	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use.					/
Security	Confidentiality	The device and system ensure that the data are accessible only to authorized users.					/
	Integrity	The device and system prevent unauthorized access to modify the programs or data.					/
	Non-repudiation	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later.					/
	Authenticity	A subject or resource's device and system identity can be proved to be the one claimed.				/	
	Accountability	An entity's device and system actions can be traced uniquely to the entity.				/	
Compatibility	Co-existence	The device and system perform their functions efficiently while sharing a typical environment and resources with other products.					/
	Interoperability	The device and system's two or more products or components can exchange information and use the information that has been exchanged.					/

Maintainability	Modularity	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts.	/		
	Reusability	The device and system asset can be used in multiple systems or in building other assets.		/	
	Analyzability	The device and system effectiveness and efficiency with which it is possible to assess the impact on a product or system of an intended change to one or more parts.			/
	Modifiability	The device and system are effectively modified without introducing defects in existing product quality.		/	
	Testability	Test criteria can be established for a system, product, or component and can be performed to determine whether those criteria have been met.			/
Portability	Adaptability	It is adapted for different or evolving hardware, software, or other operational or usage environments			/
	Instability	The device and system can be successfully installed and uninstalled.			/
	Replaceability	The device and system can replace another specified product for the same purpose.			/

Comment/Suggestions:

Software	Average
Functional Suitability:	<u>4.67</u>
Reliability:	<u>4.75</u>
Performance Efficiency:	<u>4.33</u>
Usability:	<u>4.67</u>
Security:	<u>4.6</u>
Compatibility:	<u>5</u>
Maintainability:	<u>4.6</u>
Portability:	<u>4.67</u>
Totality:	<u>4.66</u>

Certified true copy and correct by:



JAMES BALA

Signature Over Printed Name of Evaluator

Date: April 21, 2024

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Name: Jhee anne B. Lagrimas
 Company: _____
 Position: _____

Instructions: Please put a check under the corresponding statistical rating

5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable


Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability	Functional Completeness	The device and system cover all the specified tasks and user objectives.					/
	Functional Correctness	The device and system provide the correct results with the needed degree of precision.				/	
	Functional Appropriateness	The device and system facilitate the accomplishment of specified tasks and objectives.					/
Reliability	Maturity	The device and system meet the needs for reliability under regular operation.					/
	Availability	The device and system perform specified function in a time and are accessible when required.					/
	Fault Tolerance	The device and system can operate as intended despite hardware/software faults.				/	
	Recoverability	The device and system can recover the data directly affected and re-establish the desired state.					/
Performance Efficiency	Time Behavior	When performing its function, the device and system's response, processing times, and throughout rates meet the requirements.				/	
	Recourse Utilization	The device and system amount and types of resources used when performing its functions meet the requirements.					/
	Capacity	The device and system's maximum limits of the product and system parameters meet the requirements.				/	
Usability	Appropriateness Recognizability	The device and system allow users to recognize if it is appropriate for their needs.					/
	Learnability	The device functions can be easily learned by the users.					/
	Operability	The device and system have the attributes that make it easy to operate and control.					/
	User Error Protection	The device and system protect the users against making errors.				/	
	User Interface Aesthetics	The device and system enable good and satisfying interaction for the user.					/
	Accessibility	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use.					/
Security	Confidentiality	The device and system ensure that the data are accessible only to authorized users.					/
	Integrity	The device and system prevent unauthorized access to modify the programs or data.					/
	Non-repudiation	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later.					/
	Authenticity	A subject or resource's device and system identity can be proved to be the one claimed.				/	
	Accountability	An entity's device and system actions can be traced uniquely to the entity.					/
Compatibility	Co-existence	The device and system perform their functions efficiently while sharing a typical environment and resources with other products.					/
	Interoperability	The device and system's two or more products or components can exchange information and use the information that has been exchanged.					/

Maintainability	Modularity	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts.	/			
	Reusability	The device and system asset can be used in multiple systems or in building other assets.				/
	Analyzability	The device and system effectiveness and efficiency with which it is possible to assess the impact on a product or system of an intended change to one or more parts.				/
	Modifiability	The device and system are effectively modified without introducing defects in existing product quality.				/
	Testability	Test criteria can be established for a system, product, or component and can be performed to determine whether those criteria have been met.				/
Portability	Adaptability	It is adapted for different or evolving hardware, software, or other operational or usage environments				/
	Instability	The device and system can be successfully installed and uninstalled.				/
	Replaceability	The device and system can replace another specified product for the same purpose.				/

Comment/Suggestions: My suggestion to this device is that it should cater other types and sizes of fish

Software	Average
Functional Suitability:	<u>4.67</u>
Reliability:	<u>4.75</u>
Performance Efficiency:	<u>4.33</u>
Usability:	<u>4.67</u>
Security:	<u>4.2</u>
Compatibility:	<u>5</u>
Maintainability:	<u>4.6</u>
Portability:	<u>4.67</u>
Totality:	<u>4.61</u>

Certified true copy and correct by:


JHEECANNE B. LAGRIMAS
 Signature Over Printed Name of Evaluator

Date: April 20, 2024

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Name: Rodny S. Salvador
 Company: CMIT
 Position: Backup and Storage Admin

Instructions: Please put a check under the corresponding statistical rating

5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable


Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability	Functional Completeness	The device and system cover all the specified tasks and user objectives.					/
	Functional Correctness	The device and system provide the correct results with the needed degree of precision.				/	
	Functional Appropriateness	The device and system facilitate the accomplishment of specified tasks and objectives.					/
Reliability	Maturity	The device and system meet the needs for reliability under regular operation.					/
	Availability	The device and system perform specified function in a time and are accessible when required.					/
	Fault Tolerance	The device and system can operate as intended despite hardware/software faults.				/	
	Recoverability	The device and system can recover the data directly affected and re-establish the desired state.					/
Performance Efficiency	Time Behavior	When performing its function, the device and system's response, processing times, and throughout rates meet the requirements.				/	
	Recourse Utilization	The device and system amount and types of resources used when performing its functions meet the requirements.					/
	Capacity	The device and system's maximum limits of the product and system parameters meet the requirements.				/	
Usability	Appropriateness Recognizability	The device and system allow users to recognize if it is appropriate for their needs.					/
	Learnability	The device functions can be easily learned by the users.					/
	Operability	The device and system have the attributes that make it easy to operate and control.					/
	User Error Protection	The device and system protect the users against making errors.				/	
	User Interface Aesthetics	The device and system enable good and satisfying interaction for the user.					/
	Accessibility	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use.					/
Security	Confidentiality	The device and system ensure that the data are accessible only to authorized users.					/
	Integrity	The device and system prevent unauthorized access to modify the programs or data.					/
	Non-repudiation	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later.					/
	Authenticity	A subject or resource's device and system identity can be proved to be the one claimed.				/	
	Accountability	An entity's device and system actions can be traced uniquely to the entity.					/
Compatibility	Co-existence	The device and system perform their functions efficiently while sharing a typical environment and resources with other products.					/
	Interoperability	The device and system's two or more products or components can exchange information and use the information that has been exchanged.					/

Maintainability	Modularity	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts.	/	/
	Reusability	The device and system asset can be used in multiple systems or in building other assets.		/
	Analyzability	The device and system effectiveness and efficiency with which it is possible to assess the impact on a product or system of an intended change to one or more parts.		/
	Modifiability	The device and system are effectively modified without introducing defects in existing product quality.		/
	Testability	Test criteria can be established for a system, product, or component and can be performed to determine whether those criteria have been met.		/
Portability	Adaptability	It is adapted for different or evolving hardware, software, or other operational or usage environments		/
	Instability	The device and system can be successfully installed and uninstalled.		/
	Replaceability	The device and system can replace another specified product for the same purpose.		/

Comment/Suggestions: _____

Software	Average
Functional Suitability:	<u>4.67</u>
Reliability:	<u>4.75</u>
Performance Efficiency:	<u>4.33</u>
Usability:	<u>4.67</u>
Security:	<u>4.4</u>
Compatibility:	<u>5</u>
Maintainability:	<u>4.6</u>
Portability:	<u>4.67</u>
Totality:	<u>4.66</u>

Certified true copy and correct by:



RODNY S. SALVADOR

Signature Over Printed Name of Evaluator

Date: April 21, 2024

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Name: Daniel Christopher G. Gonzales

Company: DHL Supply Chain Philippines

Position: IT System Support Specialist

Instructions: Please put a check under the corresponding statistical rating

5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable


Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability	Functional Completeness	The device and system cover all the specified tasks and user objectives.					/
	Functional Correctness	The device and system provide the correct results with the needed degree of precision.				/	
	Functional Appropriateness	The device and system facilitate the accomplishment of specified tasks and objectives.					/
Reliability	Maturity	The device and system meet the needs for reliability under regular operation.					/
	Availability	The device and system perform specified function in a time and are accessible when required.					/
	Fault Tolerance	The device and system can operate as intended despite hardware/software faults.				/	
	Recoverability	The device and system can recover the data directly affected and re-establish the desired state.					/
Performance Efficiency	Time Behavior	When performing its function, the device and system's response, processing times, and throughout rates meet the requirements.					/
	Recourse Utilization	The device and system amount and types of resources used when performing its functions meet the requirements.					/
	Capacity	The device and system's maximum limits of the product and system parameters meet the requirements.					/
Usability	Appropriateness Recognizability	The device and system allow users to recognize if it is appropriate for their needs.					/
	Learnability	The device functions can be easily learned by the users.					/
	Operability	The device and system have the attributes that make it easy to operate and control.					/
	User Error Protection	The device and system protect the users against making errors.					/
	User Interface Aesthetics	The device and system enable good and satisfying interaction for the user.					/
	Accessibility	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use.					/
Security	Confidentiality	The device and system ensure that the data are accessible only to authorized users.				/	
	Integrity	The device and system prevent unauthorized access to modify the programs or data.				/	
	Non-repudiation	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later.				/	
	Authenticity	A subject or resource's device and system identity can be proved to be the one claimed.					/
	Accountability	An entity's device and system actions can be traced uniquely to the entity.					/
Compatibility	Co-existence	The device and system perform their functions efficiently while sharing a typical environment and resources with other products.					/
	Interoperability	The device and system's two or more products or components can exchange information and use the information that has been exchanged.					/

Maintainability	Modularity	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts.			/	
	Reusability	The device and system asset can be used in multiple systems or in building other assets.				/
	Analyzability	The device and system effectiveness and efficiency with which it is possible to assess the impact on a product or system of an intended change to one or more parts.				/
	Modifiability	The device and system are effectively modified without introducing defects in existing product quality.			/	
	Testability	Test criteria can be established for a system, product, or component and can be performed to determine whether those criteria have been met.				/
Portability	Adaptability	It is adapted for different or evolving hardware, software, or other operational or usage environments				/
	Instability	The device and system can be successfully installed and uninstalled.				/
	Replaceability	The device and system can replace another specified product for the same purpose.		/		

Comment/Suggestions: Applying varnish to the plywood will help it last longer

Software	Average
Functional Suitability:	<u>4.67</u>
Reliability:	<u>4.75</u>
Performance Efficiency:	<u>4.73</u>
Usability:	<u>4.67</u>
Security:	<u>3.4</u>
Compatibility:	<u>5</u>
Maintainability:	<u>4.6</u>
Portability:	<u>4.33</u>
Totality:	<u>4.47</u>

Certified true copy and correct by:


Daniel Christopher G. Gonzales
Signature Over Printed Name of Evaluator

Date: April 25, 2024

Appendix F.3.A: Raw Data Evaluation of Fresh Fish Vendors

Factors and Criteria	1	2	3	4	5	6	7	MEAN
Functional Stability								
Functional Completeness	5	5	5	4	4	4	5	4.57
Functional Correctness	5	5	5	5	4	5	4	4.71
Functional Appropriateness	4	5	5	5	5	5	4	4.71
Subtotal	4.67	5.00	5.00	4.67	4.33	4.67	4.33	4.67
Reliability								
Maturity	4	4	5	4	4	4	4	4.14
Availability	4	5	4	4	5	4	5	4.43
Fault Tolerance	5	5	5	5	4	4	4	4.57
Recoverability	4	4	5	4	4	4	4	4.14
Subtotal	4.25	4.50	4.75	4.25	4.25	4.00	4.25	4.32
Performance Efficiency								
Time Behavior	5	4	5	5	4	5	4	4.57
Resource Utilization	5	4	5	5	5	4	4	4.57
Capacity	5	5	5	5	5	5	4	4.86
Subtotal	5.00	4.33	5.00	5.00	4.67	4.67	4.00	4.67
Usability								
Appropriateness Recognizability	5	5	5	5	5	4	5	4.86
Learnability	4	5	5	5	5	5	5	4.86
Operability	5	4	5	4	5	4	5	4.57
User Error Protection	5	4	4	4	4	4	4	4.14
User Interface Aesthetics	5	5	5	5	4	4	4	4.57
Accessibility	4	5	5	4	4	4	5	4.43
Subtotal	4.67	4.67	4.83	4.50	4.50	4.17	4.67	4.57
Security								
Confidentiality	4	3	4	4	4	4	5	4.00
Integrity	5	4	4	4	4	4	5	4.29
Non-repudiation	4	4	4	5	5	5	4	4.43
Authenticity	5	3	5	4	5	5	4	4.43
Accountability	4	4	5	5	4	4	4	4.29
Subtotal	4.40	3.60	4.40	4.40	4.40	4.40	4.40	4.29
Compatibility								
Co-existence	5	4	5	5	4	5	4	4.57
Interoperability	5	5	4	4	4	5	4	4.43
Subtotal	5.00	4.50	4.50	4.50	4.00	5.00	4.00	4.50
Maintainability								
Modularity	4	5	4	4	5	4	4	4.29
Reusability	5	4	5	5	5	5	5	4.86
Analyzability	4	5	5	4	4	4	4	4.29
Modifiability	5	5	4	4	4	5	4	4.43
Testability	5	4	5	5	4	5	5	4.71
Subtotal	4.60	4.60	4.60	4.40	4.40	4.60	4.40	4.51
Portability								
Adaptability	5	5	5	5	4	4	5	4.71
Installability	5	5	4	4	4	4	4	4.29
Replaceability	4	3	4	4	3	4	3	3.57
Subtotal	4.67	4.33	4.33	4.33	3.67	4.00	4.00	4.19
SOFTWARE EVAL. TOTAL	4.66	4.44	4.68	4.51	4.28	4.44	4.26	4.46

Appendix F.3.B: Filled-out Evaluation Instrument of Fresh Fish Vendors

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Pangalan: MICHAEL AQUINO

Kumpanya: _____

Katungkuluan: _____

Instructions: Please put a check under the corresponding statistical rating

5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability (Kaangkupan sa Paggana)	Functional Completeness (Kumpletong Paggana)	The device and system covers all the specified tasks and user objectives. (Nagagawa nito ang mga gawain at nais ng gumagamit)					/
	Functional Correctness (Wastong Paggana)	The device and system provide correct results with the needed degrees of precision. (Nagbibigay ito ng tamang resulta na kailangan)					/
	Functional Appropriateness (Angkop na Paggana)	The device and system facilitate the accomplishment of specified tasks and objectives (Nagagawa nito ang dapat nitong gawin)				/	
Reliability	Maturity (Kapanahunan)	The device and system meet the need for reliability under regular operation (Reliable ang device sa regular na paggamit)				/	
	Availability (Kakayahang Gumana)	The device and system are designed to perform specified functions efficiently in a over time. (Ito ay gumagana kapag kinakailangan)				/	
	Fault Tolerance (Toleransiya sa Pagkakamali)	The device and system can operate as intended despite hardware/software faults (Gumagana ito kahit may problema sa hardware o software)					/
	Recoverability (Kakayahang Makabawi)	The device and system have the capability to recover the data when encountering errors (Ang aparato at Sistema ay maaaring mabawi ang data na direktaan apektado at muling maitatag ang nais na estado)				/	
Performance Efficiency	Time Behavior (Pag-uugali ng oras)	When performing its functions, the device and systems response processing times, and throughout rates meet the requirements. (Tumutugma ito sa pangangailangan ng user tuwing ginagamit)					/
	Resource Utilization (Pag gamit ng mapagkukunan)	The device and system resources amount and types used when performing functions meet the requirements. (Ang mga kailangang resources nito ay nameet ang mga kinakailangan.)					/
	Capacity (Kapasidad)	The device and system's maximum limits of the product and system parameters meet the requirements. (Natutugunan nito ang kapasidad na kinakailangan)					/
Usability	Appropriateness Recognizability (kaangkupan)	It allow users to recognize if it is appropriate for their needs. (Naangkop ito sa pangangailangan ng gumagamit)					
	Learnability (Kakayahang matuto)	The device and system can be used to achieve the goals of learning to use the product. (Matututunan itong gamitin upang magawa ang dapat gawin)					/
	Operability (Paggamit)	The device and system have the attributes that make it easy to operate and control. (Ang aparato at sistema ay mga katangian na ginagawang mapadali ang pag papatakbo at pag control)					/
	User Error Protection (Proteksyon ng Gagamit sa Error)	The device and system protect the users against making errors. (Pinoprotektahan nito ang user sa paggawa ng malis sa device)					/
	User Interface Aesthetics (Kagandahan ng device)	The device and system enable good and satisfying interaction for the user. (May maganda at nakakaaliw itong gamitin)					/
	Accessibility (Paggamit)	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use. (Magagamit ito ng mga tao para sa dapat paggamitan)					/
	Confidentiality (Pagkukumpidensyal)	The device and system ensure that the data are accessible only to authorized users. (Authorized user lamang ang maaaring gumamit nito)					/

Security	Integrity (Integridad)	The device and system prevent unauthorized access to modify the programs or data. (Ang aparato at Sistema ay pumipigi sa hindi awtorisadong pag access upang baguhin ang mga programa o data)			/
	Non-repudiation (Hindi Pagtanggili)	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later. (Mapapatunayang ginawa ng device ang kanyang function at hindi maitatanggili)			/
	Authenticity (Pagiging Tunay)	A subject or resource's device and system identity can be proved to be the one claimed. (Ito ay kung anong sinasabing kayang gawin nito)			/
	Accountability (Panangutan)	An entity's device and system actions can be traced uniquely to the entity. (Ang aparato at mga pagkilos ng system ng isang entity ay maaaring masubaybayan nang natatangi sa entity)			/
Compatibility	Co-existence (Pagsasama sama)	The device and system perform their functions efficiently while sharing a typical environment and resources with other products. (Maayos gumagana kasabay ng ibang produkto o system)			/
	Interoperability (Kakayahang Mapagsabaya)	The device interacts with other product or system (Maaring itong gamitin kasabay ng ibang system o sa ibang produkto)			/
Maintainability	Modularity (kakayahang mapalitan)	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts. (Wala masyadong epekto ang pagpapalit ng parts)			/
	Reusability (Muling Paggamit)	The device and system asset can be used in multiple systems or in building other assets. (Ito ay maaring gamitin sa ibang Sistema o pagbuo ng iba pang device)			/
	Analyzability (Kakayahang Masuri)	The device and system ability to assess the impact of changes on a product or system of an intended change to one or more parts. (Mapalitan ang parte nito gamit ang ibang bagay para sa kaperhong layunin)			/
	Modifiability (Kakayahang Mabago)	The device and system are effectively modified without introducing defects in existing product quality. (Maaring baguhin nang walang nagiging sira dito)			/
	Testability (Kakayahang Subukan)	Test criteria can be set for a system, product, or component and can be performed to verify whether those criteria have been met. (Maaring i-test upang mapatunayang nakamit nito ang mga criteria)			/
Portability	Adaptability (Kakayahang Umangkop)	It is designed to adapt for changing or evolving hardware, software, and operational or usage environments. (Ito ay iniangkop para sa iba't ibang o umuunlad na hardware, software, o iba pang mga operasyon o paggamit ng kapaligiran)			/
	Installability (Kakayahang Ma-install)	The device and system can be successfully installed and uninstalled. (Ito ay maaring i-install at i-uninstall)			/
	Replaceability (Kakayahang Mapaltan)	The device and system can replace another specified product for the same purpose. (Maaaring palitan ang ibang parte nito para sa kaparehong paggamitan)			/

Comment/Suggestions: _____

Functional Suitability:	Average <u>4.67</u>
Reliability:	<u>4.25</u>
Performance Efficiency:	<u>5</u>
Usability:	<u>4.67</u>
Security:	<u>4.4</u>
Compatibility:	<u>5</u>
Maintainability:	<u>4.6</u>
Portability:	<u>4.67</u>
Totality:	<u>4.66</u>

Lajn
 Certified true copy and correct by:
NICHAEL AQUINO
 Signature Over Printed Name of Evaluator
 Date: _____

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Pangalan: FATIMA DOGT
Kumpanya: _____
Katungkuluan: _____

Instructions: Please put a check under the corresponding statistical rating
5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability (Kaangkupan sa Paggana)	Functional Completeness (Kumpleteong Paggana)	The device and system covers all the specified tasks and user objectives. (Nagagawa nito ang mga gawain at nais ng gumagamit)					/
	Functional Correctness (Wastong Paggana)	The device and system provide correct results with the needed degrees of precision. (Nagbibigay ito ng tamang resulta na kailangan)					/
	Functional Appropriateness (Angkop na Paggana)	The device and system facilitate the accomplishment of specified tasks and objectives (Nagagawa nito ang dapat nitong gawin)					/
Reliability	Maturity (Kapanahunan)	The device and system meet the need for reliability under regular operation (Reliable ang device sa regular na paggamit)					/
	Availability (Kakayahang Gumana)	The device and system are designed to perform specified functions efficiently in a over time. (Ito ay gumagana kapag kinakailangan)					/
	Fault Tolerance (Toleransiya sa Pagkakamali)	The device and system can operate as intended despite hardware/software faults (Gumagana ito kahit may problema sa hardware o software)					/
	Recoverability (Kakayahang Makabawi)	The device and system have the capability to recover the data when encountering errors (Ang aparato at Sistema ay maaaring mabawi ang data na direktan apektado at muling maitatag ang nais na estado)					/
Performance Efficiency	Time Behavior (Pag-uugali ng oras)	When performing its functions, the device and systems response processing times, and throughout rates meet the requirements. (Tumutugma ito sa pangangailangan ng user tuwing ginagamit)					/
	Resource Utilization (Pag gamit ng mapagkukunan)	The device and system resources amount and types used when performing is functions meet the requirements. (Ang mga kailangang resources nito ay nameet ang mga kinakailangan.)					/
	Capacity (Kapasidad)	The device and system's maximum limits of the product and system parameters meet the requirements. (Natutugunan nito ang kapasidad na kinakailangan)					/
Usability	Appropriateness Recognizability (kaangkupan)	It allow users to recognize if it is appropriate for their needs. (Naangkop ito sa pangangailangan ng gumagamit)					/
	Learnability (Kakayahang matuto)	The device and system can be used to achieve the goals of learning to use the product. (Matututunan itong gamitin upang magawa ang dapat gawin)					/
	Operability (Paggamit)	The device and system have the attributes that make li easy to operate and control. (Ang aparato at sistema ay mga katangian na ginagawang mapadali ang pag papatakbo at pag control)					/
	User Error Protection (Protekson ng Gagamit sa Error)	The device and system protect the users against making errors. (Pinoprotektahan nito ang user sa paggawa ng mali sa device)					/
	User Interface Aesthetics (Kagandahan ng device)	The device and system enable good and satisfying interaction for the user. (May maganda at nakakaaliw itong gamitin)					/
	Accessibility (Paggamit)	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use. (Magagamit ito ng mga tao para sa dapat paggamitan)					/
	Confidentiality (Pagkukumpidensyal)	The device and system ensure that the data are accessible only to authorized users. (Authorized user lamang ang maaaring gumamit nito)					/

Security	Integrity (Integridad)	The device and system prevent unauthorized access to modify the programs or data. (Ang aparato at Sistema ay pumipigil sa hindi awtorisadong pag access upang baguhin ang mga programa o data)			/
	Non-repudiation (Hindi Pagtanggi)	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later. (Mapaputunayang ginawa ng device ang kanyang function at hindi maitatanggi)			/
	Authenticity (Pagiging Tunay)	A subject or resource's device and system identity can be proved to be the one claimed. (Ito ay kung anong sinasabing kayang gawin nito)		/	/
	Accountability (Pananagutan)	An entity's device and system actions can be traced uniquely to the entity. (Ang aparato at mga pagkilos ng system ng isang entity ay maaaring masubaybayan nang natatangi sa entity)			/
Compatibility	Co-existence (Pagsasama sama)	The device and system perform their functions efficiently while sharing a typical environment and resources with other products. (Maayos gumagana kasabay ng ibang produkto o system)			/
	Interoperability (Kakayahang Mapagsabay)	The device interacts with other product or system (Maaring itong gamitin kasabay ng ibang system o sa ibang produkto)			/
Maintainability	Modularity (kakayahang mapalitan)	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts. (Wala masyadong epekto ang pagpapalit ng parts)			/
	Reusability (Muling Paggamit)	The device and system asset can be used in multiple systems or in building other assets. (Ito ay maaring gamitin sa ibang Sistema o pagbuo ng iba pang device)			/
	Analyzability (Kakayahang Masuri)	The device and system ability to assess the impact of changes on a product or system of an intended change to one or more parts. (Mapalitan ang parte nito gamit ang ibang bagay para sa kaperhong layunin)			/
	Modifiability (Kakayahang Mabago)	The device and system are effectively modified without introducing defects in existing product quality. (Maaring baguhin nang walang nagiging sira dito)			/
	Testability (Kakayahang Subukan)	Test criteria can be set for a system, product, or component and can be performed to verify whether those criteria have been met. (Maaring i-test upang maputunayang nakamit nito ang mga criteria)			/
Portability	Adaptability (Kakayahang Umangkop)	It is designed to adapt for changing or evolving hardware, software, and operational or usage environments. (Ito ay inilangkop para sa iba't ibang o umunlad na hardware, software, o iba pang mga operasyon o paggamit ng kapaligiran)			/
	Installability (Kakayahang Ma-install)	The device and system can be successfully installed and uninstalled. (Ito ay maaring i-install at i-uninstall)			/
	Replaceability (Kakayahang Mapaltan)	The device and system can replace another specified product for the same purpose. (Maaaring palitan ang ibang parte nito para sa kaparehong paggagamitan)			/

Comment/Suggestions: _____

	Average
Functional Suitability:	5
Reliability:	4.5
Performance Efficiency:	4.33
Usability:	4.62
Security:	3.6
Compatibility:	4.5
Maintainability:	4.6
Portability:	4.33
Totality:	4.44

Certified true copy and correct by:

 Signature Over Printed Name of Evaluator
 Date: _____

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Pangalan: A. LEON G. DE LEON

Kumpanya: _____

Katungkuluan: _____

Instructions: Please put a check under the corresponding statistical rating
5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability (Kaangkupan sa Paggana)	Functional Completeness (Kumpletong Paggana)	The device and system covers all the specified tasks and user objectives. (Nagagawa nito ang mga gawain at nais ng gumagamit)					/
	Functional Correctness (Wastong Paggana)	The device and system provide correct results with the needed degrees of precision. (Nagbibigay ito ng tamang resulta na kailangan)					/
	Functional Appropriateness (Angkop na Paggana)	The device and system facilitate the accomplishment of specified tasks and objectives (Nagagawa nito ang dapat nitong gawin)					/
Reliability	Maturity (Kapanahunan)	The device and system meet the need for reliability under regular operation (Reliable ang device sa regular na paggamit)					/
	Availability (Kakayahang Gumana)	The device and system are designed to perform specified functions efficiently in a over time. (Ito ay gumagana kapag kinakailangan)				/	
	Fault Tolerance (Toleransiya sa Pagkakamali)	The device and system can operate as intended despite hardware/software faults (Gumagana ito kahit may problema sa hardware o software)				/	
	Recoverability (Kakayahang Makabawi)	The device and system have the capability to recover the data when encountering errors (Ang aparato at Sistema ay maaaring mabawi ang data na direktaan apektado at muling maitatag ang nais na estado)					/
Performance Efficiency	Time Behavior (Pag-uugali ng oras)	When performing its functions, the device and systems response processing times, and throughout rates meet the requirements. (Tumutugma ito sa pangangailangan ng user tuwing ginagamit)					/
	Resource Utilization (Pag gamit ng mapagkukunan)	The device and system resources amount and types used when performing is functions meet the requirements. (Ang mga kailangang resources nito ay nameet ang mga kinakailangan.)					/
	Capacity (Kapasidad)	The device and system's maximum limits of the product and system parameters meet the requirements. (Natutugunan nito ang kapasidad na kinakailangan)					/
Usability	Appropriateness Recognizability (kaangkupan)	It allow users to recognize if it is appropriate for their needs. (Naangkop ito sa pangangailangan ng gumagamit)					/
	Learnability (Kakayahang matuto)	The device and system can be used to achieve the goals of learning to use the product. (Matututunan itong gamitin upang magawa ang dapat gawin)					/
	Operability (Paggamit)	The device and system have the attributes that make li easy to operate and control. (Ang aparato at sistema ay mga katangian na ginagawang mapadali ang pag papatakbo at pag control)					/
	User Error Protection (Protekson ng Gagamit sa Error)	The device and system protect the users against making errors. (Pinoprotektahan nito ang user sa paggawa ng mali sa device)				/	
	User Interface Aesthetics (Kagandahan ng device)	The device and system enable good and satisfying interaction for the user. (May maganda at nakakaaliw itong gamitin)					/
	Accessibility (Paggamit)	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use. (Magagamit ito ng mga tao para sa dapat paggamitan)					/
	Confidentiality (Pagkukumpidensyal)	The device and system ensure that the data are accessible only to authorized users. (Authorized user lamang ang maaaring gumamit nito)				/	

Security	Integrity (Integridad)	The device and system prevent unauthorized access to modify the programs or data. (Ang aparato at Sistema ay pumipigi sa hindi awtorisadong pag access upang baguhin ang mga programa o data)			/
	Non-repudiation (Hindi Pagtanggi)	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later. (Mapapatunayang ginawa ng device ang kanyang function at hindi maitatanggi)			/
	Authenticity (Pagiging Tunay)	A subject or resource's device and system identity can be proved to be the one claimed. (Ito ay kung anong sinasabing kayang gawin nito)			/
	Accountability (Panaganagutan)	An entity's device and system actions can be traced uniquely to the entity. (Ang aparato at mga pagkilos ng system ng Isang entity ay maaaring masubaybayan nang natatangi sa entity)			/
Compatibility	Co-existence (Pagsasama sama)	The device and system perform their functions efficiently while sharing a typical environment and resources with other products. (Maayos gumagana kasabay ng ibang produkto o system)			/
	Interoperability (Kakayahang Mapagsabay)	The device interacts wth other product or system (Maaring itong gamitin kasabay ng ibang system o sa ibang produkto)			/
Maintainability	Modularity (kakayahang mapalitan)	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts. (Wala masyadong epekto ang pagpapalit ng parts)			/
	Reusability (Muling Paggamit)	The device and system asset can be used in multiple systems or in building other assets. (Ito ay maaring gamitin sa ibang Sistema o pagbuo ng iba pang device)			/
	Analyzability (Kakayahang Masuri)	The device and system ability to assess the impact of changes on a product or system of an intended change to one or more parts. (Mapalitan ang parte nito gamit ang ibang bagay para sa kaperhong layunin)			/
	Modifiability (Kakayahang Mabago)	The device and system are effectively modified without introducing defects in existing product quality. (Maaring baguhin nang walang nagiging sira dito)			/
	Testability (Kakayahang Subukan)	Test criteria can be set for a system, product, or component and can be performed to verify whether those criteria have been met. (Maaring i-test upang mapatunayang nakamit nito ang mga criteria)			/
Portability	Adaptability (Kakayahang Umangkop)	It is design to adapt for changing or evolving hardware, software, and operational or usage environments. (Ito ay inilangkop para sa iba't ibang o umuunlad na hardware, software, o iba pang mga operasyon o paggamit ng kapaligiran)			/
	Installability (Kakayahang Ma-install)	The device and system can be successfully installed and uninstalled. (Ito ay maaring i-install at i-uninstall)			/
	Replaceability (Kakayahang Mapaltan)	The device and system can replace another specified product for the same purpose. (Maaaring palitan ang ibang parte nito para sa kaparehong paggagamitan)			/

Comment/Suggestions: _____

	Average
Functional Suitability:	<u>5</u>
Reliability:	<u>4.75</u>
Performance Efficiency:	<u>5</u>
Usability:	<u>4.83</u>
Security:	<u>4.4</u>
Compatibility:	<u>4.5</u>
Maintainability:	<u>4.6</u>
Portability:	<u>4.33</u>
Totality:	<u>4.68</u>

M. S.
Certified true copy and correct by:
PAWAT H. G. DE BOON
Signature Over Printed Name of Evaluator
Date: _____

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Pangalan: Teodoris Chaper
Kumpanya: _____
Katungkuluan: _____


Instructions: Please put a check under the corresponding statistical rating
5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability (Kaangkupan sa Paggana)	Functional Completeness (Kumppletong Paggana)	The device and system covers all the specified tasks and user objectives. (Nagagawa nito ang mga gawain at nais ng gumagamit)				/	
	Functional Correctness (Wastong Paggana)	The device and system provide correct results with the needed degrees of precision. (Nagbibigay ito ng tamang resulta na kailangan)				/	
	Functional Appropriateness (Angkop na Paggana)	The device and system facilitate the accomplishment of specified tasks and objectives (Nagagawa nito ang dapat nitong gawin)			/		
Reliability	Maturity (Kapanahunan)	The device and system meet the need for reliability under regular operation (Reliable ang device sa regular na paggamit)			/		
	Availability (Kakayahang Gumana)	The device and system are designed to perform specified functions efficiently in a over time. (Ito ay gumagana kapag kinailangan)			/		
	Fault Tolerance (Toleransiya sa Pagkakamali)	The device and system can operate as intended despite hardware/software faults (Gumagana ito kahit may problema sa hardware o software)				/	
	Recoverability (Kakayahang Makabawi)	The device and system have the capability to recover the data when encountering errors (Ang aparato at Sistema ay maaring mabawi ang data na direktaan apektado at muling maitatag ang nais na estado)			/		
Performance Efficiency	Time Behavior (Pag-uugali ng oras)	When performing its functions, the device and systems response processing times, and throughout rates meet the requirements. (Tumutugma ito sa pangangailangan ng user tuwing ginagamit)				/	
	Resource Utilization (Pag gamit ng mapagkukunan)	The device and system resources amount and types used when performing its functions meet the requirements. (Ang mga kailangang resources nito ay nameet ang mga kinailangan.)				/	
	Capacity (Kapasidad)	The device and system's maximum limits of the product and system parameters meet the requirements. (Natutugunan nito ang kapasidad na kinailangan)				/	
Usability	Appropriateness Recognizability (kaangkupan)	It allow users to recognize if it is appropriate for their needs. (Naangkop ito sa pangangailangan ng gumagamit)				/	
	Learnability (Kakayahang matuto)	The device and system can be used to achieve the goals of learning to use the product. (Matututunan itong gamitin upang magawa ang dapat gawin)				/	
	Operability (Paggamit)	The device and system have the attributes that make it easy to operate and control. (Ang aparato at sistema ay mga katangian na ginagawang mapadali ang pag papatakbo at pag control)				/	
	User Error Protection (Protekson ng Gagamit sa Error)	The device and system protect the users against making errors. (Pinoprotektahan nito ang user sa paggawa ng mali sa device)				/	
	User Interface Aesthetics (Kagandahan ng device)	The device and system enable good and satisfying interaction for the user. (May maganda at nakakaaliw itong gamitin)				/	
	Accessibility (Paggamit)	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use. (Magagamit ito ng mga tao para sa dapat paggamitan)				/	
	Confidentiality (Pagkukumpidensyal)	The device and system ensure that the data are accessible only to authorized users. (Authorized user lamang ang maaring gumamit nito)				/	

Security	Integrity (Integridad)	The device and system prevent unauthorized access to modify the programs or data. (Ang aparato at Sistema ay pumipigil sa hindi awtorisadong pag access upang baguhin ang mga programa o data)	/		
	Non-repudiation (Hindi Pagtanggi)	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later. (Mapapatunayang ginawa ng device ang kanyang function at hindi maitatanggi)		/	
	Authenticity (Paging Tunay)	A subject or resource's device and system identity can be proved to be the one claimed. (Ito ay kung anong sinasabing kayang gawin nito)		/	
	Accountability (Panagutan)	An entity's device and system actions can be traced uniquely to the entity. (Ang aparato at mga pagkilos ng system ng Isang entity ay maaaring masubaybayan nang natatangi sa entity)			/
Compatibility	Co-existence (Pagsasama sama)	The device and system perform their functions efficiently while sharing a typical environment and resources with other products. (Maayos gumagana kasabay ng ibang produkto o system)		/	
	Interoperability (Kakayahang Mapagsabay)	The device interacts with other product or system (Maaring itong gamitin kasabay ng ibang system o sa ibang produkto)		/	
Maintainability	Modularity (kakayahang mapalitan)	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts. (Wala masyadong epekto ang pagpapalit ng parts)		/	
	Reusability (Muling Paggamit)	The device and system asset can be used in multiple systems or in building other assets. (Ito ay maaring gamitin sa ibang Sistema o pagbuo ng iba pang device)			/
	Analyzability (Kakayahang Masuri)	The device and system ability to assess the impact of changes on a product or system of an intended change to one or more parts. (Mapalitan ang parte nito gamit ang ibang bagay para sa kaperhong layunin)		/	
	Modifiability (Kakayahang Mabago)	The device and system are effectively modified without introducing defects in existing product quality. (Maaring baguhin nang walang nagiging sira dito)		/	
	Testability (Kakayahang Subukan)	Test criteria can be set for a system, product, or component and can be performed to verify whether those criteria have been met. (Maaring i-test upang mapatunayang nakamit nito ang mga criteria)			/
Portability	Adaptability (Kakayahang Umangkop)	It is design to adapt for changing or evolving hardware, software, and operational or usage environments. (Ito ay iniangkop para sa iba't ibang o umuuunlad na hardware, software, o iba pang mga operasyon o paggamit ng kapaligiran)			/
	Installability (Kakayahang Ma-install)	The device and system can be successfully installed and uninstalled. (Ito ay maaring i-install at i-uninstall)			/
	Replaceability (Kakayahang Mapaltan)	The device and system can replace another specified product for the same purpose. (Maaring palitan ang ibang parte nito para sa kaparehong paggagamitan)			/

Comment/Suggestions: _____

Functional Suitability:	Average <u>4.67</u>
Reliability:	<u>4.25</u>
Performance Efficiency:	<u>5</u>
Usability:	<u>4.5</u>
Security:	<u>4.4</u>
Compatibility:	<u>4.5</u>
Maintainability:	<u>4.4</u>
Portability:	<u>4.33</u>
Totality:	<u>4.51</u>

Certified true copy and correct by:

 Signature Over Printed Name of Evaluator
 Date: _____

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Pangalan: Jomar Centeno
Kumpanya: _____
Katungkuluan: _____

Instructions: Please put a check under the corresponding statistical rating
5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability (Kaangkupan sa Paggana)	Functional Completeness (Kumpletong Paggana)	The device and system covers all the specified tasks and user objectives. (Nagagawa nito ang mga gawain at nais ng gumagamit)				✓	
	Functional Correctness (Wastong Paggana)	The device and system provide correct results with the needed degrees of precision. (Nagbibigay ito ng tamang resulta na kailangan)				✓	
	Functional Appropriateness (Angkop na Paggana)	The device and system facilitate the accomplishment of specified tasks and objectives (Nagagawa nito ang dapat nitong gawin)				✓	
Reliability	Maturity (Kapanahunan)	The device and system meet the need for reliability under regular operation (Reliable ang device sa regular na paggamit)				✓	
	Availability (Kakayahang Gumana)	The device and system are designed to perform specified functions efficiently in a over time. (Ito ay gumagana kapag kinakailangan)				✓	
	Fault Tolerance (Toleransiya sa Pagkakamali)	The device and system can operate as intended despite hardware/software faults (Gumagana ito kahit may problema sa hardware o software)				✓	
	Recoverability (Kakayahang Makabawi)	The device and system have the capability to recover the data when encountering errors (Ang aparato at Sistema ay maaaring mabawi ang data na direktaan apektado at muling maitatag ang nais na estado)				✓	
Performance Efficiency	Time Behavior (Pag-ugali ng oras)	When performing its functions, the device and systems response processing times, and throughout rates meet the requirements. (Tumutugma ito sa pangangailangan ng user tuwing ginagamit)				✓	
	Resource Utilization (Pag gamit ng mapagkukunan)	The device and system resources amount and types used when performing is functions meet the requirements. (Ang mga kailangang resources nito ay nameet ang mga kinakailangan.)				✓	
	Capacity (Kapasidad)	The device and system's maximum limits of the product and system parameters meet the requirements. (Natutugunan nito ang kapasidad na kinakailangan)				✓	
Usability	Appropriateness Recognizability (kaangkupan)	It allow users to recognize if it is appropriate for their needs. (Naangkop ito sa pangangailangan ng gumagamit)				✓	
	Learnability (Kakayahang matuto)	The device and system can be used to achieve the goals of learning to use the product. (Matututunan itong gamitin upang magawa ang dapat gawin)				✓	
	Operability (Paggamit)	The device and system have the attributes that make it easy to operate and control. (Ang aparato at sistema ay mga katangian na ginagawang mapadali ang pag papatakbo at pag control)				✓	
	User Error Protection (Proteksyon ng Gagamit sa Error)	The device and system protect the users against making errors. (Pinoprotektahan nito ang user sa paggawa ng mali sa device)				✓	
	User Interface Aesthetics (Kagandahan ng device)	The device and system enable good and satisfying interaction for the user. (May maganda at nakakaaliw itong gamitin)				✓	
	Accessibility (Paggamit)	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use. (Magagamit ito ng mga tao para sa dapat paggamitan)				✓	
	Confidentiality (Pagkukumpidensyal)	The device and system ensure that the data are accessible only to authorized users. (Authorized user lamang ang maaaring gumamit nito)				✓	

Security	Integrity (Integridad)	The device and system prevent unauthorized access to modify the programs or data. (Ang aparato at Sistema ay pumipigil sa hindi awtorisadong pag access upang baguhin ang mga programa o data)				✓
	Non-repudiation (Hindi Pagtanggi)	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later. (Mapapatunayang ginawa ng device ang kanyang function at hindi maitatanggi)				✓
	Authenticity (Paging Tunay)	A subject or resource's device and system identity can be proved to be the one claimed. (Ito ay kung anong sinasabing kayang gawin nito)				✓
	Accountability (Pananagutan)	An entity's device and system actions can be traced uniquely to the entity. (Ang aparato at mga pagkilos ng system ng isang entity ay maaaring masubaybayan nang natatangi sa entity)				✓
Compatibility	Co-existence (Pagsasama sama)	The device and system perform their functions efficiently while sharing a typical environment and resources with other products. (Maayos gumagana kasabay ng ibang produkto o system)				✓
	Interoperability (Kakayahang Mapagsabay)	The device interacts with other product or system (Maaring itong gamitin kasabay ng ibang system o sa ibang produkto)				✓
Maintainability	Modularity (kakayahang mapalitan)	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts. (Wala masyadong epekto ang pagpapalit ng parts)				✓
	Reusability (Muling Paggamit)	The device and system asset can be used in multiple systems or in building other assets. (Ito ay maaring gamitin sa ibang Sistema o pagbuo ng iba pang device)				✓
	Analyzability (Kakayahang Masuri)	The device and system ability to assess the impact of changes on a product or system of an intended change to one or more parts. (Mapalitan ang parte nito gamit ang ibang bagay para sa kaperhong layunin)				✓
	Modifiability (Kakayahang Mabago)	The device and system are effectively modified without introducing defects in existing product quality. (Maaring baguhin nang walang nagiging sira dito)				✓
	Testability (Kakayahang Subukan)	Test criteria can be set for a system, product, or component and can be performed to verify whether those criteria have been met. (Maaring i-test upang mapatunayang nakamit nito ang mga criteria)				✓
Portability	Adaptability (Kakayahang Umangkop)	It is designed to adapt for changing or evolving hardware, software, and operational or usage environments. (Ito ay iniangkop para sa iba't ibang o umuunlad na hardware, software, o iba pang mga operasyon o paggamit ng kapaligiran)				✓
	Installability (Kakayahang Ma-install)	The device and system can be successfully installed and uninstalled. (Ito ay maaring I install at i-uninstall)				✓
	Replaceability (Kakayahang Mapaltan)	The device and system can replace another specified product for the same purpose. (Maaring palitan ang ibang parte nito para sa kaparehong paggagamitan)				✓

Comment/Suggestions: _____

Functional Suitability:	Average <u>4.33</u>
Reliability:	<u>4.25</u>
Performance Efficiency:	<u>4.67</u>
Usability:	<u>4.5</u>
Security:	<u>4.4</u>
Compatibility:	<u>4</u>
Maintainability:	<u>4.4</u>
Portability:	<u>3.67</u>

Totality: A. 28

Certified true copy and correct by:

 Signature Over Printed Name of Evaluator
 Date: _____

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Pangalan: Linda Fajardo
Kumpanya: _____
Katungkulhan: _____

Instructions: Please put a check under the corresponding statistical rating


5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability (Kaangkupan sa Paggana)	Functional Completeness (Kumpletong Paggana)	The device and system covers all the specified tasks and user objectives. (Nagagawa nito ang mga gawain at nais ng gumagamit)					✓
	Functional Correctness (Wastong Paggana)	The device and system provide correct results with the needed degrees of precision. (Nagbibigay ito ng tamang resulta na kailangan)					✓
	Functional Appropriateness (Angkop na Paggana)	The device and system facilitate the accomplishment of specified tasks and objectives (Nagagawa nito ang dapat nitong gawin)					✓
Reliability	Maturity (Kapanahunan)	The device and system meet the need for reliability under regular operation (Reliable ang device sa regular na paggamit)					✓
	Availability (Kakayahang Gumana)	The device and system are designed to perform specified functions efficiently in a over time. (Ito ay gumagana kapag kinakailangan)					✓
	Fault Tolerance (Toleransiya sa Pagkakamali)	The device and system can operate as intended despite hardware/software faults (Gumagana ito kahit may problema sa hardware o software)					✓
	Recoverability (Kakayahang Makabawi)	The device and system have the capability to recover the data when encountering errors (Ang aparato at Sistema ay maaaring mabawi ang data na direktan apektado at muling maitatag ang nais na estado)					✓
Performance Efficiency	Time Behavior (Pag-uugali ng oras)	When performing its functions, the device and systems response processing times, and throughout rates meet the requirements. (Tumutugma ito sa pangangailangan ng user tuwing ginagamit)					✓
	Resource Utilization (Pag gamit ng mapagkukunan)	The device and system resources amount and types used when performing its functions meet the requirements. (Ang mga kailangang resources nito ay nameet ang mga kinakailangan.)					✓
	Capacity (Kapasidad)	The device and system's maximum limits of the product and system parameters meet the requirements. (Natutugunan nito ang kapasidad na kinakailangan)					✓
Usability	Appropriateness (kaangkupan)	It allow users to recognize if it is appropriate for their needs. (Naangkop ito sa pangangailangan ng gumagamit)					✓
	Learnability (Kakayahang matuto)	The device and system can be used to achieve the goals of learning to use the product. (Matututunan itong gamitin upang magawa ang dapat gawin)					✓
	Operability (Paggamit)	The device and system have the attributes that make it easy to operate and control. (Ang aparato at sistema ay mga katangian na ginagawang mapadali ang pag papatakbo at pag control)					✓
	User Error Protection (Proteksyon ng Gagamit sa Error)	The device and system protect the users against making errors. (Pinoprotektahan nito ang user sa paggawa ng mali sa device)					✓
	User Interface Aesthetics (Kagandahan ng device)	The device and system enable good and satisfying interaction for the user. (May maganda at nakakaaliw itong gamitin)					✓
	Accessibility (Paggamit)	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use. (Magagamit ito ng mga tao para sa dapat paggamitan)					✓
	Confidentiality (Pagkukumpidensyal)	The device and system ensure that the data are accessible only to authorized users. (Authorized user lamang ang maaaring gumamit nito)					✓

Security	Integrity (Integridad)	The device and system prevent unauthorized access to modify the programs or data. (Ang aparato at Sistema ay pumipigi sa hindi awtorisadong pag access upang baguhin ang mga programa o data)				✓
	Non-repudiation (Hindi Pagtanggi)	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later. (Mapapatunayang ginawa ng device ang kanyang function at hindi maitatanggi)				✓
	Authenticity (Pagiging Tunay)	A subject or resource's device and system identity can be proved to be the one claimed. (Ito ay kung anong sinasabing kayang gawin nito)				✓
	Accountability (Pananagutan)	An entity's device and system actions can be traced uniquely to the entity. (Ang aparato at mga pagkilos ng system ng isang entity ay maaaring masubaybayan nang natatangi sa entity)				✓
Compatibility	Co-existence (Pagsasama sama)	The device and system perform their functions efficiently while sharing a typical environment and resources with other products. (Maayos gumagana kasabay ng ibang produkto o system)				✓
	Interoperability (Kakayahang Mapagsabay)	The device interacts with other product or system (Maaring itong gamitin kasabay ng ibang system o sa ibang produkto)				✓
Maintainability	Modularity (kakayahang mapalitan)	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts. (Wala masyadong epekto ang pagpapalit ng parts)				✓
	Reusability (Muling Paggamit)	The device and system asset can be used in multiple systems or in building other assets. (Ito ay maaring gamitin sa ibang Sistema o pagbuo ng iba pang device)				✓
	Analyzability (Kakayahang Masuri)	The device and system ability to assess the impact of changes on a product or system of an intended change to one or more parts. (Mapalitan ang parte nito gamit ang ibang bagay para sa kaperhong layunin)				✓
	Modifiability (Kakayahang Mabago)	The device and system are effectively modified without introducing defects in existing product quality. (Maaring baguhin nang walang nagiging sira dito)				✓
	Testability (Kakayahang Subukan)	Test criteria can be set for a system, product, or component and can be performed to verify whether those criteria have been met. (Maaring i-test upang mapatunayang nakamit nito ang mga criteria)				✓
Portability	Adaptability (Kakayahang Umgangkop)	It is designed to adapt for changing or evolving hardware, software, and operational or usage environments. (Ito ay iniangkop para sa iba't ibang o umunlad na hardware, software, o iba pang mga operasyon o paggamit ng kapaligiran)				✓
	Installability (Kakayahang Ma-install)	The device and system can be successfully installed and uninstalled. (Ito ay maaring I install at I-uninstall)				✓
	Replaceability (Kakayahang Mapaltan)	The device and system can replace another specified product for the same purpose. (Maaaring palitan ang ibang parte nito para sa kaparehong paggagamitan)				✓

Comment/Suggestions: _____

Functional Suitability:	Average <u>4.67</u>
Reliability:	<u>4</u>
Performance Efficiency:	<u>4.67</u>
Usability:	<u>4.17</u>
Security:	<u>4.4</u>
Compatibility:	<u>5</u>
Maintainability:	<u>4.6</u>
Portability:	<u>4</u>
Totality:	<u>4.44</u>

Certified true copy and correct by:

 Signature Over Printed Name of Evaluator
 Date: _____

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Pangalan: EFRAYN MIRAMAN
Kumpanya: _____
Katungkuluan: _____

Instructions: Please put a check under the corresponding statistical rating
5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability (Kaangkupan sa Paggana)	Functional Completeness (Kumpletong Paggana)	The device and system covers all the specified tasks and user objectives. (Nagagawa nito ang mga gawain at nais ng gumagamit)					/
	Functional Correctness (Wastong Paggana)	The device and system provide correct results with the needed degrees of precision. (Nagbibigay ito ng tamang resulta na kailangan)				/	/
	Functional Appropriateness (Angkop na Paggana)	The device and system facilitate the accomplishment of specified tasks and objectives (Nagagawa nito ang dapat nitong gawin)			/		/
Reliability	Maturity (Kapanahunan)	The device and system meet the need for reliability under regular operation (Reliable ang device sa regular na paggamit)			/		/
	Availability (Kakayahang Gumana)	The device and system are designed to perform specified functions efficiently in a over time. (Ito ay gumagana kapag kinakailangan)				/	/
	Fault Tolerance (Toleransiya sa Pagkakamali)	The device and system can operate as intended despite hardware/software faults (Gumagana ito kahit may problema sa hardware o software)			/		/
	Recoverability (Kakayahang Makabawi)	The device and system have the capability to recover the data when encountering errors (Ang aparato at Sistema ay maaaring mabawi ang data na direktan apektado at muling maitatag ang nais na estado)			/		/
Performance Efficiency	Time Behavior (Pag-uugali ng oras)	When performing its functions, the device and systems response processing times, and throughout rates meet the requirements. (Tumutugma ito sa pangangailangan ng user tuwing ginagamit)			/		/
	Resource Utilization (Pag gamit ng mapagkukunan)	The device and system resources amount and types used when performing is functions meet the requirements. (Ang mga kailangang resources nito ay nameet ang mga kinakailangan.)			/		/
	Capacity (Kapasidad)	The device and system's maximum limits of the product and system parameters meet the requirements. (Natutugunan nito ang kapasidad na kinakailangan)			/		/
Usability	Appropriateness Recognizability (kaangkupan)	It allow users to recognize if it is appropriate for their needs. (Naangkop ito sa pangangailangan ng gumagamit)					/
	Learnability (Kakayahang matuto)	The device and system can be used to achieve the goals of learning to use the product. (Matututunan itong gamitin upang magawa ang dapat gawin)					/
	Operability (Paggamit)	The device and system have the attributes that make li easy to operate and control. (Ang aparato at sistema ay mga katangian na ginagawang mapadali ang pag papatakbo at pag control)					/
	User Error Protection (Protekson ng Gagamit sa Error)	The device and system protect the users against making errors. (Pinoprotektahan nito ang user sa paggawa ng mali sa device)				/	/
	User Interface Aesthetics (Kagandahan ng device)	The device and system enable good and satisfying interaction for the user. (May maganda at nakakaaliw itong gamitin)				/	/
	Accessibility (Paggamit)	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use. (Magagamit ito ng mga tao para sa dapat paggamitan)					/

Security	Integrity (Integridad)	The device and system prevent unauthorized access to modify the programs or data. (Ang aparato at Sistema ay pumpigpi sa hindi awtorisadong pag access upang baguhin ang mga programa o data)				/
	Non-repudiation (Hindi Pagtanggili)	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later. (Mapapatunayang ginawa ng device ang kanyang function at hindi maitatanggili)				/
	Authenticity (Paging Tunay)	A subject or resource's device and system identity can be proved to be the one claimed. (Ito ay kung anong sinasabing kayang gawin nito)			/	
	Accountability (Pananagutan)	An entity's device and system actions can be traced uniquely to the entity. (Ang aparato at mga pagkilos ng system ng isang entity ay maaaring masubaybayan nang natatangi sa entity)			/	
Compatibility	Co-existence (Pagsasama sama)	The device and system perform their functions efficiently while sharing a typical environment and resources with other products. (Maayos gumagana kasabay ng ibang produkto o system)			/	
	Interoperability (Kakayahang Mapagsabay)	The device interacts with other product or system (Maaring itong gamitin kasabay ng ibang system o sa ibang produkto)			/	
Maintainability	Modularity (kakayahang mapalitan)	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts. (Wala masyadong epekto ang pagpapalit ng parts)			/	
	Reusability (Muling Paggamit)	The device and system asset can be used in multiple systems or in building other assets. (Ito ay maaring gamitin sa ibang Sistema o pagbuo ng iba pang device)			/	
	Analyzability (Kakayahang Masuri)	The device and system ability to assess the impact of changes on a product or system of an intended change to one or more parts. (Mapalitan ang parte nito gamit ang ibang bagay para sa kaperhong layunin)			/	
	Modifiability (Kakayahang Mabago)	The device and system are effectively modified without introducing defects in existing product quality. (Maaring baguhin nang walang nagiging sira dito)			/	
	Testability (Kakayahang Subukan)	Test criteria can be set for a system, product, or component and can be performed to verify whether those criteria have been met. (Maaring i-test upang mapatunayang nakamit nito ang mga criteria)			/	
Portability	Adaptability (Kakayahang Umangkop)	It is design to adapt for changing or evolving hardware, software, and operational or usage environments. (Ito ay iniangkop para sa iba't ibang o umuunlad na hardware, software, o iba pang mga operasyon o paggamit ng kapaligiran)			/	
	Installability (Kakayahang Ma-install)	The device and system can be successfully installed and uninstalled. (Ito ay maaring i-install at i-uninstall)			/	
	Replaceability (Kakayahang Mapaltan)	The device and system can replace another specified product for the same purpose. (Maaaring palitan ang ibang parte nito para sa kaparehong paggaganitan)			/	

Comment/Suggestions: _____

Functional Suitability:	Average <u>4.33</u>
Reliability:	<u>4.75</u>
Performance Efficiency:	<u>4.70</u>
Usability:	<u>4.72</u>
Security:	<u>4.90</u>
Compatibility:	<u>4.50</u>
Maintainability:	<u>4.49</u>
Portability:	<u>4.00</u>
Totality:	<u>4.26</u>

Certified to copy and correct by:


EFRAIN V. MAMPIN

Signature Over Printed Name of Evaluator

Date: _____

Appendix F.4.A: Raw Data Evaluation of Dried Fish Vendors

Factors and Criteria	1	2	3	MEAN
Functional Stability				
Functional Completeness	5	5	5	5.00
Functional Correctness	5	4	5	4.67
Functional Appropriateness	5	4	5	4.67
Subtotal	5.00	4.33	5.00	4.78
Reliability				
Maturity	4	5	5	4.67
Availability	4	5	4	4.33
Fault Tolerance	5	4	5	4.67
Recoverability	5	4	4	4.33
Subtotal	4.50	4.50	4.50	4.50
Performance Efficiency				
Time Behavior	5	4	5	4.67
Resource Utilization	4	5	5	4.67
Capacity	5	5	5	5.00
Subtotal	4.67	4.67	5.00	4.78
Usability				
Appropriateness Recognizability	4	5	5	4.67
Learnability	5	5	5	5.00
Operability	5	5	4	4.67
User Error Protection	5	4	5	4.67
User Interface Aesthetics	5	4	5	4.67
Accessibility	3	5	4	4.00
Subtotal	4.50	4.67	4.67	4.61
Security				
Confidentiality	4	5	4	4.33
Integrity	4	4	4	4.00
Non-repudiation	5	3	4	4.00
Authenticity	5	4	5	4.67
Accountability	4	4	5	4.33
Subtotal	4.40	4.00	4.40	4.27
Compatibility				
Co-existence	4	5	5	4.67
Interoperability	5	4	4	4.33
Subtotal	4.50	4.50	4.50	4.50
Maintainability				
Modularity	5	4	4	4.33
Reusability	5	5	5	5.00
Analyzability	4	5	5	4.67
Modifiability	5	4	4	4.33
Testability	5	5	5	5.00
Subtotal	4.80	4.60	4.60	4.67
Portability				
Adaptability	4	5	5	4.67
Installability	4	4	4	4.00
Replaceability	3	3	4	3.33
Subtotal	3.67	4.00	4.33	4.00
SOFTWARE EVAL. TOTAL	4.50	4.41	4.63	4.51

Appendix F.3.B: Filled-out Evaluation Instrument of Dried Fish Vendors

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Pangalan: BABY MENDIZA
Kumpanya: _____
Katungkuluan: _____

Instructions: Please put a check under the corresponding statistical rating

5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability (Kaangkupan sa Paggana)	Functional Completeness (Kumpletong Paggana)	The device and system covers all the specified tasks and user objectives. (Nagagawa nito ang mga gawain at nais ng gumagamit)					/
	Functional Correctness (Wastong Paggana)	The device and system provide correct results with the needed degrees of precision. (Nagbibigay ito ng tamang resulta na kailangan)					/
	Functional Appropriateness (Angkop na Paggana)	The device and system facilitate the accomplishment of specified tasks and objectives (Nagagawa nito ang dapat nitong gawin)					/
Reliability	Maturity (Kapanahunan)	The device and system meet the need for reliability under regular operation (Reliable ang device sa regular na paggamit)				/	
	Availability (Kakayahang Gumana)	The device and system are designed to perform specified functions efficiently in a over time. (Ito ay gumagana kapag kinakailangan)			/		
	Fault Tolerance (Toleransiya sa Pagkakamali)	The device and system can operate as intended despite hardware/software faults (Gumagana ito kahit may problema sa hardware o software)				/	
	Recoverability (Kakayahang Makabawi)	The device and system have the capability to recover the data when encountering errors (Ang aparato at Sistema ay maaaring mabawi ang data na direktaan apektado at muling maitatag ang nais na estado)				/	
Performance Efficiency	Time Behavior (Pag-uugali ng oras)	When performing its functions, the device and systems response processing times, and throughout rates meet the requirements. (Tumutugma ito sa pangangailangan ng user tuwing ginagamit)				/	
	Resource Utilization (Pag gamit ng mapagkukunan)	The device and system resources amount and types used when performing its functions meet the requirements. (Ang mga kailangang resources nito ay nameet ang mga kinakailangan.)				/	
	Capacity (Kapasidad)	The device and system's maximum limits of the product and system parameters meet the requirements. (Natutugunan nito ang kapasidad na kinakailangan)				/	
Usability	Appropriateness Recognizability (kaangkupan)	It allow users to recognize if it is appropriate for their needs. (Naangkop ito sa pangangailangan ng gumagamit)				/	
	Learnability (Kakayahang matuto)	The device and system can be used to achieve the goals of learning to use the product. (Matututunan itong gamitin upang magawa ang dapat gawin)				/	
	Operability (Paggamit)	The device and system have the attributes that make it easy to operate and control. (Ang aparato at sistema ay mga katangian na ginagawang mapadali ang pag papatakbo at pag control)				/	
	User Error Protection (Proteksyon ng Gagamit sa Error)	The device and system protect the users against making errors. (Pinoprotektahan nito ang user sa paggawa ng mali sa device)				/	
	User Interface Aesthetics (Kagandahan ng device)	The device and system enable good and satisfying interaction for the user. (May maganda at nakakaaliw itong gamitin)				/	
	Accessibility (Paggamit)	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use. (Magagamit ito ng mga tao para sa dapat paggamitan)			/		
	Confidentiality (Pagkukumpidensyal)	The device and system ensure that the data are accessible only to authorized users. (Authorized user lamang ang maaaring gumamit nito)				/	

Security	Integrity (Integridad)	The device and system prevent unauthorized access to modify the programs or data. (Ang aparato at Sistema ay pumipigi sa hindi awtorisadong pag access upang baguhin ang mga programa o data)			/
	Non-repudiation (Hindi Pagtanggi)	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later. (Mapapatunayang ginawa ng device ang kanyang function at hindi maitatanggi)			/
	Authenticity (Pagiging Tunay)	A subject or resource's device and system identity can be proved to be the one claimed. (Ito ay kung anong sinasabing kayang gawin nito)			/
	Accountability (Pananagutan)	An entity's device and system actions can be traced uniquely to the entity. (Ang aparato at mga pagkilos ng system ng isang entity ay maaaring masubaybayan nang natatangi sa entity)			/
Compatibility	Co-existence (Pagsasama sama)	The device and system perform their functions efficiently while sharing a typical environment and resources with other products. (Maayos gumagana kasabay ng ibang produkto o system)			/
	Interoperability (Kakayahang Mapagsabay)	The device interacts wth other product or system (Maaring itong gamitin kasabay ng ibang system o sa ibang produkto)			/
Maintainability	Modularity (kakayahang mapalitan)	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts. (Wala masyadong epekto ang pagpapalit ng parts)			/
	Reusability (Muling Paggamit)	The device and system asset can be used in multiple systems or in building other assets. (Ito ay maaring gamitin sa ibang Sistema o pagbuo ng iba pang device)			/
	Analyzability (Kakayahang Masuri)	The device and system ability to assess the impact of changes on a product or system of an intended change to one or more parts. (Mapalitan ang parte nito gamit ang ibang bagay para sa kaperhong layunin)			/
	Modifiability (Kakayahang Mabago)	The device and system are effectively modified without introducing defects in existing product quality. (Maaring baguhin nang walang nagiging sira dito)			/
	Testability (Kakayahang Subukan)	Test criteria can be set for a system, product, or component and can be performed to verify whether those criteria have been met. (Maaring i-test upang mapatunayang nakamit nito ang mga criteria)			/
Portability	Adaptability (Kakayahang Umangkop)	It is design to adapt for changing or evolving hardware, software, and operational or usage environments. (Ito ay iniangkop para sa iba't ibang o umuunlad na hardware, software, o iba pang mga operasyon o paggamit ng kapaligiran)			/
	Installability (Kakayahang Ma-install)	The device and system can be successfully Installed and uninstalled. (Ito ay maaring i-install at i-uninstall)			/
	Replaceability (Kakayahang Mapaltan)	The device and system can replace another specified product for the same purpose. (Maaaring palitan ang ibang parte nito para sa kaparehong paggagamitan)			/

Comment/Suggestions: _____

	Average
Functional Suitability:	<u>5</u>
Reliability:	<u>4.5</u>
Performance Efficiency:	<u>4.67</u>
Usability:	<u>4.5</u>
Security:	<u>4.4</u>
Compatibility:	<u>4.5</u>
Maintainability:	<u>4.8</u>
Portability:	<u>3.67</u>
Totality:	<u>4.5</u>

Certified true copy and correct by:

Signature Over Printed Name of Evaluator

Date: _____

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Pangalan: Ana Christine Santos
Kumpanya: _____
Katungkuluan: _____

Instructions: Please put a check under the corresponding statistical rating


5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability (Kaangkupan sa Paggana)	Functional Completeness (Kumpletong Paggana)	The device and system covers all the specified tasks and user objectives. (Nagagawa nito ang mga gawain at nais ng gumagamit)					✓
	Functional Correctness (Wastong Paggana)	The device and system provide correct results with the needed degrees of precision. (Nagbibigay ito ng tamang resulta na kailangan)					✓
	Functional Appropriateness (Angkop na Paggana)	The device and system facilitate the accomplishment of specified tasks and objectives (Nagagawa nito ang dapat nitong gawin)					✓
Reliability	Maturity (Kapanahunan)	The device and system meet the need for reliability under regular operation (Reliable ang device sa regular na paggamit)					✓
	Availability (Kakayahang Gumana)	The device and system are designed to perform specified functions efficiently in a over time. (Ito ay gumagana kapag kinakailangan)					✓
	Fault Tolerance (Toleransiya sa Pagkakamali)	The device and system can operate as intended despite hardware/software faults (Gumagana ito kahit may problema sa hardware o software)					✓
	Recoverability (Kakayahang Makabawi)	The device and system have the capability to recover the data when encountering errors (Ang aparato at Sistema ay maaaring mabawi ang data na direktaan apektado at muling maitatag ang nais na estado)					✓
Performance Efficiency	Time Behavior (Pag-uugali ng oras)	When performing its functions, the device and systems response processing times, and throughout rates meet the requirements. (Tumutugma ito sa pangangailangan ng user tuwing ginagamit)					✓
	Resource Utilization (Pag gamit ng mapagkukunan)	The device and system resources amount and types used when performing is functions meet the requirements. (Ang mga kailangang resources nito ay nameet ang mga kinakailangan.)					✓
	Capacity (Kapasidad)	The device and system's maximum limits of the product and system parameters meet the requirements. (Natutugunan nito ang kapasidad na kinakailangan)					✓
Usability	Appropriateness Recognizability (kaangkupan)	It allow users to recognize if it is appropriate for their needs. (Naangkop ito sa pangangailangan ng gumagamit)					✓
	Learnability (Kakayahang matuto)	The device and system can be used to achieve the goals of learning to use the product. (Matututunan itong gamitin upang magawa ang dapat gawin)					✓
	Operability (Paggamit)	The device and system have the attributes that make li easy to operate and control. (Ang aparato at sistema ay mga katangian na ginagawang mapadali ang pag papatakbo at pag control)					✓
	User Error Protection (Protekson ng Gagamit sa Error)	The device and system protect the users against making errors. (Pinoprotektahan nito ang user sa paggawa ng malis sa device)					✓
	User Interface Aesthetics (Kagandahan ng device)	The device and system enable good and satisfying interaction for the user. (May maganda at nakakaaliw itong gamitin)					✓
	Accessibility (Paggamit)	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use. (Magagamit ito ng mga tao para sa dapat paggamitan)					✓

Security	Confidentiality (Pagkukimpidensyal)	The device and system ensure that the data are accessible only to authorized users. (Authorized user lamang ang maaaring gumamit nito)				✓
	Integrity (Integridad)	The device and system prevent unauthorized access to modify the programs or data. (Ang aparato at Sistema ay pumipig sa hindi awtorisadong pag access upang baguhin ang mga programa o data)			✓	
	Non-repudiation (Hindi Pagtanggili)	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later. (Mapapatunayang ginawa ng device ang kanyang function at hindi maitatanggili)		✓		
	Authenticity (Paging Tunay)	A subject or resource's device and system identity can be proved to be the one claimed. (Ito ay kung anong sinasabing kayang gawin nito)			✓	
	Accountability (Panaganutan)	An entity's device and system actions can be traced uniquely to the entity. (Ang aparato at mga pagkilos ng system ng isang entity ay maaaring masubaybayan nang natatangi sa entity)			✓	
Compatibility	Co-existence (Pagsasama sama)	The device and system perform their functions efficiently while sharing a typical environment and resources with other products. (Maayos gumagana kasabay ng ibang produkto o system)			✓	
	Interoperability (Kakayahang Mapagsabaya)	The device interacts wth other product or system (Maaring itong gamitin kasabay ng ibang system o sa ibang produkto)		✓		
Maintainability	Modularity (kakayahang mapalitan)	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts. (Wala masyadong epekto ang pagpapalit ng parts)		✓		
	Reusability (Muling Paggamit)	The device and system asset can be used in multiple systems or in building other assets. (Ito ay maaring gamitin sa ibang Sistema o pagbuo ng iba pang device)			✓	
	Analyzability (Kakayahang Masuri)	The device and system ability to assess the impact of changes on a product or system of an intended change to one or more parts. (Mapalitan ang parte nito gamit ang ibang bagay para sa kaperhong layunin)			✓	
	Modifiability (Kakayahang Mabago)	The device and system are effectively modified without introducing defects in existing product quality. (Maaring baguhin nang walang nagiging sira dito)			✓	
	Testability (Kakayahang Subukan)	Test criteria can be set for a system, product, or component and can be performed to verify whether those criteria have been met. (Maaring i-test upang mapatunayang nakamit nito ang mga criteria)			✓	
Portability	Adaptability (Kakayahang Umangkop)	It is design to adapt for changing or evolving hardware, software, and operational or usage environments. (Ito ay iniangkop para sa iba't ibang o umuunlad na hardware, software, o iba pang mga operasyon o paggamit ng kapaligiran)			✓	
	Installability (Kakayahang Ma-install)	The device and system can be successfully installed and uninstalled. (Ito ay maaring i install at i-uninstall)			✓	
	Replaceability (Kakayahang Mapaltan)	The device and system can replace another specified product for the same purpose. (Maaring palitan ang ibang parte nito para sa kaparehong paggagamitan)			✓	

Comment/Suggestions: _____

Average	
Functional Suitability:	4.37
Reliability:	4.50
Performance Efficiency:	4.67
Usability:	4.67
Security:	4.70
Compatibility:	4.5
Maintainability:	4.60
Portability:	4.59
Totality:	4.91

Certified to copy and correct by:

 Signature Over Printed Name of Evaluator
 Date: _____

ARDUINO-BASED TAMBAN AND GALUNGGONG DEHYDRATOR FOR SELECTED RETAIL FISH VENDOR IN SAN PABLO CITY PUBLIC MARKET

Pangalan: ROWENA PANTINA
Kumpanya: _____
Katungkuluan: _____

Instructions: Please put a check under the corresponding statistical rating

5-Highly Acceptable 4-Very Acceptable 3-Acceptable 2-Moderately Acceptable 1-Not Acceptable

Characteristic	Sub-Characteristic	Content	1	2	3	4	5
Functional Suitability (Kaangkupan sa Paggana)	Functional Completeness (Kumpletong Paggana)	The device and system covers all the specified tasks and user objectives. (Nagagawa nito ang mga gawain at nais ng gumagamit)					✓
	Functional Correctness (Wastong Paggana)	The device and system provide correct results with the needed degrees of precision. (Nagbibigay ito ng tamang resulta na kailangan)					✓
	Functional Appropriateness (Angkop na Paggana)	The device and system facilitate the accomplishment of specified tasks and objectives (Nagagawa nito ang dapat nitong gawin)					✓
Reliability	Maturity (Kapanahunan)	The device and system meet the need for reliability under regular operation (Reliable ang device sa regular na paggamit)					✓
	Availability (Kakayahang Gumana)	The device and system are designed to perform specified functions efficiently in a over time. (Ito ay gumagana kapag kinakailangan)					✓
	Fault Tolerance (Toleransiya sa Pagkakamali)	The device and system can operate as intended despite hardware/software faults (Gumagana ito kahit may problema sa hardware o software)					✓
	Recoverability (Kakayahang Makabawi)	The device and system have the capability to recover the data when encountering errors (Ang aparato at sistema ay maaaring mabawi ang data na direktan apektado at muling maitatag ang nais na estado)					✓
Performance Efficiency	Time Behavior (Pag-ugali ng oras)	When performing its functions, the device and systems response processing times, and throughout rates meet the requirements. (Tumutugma ito sa pangangailangan ng user tuwing ginagamit)					✓
	Resource Utilization (Pag gamit ng mapagkukunan)	The device and system resources amount and types used when performing is functions meet the requirements. (Ang mga kailangang resources nito ay nameet ang mga kinakailangan.)					✓
	Capacity (Kapasidad)	The device and system's maximum limits of the product and system parameters meet the requirements. (Natutugunan nito ang kapasidad na kinakailangan)					✓
Usability	Appropriateness Recognizability (kaangkupan)	It allow users to recognize if it is appropriate for their needs. (Naangkop ito sa pangangailangan ng gumagamit)					✓
	Learnability (Kakayahang matuto)	The device and system can be used to achieve the goals of learning to use the product. (Matututunan itong gamitin upang magawa ang dapat gawin)					✓
	Operability (Paggamit)	The device and system have the attributes that make it easy to operate and control. (Ang aparato at sistema ay mga katangian na ginagawang mapadali ang pag papatakbo at pag control)					✓
	User Error Protection (Protekson ng Gagamit sa Error)	The device and system protect the users against making errors. (Pinoprotektahan nito ang user sa paggawa ng malis sa device)					✓
	User Interface Aesthetics (Kagandahan ng device)	The device and system enable good and satisfying interaction for the user. (May maganda at nakakaaliw itong gamitin)					✓
	Accessibility (Paggamit)	People with the broadest range of capabilities can use the device and system to achieve a specified goal in a specified context of use. (Magagamit ito ng mga tao para sa dapat paggamitan)					✓

Security	Confidentiality (Pagkukumpidensyal)	The device and system ensure that the data are accessible only to authorized users. (Authorized user lamang ang maaaring gumamit nito)			J
	Integrity (Integridad)	The device and system prevent unauthorized access to modify the programs or data. (Ang aparato at Sistema ay pumipigil sa hindi awtorisadong pag access upang baguhin ang mga programa o data)			J
	Non-repudiation (Hindi Pagtanggili)	The device and system actions or events can be proven to have occurred so that the events or activities cannot be repudiated later. (Mapaputunayang ginawa ng device ang kanyang function at hindi maitatanggi)			J
	Authenticity (Pagiging Tunay)	A subject or resource's device and system identity can be proved to be the one claimed. (Ito ay kung anong sinasabing kayang gawin nito)			J
	Accountability (Pananagutan)	An entity's device and system actions can be traced uniquely to the entity. (Ang aparato at mga pagkilos ng system ng isang entity ay maaaring masubaybayan nang natatangi sa entity)			J
Compatibility	Co-existence (Pagsasama sama)	The device and system perform their functions efficiently while sharing a typical environment and resources with other products. (Mayaos gumagana kasabay ng ibang produkto o system)			J
	Interoperability (Kakayahang Mapagsabay)	The device interacts with other product or system (Maaring itong gamitin kasabay ng ibang system o sa ibang produkto)			J
Maintainability	Modularity (kakayahang mapalitan)	The device and system are composed of discrete components such that a change to one piece has minimal impact on other parts. (Wala masyadong epekto ang pagpapalit ng parts)			J
	Reusability (Muling Paggamit)	The device and system asset can be used in multiple systems or in building other assets. (Ito ay maaaring gamitin sa ibang Sistema o pagbuo ng iba pang device)			J
	Analyzability (Kakayahang Masuri)	The device and system ability to assess the impact of changes on a product or system of an intended change to one or more parts. (Mapalitan ang parte nito gamit ang ibang bagay para sa kaperhong layunin)			J
	Modifiability (Kakayahang Mabago)	The device and system are effectively modified without introducing defects in existing product quality. (Maaring baguhin nang walang nagiging sira dito)			J
	Testability (Kakayahang Subukan)	Test criteria can be set for a system, product, or component and can be performed to verify whether those criteria have been met. (Maaring i-test upang mapaputunayang nakamit nito ang mga criteria)			J
Portability	Adaptability (Kakayahang Umangkop)	It is designed to adapt for changing or evolving hardware, software, and operational or usage environments. (Ito ay ininiangkop para sa iba't ibang o umuuunlad na hardware, software, o iba pang mga operasyon o paggamit ng kapaligiran)			J
	Installability (Kakayahang Ma-install)	The device and system can be successfully installed and uninstalled. (Ito ay maaaring I install at I-uninstall)			J
	Replaceability (Kakayahang Mapaltan)	The device and system can replace another specified product for the same purpose. (Maaaring palitan ang ibang parte nito para sa kaparehong paggagamitan)			J

Comment/Suggestions:

	Average
Functional Suitability:	5.00
Reliability:	4.75
Performance Efficiency:	5.00
Usability:	4.67
Security:	4.48
Compatibility:	4.50
Maintainability:	4.60
Portability:	4.37
Totality:	4.63

Certified true copy and correct by:

Signature Over Printed Name of Evaluator

Date: _____


Appendix G: Total Budget of the Project

Expenses				
Item	Price	No of items	Shipping	Total
Heating Element(200W)	₱ 180.00	1	₱ 0.00	₱ 180.00
Heating Element(300W)	₱ 250.00	1	₱ 50.00	₱ 300.00
DHT22 sensor	₱ 191.00	1	₱ 0.00	₱ 191.00
Load Cell	₱ 29.00	4	₱ 0.00	₱ 116.00
HX711 amplifier	₱ 45.00	1	₱ 0.00	₱ 45.00
Porcelain Insulator	₱ 10.00	10	₱ 0.00	₱ 100.00
LCD Screen	₱ 273.00	1	₱ 0.00	₱ 273.00
SSR Relay	₱ 156.00	2	₱ 0.00	₱ 312.00
Buttons	₱ 5.00	3	₱ 0.00	₱ 15.00
Arduino Uno	₱ 449.00	1	₱ 0.00	₱ 449.00
Fans	₱ 200.00	2	₱ 0.00	₱ 400.00
Plywood (1/2 inch)	₱ 580.00	1	₱ 0.00	₱ 580.00
Aluminum Stucco Sheet	₱ 550.00	2	₱ 0.00	₱ 1,100.00
Aluminum Angle bar	₱ 350.00	3	₱ 0.00	₱ 1,050.00
Aluminum Tubular	₱ 350.00	4	₱ 0.00	₱ 1,400.00
Blind Rivet	₱ 200.00	1	₱ 0.00	₱ 200.00
Expanded Wire	₱ 576.00	1	₱ 0.00	₱ 576.00
Wheels	₱ 25.00	4	₱ 0.00	₱ 100.00
Stainless Round bar	₱ 180.00	5	₱ 0.00	₱ 900.00
Male and Female pins	₱ 8.00	4	₱ 0.00	₱ 32.00
Door handle(double)	₱ 29.00	1	₱ 0.00	₱ 29.00
Wire (24awg)	₱ 80.00	1	₱ 0.00	₱ 80.00
Insulation	₱ 240.00	1	₱ 0.00	₱ 240.00
Jumper wires	₱ 40.00	2	₱ 0.00	₱ 80.00
wire insulator	₱ 35.00	2	₱ 0.00	₱ 70.00
2x2(GI) angle bar	₱ 540.00	1	₱ 0.00	₱ 540.00
2.54mm wire cable Connector	₱ 22.00	1	₱ 0.00	₱ 22.00
PCB universal Board(8x12)	₱ 48.00	1	₱ 0.00	₱ 48.00
Wire (16AWG)	₱ 120.00	1	₱ 0.00	₱ 120.00
Sim800l V2 module	₱ 349.00	1	₱ 0.00	₱ 349.00
Simcard	₱ 60.00	1	₱ 0.00	₱ 60.00
Aluminum tape	₱ 113.00	1	₱ 0.00	₱ 113.00
Varnish	₱ 50.00	1	₱ 0.00	₱ 50.00
Lead	₱ 50.00	1	₱ 0.00	₱ 50.00
9v Adapter	₱ 118.00	1	₱ 58.00	₱ 176.00
LM25962 buck Converter	₱ 39.00	1	₱ 0.00	₱ 39.00
Hinges with screw	₱ 5.00	8	₱ 0.00	₱ 40.00
Cable Connector	₱ 25.00	1	₱ 0.00	₱ 25.00
Shrinkable tube	₱ 20.00	1	₱ 0.00	₱ 20.00
Cable Tie	₱ 39.00	1	₱ 0.00	₱ 39.00
Moldex	₱ 45.00	1	₱ 0.00	₱ 45.00
			Total	₱ 10,379.00


Appendix H:

Blueprint of the Project

Appendix H.1: Schematic Diagram of the Device

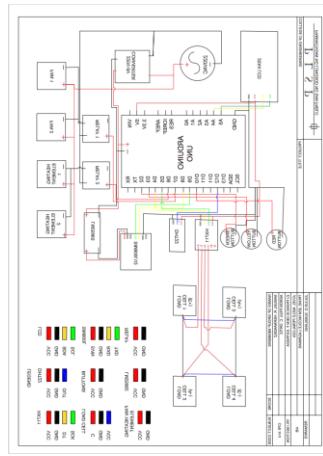

Appendix H.2: Top, Front, Side and Isometric view of the Project

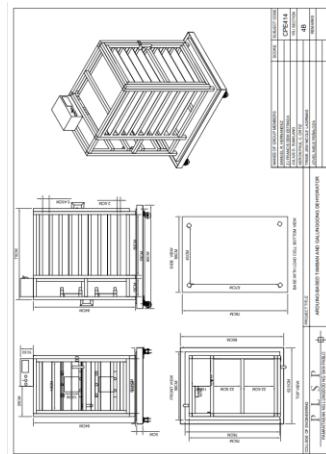

Appendix I: Hardware/Technical Manual



Arduino® UNO R3

Product Reference Manual
SKU: A000066



Description

The Arduino Uno R3 is the perfect board to get familiar with electronics and coding. This versatile development board is equipped with the well-known ATmega328P and the ATmega 16U2 Processor. This board will give you a great first experience within the world of Arduino.

Target areas:

Maker, introduction, industries



Features

- **ATMega328P Processor**
 - **Memory**
 - AVR CPU at up to 16 MHz
 - 32KB Flash
 - 2KB SRAM
 - 1KB EEPROM
 - **Security**
 - Power On Reset (POR)
 - Brown Out Detection (BOD)
 - **Peripherals**
 - 2x 8-bit Timer/Counter with a dedicated period register and compare channels
 - 1x 16-bit Timer/Counter with a dedicated period register, input capture and compare channels
 - 1x USART with fractional baud rate generator and start-of-frame detection
 - 1x controller/peripheral Serial Peripheral Interface (SPI)
 - 1x Dual mode controller/peripheral I2C
 - 1x Analog Comparator (AC) with a scalable reference input
 - Watchdog Timer with separate on-chip oscillator
 - Six PWM channels
 - Interrupt and wake-up on pin change
- **ATmega16U2 Processor**
 - 8-bit AVR® RISC-based microcontroller
- **Memory**
 - 16 KB ISP Flash
 - 512B EEPROM
 - 512B SRAM
 - debugWIRE interface for on-chip debugging and programming
- **Power**
 - 2.7-5.5 volts



CONTENTS

1 The Board	4
1.1 Application Examples	4
1.2 Related Products	4
2 Ratings	5
2.1 Recommended Operating Conditions	5
2.2 Power Consumption	5
3 Functional Overview	5
3.1 Board Topology	5
3.2 Processor	6
3.3 Power Tree	7
4 Board Operation	8
4.1 Getting Started - IDE	8
4.2 Getting Started - Arduino Web Editor	8
4.3 Sample Sketches	8
4.4 Online Resources	8
5 Connector Pinouts	9
5.1 ANALOG	10
5.2 DIGITAL	10
5.3 Mechanical Information	11
5.4 Board Outline & Mounting Holes	11
6 Certifications	12
6.1 Declaration of Conformity CE DoC (EU)	12
6.2 Declaration of Conformity to EU RoHS & REACH 2011 01/19/2021	12
6.3 Conflict Minerals Declaration	13
7 FCC Caution	13
8 Company Information	14
9 Reference Documentation	14
10 Revision History	14



1 The Board

1.1 Application Examples

The UNO board is the flagship product of Arduino. Regardless if you are new to the world of electronics or will use the UNO as a tool for education purposes or industry-related tasks, the UNO is likely to meet your needs.

First entry to electronics: If this is your first project within coding and electronics, get started with our most used and documented board; Arduino UNO. It is equipped with the well-known ATmega328P processor, 14 digital input/output pins, 6 analog inputs, USB connections, ICSP header and reset button. This board includes everything you will need for a great first experience with Arduino.

Industry-standard development board: Using the Arduino UNO R3 board in industries, there are a range of companies using the UNO board as the brain for their PLC's.

Education purposes: Although the UNO R3 board has been with us for about ten years, it is still widely used for various education purposes and scientific projects. The board's high standard and top quality performance makes it a great resource to capture real time from sensors and to trigger complex laboratory equipment to mention a few examples.

1.2 Related Products

- Starter Kit
- Arduino UNO R4 Minima
- Arduino UNO R4 WiFi
- Tinkerkit Braccio Robot



2 Ratings

2.1 Recommended Operating Conditions

Symbol	Description	Min	Max
	Conservative thermal limits for the whole board:	-40 °C (-40°F)	85 °C (185°F)

NOTE: In extreme temperatures, EEPROM, voltage regulator, and the crystal oscillator, might not work as expected.


2.2 Power Consumption

Symbol	Description	Min	Typ	Max	Unit
VINMax	Maximum input voltage from VIN pad	6	-	20	V
VUSBMax	Maximum input voltage from USB connector	-	-	5.5	V
PMax	Maximum Power Consumption	-	-	xx	mA

3 Functional Overview

3.1 Board Topology

Top view

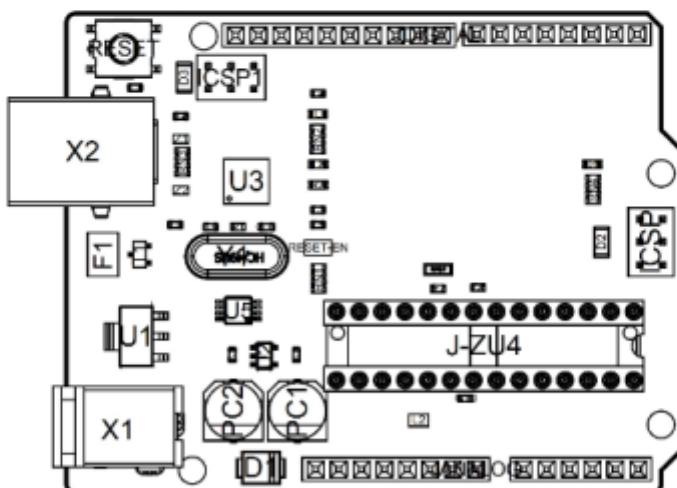

Board topology



Arduino® UNO R3

Ref.	Description	Ref.	Description
X1	Power jack 2.1x5.5mm	U1	SPX1117M3-L-5 Regulator
X2	USB B Connector	U3	ATMEGA16U2 Module
PC1	EEE-1EA470WP 25V SMD Capacitor	U5	LMV358LIST-A.9 IC
PC2	EEE-1EA470WP 25V SMD Capacitor	F1	Chip Capacitor, High Density
D1	CGRA4007-G Rectifier	ICSP	Pin header connector (through hole 6)
J-ZU4	ATMEGA328P Module	ICSP1	Pin header connector (through hole 6)
Y1	ECS-160-20-4X-DU Oscillator		

3.2 Processor

The Main Processor is a ATmega328P running at up to 20 MHz. Most of its pins are connected to the external headers, however some are reserved for internal communication with the USB Bridge coprocessor.



Arduino® UNO R3

3.3 Power Tree



Legend:

- Component
- Power I/O
- Conversion Type
- Max Current
- Voltage Range

Power tree



4 Board Operation

4.1 Getting Started - IDE

If you want to program your Arduino UNO R3 while offline you need to install the Arduino Desktop IDE [1]. To connect the Arduino UNO to your computer, you'll need a USB-B cable. This also provides power to the board, as indicated by the LED.

4.2 Getting Started - Arduino Web Editor

All Arduino boards, including this one, work out-of-the-box on the Arduino Web Editor [2], by just installing a simple plugin.


The Arduino Web Editor is hosted online, therefore it will always be up-to-date with the latest features and support for all boards. Follow [3] to start coding on the browser and upload your sketches onto your board.

4.3 Sample Sketches

Sample sketches for the Arduino UNO R3 can be found either in the "Examples" menu in the Arduino IDE or in the "Documentation" section of the Arduino website [4].

4.4 Online Resources

Now that you have gone through the basics of what you can do with the board you can explore the endless possibilities it provides by checking exciting projects on Arduino Project Hub [5], the Arduino Library Reference [6] and the online Arduino store [7] where you will be able to complement your board with sensors, actuators and more.

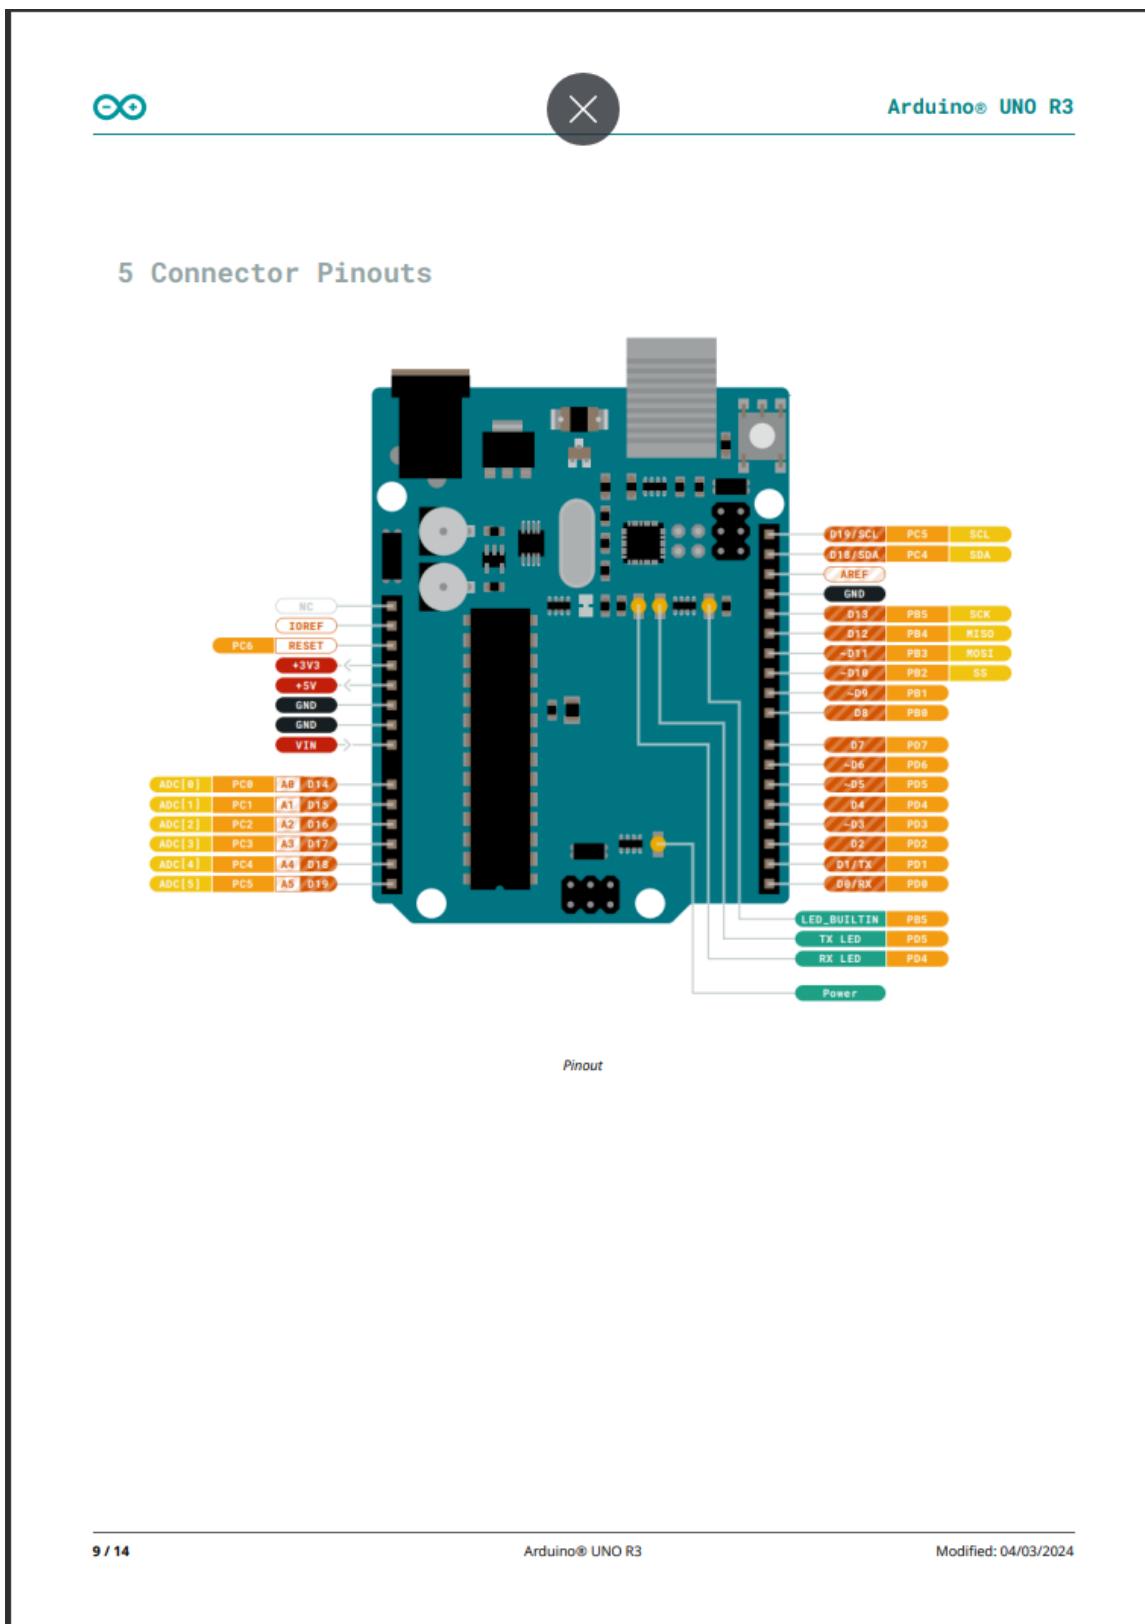



Arduino® UNO R3

5.1 JANALOG

Pin	Function	Type	Description
1	NC	NC	Not connected
2	IOREF	IOREF	Reference for digital logic V - connected to 5V
3	Reset	Reset	Reset
4	+3V3	Power	+3V3 Power Rail
5	+5V	Power	+5V Power Rail
6	GND	Power	Ground
7	GND	Power	Ground
8	VIN	Power	Voltage Input
9	A0	Analog/GPIO	Analog input 0 /GPIO
10	A1	Analog/GPIO	Analog input 1 /GPIO
11	A2	Analog/GPIO	Analog input 2 /GPIO
12	A3	Analog/GPIO	Analog input 3 /GPIO
13	A4/SDA	Analog input/I2C	Analog input 4/I2C Data line
14	A5/SCL	Analog input/I2C	Analog input 5/I2C Clock line


5.2 JDIGITAL

Pin	Function	Type	Description
1	D0	Digital/GPIO	Digital pin 0/GPIO
2	D1	Digital/GPIO	Digital pin 1/GPIO
3	D2	Digital/GPIO	Digital pin 2/GPIO
4	D3	Digital/GPIO	Digital pin 3/GPIO
5	D4	Digital/GPIO	Digital pin 4/GPIO
6	D5	Digital/GPIO	Digital pin 5/GPIO
7	D6	Digital/GPIO	Digital pin 6/GPIO
8	D7	Digital/GPIO	Digital pin 7/GPIO
9	D8	Digital/GPIO	Digital pin 8/GPIO
10	D9	Digital/GPIO	Digital pin 9/GPIO
11	SS	Digital	SPI Chip Select
12	MOSI	Digital	SPI1 Main Out Secondary In
13	MISO	Digital	SPI Main In Secondary Out
14	SCK	Digital	SPI serial clock output
15	GND	Power	Ground
16	AREF	Digital	Analog reference voltage
17	A4/SD4	Digital	Analog input 4/I2C Data line (duplicated)
18	A5/SD5	Digital	Analog input 5/I2C Clock line (duplicated)



5.3 Mechanical Information

5.4 Board Outline & Mounting Holes

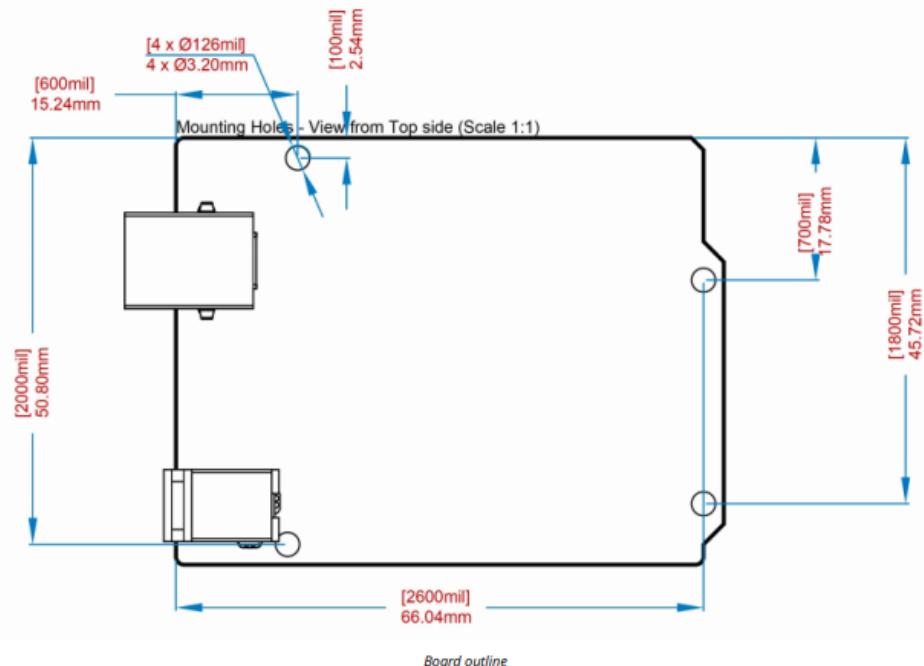



6 Certifications

6.1 Declaration of Conformity CE DoC (EU)

We declare under our sole responsibility that the products above are in conformity with the essential requirements of the following EU Directives and therefore qualify for free movement within markets comprising the European Union (EU) and European Economic Area (EEA).

ROHS 2 Directive 2011/65/EU	
Conforms to:	EN50581:2012
Directive 2014/35/EU. (LVD)	
Conforms to:	EN 60950-1:2006/A11:2009/A1:2010/A12:2011/AC:2011
Directive 2004/40/EC & 2008/46/EC & 2013/35/EU, EMF	
Conforms to:	EN 62311:2008

6.2 Declaration of Conformity to EU RoHS & REACH 211 01/19/2021

Arduino boards are in compliance with RoHS 2 Directive 2011/65/EU of the European Parliament and RoHS 3 Directive 2015/863/EU of the Council of 4 June 2015 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

Substance	Maximum limit (ppm)
Lead (Pb)	1000
Cadmium (Cd)	100
Mercury (Hg)	1000
Hexavalent Chromium (Cr6+)	1000
Poly Brominated Biphenyls (PBB)	1000
Poly Brominated Diphenyl ethers (PBDE)	1000
Bis(2-Ethylhexyl) phthalate (DEHP)	1000
Benzyl butyl phthalate (BBP)	1000
Dibutyl phthalate (DBP)	1000
Diisobutyl phthalate (DIBP)	1000

Exemptions: No exemptions are claimed.

Arduino Boards are fully compliant with the related requirements of European Union Regulation (EC) 1907 /2006 concerning the Registration, Evaluation, Authorization and Restriction of Chemicals (REACH). We declare none of the SVHCs (<https://echa.europa.eu/web/guest/candidate-list-table>), the Candidate List of Substances of Very High Concern for authorization currently released by ECHA, is present in all products (and also package) in quantities totaling in a concentration equal or above 0.1%. To the best of our knowledge, we also declare that our products do not contain any of the substances listed on the "Authorization List" (Annex XIV of the REACH regulations) and Substances of Very High Concern (SVHC) in any significant amounts as specified by the Annex XVII of Candidate list published by ECHA (European Chemical Agency) 1907 /2006/EC.

50kg Load Cell

Load Cell Specification:

1. Material : Aluminum Alloy
2. Capacity : 50Kg
3. Temperature : 10°C~50°C
4. Output Sensitivity (mv/v) : 1 ± 0.1
5. Nonlinearity (%FS) : 0.03
6. Repeatability (%FS) : 0.03
7. Input Resistance : 1000 Ohm
8. Insulation Resistance : 5000 Mega Ohm



The Load Cell 50Kg High quality aluminum alloy structure, sturdy and stable, long serving life. High accuracy, small comprehensive error, stable and durable performance. Anti-fatigue, anti-bias load, can withstand the pull and pressure work. Compact size and light Weight, easy to install. Applicable to digital products, medical electronics, security equipment, household appliances, smart homes, measuring instruments, automotive electronics, network communications, and other fields.

HX711 amplifier

This Weight Sensor amplifier is based on HX711. It has an amplifier and a precision 24-bit analog-to-digital convertor designed for weigh scale and industrial control applications to interface directly with a bridge sensor. The HX711 uses a two-wire interface (Clock and Data) for communication. Compared with other chips, HX711 has added advantages such as high integration, fast response, immunity, and other features that improve total performance and reliability. Finally, it's one of the best choices for electronic enthusiasts.

The dual-channel 24 24-bit precision A/D weight Pressure Sensor Load Cell Amplifier and ADC HX711 Module is a small breakout board. By connecting the

module to your microcontroller, you will be able to read the changes in the resistance of the load cell. With some calibration, you'll be able to get very accurate weight measurements.

This can be handy for creating your own industrial scale, process control, or simple presence detection. The HX711 Weighing Sensor uses a two-wire interface (Clock and Data) for communication. Any microcontroller's GPIO pins should work, and numerous libraries have been written, making it easy to read data from the HX711.

Connect the wires from your load cell as below:

- Red (Excitation+ or VCC)
- Black (Excitation- or GND)
- White (Amplifier+, Signal+, or Output+)
- Green (A-, S-, or O-).
- Yellow (Shield)

The YLW pin acts as an optional input that does not hook up to the strain gauge but is utilized to ground and shield against outside EMI (electromagnetic interference). Please keep in mind that some load cells might have variations in color-coding.

Specifications

- Output Sensitivity: $1.0 \pm 0.1 \text{ mV} / \text{V}$
- Recommended excitation voltage: 5-10V
- Two selectable differential input channels
- On-chip active low-noise PGA with a selectable gain of 32, 64, and 128
- On-chip power supply regulator for load-cell and ADC analog power supply
- Selectable 10SPS or 80SPS output data rate
- On-chip oscillator requiring no external component with optional external crystal
- On-chip power-on-reset


- Simple digital control and serial interface: pin-driven controls, no programming needed
- Simultaneous 50 and 60Hz supply rejection
- Measurement Resolution: 24 bit
- On-chip oscillator requiring no external component with optional external crystal
- Weight: less than 5 grams
- Dimensions : 2.5 x 1.5 x 0.5cm

Sim800I V2 from <https://components101.com/wireless/sim800l-gsm-module-pinout-datasheet-equivalent-circuit-specs>

The SIM800L, produced by Simcom, is a GSM module designed to equip any microcontroller with GSM capabilities. This enables the microcontroller to link up with the cellular network for making and receiving calls, exchanging text messages, and accessing the internet via GPRS, TCP, or IP protocols. Furthermore, it leverages established mobile frequencies, enabling its use across global locations.

2D Model and Dimensions

If you are designing a PCB or Perf board with this component then the following picture from the Datasheet will be useful to know its package type and dimensions.

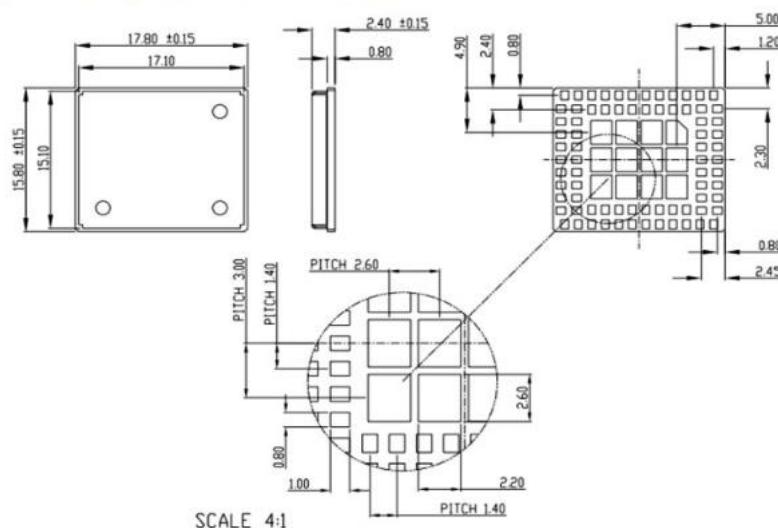

SIM800L Pinout Configuration


Pin Number	Pin Name	Description
1	NET	External antenna attachment pin
2	VCC	Power supply pin, 3.4V to 4.4V input
3	RST	Reset pin, pull low for 100ms to perform hard reset
4	RXD	Serial data input
5	TXD	Serial data output
6	GND	Module ground reference
7, 8	SPK	Speaker differential output
9, 10	MIC	Microphone differential input
11	DTR	Serial data terminal ready pin, pull high to enable sleep mode
12	RING	Interrupt output, active low

Features and Specifications

- Full modem serial port
- Two microphone inputs and speaker output
- SIM card interface
- Supports FM and PWM
- Sleep mode with 0.7mA current

How To Use SIM800L GSM Module

The SIM800L is a GSM module with a serial interface. It can send and receive text messages and receive phone calls. It can also connect to the internet and receive FM signals. The SIM800L can be connected to a microcontroller using the serial UART interface, and in the example shown below, connected to an Arduino.

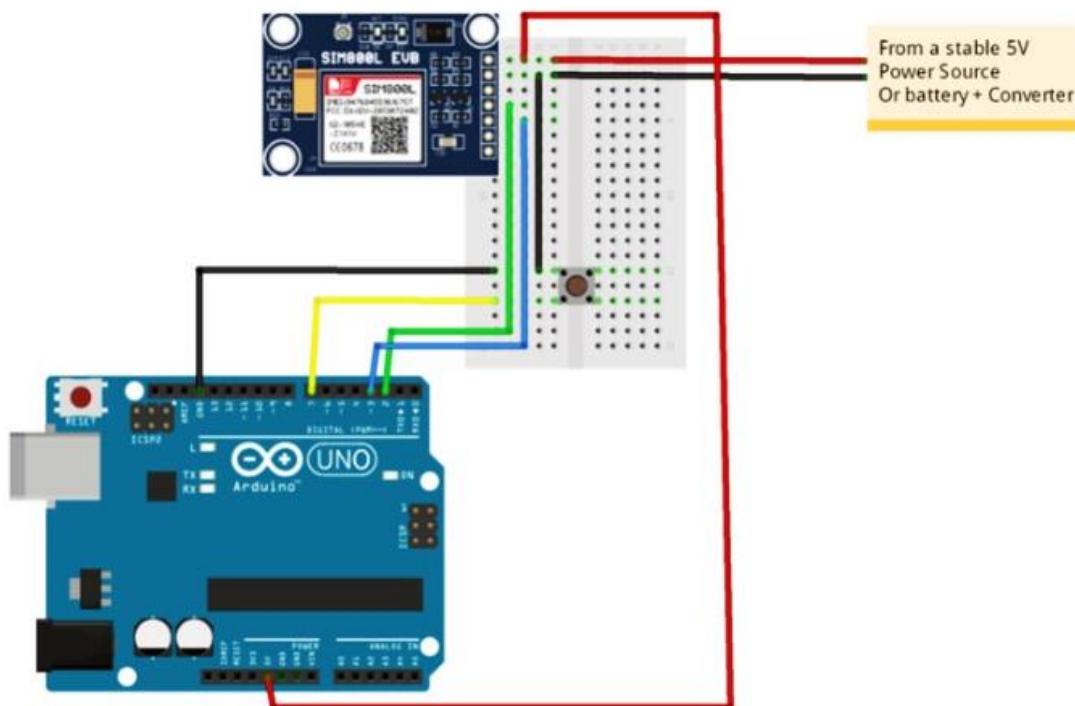

The module recognizes AT commands, which can be used to do things like check signal strength, get the SIM card number, check the network connection and battery state, in addition to reading texts, making and receiving calls.

LM2596s

The DC-DC Buck Converter LM2596s solves this by converting higher voltage to lower voltage without the need for an additional power supply. This DC-DC Buck Converter LM2596S is a step-down power module with adjustable voltage range capable of driving a load up to 3A with high efficiency. Using this module with current above 2.5A (or output power greater than 10W) requires the addition of heatsink to prevent overheating.

DHT22

Aosong Electronics Co.,Ltd

Your specialist in innovating humidity & temperature sensors

1. Feature & Application:

- * Full range temperature compensated * Relative humidity and temperature measurement
- * Calibrated digital signal *Outstanding long-term stability *Extra components not needed
- * Long transmission distance * Low power consumption *4 pins packaged and fully interchangeable

2. Description:

DHT22 output calibrated digital signal. It utilizes exclusive digital-signal-collecting-technique and humidity sensing technology, assuring its reliability and stability. Its sensing elements is connected with 8-bit single-chip computer.

Every sensor of this model is temperature compensated and calibrated in accurate calibration chamber and the calibration-coefficient is saved in type of programme in OTP memory, when the sensor is detecting, it will cite coefficient from memory.

Small size & low consumption & long transmission distance(20m) enable DHT22 to be suited in all kinds of harsh application occasions.

Single-row packaged with four pins, making the connection very convenient.

3. Technical Specification:

Model	DHT22	
Power supply	3.3-6V DC	
Output signal	digital signal via single-bus	
Sensing element	Polymer capacitor	
Operating range	humidity 0-100%RH; temperature -40~80Celsius	
Accuracy	humidity +/-2%RH(Max +/-5%RH); temperature +/-0.5Celsius	
Resolution or sensitivity	humidity 0.1%RH; temperature 0.1Celsius	
Repeatability	humidity +/-1%RH; temperature +/-0.2Celsius	
Humidity hysteresis	+/-0.3%RH	
Long-term Stability	+/-0.5%RH/year	
Sensing period	Average: 2s	
Interchangeability	fully interchangeable	
Dimensions	small size 14*18*5.5mm; big size 22*28*5mm	

4. Dimensions: (unit---mm)

1) Small size dimensions: (unit---mm)


2

Thomas Liu (Business Manager)

Email: thomasliu198518@yahoo.com.cn

Aosong Electronics Co.,Ltd

Your specialist in innovating humidity & temperature sensors

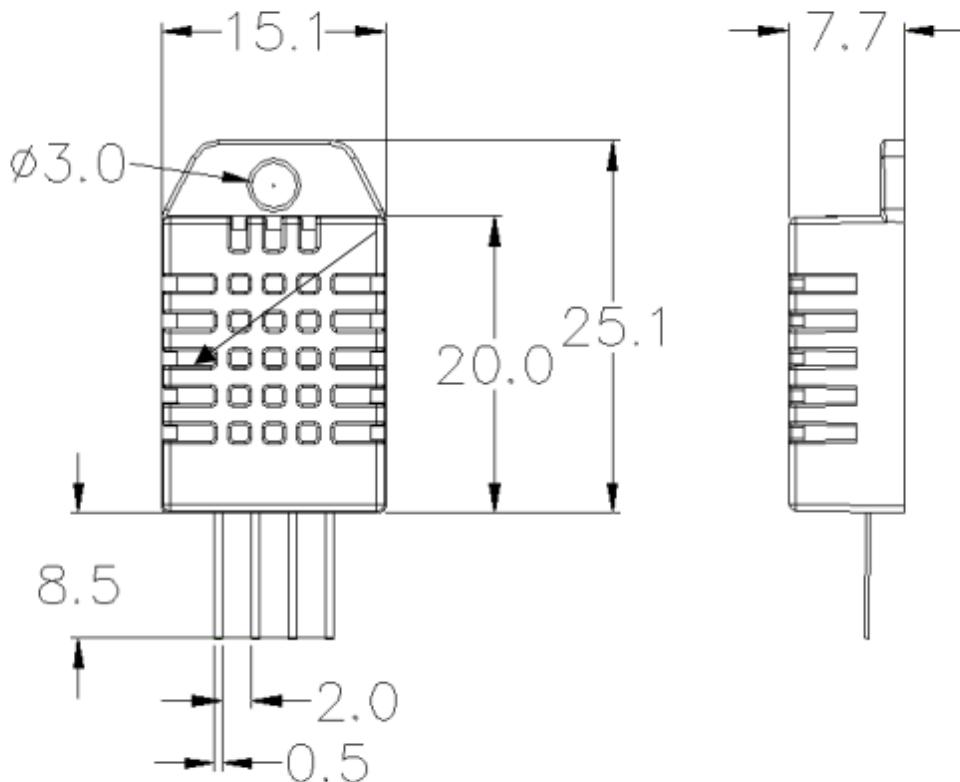

Pin sequence number: 1 2 3 4 (from left to right direction).

Pin	Function
1	VDD----power supply
2	DATA--signal
3	NULL
4	GND


4

Thomas Liu (Business Manager)

Email: thomasliu198518@yahoo.com.cn

Your specialist in innovating humidity & temperature sensors

5. Electrical connection diagram:

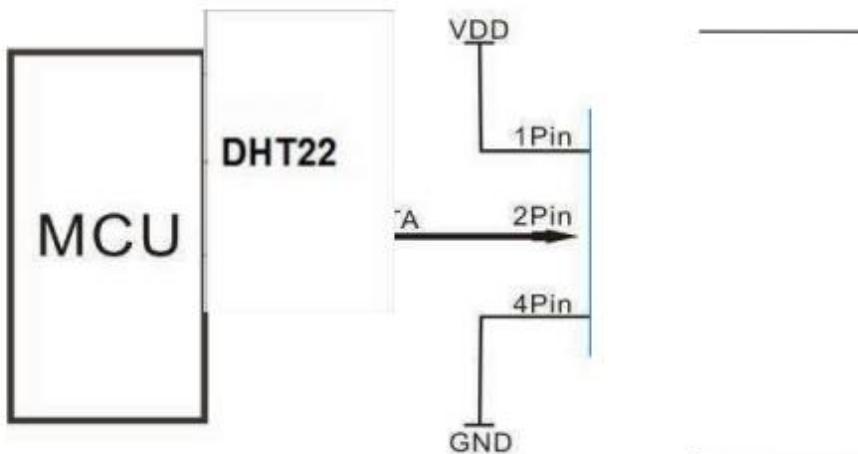

3Pin---NC, AM2302 is another name for DHT22

6. Operating specifications:

(1) Power and Pins

Power's voltage should be 3.3-6V DC. When power is supplied to sensor, don't send any instruction to the sensor within one second to pass unstable status. One capacitor valued 100nF can be added between VDD and GND for wave filtering.

(2) Communication and signal

Single-bus data is used for communication between MCU and DHT22, it costs 5mS for single time communication.

Data is comprised of integral and decimal part, the following is the formula for data.

DHT22 send out higher data bit firstly!

DATA=8 bit integral RH data+8 bit decimal RH data+8 bit integral T data+8 bit decimal T data+8 bit check-sum
If the data transmission is right, check-sum should be the last 8 bit of "8 bit integral RH data+8 bit decimal RH data+8 bit integral T data+8 bit decimal T data".

When MCU send start signal, DHT22 change from low-power-consumption-mode to running-mode. When MCU finishes sending the start signal, DHT22 will send response signal of 40-bit data that reflect the relative humidity

5

Thomas Liu (Business Manager)


Email: thomasliu198518@yahoo.com.cn

Aosong Electronics Co.,Ltd

Your specialist in innovating humidity & temperature sensors

and temperature information to MCU. Without start signal from MCU, DHT22 will not give response signal to MCU. One start signal for one time's response data that reflect the relative humidity and temperature information from DHT22. DHT22 will change to low-power-consumption-mode when data collecting finish if it don't receive start signal from MCU again.

1) Check bellow picture for overall communication process:

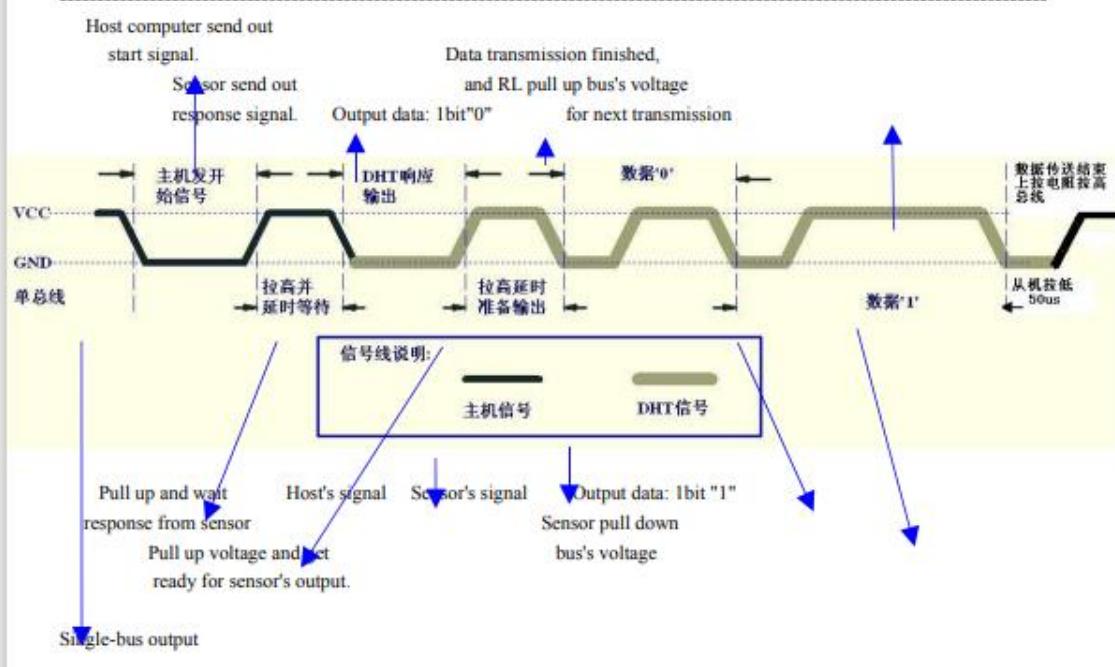

2) Step 1: MCU send out start signal to DHT22

Data-bus's free status is high voltage level. When communication between MCU and DHT22 begin, program of MCU will transform data-bus's voltage level from high to low level and this process must beyond at least 1ms to ensure DHT22 could detect MCU's signal, then MCU will wait 20-40us for DHT22's response.

Check bellow picture for step 1:

6

Thomas Liu (Business Manager)

Email: thomasliu198518@yahoo.com.cn

Aosong Electronics Co.,Ltd

Your specialist in innovating humidity & temperature sensors

8. Attentions of application:

(1) Operating and storage conditions

We don't recommend the applying RH-range beyond the range stated in this specification. The DHT22 sensor can recover after working in non-normal operating condition to calibrated status, but will accelerate sensors' aging.

(2) Attentions to chemical materials

Vapor from chemical materials may interfere DHT22's sensitive-elements and debase DHT22's sensitivity.

(3) Disposal when (1) & (2) happens

Step one: Keep the DHT22 sensor at condition of Temperature 50~60Celsius, humidity <10%RH for 2 hours;

Step two: After step one, keep the DHT22 sensor at condition of Temperature 20~30Celsius, humidity >70%RH for 5 hours.

(4) Attention to temperature's affection

Relative humidity strongly depend on temperature, that is why we use temperature compensation technology to ensure accurate measurement of RH. But it's still be much better to keep the sensor at same temperature when sensing.

DHT22 should be mounted at the place as far as possible from parts that may cause change to temperature.

(5) Attentions to light

Long time exposure to strong light and ultraviolet may debase DHT22's performance.

(6) Attentions to connection wires

The connection wires' quality will effect communication's quality and distance, high quality shielding-wire is recommended.

(7) Other attentions

* Welding temperature should be bellow 260Celsius.

* Avoid using the sensor under dew condition.

* Don't use this product in safety or emergency stop devices or any other occasion that failure of DHT22 may cause personal injury.

1

Thomas Liu (Business Manager)

Email: thomasliu198518@yahoo.com.cn

Appendix J:

User's Manual

Appendix J.1: User's Manual (Filipino Version)

GROUP 3

ARDUINO-BASED DEHYDRATOR

For Tamban and Galunggong Fish (Filipino Version)

USER MANUAL

PREPARED BY:

ZJ Francis Dem F. Estrada
Samuel R. Hernandez
Trixie Jem Nicole L. Lagrimas
Aeron Paul C. Ortiz
Jovel Neile B. Peñaloza
Julius D. Sumilang

May 2024



MGA PARTE NG DEVICE

1

The diagram illustrates a vertical drying rack with multiple trays. A control box is mounted on top. A fan is positioned on the left side. A heating element is located at the bottom center. The base features a load cell sensor. The entire unit is supported by a wheeled cart.

Control box - Dito nakalagay ang microcontroller, relay at ibat ibang module na ginagamit upang gumana ang device

Fan - Ito ang nagkakalat o nagpapaikot ng hangin sa loob ng device

Heating Element - Ito ang nagbibigay init sa loob ng device

Base with Load Cell - dito nakalagay ang sensor upang mag-monitor ang timbang ng isda sa loob ng device,

Tray - Dito inilalagay ang mga tutuyuing isda.

PAANO ISET-UP ANG DEVICE?

2

1. Ilagay ang base sa isang pantay na lugar.
2. Ipatong ang platform na mayroong load sensor sa ilalim.
3. Ilagay sa ibabaw ang Dryer
4. Ikabit ang cable connector na nagdudugtong sa device at base.
5. Buhayin at i-calibrate ang device.




1



2



3



5



6

PAANO GAMITIN ANG DRYER?

Napakadaling gamiting ng dryer na ito dahil makikita mo na sa LCD Screen ang mga hakbang na dapat mong gawin upang ito ay mapagana. Narito ang mga hakbang upang magamit ang dryer sa wastong paraan

Paghahanda ng isdang tutuyuin:

Step 1: Hugasan muna nang maigi ang mga isda

Step 2: Ibabad ang isda sa tubig na may asin. (0.33 grams na asin sa isang litrong tubig). Maaari rin gumamit ng ibang timpla na naaayon sa nais na lasa. Ibabad sa loob ng tatlo o higit pang oras.

Step 4: Matapos ibabad, banlawan ang isda.

Step 5: Patuluin muna sa isang strainer o salaan ang mga isda sa loob ng 5-15 minuto upang matanggal ang tubig at mapabilis ang pagtutuyo



PAANO GAMITIN ANG DRYER?

4

Paggamit ng device

Step 1: Isaksak ang device, siguruhing hindi ito mahuhugot habang tinutuyo ang isda.

Step 2: I-on ang switch ng device, siguraduhing nakasara at nakalagay lahat ng tray sa loob ng device.

Step 4: I-calibrate ang device, pindutin ang yellow button at sundin ang sinasabi sa LCD Screen.(opsyonal)

Step 5: Matapos i-calibrate, pindutin ang green button, sundin ang sinasabi sa LCD screen.

Step 6: Pag lumabas ang “insert the fish”, buksan ang device at ilatag ang mga isda sa tray.

Step 7: Isara ang device at pindutin ang green button.

Step 8: Kumpirmahin na nasisimula ang pagtutuyo sa pagtingin sa LCD.

Step 9: Hintayin na matapos ang pagtutuyo, maaaring makareceive ng text mula sa device kung ito ay may load.

Ang pagtutuyo ay maaring tumagal ng 12-17 oras depende sa laki at dami ng isda na tutuyuin

PAANO LINISIN ANG DRYER?

Ang pagiging malinis ay labis na mahalaga sa lahat ng bagay. Makakaiwas tayo sa mga mikrobyo at iba pang maaaring magdulot ng hindi maganda sa ating katawan. Narito ang ilan sa mga paraan kung paano linisin ang dryer.

1. Siguraduhing hindi nakasaksak ang device kung ito ay lilinisin. Maaaring magdulot ng kapahamakan kung lilinisin ang device habang ito ay nakasaksak sa outlet.
2. Punasan ang device ng basang basahan upang lumambot ang mga residue ng isda. At punasan ito ng mayroong dishwashing liquid.
3. Punasan muli ang device ng basahan upang mawala ang sabon.

Para sa tray

1. Gumamit ng Brush na mayroong dishwashing liquid upang matanggal ang tira tirang isda.
2. Patuyuin muna bago ibalik sa loob ng dryer upang hindi tumulo ang tubig sa loob na maaring maging sanhi ng pagkakaroon ng bacteria

IKAW BA AY
MAYROONG
KATANUNGAN?

KONTAKIN KAMI



AERON PAUL ORTIZ
cpe.ortiz.aeronpaul@gmail.com
09122947284

SAMUEL HERNANDEZ
cpe.hernandez.samuel@gmail.com
09312145655



GROUP 3

Appendix J.2: User's Manual (English Version)

 GROUP 3

ARDUINO-BASED DEHYDRATOR

For Tamban and Galunggong Fish (English Version)

USER MANUAL

PREPARED BY

ZJ Francis Dem F. Estrada
Samuel R. Hernandez
Trixie Jem Nicole L. Lagrimas
Aeron Paul C. Ortiz
Jovel Neile B. Peñaloza
Julius D. Sumilang

May 2024




CONTENTS

PARTS OF THE DEVICE-----	1
TO SET UP THE DEVICE-----	2
HOW TO USE? -----	3
HOW TO CLEAN? -----	5

PARTS OF THE DEVICE

1

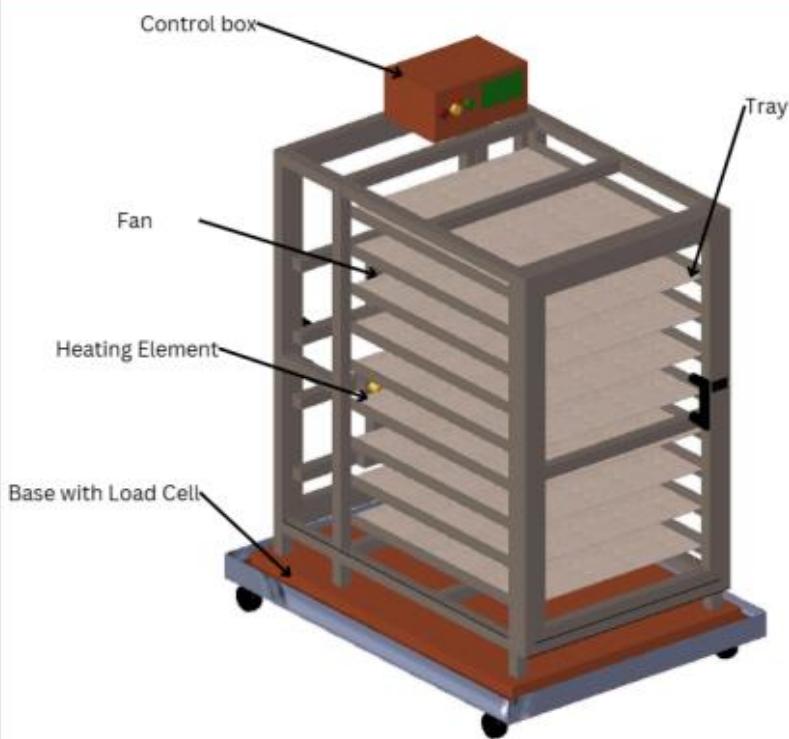

Control box - Here is where the microcontroller, relay, and various modules used to operate the device are placed.

Fan - This is what circulates or distributes the air inside the device.

Heating Element - This is what provides heat inside the device

Base with Load Cell - This is where the sensor is placed to monitor the weight of the fish inside the device.

Tray - This is where the fish to be dried are placed.

HOW TO SET UP THE DEVICE?

2

1. Place the base on a level surface.
2. Place the platform with the load sensor underneath.
3. Place the dryer on top.



1




2



3

4. Connect the cable connector that links the device to the base.
5. Turn on and calibrate the device.



5



6

HOW TO USE THE DRYER?

3

Using this dryer is very easy because you can see on the LCD screen the steps you need to take to operate it properly. Here are the steps to properly use the dryer:

Preparation of dried fish:

Step 1: Thoroughly wash the fish first.

Step 2: Soak the fish in water with salt (0.33 grams of salt per liter of water). You can also use other seasonings according to your desired taste. Soak for at least three hours or more.

Step 4: After soaking, rinse the fish.

Step 5: Drain the fish in a strainer or colander for 5-15 minutes to remove excess water and speed up the drying process.



HOW TO USE THE DRYER?

4

Device usage

Step 1: Plug in the device, ensuring it remains secure while the fish is being dried.

Step 2: Turn on the switch of the device, ensuring all trays are closed and properly placed inside.

Step 4: Calibrate the device by pressing the yellow button and following the instructions on the LCD screen.
(Optional)

Step 5: After calibrating, press the green button and follow the instructions on the LCD screen.

Step 6: When 'insert the fish' appears, open the device and lay out the fish on the tray.

Step 7: Close the device and press the green button.

Step 8: Confirm that the drying process has started by checking the LCD.

Step 9: Wait for the drying process to finish. You may receive a text message from the device if it has load

The drying process may take 12-17 hours, depending on the size and quantity of fish being dried

HOW TO CLEAN THE DRYER?

5

Cleanliness is extremely important in everything. It helps us avoid microbes and other things that may have negative effects on our bodies. Here are some ways to clean the dryer.

1. Make sure the device is unplugged when cleaning it.
Cleaning the device while it is plugged into the outlet can be hazardous..
2. Wipe the device with a damp cloth to soften any fish residue. Then wipe it with dishwashing liquid.
3. Wipe the device again with a wet cloth to remove the soap.

For the tray

1. Use a brush with dishwashing liquid to remove any remaining fish residue.
2. Allow it to dry completely before returning it to the dryer to prevent water from dripping inside, which could lead to bacterial growth.

**DO YOU HAVE
ANY QUESTIONS?**

CONTACT US.



AERON PAUL ORTIZ
cpe.ortiz.aeronpaul@gmail.com
09122947284

SAMUEL HERNANDEZ
cpe.hernandez.samuel@gmail.com
09312145655



GROUP 3

Appendix K:

Pictures during Defenses, Evaluation, and Deployment

Appendix K.1: Topic Presentation



On October 23, 2023, the developers presented their topic in Room 103 of the COE building to the Design Project committee, which included Dr. Aquino as their chairperson, Engr. Escobido and Dr. Magee who are member of panelists, and with their Design Project Adviser, Engr. Cura.

Appendix K.2: Pre-Oral Presentation





On January 18, 2024, the developers presented their Chapters 1 to 3 in Room 103 of the COE building to the Design Project Committee. The committee comprised Engr. Brucal as the chairperson, Engr. Escobido and Dr. Magee as panel members, their adviser, Engr. Cura, and two guest panelists, Mr. Patrick Kevin Magee and Mrs. Rosa Kelly Santiago.

Appendix K.3: Final Defense





The images above show the final defense presentation during and after the developers' final defense on May 21, 2024, in the Faculty of Engineering. Present were the panel members Dr. Magee, Engr. Orense, and Engr. Brucal; the developers' chairperson, Engr. Cura; the developers' adviser; and Mr. Dennis S. Gambuta from OVPRI.

Appendix K.4.A: Evaluation of CpE Practitioners

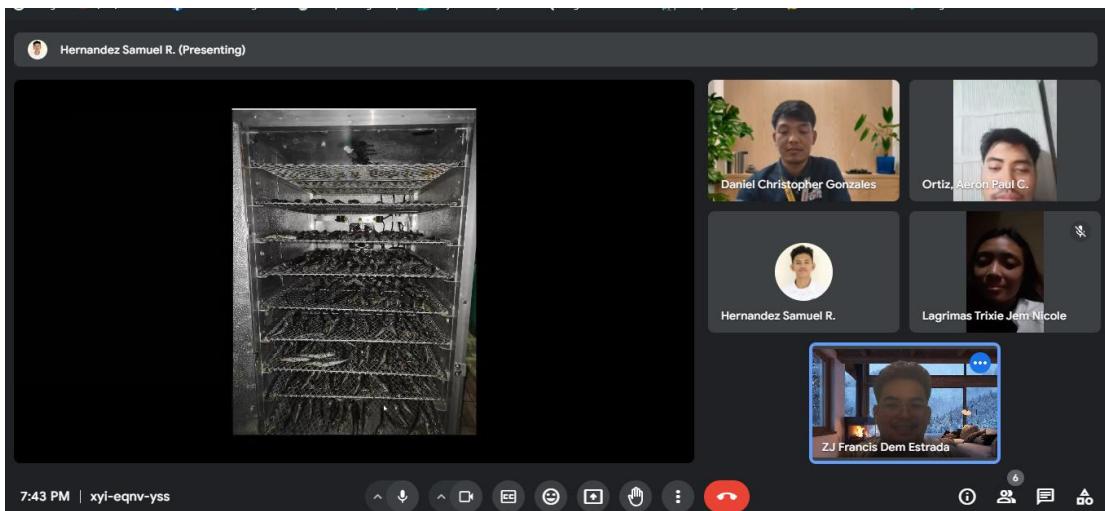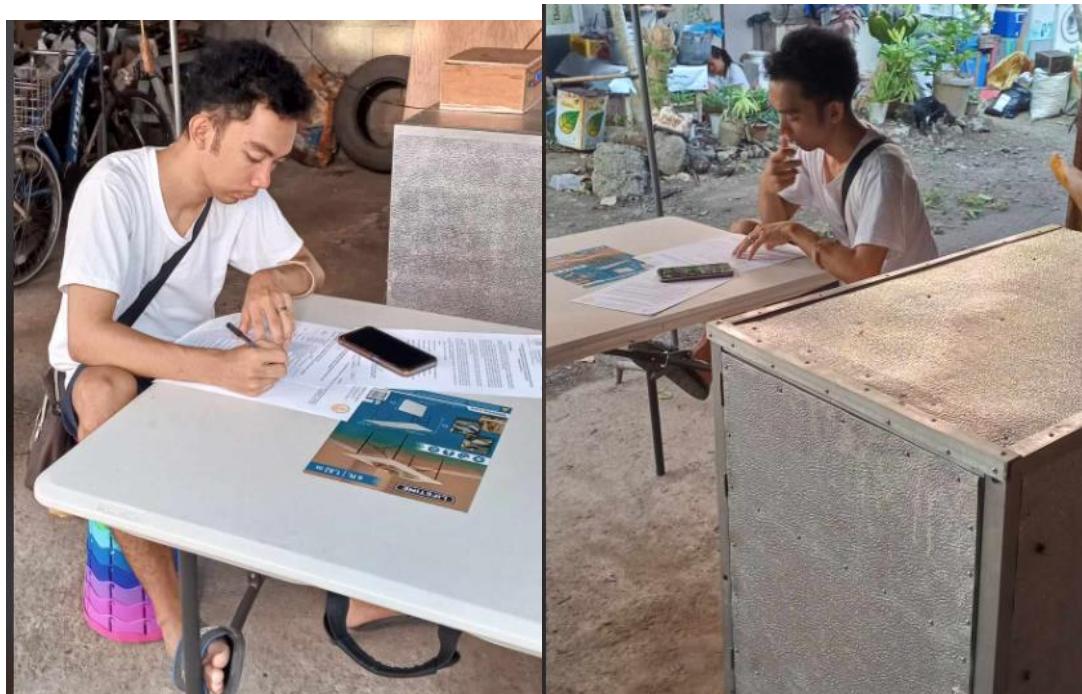

The first image is the photo of Engr. Anista while evaluating the device in the Brgy. San Rafael San Pablo City Laguna. The second image depicts Engr. Gonzales, an IT System Support Specialist at DHL Supply Chain Philippines. To facilitate the evaluation of the device, the developers utilized a Google Meet video conference to present it to Engr. Gonzales.

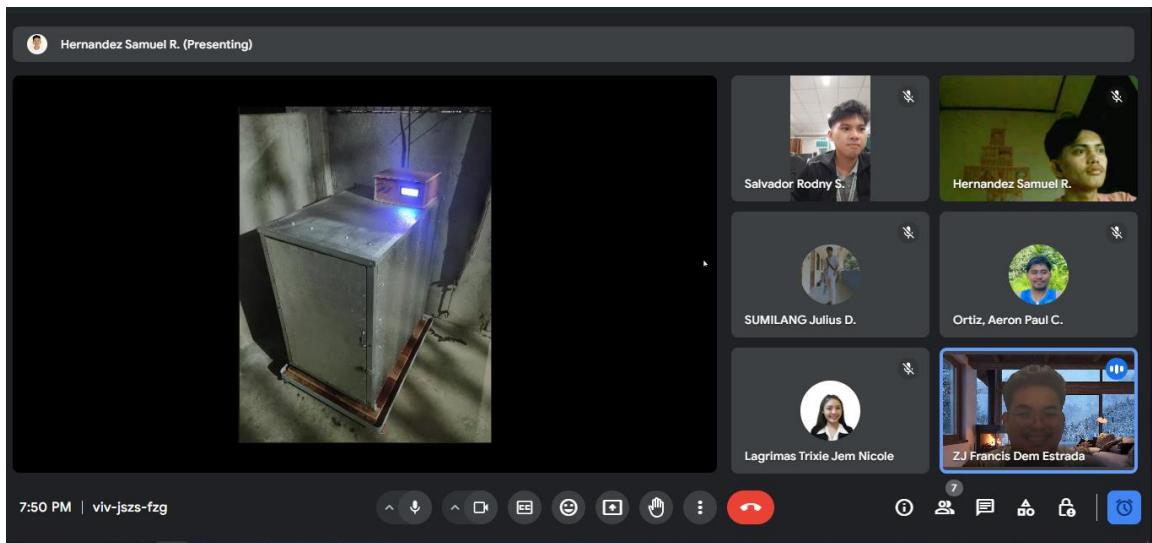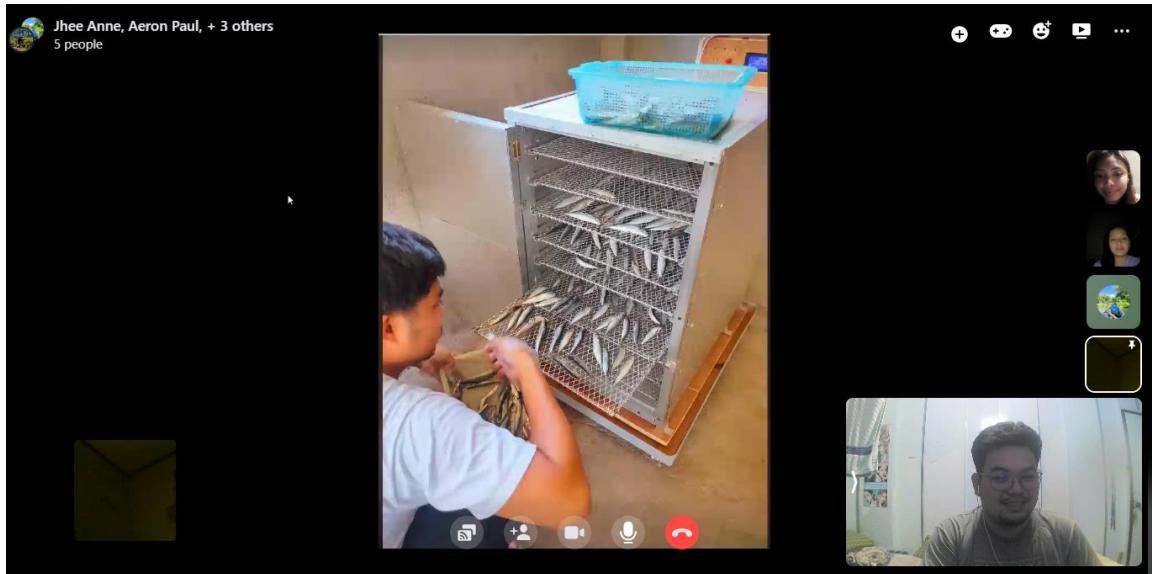

This first image above captures the evaluation of the device by Engr. Jhee Anne, a Project Engineer at Integrated Micro-Electronics Inc. The evaluation was conducted through a Messenger call. The second image depicts Engr. Salvador, developer at FDS Asya. To facilitate the evaluation of the device, the developers utilized a Google Meet video conference to present it to Engr. Salvador.

Appendix K.4.B: Evaluation of Fresh Fish Sellers



The image above shows the developers along with the evaluators at the San Pablo City Public Market. The developers carefully explain the function of the device and present a video demonstration to ensure the evaluators can properly assess the device's capabilities.



The picture above shows the additional documentation for the evaluation of the device by the retail fish vendor in San Pablo City Public Market on April 13, 2024.



This picture captures the developers with their client, Mr. Efrain Maranan Jr., during the evaluation at the San Pablo City Public Market on April 13, 2024. The developers are meticulously explaining the functionalities of their device to Mr. Maranan using pictures and a video presentation. Throughout the evaluation, the developers ensured they did not interfere with the client's business activities.

Appendix K.4.C: Evaluation of Dried Fish Sellers



The photograph depicts the developers interacting with two dried fish sellers who are evaluating the device at the San Pablo City Public Market on April 13, 2024. During this evaluation, the developers presented a video demonstration and additional photographs to aid the sellers in assessing the device.



The photograph showcases the developers interacting with dried fish sellers at the San Pablo City Public Market on April 13, 2024. During this evaluation, the developers presented a video demonstration and additional photographs to facilitate the evaluation of the device by the sellers.

Appendix K.5: Pictures During Deployment




This shows the photo of the deployment of the device on June 19, 2024 along with Engr. Jomar C. Escobido, and the client and his family in Brgy. San Gabriel San Pablo City Laguna.

Appendix K.6: Memorandum of Understanding

MEMORANDUM OF UNDERSTANDING

KNOW ALL MEN BY THESE PRESENTS:

This Memorandum of Understanding entered into by and between:


PAMANTASAN NG LUNGSOD NG SAN PABLO College of Engineering, with office located at
Brgy. San Jose, San Pablo City represented herein by its Dean of the College of Engineering, DR.
SOLITA M. MAGEE; represented in this Agreement by ENGR. JOMAR C. ESCOBIDO and referred
hereto as PLSP-COE;

-and-


MR. EFRAIN MARANAN JR., a retail fish vendor in the Public Market in the City of San Pablo
living in BRGY. SAN GABRIEL, CITY OF SAN PABLO;

WITNESSETH: That,

WHEREAS, the students from the Pamantasan ng Lungsod ng San Pablo – College of
Engineering developed an automated Tamban and Galunggong dehydrator project for the requirements
of Design Project 2 course;

WHEREAS, Mr. Maranan desires to have the project deployed in his residence at Brgy. San
Gabriel, City of San Pablo;

WHEREAS, the Panel Representative and Mr. Maranan have agreed to the terms and conditions
for the deployment of the project;

NOW, THEREFORE in consideration of the foregoing premises and the mutual covenant
hereinafter contained, the parties agree as follows:

A. ROLES AND RESPONSIBILITIES OF THE PARTIES

1. Deployment of Project

1.1. The panel representative agrees to deploy the automated fish dehydrator at the Brgy. San
Gabriel, City of San Pablo. Mr. Maranan agrees to accept the project and allow its deployment at
his residence.

2. Deployment Schedule

2.1. The deployment of the project has occurred at 9:00 am of 19th day of June 2024 at Brgy. San
Gabriel, City of San Pablo.
2.2 The panel representative and developers provided Mr. Maranan with a finalized deployment
schedule at least one (1) week prior to the deployment date.

3. Responsibilities of the Developers

3.1. The developers shall be responsible for the following:
a) Delivery of the project to the Brgy. San Gabriel, City of San Pablo.
b) Installation and configuration of the project at the clients' residence.
c) Training of client on the operation and maintenance of the device.
d) Providing warranty coverage for the automated fish dehydrator for a period of six (6)
months from the date of deployment (excluding the device hardware and all the
components).

4. Responsibilities of the Client

4.1. The client shall be responsible for the following:
a) Providing a suitable location for the deployment of the project, taking into consideration of
the project's specifications and operational requirements.
b) Providing access to utilities required for the operation of the project.
c) Ensuring the safety and security of the project after its deployment.
d) Performing routine maintenance of the project in accordance with the instructions provided
by the developers.

5. Intellectual Property

5.1. The developers shall retain all ownership rights to the intellectual property associated with
the project.

B. EFFECTIVITY CLAUSE

This Agreement constitutes the entire agreement between the parties with respect to the subject matter hereof and supersedes all prior or contemporaneous communications, representations, or agreements, whether oral or written. This Agreement may be amended only by a written instrument signed by both parties.

IN WITNESS WHEREOF, the parties hereunto have affixed their respective signatures this day of 26 JUN 2024 at SAN PABLO CITY, Philippines.

PAMANTASAN NG LUNGSOD NG SAN PABLO


ENGR. JOMAR C. ESCOBIDO
Panelists' Representative


ENGR. JAKE C. MAGPILY
Extension Coordinator



DR. SOLITA M. MAGEE
Dean, PLSP-College of Engineering


BRGY. SAN GABRIEL, CITY OF SAN PABLO

MR. EFRAIN MARANAN JR.
Retail Fish Vendor

Signed in the presence of:


ENGR. MARIO JR G. BRUCAL
Panelist's Chairperson


ENGR. REY A. ORENSE
Panelist's Member

ACKNOWLEDGMENT

BEFORE ME, a Notary Public for and in San Pablo City, Laguna, personally appeared the following persons on 26 JUN 2024, 2024 who presented to me their Competent Proof of Identities as follows:


Name	ID Number	Type/Kind of ID
Jomar C. Escobido		
Jake C. Magpily		
Efrain Maranan Jr.		
Solita M. Magee		

known to me to be the same persons who executed the foregoing understanding and acknowledged to me that the same is their free and voluntary act and deed of that of the institutions they respectively represent.

This instrument refers to a Memorandum of Understanding consisting of two (2) pages, including this page whereon this Acknowledgment is written and signed by the parties and their instrumental witnesses.

WITNESS MY HAND AND NOTARIAL SEAL, on the date and at the place first mentioned.

Doc. No. 34;
Page No. 50;
Book No. XIV;
Series of 2024


ATTY. AGRIPIINO G. MORGА
NOTARY PUBLIC
COMMISSION EXPIRES ON DEC. 31, 2025
P. ZAMORA ST. BRGY VII-B SAN PABLO CITY
ROLL NO. 30333
MCLE EXEMPTION VII-JRTCR 002752. 4-14-25
IBP NO. 383696. 1-2-2024
PTR NO. 6124475. 1-2-2024

Appendix L: System Source Code

```
# #include <SoftwareSerial.h>
#include <Wire.h>
#include <LiquidCrystal_I2C.h>
#include <DHT.h>
#include "HX711.h"
#include <EEPROM.h>

SoftwareSerial myGSM(8,9);

//this is for the pin of load sensor
uint8_t dataPin = 4;
uint8_t clockPin = 5;

//this is for the button
#define BUTTON_PIN_GREEN 3 //for the button
#define BUTTON_PIN_YELLOW 2 //for the button
#define BUTTON_PIN_RED 10 // for the red button

//this is for the Temperature sensor
#define DHTPIN 12
#define DHTTYPE DHT22
DHT dht(DHTPIN, DHTTYPE);
#define TEMPERATURE_READ_INTERVAL 5000
unsigned long lastTempReadTime = 0;

//this is for relays
#define RELAY_PIN1 6 // heater
#define RELAY_PIN2 7

//this is for the display
LiquidCrystal_I2C lcd(0x27, 20, 4);

//this is for the data in loadcell
HX711 scale;
const int calVal_eepromAdress = 0;
float w1, w2, previous = 0;
```

```
float initialWeight;  
  
//this is for the button  
int GREENButtonState;  
int YELLOWButtonState;  
int REDButtonState;  
  
void setup() {  
    lcd.begin(20, 4);  
    lcd.backlight();  
  
    pinMode(BUTTON_PIN_GREEN, INPUT_PULLUP);  
    pinMode(BUTTON_PIN_YELLOW, INPUT_PULLUP);  
    pinMode(BUTTON_PIN_RED, INPUT_PULLUP);  
    pinMode(RELAY_PIN1, OUTPUT);  
    pinMode(RELAY_PIN2, OUTPUT);  
    myGSM.begin(9600); //baud rate of GSM Module or set to 9600  
    delay(100);  
  
    customSetup();  
  
    dht.begin();  
  
    scale.begin(dataPin, clockPin);  
    float calibrationValue;  
    EEPROM.get(calVal_eepromAdress, calibrationValue);  
    scale.set_scale(calibrationValue);  
  
    lcd.clear();  
    lcd.setCursor(0, 0);  
    lcd.print(" Drying Setup");  
    lcd.setCursor(0, 2);  
    lcd.print(" Taring..");  
    lcd.setCursor(0, 3);  
    lcd.print(" Do not touch");  
    delay(5000);  
  
    scale.tare();
```

```
lcd.clear();
lcd.setCursor(0, 2);
lcd.print("    Wait a moment..");
lcd.setCursor(0, 3);
lcd.print("    Do not touch");
delay(2000);

dryingSetup();
sendFirst();

}

void loop(){

unsigned long time = millis();
unsigned long hours = time / 3600000UL;
unsigned long minutes = (time % 3600000UL) / 60000UL;
float fractionOfHour = (time % 60000UL) / 3600000.0;
float temp = dht.readTemperature();
float humidity = dht.readHumidity();

digitalWrite(RELAY_PIN2, HIGH);

w1 = scale.get_units(10);
delay(100);
w2 = scale.get_units();
while (abs(w1 - w2) > 10)
{
    w1 = w2;
    w2 = scale.get_units();
    delay(100);
}

w1 /= 1000;

lcd.clear();
lcd.setCursor(0,0);
lcd.print("    Drying...");
lcd.setCursor(0,1);
lcd.print("Weight: ");
```

```

lcd.print(w1);
lcd.print("kg");

if (time - lastTempReadTime >= TEMPERATURE_READ_INTERVAL) {
    if (hours < 4) {
        if (temp < 36) {
            digitalWrite(RELAY_PIN1, HIGH);
        } else if (temp > 41) {
            digitalWrite(RELAY_PIN1, LOW);
        }
    } else {
        // Control temperature for the remaining time (53-58°C)
        if (temp < 52) {
            digitalWrite(RELAY_PIN1, HIGH);
        } else if (temp > 57) {
            digitalWrite(RELAY_PIN1, LOW);
        }
    }
    lastTempReadTime = time; // Update the last reading time
}
lcd.setCursor(0,2);
lcd.print("Temp:");
lcd.print(temp);
lcd.print("C");
lcd.setCursor(0,3);
lcd.print("Humidity:");
lcd.print(humidity);
lcd.print("%");

if(w1<initialWeight*0.45 || hours > 17){
    lcd.clear();
    digitalWrite(RELAY_PIN1, LOW);
    digitalWrite(RELAY_PIN2, LOW);
    sendMessage(w1);

    while(true){

        lcd.setCursor(0, 0);
        lcd.print("    Done! ");
    }
}

```

```
lcd.setCursor(0, 1);
lcd.print("Time:");
lcd.print(hours);
lcd.print("h ");
lcd.print(minutes);
lcd.print("min");

lcd.setCursor(0, 2);
lcd.print("Before: ");
lcd.print(initialWeight);
lcd.print("kg");

lcd.setCursor(0, 3);
lcd.print("After: ");
lcd.print(w1);
lcd.print("kg");
}

}

}

void calibrate() {
lcd.clear();
lcd.setCursor(0, 0);
lcd.print(" Calibration");
scale.begin(dataPin, clockPin);
lcd.setCursor(0, 1);
lcd.print(" Please wait");

delay(5000);
float known_weight = 500;
uint32_t new_weight = 0;

scale.tare(20);
uint32_t offset = scale.get_offset();

lcd.clear();
lcd.setCursor(0, 0);
lcd.print(" Calibration");
lcd.setCursor(0, 1);
```

```
lcd.print("1.Remove all weights");
lcd.setCursor(0, 2);
lcd.print("2.Place 500g weight");
lcd.setCursor(0, 3);
lcd.print("3.Push Green button");

while (digitalRead(BUTTON_PIN_GREEN) == HIGH) {
    delay(50);
}

lcd.clear();
lcd.setCursor(0, 0);
lcd.print(" Calibration");
lcd.setCursor(0, 1);
lcd.print("Calibrating...");
delay(5000);

new_weight = known_weight;

scale.calibrate_scale(new_weight, 20);
float newCalibrationValue = scale.get_scale();
EEPROM.put(calVal_eepromAdress, newCalibrationValue);

lcd.clear();
lcd.setCursor(0, 0);
lcd.print(" Calibration");

lcd.setCursor(0, 1);
lcd.print("*****Success!*****");
delay(1000);

while (digitalRead(BUTTON_PIN_RED) == HIGH) {
    delay(50);
    lcd.setCursor(0, 2);
    lcd.print("Press Red Button");
    lcd.setCursor(0, 3);
    lcd.print("to exit");
}
customSetup();
}
```

```
void customSetup() {  
    lcd.clear();  
    while (true) {  
        lcd.setCursor(0, 0);  
        lcd.print("      Setup");  
        lcd.setCursor(0, 1);  
        lcd.print("Please Press");  
        lcd.setCursor(0, 2);  
        lcd.print("Yellow - Calibrate");  
        lcd.setCursor(0, 3);  
        lcd.print("Green - Start Drying");  
  
        GREENButtonState = digitalRead(BUTTON_PIN_GREEN);  
        YELLOWButtonState = digitalRead(BUTTON_PIN_YELLOW);  
  
        if (GREENButtonState == LOW) {  
            lcd.clear();  
            lcd.setCursor(0, 0);  
            lcd.print("      Choose");  
            lcd.setCursor(0, 1);  
            lcd.print("      Setup");  
            lcd.setCursor(0, 2);  
            lcd.print("  Start Drying");  
            delay(2000);  
            break;  
        } else if (YELLOWButtonState == LOW) {  
            lcd.clear();  
            lcd.setCursor(0, 0);  
            lcd.print("      Setup");  
            lcd.setCursor(0, 0);  
            lcd.print("  Calibrate");  
            delay(2000);  
            calibrate();  
        }  
    }  
}  
  
void dryingSetup(){
```

```
lcd.clear();
lcd.setCursor(0, 0);
lcd.print("    Setup");

lcd.setCursor(0, 1);
lcd.print("1. Insert Fish");

lcd.setCursor(0, 2);
lcd.print("2. Press green button");
lcd.setCursor(0, 3);
lcd.print("  when done.");

while (digitalRead(BUTTON_PIN_GREEN) == HIGH) {
  delay(50);
}

lcd.clear();
lcd.setCursor(0, 0);
lcd.print("    Setup");

lcd.setCursor(0, 1);
lcd.print("  Please Wait");
delay(5000);

w1 = scale.get_units(10);
delay(100);
w2 = scale.get_units();
while (abs(w1 - w2) > 10)
{
  w1 = w2;
  w2 = scale.get_units();
  delay(100);
}

w1 /= 1000;
initialWeight = w1;


lcd.clear();
lcd.setCursor(0, 0);
lcd.print("    Setup");
```

```
lcd.setCursor(0, 1);
lcd.print("Weight: ");
lcd.print(initialWeight);
lcd.print("kg");
lcd.setCursor(0, 3);
lcd.print("Please wait");
delay(3000);
}

void sendMessage(double weight) {
    String message = "Drying is done, Final Weight: " + String(weight);
    myGSM.println("AT+CMGF=1");
    delay(1000);
    myGSM.println("AT+CMGS=\"099123456789\"\r");
    delay(1000);
    // Send the message
    myGSM.println(message);
    delay(1000);
    myGSM.println((char)26);
    delay(1000);
}

void sendFirst(){
    myGSM.println("AT+CMGF=1");
    delay(1000);
    myGSM.println("AT+CMGS=\"+639123456789\"\r");
    delay(1000);
    myGSM.println("The drying will begin");
    delay(1000);
    myGSM.println((char)26);
    delay(1000);
}
```

Appendix M: Grammarly Plagiarism Results

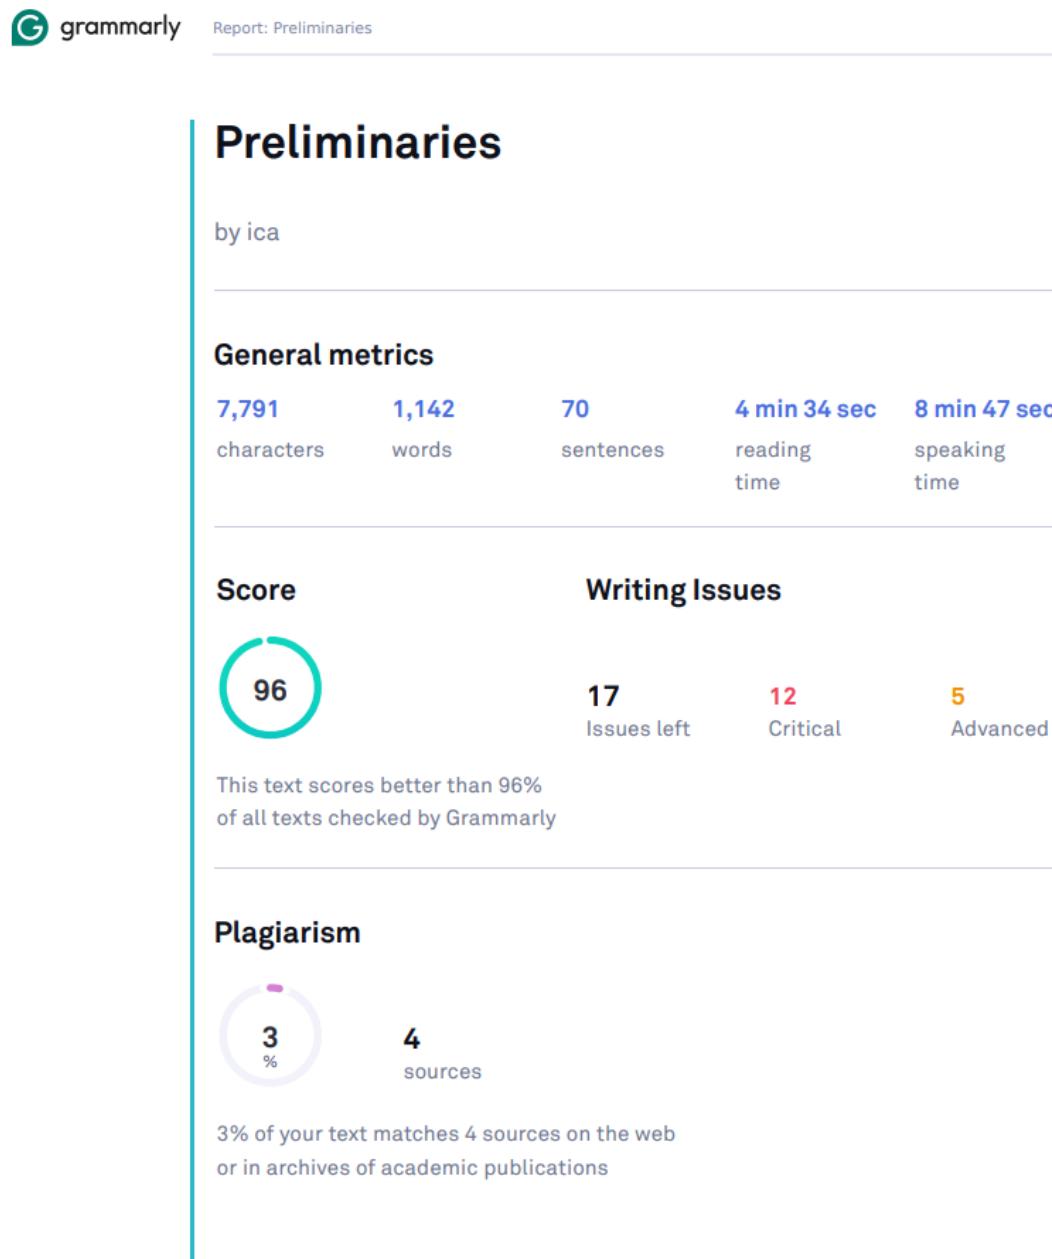



Report: Chapter 1

Chapter 1

by ica

General metrics

15,678	2,363	135	9 min 27 sec	18 min 10 sec
characters	words	sentences	reading time	speaking time

Score



99

Writing Issues

17
Issues left

Critical

17 Advanced

This text scores better than 99%
of all texts checked by Grammarly

Plagiarism



2
%

0
source

2% of your text matches 0 sources on the web
or in archives of academic publications



Report: Chapter 2

Chapter 2

by ica

General metrics

40,925	5,852	326	23 min 24 sec	45 min 0 sec
characters	words	sentences	reading time	speaking time

Score



99

Writing Issues

61	21	40
Issues left	Critical	Advanced

This text scores better than 99%
of all texts checked by Grammarly

Plagiarism



1
%

5

sources

1% of your text matches 5 sources on the web
or in archives of academic publications



Report: Chapter 3

Chapter 3

by ica

General metrics

19,503	2,922	197	11 min 41 sec	22 min 28 sec
characters	words	sentences	reading time	speaking time

Score

98

Writing Issues

4

Issues left

1


Critical

25

Advanced

This text scores better than 98%
of all texts checked by Grammarly

Plagiarism



2
%

5

sources

2% of your text matches 5 sources on the web
or in archives of academic publications



Report: Chapter IV

Chapter IV

by ZJ Estrada

General metrics

64,258	7,441	1195	29 min 45 sec	57 min 14 sec
characters	words	sentences	reading time	speaking time

Score




94

Writing Issues

142	19	123
Issues left	Critical	Advanced

This text scores better than 94%
of all texts checked by Grammarly

Plagiarism



1
%

10
sources

1% of your text matches 10 sources on the web
or in archives of academic publications



Report: Chapter 5

Chapter 5

by ica

General metrics

4,645	709	46	2 min 50 sec	5 min 27 sec
characters	words	sentences	reading time	speaking time

Score



99

Writing Issues

5
Issues left

1
Critical

4
Advanced

This text scores better than 99%
of all texts checked by Grammarly

Plagiarism



4
%

2
sources


4% of your text matches 2 sources on the web
or in archives of academic publications

Appendix N: Grammarian's Certificate

June 24, 2024

GRAMMARIAN'S CERTIFICATE

This is to certify that I have edited the thesis/research entitled "Arduino-Based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in the Public Market of the City of San Pablo", and found it thorough and acceptable with respect to English grammar and composition.



Gladys Grace S. Farolan, LPT, MAED English
Grammariian/Language Editor
+639608315906
ggsfarolan23@gmail.com

Name of Developers:

Samuel R. Hernandez
ZJ Francis Dem F. Estrada
Trixie Jem Nicole L. Lagrimas
Aeron Paul C. Ortiz
Jovel Neile B. Peñaloza
Julius D. Sumilang

Bachelor of Science in Computer Engineering
Pamantasan ng Lungsod ng San Pablo
College of Engineering

Appendix O:
Certificates of Recognition

Appendix O.1: Certificates of Recognition from College of Engineering







**Appendix O.2: Certificates of Recognition from Office of the Vice President for
Research and Innovation**

Appendix P: Developers' Consent to Access Their Profile



Patriotism • Leadership • Service • Professionalism

PAMANTASAN NG LUNGSOD NG SAN PABLO COLLEGE OF ENGINEERING

Brgy. San Jose, San Pablo City
Tel No.: (049) 536-7830
Email Address: pispoofficial@plsp.edu.ph

website: plsp.coe@plsp.edu.ph



CONSENT

We, the BSCpE students under the College of Engineering, whose names appeared below, were the developers of the design project entitled "**Arduino-Based Tamban and Galunggong Dehydrator for Selected Retail Fish Vendor in San Pablo City Public Market**". We are fully aware that Pamantasan ng Lungsod ng San Pablo or the designated representative is duty bound and obligated under the Data Privacy Act of 2012 and its Implementing Rules and Regulations (IRR) effective since September 8, 2016, to protect our personal and sensitive information that it collects, processes, and retains upon our application for admission, enrolment, and during my stay in the University.

Likewise, we are fully aware that PLSP may share such information to its affiliates or partner organizations as part of its contractual obligation, or with government agencies pursuant to law or legal processes. In this regard, we hereby allow PLSP to collect, process, use and share our personal data in the pursuit of its legitimate academic, research, and employment purposes and/or interests as an educational institution.

Aeron Paul C. Ortiz

Jovel Neile B. Peñaloza

Julius D. Sumilang

Samuel R. Hernandez

Trixie Jem Nicole L. Lagrimas

ZJ Francois Dem F. Estrada

April 30, 2024

"Primed to Lead and Serve for Progress"

Issue No.	0	Revision No.	0	Effective Date	May 2024
-----------	---	--------------	---	----------------	----------

Appendix Q:

Developers' Profile

SAMUEL R. HERNANDEZ

San Francisco
Tiaong Quezon
Contact #: +63-931-214-5655
Email: cpe.hernandez.samuel@gmail.com



EDUCATIONAL ATTAINMENT

- TERTIARY Pamantasan ng Lungsod ng San Pablo
Brgy. San Jose, City of San Pablo
AY 2020-2024
- SECONDARY Saint John Parochial School
Brgy. Poblacion IV Tiaong, Quezon
SY 2018-2020
- PRIMARY San Francisco Elementary School
Brgy. San Francisco Tiaong, Quezon
SY 2013-2014

SKILLS

- Video Editing
- HTML/CSS
- JavaScript
- Python
- AUTOCAD
- Software Installation and Troubleshooting

PERSONAL INFORMATION

Date of Birth : August 15, 2002
Place of Birth : Tiaong, Quezon
Sex : Male
Nationality : Filipino
Civil Status : Single
Language Spoken : Filipino/English
Parents
Father: Leodegario V. Hernandez
Mother: Maribel R. Hernandez

ZJ FRANCIS DEM F. ESTRADA
240 Maharlika Hwy, San Rafael,
San Pablo City, Laguna
Contact #: +63-977-196-1258
Email: cpe.estrada.zj@gmail.com



EDUCATIONAL ATTAINMENT

- **TERTIARY** Pamantasan ng Lungsod ng San Pablo
Brgy. San Jose, City of San Pablo
AY 2020-2024

- **SECONDARY** Central Philippines Adventist College
Murcia, 6129 Negros Occidental
AY 2017-2018

- **PRIMARY** Lipa Adventist Academy
Bugtong, Lipa City
SY 2009-2013

- **PRIMARY** Utod Adventist Elementary School
Utod, San Francisco, Quezon
SY 2005-2009

- **PRIMARY** Malinao Ibaba Elementary School
Brgy. Malinao Ibaba, Atimonan, Quezon
SY 2004-2005

SKILLS

- Graphic Design
- Video Editing
- Photography
- AUTOCAD

PERSONAL INFORMATION

Date of Birth : February 18, 1996
Place of Birth : Isabela
Sex : Male
Nationality : Filipino
Civil Status : Single
Language Spoken : Filipino/English
Parents
Father: Zaldy P. Estrada
Mother: Jovie F. Estrada

TRIXIE JEM NICOLE L. LAGRIMAS
64 Doña Esperanza St. Crispina Park Subd.
San Pablo City, Laguna
Contact #: +63-9530393286
Email: cpe.lagrimastrixiejemnicole@gmail.com



EDUCATIONAL ATTAINMENT

- TERTIARY Pamantasan ng Lungsod ng San Pablo
Brgy. San Jose, City of San Pablo
AY 2020-2024
- SECONDARY San Pablo Christian School
San Pablo City, Laguna
SY 2018-2020
- PRIMARY San Pablo Central Elementary School
San Pablo City, Laguna
SY 2008-2014

SKILLS

- Ability to work under pressure
- Goal Oriented
- Time Management
- Adaptability
- Hard work and Dedication
- Computer Literate
- Knowledge in MS Office

PERSONAL INFORMATION

Date of Birth : January 11, 2002
Place of Birth : San Pablo City
Sex : Female
Nationality : Filipino
Civil Status : Single
Language Spoken : Filipino/English
Parents
 Father: Jeff B. Lagrimas
 Mother: Jasmin P. Lucero

AERON PAUL C. ORTIZ

Sitio Ilaya Kaliwa, Brgy Behia
Tiaong Quezon
Contact #: +63991 335 8458
Email: bscpeortizaeronpaul@gmail.com



EDUCATIONAL ATTAINMENT

- TERTIARY Pamantasan ng Lungsod ng San Pablo
Brgy. San Jose, City of San Pablo
AY 2020-2024
- SECONDARY Recto Memorial National High School
Atimonan, Quezon
SY 2017-2020
- PRIMARY Maligaya National High School
Atimonan, Quezon
SY 2016-2017
- PRIMARY Rizal Elementary School
Atimonan, Quezon
SY 2013-2014

SKILLS

- Data Analysis
- Creative Problem Solving
- Effective Communication and Teamwork Skill
- Adaptability and Willingness to Learn New Technology and Tools

PERSONAL INFORMATION

Date of Birth : November 17, 2001
Place of Birth : Sipocot Camarines Sur
Sex : Male
Nationality : Filipino
Civil Status : Single
Language Spoken : Filipino/English
Parents
Father: Christopher A. Ortiz
Mother: Elsa G. Cruzat

JOVEL NEILE B. PEÑALOZA

328 Barangay Bulakin 1
Dolores, Quezon
Contact #: +63-945-168-8320
Email: cpe.penaloza.jovelneile@gmail.com



EDUCATIONAL ATTAINMENT

- TERTIARY Pamantasan ng Lungsod ng San Pablo
Brgy. San Jose, City of San Pablo
AY 2020-2024
- SECONDARY Asian Institute of Technology and Education
Tiaong, Quezon
SY 2018-2020
- PRIMARY Bulakain Elementary School
Dolores, Quezon
SY 2008-2014

SKILLS

- Communication
- Time Management
- Video Editing
- Team Work & Cooperation
- Adabtability
- Photography

PERSONAL INFORMATION

Date of Birth : December 19, 2001
Place of Birth : Dolores, Quezon
Sex : Male
Nationality : Filipino
Civil Status : Single
Language Spoken : Filipino/English
Parents
Father: Jovel B. Peñaloza
Mother: Marcia B. Peñaloza

JULIUS D. SUMILANG

Blk 53 Lot 126 Makati Homeville
Brgy Dayap Calauan, Laguna
Contact #: +63-945-524-8950
Email: cpe.sumilang.julius@gmail.com



EDUCATIONAL ATTAINMENT

- TERTIARY Pamantasan ng Lungsod ng San Pablo
Brgy. San Jose, City of San Pablo
AY 2020-2024
- SECONDARY Dayap National High School Main
Calauan, Laguna
SY 2018-2020
- PRIMARY Pio Del Pilar National High School
Makati City
SY 2014-2018
- PRIMARY Nicanor Garcia Elementary School
Makati City
SY 2008-2014

SKILLS

- Basic Video Editing
- Software and OS Installation
- Programming Languages: HTML, CSS, C++, Java
- Software Installation and Troubleshooting

PERSONAL INFORMATION

Date of Birth : July 12, 2001
Place of Birth : Makati City
Sex : Male
Nationality : Filipino
Civil Status : Single
Language Spoken : Filipino/English
Parents
Father: Walter L. Sumilang
Mother: Jeneve D. Sumilang