

Where Do Events Come From?

Reactive and Energy-Efficient Programming From The Ground Up

Anonymous Author(s)

Abstract

In reactive and event-based systems, execution is guided by an external environment which generates inputs to the application and consumes outputs from it. Reactive languages provide dedicated syntax and semantics to deal with events and greatly simplify the programming experience in this domain. Nevertheless, the environment is typically prefabricated in a host language and the very central concept of events is implemented externally to the reactive language. In this work, we propose an interrupt handler primitive for a reactive language targeting embedded systems in order to take control of the whole event loop: from a sensor input source and back to an actuator output. We propose the new asynchronous primitive in the context of the synchronous language CÉU and discuss how they synergize to avoid race conditions at compile time, support lexically-scoped drivers, and provide automatic standby for applications.

Keywords interrupt service routine, sleep mode, synchronous reactive programming

1 Introduction

Reactive applications interact continuously and in real time with the external world through sensors and actuators peripherals (e.g., buttons, displays, timers, etc.). These interactions are typically represented as input events flowing from the peripherals to the application and as output events flowing from the application to the peripherals. As illustrated in Figure 1, all peripherals can be encapsulated as a single component, *the environment*, which controls the system execution in an event loop: the application sits idle waiting for an input; the environment awakes the application on the occurrence of an input; the application reacts to the input and generates back one or more outputs; the application becomes idle and the loop restarts.

The environment is typically implemented in a host language (e.g., C) and controls the main event loop, invoking entry points in the reactive language runtime on the occurrence of inputs and also receiving output calls, both through a documented API. As examples, Esterel [3] relies on C for passing events between the environment and the running program [7], while Elm [5] uses the concept of *ports*, which allows sending out values

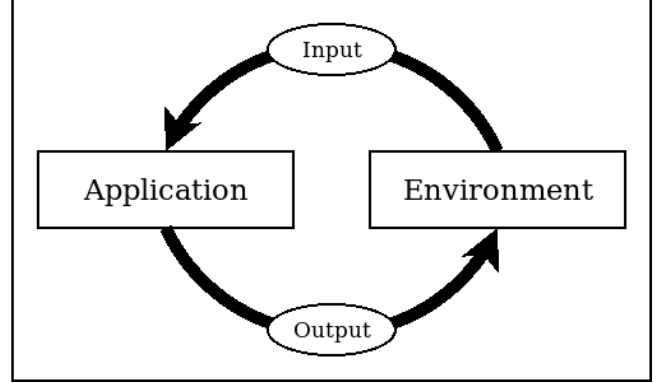


Figure 1. Event loop in reactive systems. The environment controls the application through input & output events.

to JavaScript in commands and listening for values in subscriptions [4].

The event-based interface between the application and the environment is arguably inevitable and also happens at the appropriate layer, since it connects the application with the operating system resources through a non-invasive API. However, this separation exposes the environment as a rigid system component that evolves in separate from the application. It also requires two languages and the programmer has to deal with multiple syntaxes, incompatible type systems, and different address spaces. Furthermore, in the context of embedded systems, a proper host OS may even be absent or lacking enough device drivers, which requires more low-level intervention from the application.

In this work, we propose interrupt service routines (ISRs) as an asynchronous primitive for the synchronous language CÉU [9]. ISRs empower reactive applications to also implement their own device drivers and self-generate inputs, bypassing the need for a host environment. CÉU targets resource-constrained architectures, such as Arduino-compatible microcontrollers, in which applications run in the bare metal, without operating system support. In this context, device drivers are typically libraries compiled together with the main program.

The lack of an OS opens an opportunity to explore a tighter integration between the application and its device drivers at the language level, resulting in an overall simplicity and tractability of the system. In particular, CÉU is already amenable to a simple static analysis to detect

race conditions which we extended to also encompass ISRs. Applications can share data buffers with drivers to avoid unnecessary copying, with the static guarantee that no data races will occur. CÉU also provides a lexical finalization mechanism that we adopt in drivers to properly disable interrupts and turn off peripherals completely. For instance, we can delimit the scope of a driver similarly to a lexically-scoped variables. Finally, the synchronous semantics of CÉU enforces that applications react to inputs in bounded time and remain in an idle states susceptible to standby. With the help of drivers and a power manager, we can put the microcontroller to sleep automatically at optimal sleeping modes after each input reaction.

We implemented an extensible runtime that exposes hooks for the interrupts and the power manager, which we validated in two microcontrollers: an *8-bit AVR/ATmega* and a *32-bit ARM/Cortex-M0*. We also implemented drivers for a variety of peripherals, such as GPIO, A/D converter, USART, SPI, and nRF24L01 transceiver. The applications built on top of these drivers show significant energy savings due to automatic standby.

TODO: weakness

2 Céu: Structured Synchronous Reactive Programming

CÉU [9] is a Esterel-based [10] reactive programming language targeting resource-constrained embedded systems, with the characteristics that follow:

Reactive: code only executes in reactions to events and is idle most of the time.

Structured: programs use lexically-scoped structured control mechanisms such as `spawn` and `await` (to create and suspend lines of execution).

Synchronous: reactions run atomically and to completion on each line of execution, i.e., there's no implicit preemption or real parallelism.

Structured reactive programming lets developers write code in direct style, recovering from the inversion of control imposed by event-driven execution [1, 6, 8].

Listing 1 illustrates the main characteristics of CÉU, namely event-driven I/O, lexically-scoped compositions, and synchronous execution. The program toggles the state of the LED whenever a radio packet is received, terminating on a button press, always with the LED off. The program first declares the LED output, and the BUTTON and RADIO_RECV input events (ln 1–3). The declarations include a payload type, i.e., each event occurrence carries a value of that type (`high/low` is a boolean type). Then, the program uses a `par/or` composition to run two lines of execution, aka *trails*, in parallel: a single-statement trail that waits for a button press before terminating (ln 5), and an endless loop that toggles the LED on and

```

1 output high/low LED;
2 input high/low BUTTON;
3 input Packet RADIO_RECV;
4 par/or do
5   var high/low v = await BUTTON (until v==low);
6 with
7   finalize with
8     emit LED(low);
9   end
10  loop do
11    emit LED(high);
12    await RADIO_RECV;
13    emit LED(low);
14    await RADIO_RECV;
15  end
16 end

```

Listing 1. A CÉU program that toggles the state of the LED whenever a radio packet is received, terminating on a button press, always with the LED off.

off whenever a radio packet is received (ln 10–15). The `finalize` clause (ln 7–9) ensures that, no matter how its enclosing trail terminates (e.g., from a button press), the LED will be unconditionally turned off (ln 8).

All communication between the application and the environment is done through the `await` and `emit` primitives, which awaits an input event and generates an output event, respectively.

The `par/or`, which stands for *parallel-or*, is a lexical composition that terminates as soon as one of the trails terminates, but which also automatically aborts and finalizes the other trail(s). In the example, when the button is pressed, not only the toggling loop will be aborted, but the `finalize` clause will turn the LED off unconditionally, since its enclosing block goes out of scope. The `par/or` is regarded as an *orthogonal preemption primitive* [2] because the trails need not to be tweaked in order to affect each other.

The synchronous execution model of CÉU dictates that reactions to input events are atomic and that incoming events are never lost. The event loop in Figure 1 suggests this behavior since the environment can only generate a new input after the application yields control and closes the loop. In the example, even if two packets arrive simultaneously in the environment, the synchronous model ensures atomicity and responsiveness: the first `await` awakes and turns the LED off atomically (ln 12–13); and the second `await` will awake in sequence (ln 14).

Figure 2 illustrates the synchronous execution model of CÉU. The continuous timeline (representing the environment) shows “physical timestamps” for the event

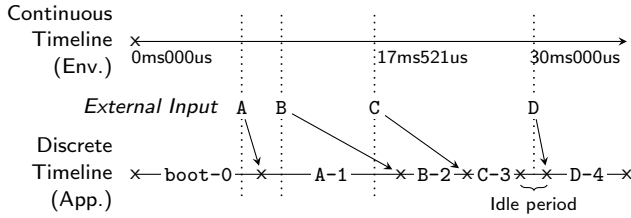


Figure 2. The discrete notion of time in CÉU.

occurrences (e.g., event C occurs exactly at 17ms521us). The discrete timeline in the application shows how the same occurring events fit in the logical notion of time of CÉU. The boot reaction `boot-0` happens before any input and starts the program. Event A “physically” occurs during `boot-0` but, because time is discrete, its corresponding reaction only executes at logical instant A-1. Similarly, event B occurs during A-1 and its reaction is postponed to execute at B-2. Event C also occurs during A-1 but its reaction must also wait for B-2 to execute at C-3. Finally, event D occurs during an idle period and can start immediately at D-4.

In order to guarantee responsiveness, the synchronous model relies on the *synchronous hypothesis*, which states that reactions must be significantly faster than the rate of inputs. For this reason, CÉU (like most synchronous languages) restricts itself and refuses unbounded loops at compile time. This guarantees that all reactions to the environment are computed in bounded time [11], ensuring that applications are always responsive to incoming events.

2.1 Lexically-Scoped Interrupt Service Routines

Interrupts service routines (ISRs) are software entry points that execute in response to hardware interrupts from peripherals such as timers and GPIOs. ISRs are at the lowest interface layer between the hardware and software and are the absolute source of inputs to programs. An ISR starts to execute as soon as the hardware interrupt occurs, suspending the ongoing program flow abruptly. Such asynchronous behavior reflects the inherent concurrent nature of peripherals interacting with the external world.

We propose to extend CÉU with asynchronous ISRs. However, asynchronous execution confronts the synchronous mindset of CÉU since the assumption that reactions are atomic no longer holds. Not only this may lead to race conditions at a fine grain, but may also affect the ordering of events at a coarse grain: the effect of an earlier event may be perceived after the effect of a later event. Still, our goal is to preserve the well-behaved interaction between the CÉU application and the environment even in the presence of asynchronous ISRs. Figure 3 adapts

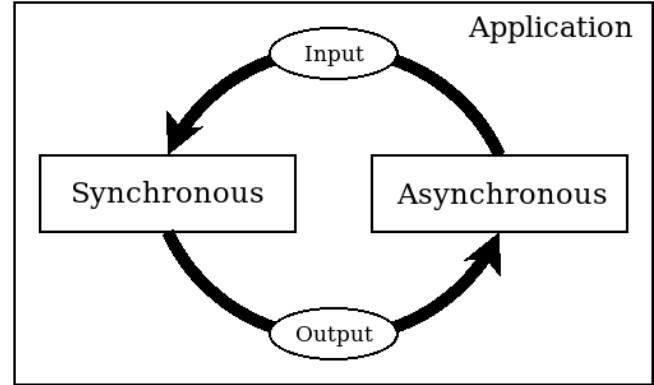


Figure 3. An application in CÉU has a concurrent asynchronous side and a predictable synchronous side that receives and reacts to inputs atomically.

```

1 output high/low PIN_13;      // connected to an LED
2 input  high/low PIN_02;      // connected to a button
3 #include "gpio.ceu"
4
5 emit PIN_13(low);
6 loop do
7     var high/low v = await PIN_02;
8     emit PIN_13(v);
9 end

```

Listing 2. Synchronous application that turns the LED on whenever the button is pressed and off whenever it is unpressed.

the event loop of Figure 1 to fit all inside the same CÉU application, now with the original application represented as the synchronous side and the environment as the asynchronous side. Our idea is to push all subtleties of asynchronous execution into device drivers which emit input events to regular synchronous code in CÉU exactly as before.

As a first example, Listing 2 and 3 uses GPIOs to virtually connect a button (pin 02) to an LED (pin 13) such that the LED is on whenever the button is pressed and off whenever it is unpressed.

Listing 2, the synchronous side, first declares its interface with the external world and includes the asynchronous side as a driver (ln 1–3). It then starts with the LED off (ln 5) and enters in a loop (ln 6–9) that, whenever the button changes (ln 7), changes the state of the LED with the new value (ln 8).

Listing 3, the asynchronous side, implements the output and input events. An `output` implementation (ln 4–6) is similar to a parameterized subroutine: whenever the application invokes `emit`, the output body executes atomically. CÉU supports inline C between curly braces (ln 3,5) and interpolation to evaluate CÉU expressions

```

331 1 // OUTPUT DRIVER
332 2
333 3 { pinMode(13, OUTPUT); }
334 4 output (high/low v) PIN_13 do
335 5   { digitalWrite(13, @v); }
336 6 end
337 7
338 8 // INPUT DRIVER
339 9
340 10 input high/low PIN_02;
341 11 {
342 12   pinMode(2, INPUT_PULLUP);
343 13   EICRA |= (1 << ISC00); // sets INTO
344 14   EIMSK |= (1 << INTO); // turns on INTO
345 15 }
346 16 spawn async/isr [INT0_vect] do
347 17   emit PIN_02({digitalRead(2)});
348 18 end

```

Listing 3. Asynchronous driver for GPIO which, on hardware interrupts, emits an input event into a queue.

(e.g., @v). This allows drivers to take advantage of existing libraries in embedded toolchains, such as Arduino. In the example, when the driver is included, it configures pin 13 as output (ln 3) and sets its state whenever PIN_13 is emitted (ln 5). An input event implementation uses an ISR registered with the `spawn async/isr` primitive (ln 16–18), which is automatically invoked whenever the associated interrupt occurs (e.g., `INT0_vect`). An ISR in CÉU will typically emit an input event inside its body to awake the synchronous side (ln 17). However, although the ISR executes asynchronously when the interrupt occurs, the `emit` goes into a queue (to be discussed) and does not interrupt the ongoing (suspended) reaction on the synchronous side. In the example, the input driver also configures pin 2 to behave as input and to generate external interrupts on level transitions (ln 11–15).

The example illustrates the clear separation between the application and the driver through an event-driven interface that reflects the desired architecture of Figures 1 and 3. Now, the whole application is written in CÉU: the synchronous side remains well behaved with no low-level calls, and the asynchronous side deals with all complexity of device drivers. Nevertheless, drivers are typically write-once components developed by embedded specialists, which are reused in most applications. Note that each architecture requires a mapping between the `async/isr` and the actual interrupt vector table, which we provide with our system.

As we discuss in the next section, supporting ISRs in the same language and memory space of the application allows programmers to choose between efficiency and safety during development by providing multiple interfaces with different levels of abstraction.

```

1 // A/D DRIVER (adc.ceu)
2
3 output int ADC_REQUEST;
4 input int ADC_DONE;
5
6 do finalize with
7 {
8   ADCSRA &= B01111111; // disables A/D converter
9   ACSR = B10000000; // disables comparator
10  DIDRO |= B00111111; // disables pins
11 }
12 end
13 ... // driver initialization
14 ... // input / output implementations
15
16 // APPLICATION (main.ceu)
17
18 loop do
19   var int v;
20   do
21     #include "adc.ceu" // driver contents above
22     emit ADC_REQUEST(A0);
23     v = await ADC_DONE;
24   end
25   ... // uses sensor value "v"
26   await 1h;
27 end

```

Listing 4. XXX.

The example in Listing 4 illustrates the use of a lexically-scoped driver for the A/D converter. Note that the driver (ln 1–14) and application (ln 16–27) are actually in separate files. The application is a typical periodic sensor sampling loop, but which designates an explicit `do--end` scope to execute the driver (ln 21) and use it (ln 22–23). The driver specifies a finalization code (ln 6–12) which executes unconditionally whenever it goes out of scope (ln 24). This code completely disables all A/D functionality to save energy. As discussed for Listing 1, the finalizer would also sensibly execute due to a `par/or` termination enclosing the driver. Note that the driver interface (ln 3–4) is visible only inside the block and thus cannot be inadvertently used outside it.

2.2 Safe Shared-Memory Concurrency

In CÉU, when multiple trails awake in the same reaction, they execute in lexical order, i.e., in the order they appear in the program source code. In Figure 4, both examples define a shared variable (ln 3) and assign to it in parallel trails (ln 6, 9). In Listing 5, the two assignments to `x` can only execute in reactions to different events `A` and `B` (ln 5,8), which cannot occur simultaneously in accordance with the synchronous model. Hence, for the sequence of events `A→B`, `x` becomes 4 $((1+1)*2)$, while for `B→A`, `x`

```

441 input void A;      1  input void A;
442 input void B;      2  // (empty line)
443 var int x = 1;      3  var int y = 1;
444 par/and do          4  par/and do
445     await A;         5      await A;
446     x = x + 1;        6      y = y + 1;
447 with                7  with
448     await B;         8      await A;
449     x = x * 2;        9      y = y * 2;
450 end                 10 end

```

Listing 5. Shared x Listing 6. Shared y

Figure 4. Accesses to shared x never concurrent. Accesses to shared y are concurrent but still deterministic.

becomes 3 $((1*2)+1)$. In Listing 6, the two assignments to y are simultaneous because they execute in reaction to the same event **A**. Nevertheless, because CÉU follows lexical order, the execution is still deterministic, and y always becomes 4 $((1+1)*2)$.

Regardless of deterministic execution, note that an apparently innocuous change in the order of trails may modify the behavior of programs. To mitigate this threat, CÉU performs concurrency checks at compile time to detect conflicting accesses to shared variables: if a variable is written in a trail segment, then a concurrent trail segment cannot access that variable [9]. The static checks are optional (or raise warnings) and do not affect the semantics of the language.

The addition of asynchronous ISRs poses real threats concerning race conditions in programs since interrupts occur at arbitrary points. Listing 7 illustrates a minimum USART application (ln 13–22) that consumes incoming bytes (ln 18–21) as they arrive (ln 16). The USART API (ln 1–4) exposes an input event to signal incoming data (ln 3) and a circular buffer to avoid missing data (ln 4). The buffer is indispensable because the microcontroller cannot cope with the USART speed. The driver ISR (ln 6–11) simply appends incoming bytes to the end of the buffer (ln 9) and signal the application (ln 10). As a possible race condition, note that the ISR may fire and append a new byte to the buffer (ln 9) just before the application clears it (ln 21), in which case the new byte will be lost forever.

CÉU treats an `async/isr` as a block of code that runs in parallel with the rest of the program (hence the required prefix `spawn`). This way, it is clear for the compiler that the accesses to `rx_buf` in Listing 7 may lead to a race condition (ln 9,21), and CÉU raises a compile-time

```

1  // USART INTERFACE
2
3  input none USART_RX;
4  var[32*] byte rx_buf;           // '*' = circular
5
6  // DRIVER
7
8  spawn async/isr [USART_RX_vect] do
9      rx_buf = rx_buf .. [{UDR0}];
10     emit USART_RX;
11 end
12
13 // APPLICATION
14
15 loop do
16     await USART_RX;
17     var int i;
18     loop i in [0 -> $rx_buf[ do // '$' = length ($)
19         // uses rx_buf[i]
20     end
21     $rx_buf = 0;
22 end

```

Listing 7. The USART buffer is shared between the ISR and the application, resulting in a pontential race condition. (*The driver and application code are in separate files.*)

error. The programmer is responsible to protect concurrent memory accesses with `atomic` blocks, which disables interrupts (supposedly) for a short period of time.

Even so, we do not expect that application programmers are required to resolve race conditions. CÉU supports reactive abstractions (similar to coroutines) that help hiding the concurrency complexity inside the driver. Listing 8 changes the USART API (ln 1–3) to expose a code abstraction that expects a reference to a buffer and a number of bytes to receive. Now, the application (ln 29–35) invokes the abstraction (ln 33) with a local buffer (ln 32). The driver (ln 5–27) now hides the low level interface of the previous example (ln 7–8) and implements the code abstraction (ln 15–27) that protects the access to the shared buffer with an `atomic` block (ln 18–21). The abstraction copies the driver buffer into the application buffer (ln 19) until the receiving the request number of bytes (ln 22). On the one hand the extra copying incurs an overhead, but on the other hand it prevents race conditions with the ISR.

2.3 Energy-Efficient Runtime

Our runtime of CÉU implements the event loop proposed in Figure 3, which alternates between synchronous, well-behaved execution, and asynchronous ISRs. Since the language now has full control over the event loop and

```

551 1 // USART INTERFACE
552 2
553 3 code Usart_RX (var&[] byte buf, var int n) -> none;
554 4
555 5 // DRIVER
556 6
557 7 input none USART_RX;
558 8 var[32*] byte rx_buf;
559 9
560 10 spawn async/isr [USART_RX_vect] do
561 11     rx_buf = rx_buf .. [{UDRO}];
562 12     emit USART_RX;
563 13 end
564 14
565 15 code Usart_RX (var&[] byte buf, var int n) -> none
566 16 do
567 17     loop do
568 18         atomic do
569 19             buf = buf..rx_buf;
570 20             $rx_buf = 0;
571 21         end
572 22         if $buf >= n then
573 23             break;
574 24         end
575 25         await USART_RX;
576 26     end
577 27 end
578 28
579 29 // APPLICATION
580 30
581 31 loop do
582 32     var[255] byte buf;
583 33     await Usart_RX(&buf, 10);
584 34     // uses buf
585 35 end

```

Listing 8. The USART driver now exposes a safer (and more friendly) interface to the application. (*The driver and application code are in separate files.*)

```

588 1 evt_t queue[MAX];           // input queue
589 2 void main () {
590 3     ceu_start();             // "boot reaction"
591 4     while (1) {
592 5         evt_t evt;
593 6         if (ceu_input(&evt)) { // query input queue
594 7             ceu_sync(&evt);    // execute synchronous
595 8         } else {
596 9             ceu_pm_sleep();    // nothing to execute
597 10        }
598 11    }
599 12 }

```

Listing 9. XXX.

only executes from interrupts, we want the runtime to enter in sleep mode automatically to save energy.

Listing 9 is a realization of this architecture: The runtime defines an input queue (ln 1) in which ISRs enqueue new events (e.g., Listing 8, ln 12). In the *main* function, we first generate the *boot reaction* (ln 3), which starts the program to spawn the ISRs and reach the first *await* statements in the multiple lines of code. Then, the runtime enters an infinite loop (ln 4–11) that queries the input queue (ln 6) to awake the program (ln 7). Note that ISRs execute asynchronously with the loop, but they typically only emit an input event into the queue which will be queried in a subsequent iteration. Note also that if the queue is empty, the runtime enters in sleep mode to save energy (ln 9), and will only awake on a new hardware interrupt.

Microcontrollers typically support multiple levels of sleep mode, each progressively saves more energy at the expense of keeping less functionality active. As an example, the least efficient mode of the *ATmega328P* allows for timer interrupts since it keeps its internal clock active, while the most efficient mode turns off all peripherals and can only awake from external interrupts.

Our runtime supports three compile-time configurations for *ceu_pm_sleep* (ln 9): The first configuration is a *nop* which simply keeps the event loop running all the time without ever sleeping. This configuration is useful when introducing new platforms. The second configuration chooses a (inefficient) sleep mode that keeps all peripherals active. Although this configuration is not the most energy efficient, at least, it requires no extra assistance from the drivers. The third configuration keeps a bit vector of the active drivers during runtime and chooses the most efficient mode, querying the vector every time *ceu_pm_sleep* is called.

The third configuration achieves optimal efficiency but requires a tight interaction between the drivers and the power management runtime. Listing 10 unveils the power manager (ln 1–18), the modified USART driver (ln 20–29), and an illustrative application (ln 31–43). The application is a loop that awaits in parallel for a button press (ln 36) or receiving 10 bytes (ln 39). Let's call this initial state *STATE-A*. The *par/or* terminates when either of them occurs, going to the next line that awaits another button click (ln 42). Let's call this other state *STATE-B*. After the button click, the program loops back to *STATE-A*. While in *STATE-A*, the program can awake from USART and external interrupts, which means that the power manager should choose a sleep mode in which the USART remains operational. While in *STATE-B*, only external interrupts should awake the program, which means that the power manager may use the most efficient sleep mode. The power manager enumerates all microcontroller's peripherals (ln 3–8) and, before sleeping, queries their states (ln 11,13) to choose the most appropriate sleep mode (ln 12,14,16). The USART driver needs to be

```

661 1 // POWER MANAGER (in C)
662 2
663 3 enum {
664 4     CEU_PM_ADC,
665 5     CEU_PM_TIMER1,
666 6     CEU_PM_USART,
667 7     ...
668 8 };
669 9
670 10 void ceu_pm_sleep (void) {
671 11     if (ceu_pm_get(CEU_PM_USART) || ...) {
672 12         sleep_mode_1(...);
673 13     } else if (ceu_pm_get(CEU_PM_ADC)) {
674 14         sleep_mode_2(...);
675 15     } else {
676 16         sleep_mode_3(...);
677 17     }
678 18 }
679 19
680 20 // USART DRIVER (in Ceu)
681 21
682 22 code Usart_RX (var&[] byte buf, var int n) -> none
683 23 do
684 24     {ceu_pm_set(CEU_PM_USART, 1);}
685 25 do finalize with
686 26     {ceu_pm_set(CEU_PM_USART, 0);}
687 27 end
688 28 ... // same as in Listing 7
689 29 end
690 30
691 31 // APPLICATION (in Ceu)
692 32
693 33 input high/low PIN_02; // connected to a button
694 34 loop do
695 35     par/or do
696 36         await PIN_02;
697 37     with
698 38         var[255] byte buf;
699 39         await Usart_RX(&buf, 10);
700 40         // uses buf
701 41     end
702 42     await PIN_02;
703 43 end

```

Listing 10. XXX. (*The power manager, driver and application code are in separate files.*)

extended with calls to enable and disable the USART state inside the power manager: just before awaiting, the driver enables the USART (ln 24) and registers a finalization block to unregister it on termination (ln 25–27). Termination may occur either directly after receiving the requested number of bytes, or indirectly if the `par/or` in the application terminates on a button click (ln 36).

Note that applications need not to be explicit about energy management to take advantage of sleep modes.

All happens automatically because of the synchronous-reactive execution model and energy-aware runtime of CéU.

3 Related Work

- TinyOS - async, race condition avoidance - nesc manual
- ICEM, standby - icem paper
 - CRP
 - finalize - structured programming - lexical scoping
- vs manual - no turn off
 - citar ICEM o mais cedo nas duas ocasioes (async, energy) - citar TOS/ICEM na introducao como maior influencia - ja no abstract?
 - falar que async/isr nao contem nada de Ceu, apenas shared memory e nocao de estar em paralelo - compartilhamento de memoria - velocidade - ajuda do compilador p/ detectar acesso concorrente
 - finite is can be still much greater than 0 (order of milliseconds) - which is a lot of time

References

- [1] A. Adya et al. 2002. Cooperative Task Management Without Manual Stack Management. In *Proceedings of ATEC'02*. USENIX Association, 289–302.
- [2] Gérard Berry. 1993. Preemption in Concurrent Systems.. In *FSTTCS (LNCS)*, Vol. 761. Springer, 72–93.
- [3] Frédéric Bousinot and Robert De Simone. 1991. The Esterel language. *Proc. IEEE* 79, 9 (Sep 1991), 1293–1304.
- [4] Evan Czaplicki. 2018. Elm and JavaScript Interop. <https://guide.elm-lang.org/interop/javascript.html> (accessed in Jul-2018).
- [5] Evan Czaplicki and Stephen Chong. 2013. Asynchronous functional reactive programming for GUIs.. In *Proceedings of PLDI'13*. 411–422.
- [6] Ingo Maier, Tiark Rompf, and Martin Odersky. 2010. *Deprecating the observer pattern*. Technical Report.
- [7] Dumitru Potop-Butucaru, Stephen A Edwards, and Gerard Berry. 2007. *Compiling esterel*. Vol. 86. Springer Science & Business Media.
- [8] Guido Salvaneschi et al. 2014. REScala: Bridging between object-oriented and functional style in reactive applications. In *Proceedings of Modularity'13*. ACM, 25–36.
- [9] Francisco Sant'Anna et al. 2013. Safe System-level Concurrency on Resource-Constrained Nodes. In *Proceedings of SenSys'13*. ACM.
- [10] Francisco Sant'anna et al. 2017. The Design and Implementation of the Synchronous Language Céu. *ACM TECS* 16, 4, Article 98 (July 2017), 26 pages. <https://doi.org/10.1145/3035544>
- [11] Rodrigo C. M. Santos et al. 2018. A Memory-Bounded, Deterministic and Terminating Semantics for the Synchronous Programming Language CéU. In *Proceedings of LCTES'18*. ACM, New York, NY, USA, 1–18. <https://doi.org/10.1145/3211332.3211334>

A Appendix

Text of appendix ...