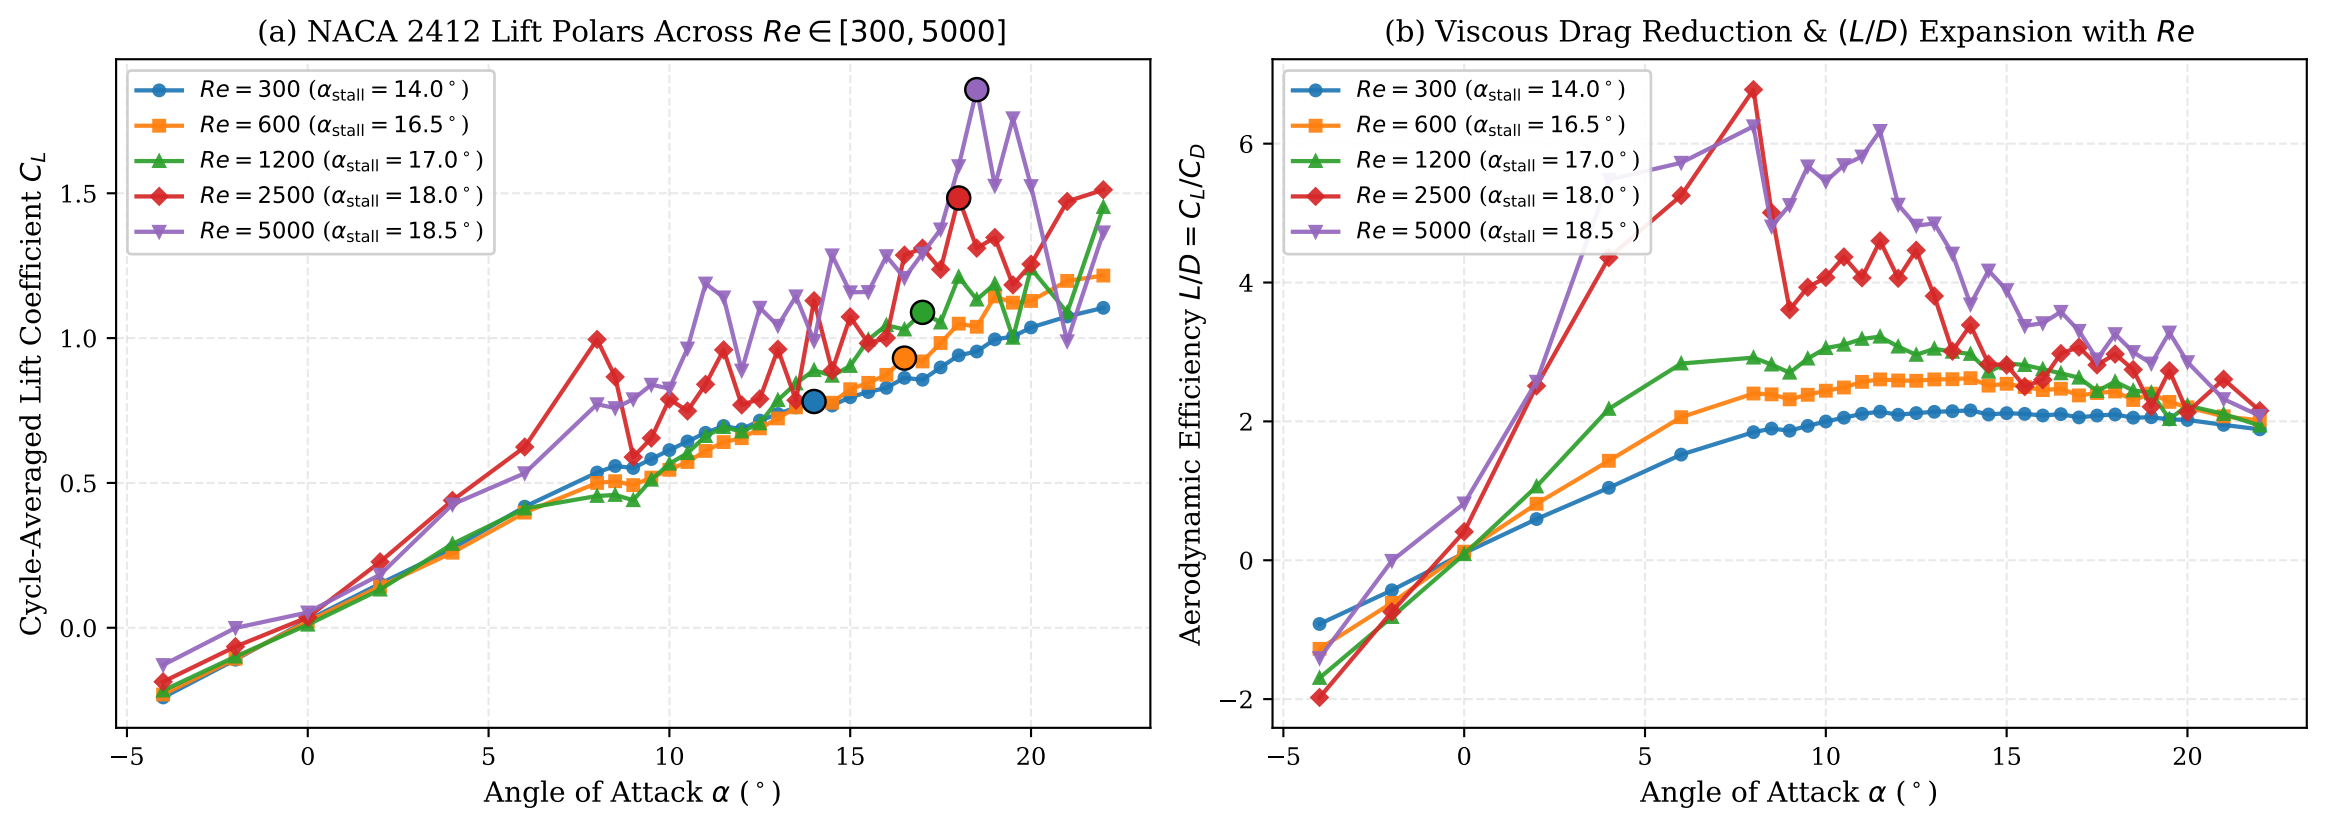
(a) NACA 2412 Lift Polars Across $Re \in [300, 5000]$
Cycle-Averaged Lift Coefficient C_L
Angle of Attack α (°)
$Re = 300$ ($\alpha_{stall} = 14.0°$)
$Re = 600$ ($\alpha_{stall} = 16.5°$)
$Re = 1200$ ($\alpha_{stall} = 17.0°$)
$Re = 2500$ ($\alpha_{stall} = 18.0°$)
$Re = 5000$ ($\alpha_{stall} = 18.5°$)
(b) Viscous Drag Reduction & (L/D) Expansion with Re
Aerodynamic Efficiency $L/D = C_L/C_D$
Angle of Attack α (°)