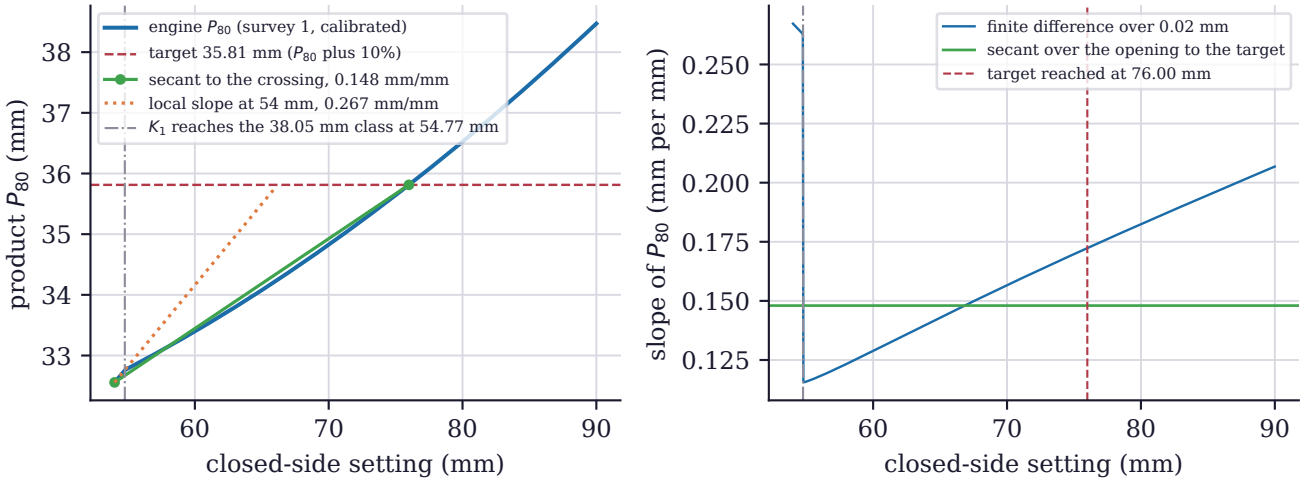
(a) the drawn range and its secant
engine P_{80} (survey 1, calibrated)
target 35.81 mm (P_{80} plus 10%)
secant to the crossing, 0.148 mm/mm
local slope at 54 mm, 0.267 mm/mm
K_1 reaches the 38.05 mm class at 54.77 mm
product P_{80} (mm)
38
37
36
35
34
33
60
70
80
90
closed-side setting (mm)
(b) the slope is piecewise in the setting
finite difference over 0.02 mm
secant over the opening to the target
target reached at 76.00 mm
slope of P_{80} (mm per mm)
0.250
0.225
0.200
0.175
0.150
0.125
60
70
80
90
closed-side setting (mm)