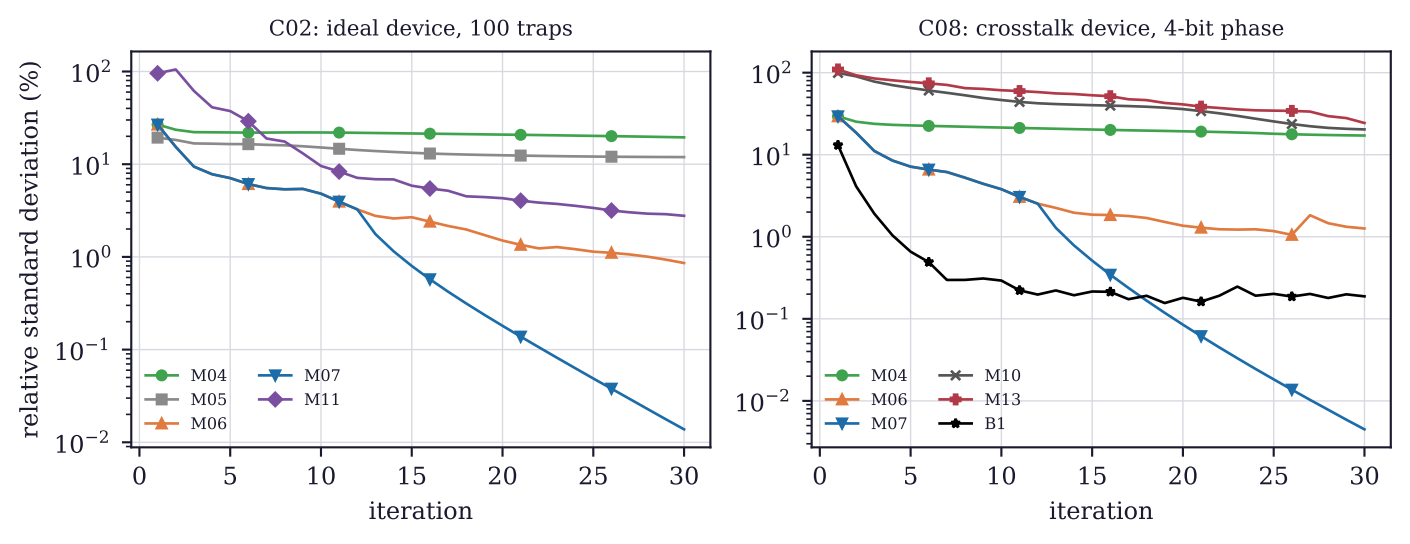
C02: ideal device, 100 traps
relative standard deviation (%)
iteration
M04
M05
M06
M07
M11
C08: crosstalk device, 4-bit phase
iteration
M04
M06
M07
M10
M13
B1