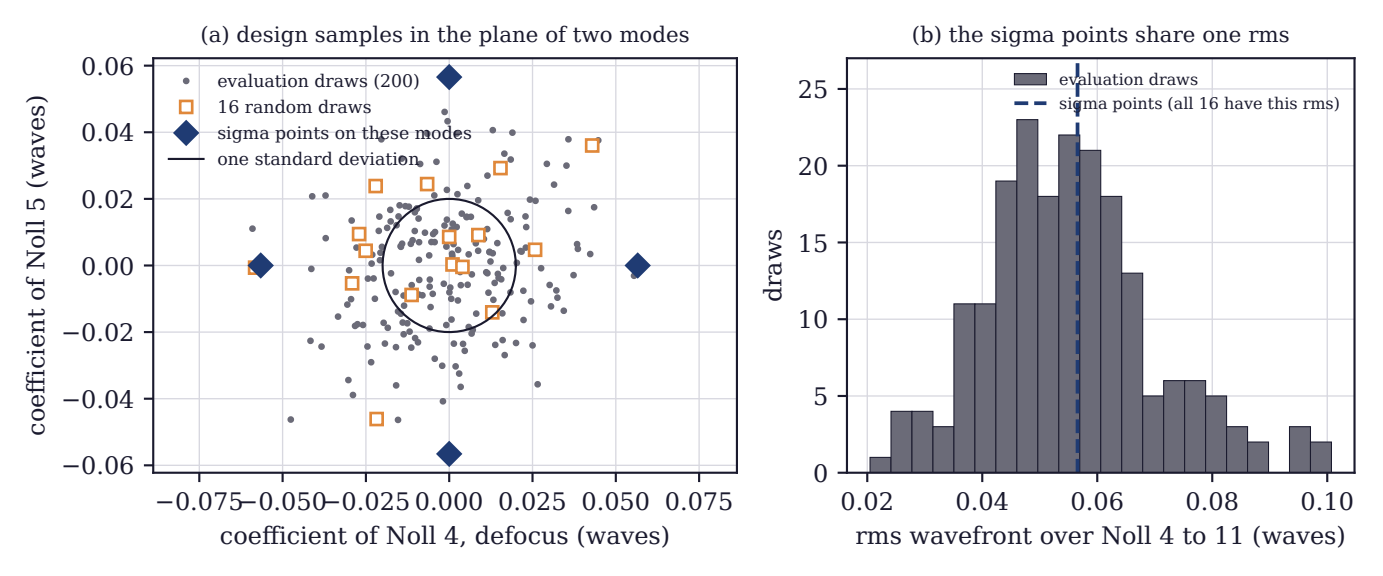
(a) design samples in the plane of two modes
evaluation draws (200)
16 random draws
sigma points on these modes
one standard deviation
coefficient of Noll 5 (waves)
coefficient of Noll 4, defocus (waves)
0.06
0.04
0.02
0.00
−0.02
−0.04
−0.06
−0.075
−0.050
−0.025
0.000
0.025
0.050
0.075
(b) the sigma points share one rms
evaluation draws
sigma points (all 16 have this rms)
draws
rms wavefront over Noll 4 to 11 (waves)
25
20
15
10
5
0
0.02
0.04
0.06
0.08
0.10