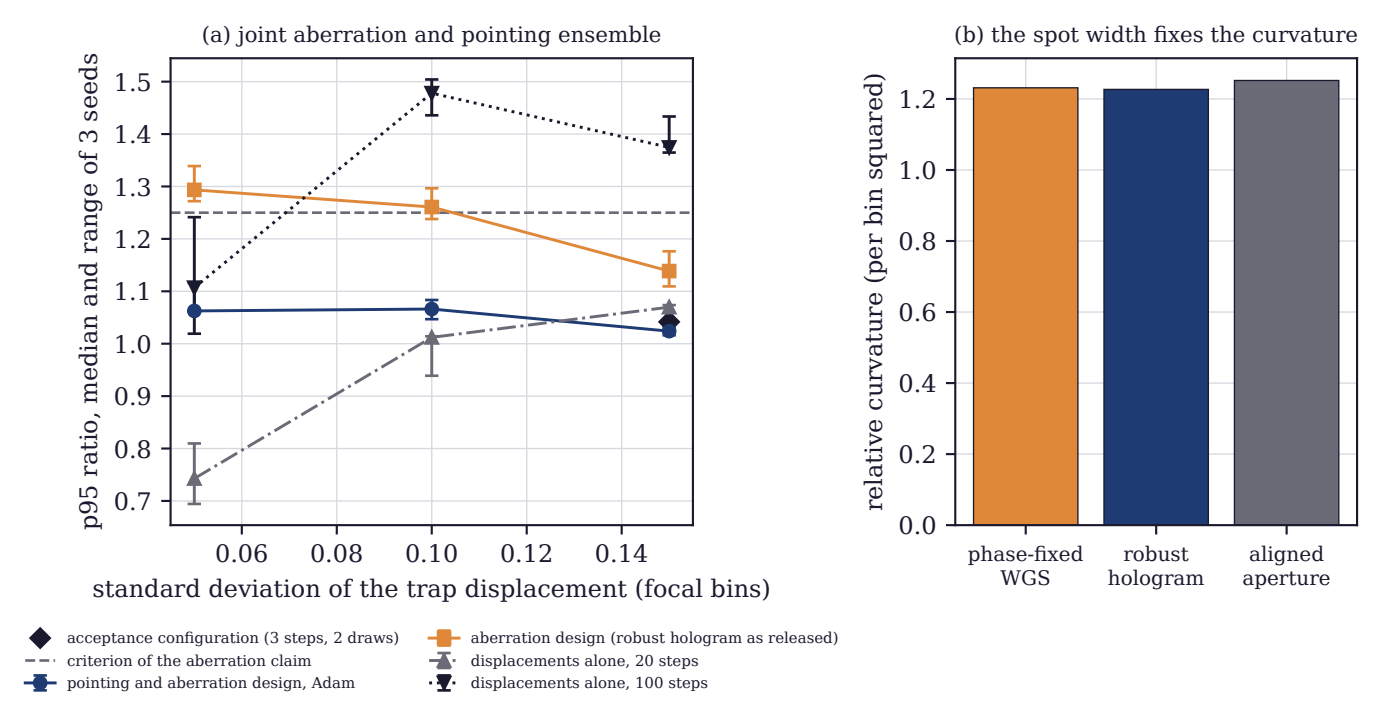
(a) joint aberration and pointing ensemble
p95 ratio, median and range of 3 seeds
standard deviation of the trap displacement (focal bins)
(b) the spot width fixes the curvature
relative curvature (per bin squared)
phase-fixed WGS
robust hologram
aligned aperture
acceptance configuration (3 steps, 2 draws)
criterion of the aberration claim
pointing and aberration design, Adam
aberration design (robust hologram as released)
displacements alone, 20 steps
displacements alone, 100 steps