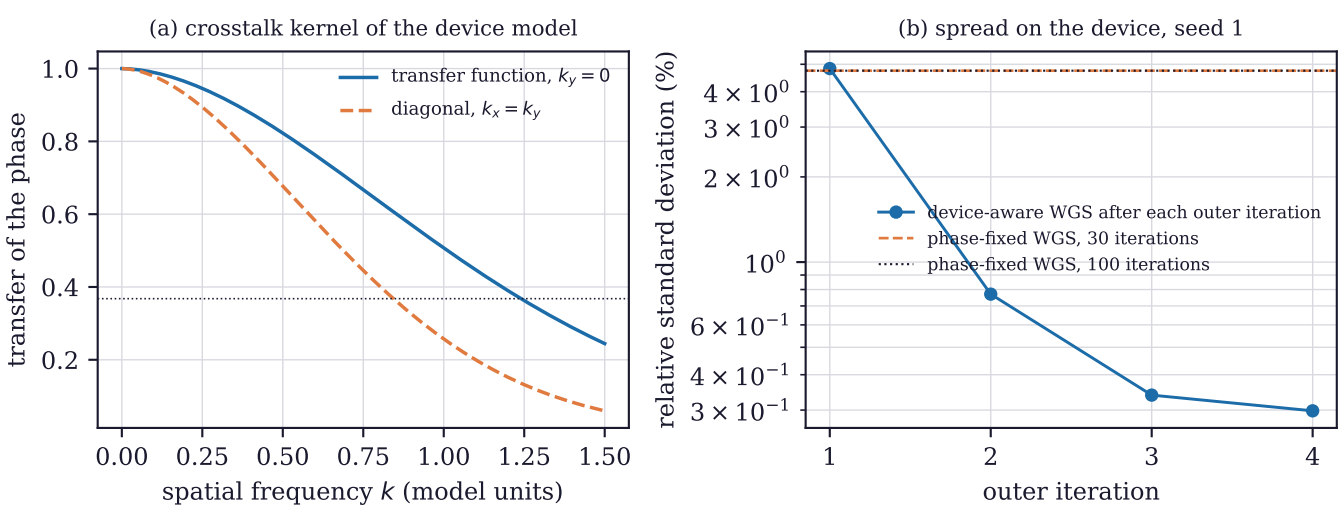
(a) crosstalk kernel of the device model
transfer function, $k_y = 0$
diagonal, $k_x = k_y$
transfer of the phase
1.0
0.8
0.6
0.4
0.2
0.00
0.25
0.50
0.75
1.00
1.25
1.50
spatial frequency k (model units)
(b) spread on the device, seed 1
relative standard deviation (%)
4×10^0
3×10^0
2×10^0
10^0
6×10^{-1}
4×10^{-1}
3×10^{-1}
device-aware WGS after each outer iteration
phase-fixed WGS, 30 iterations
phase-fixed WGS, 100 iterations
1
2
3
4
outer iteration