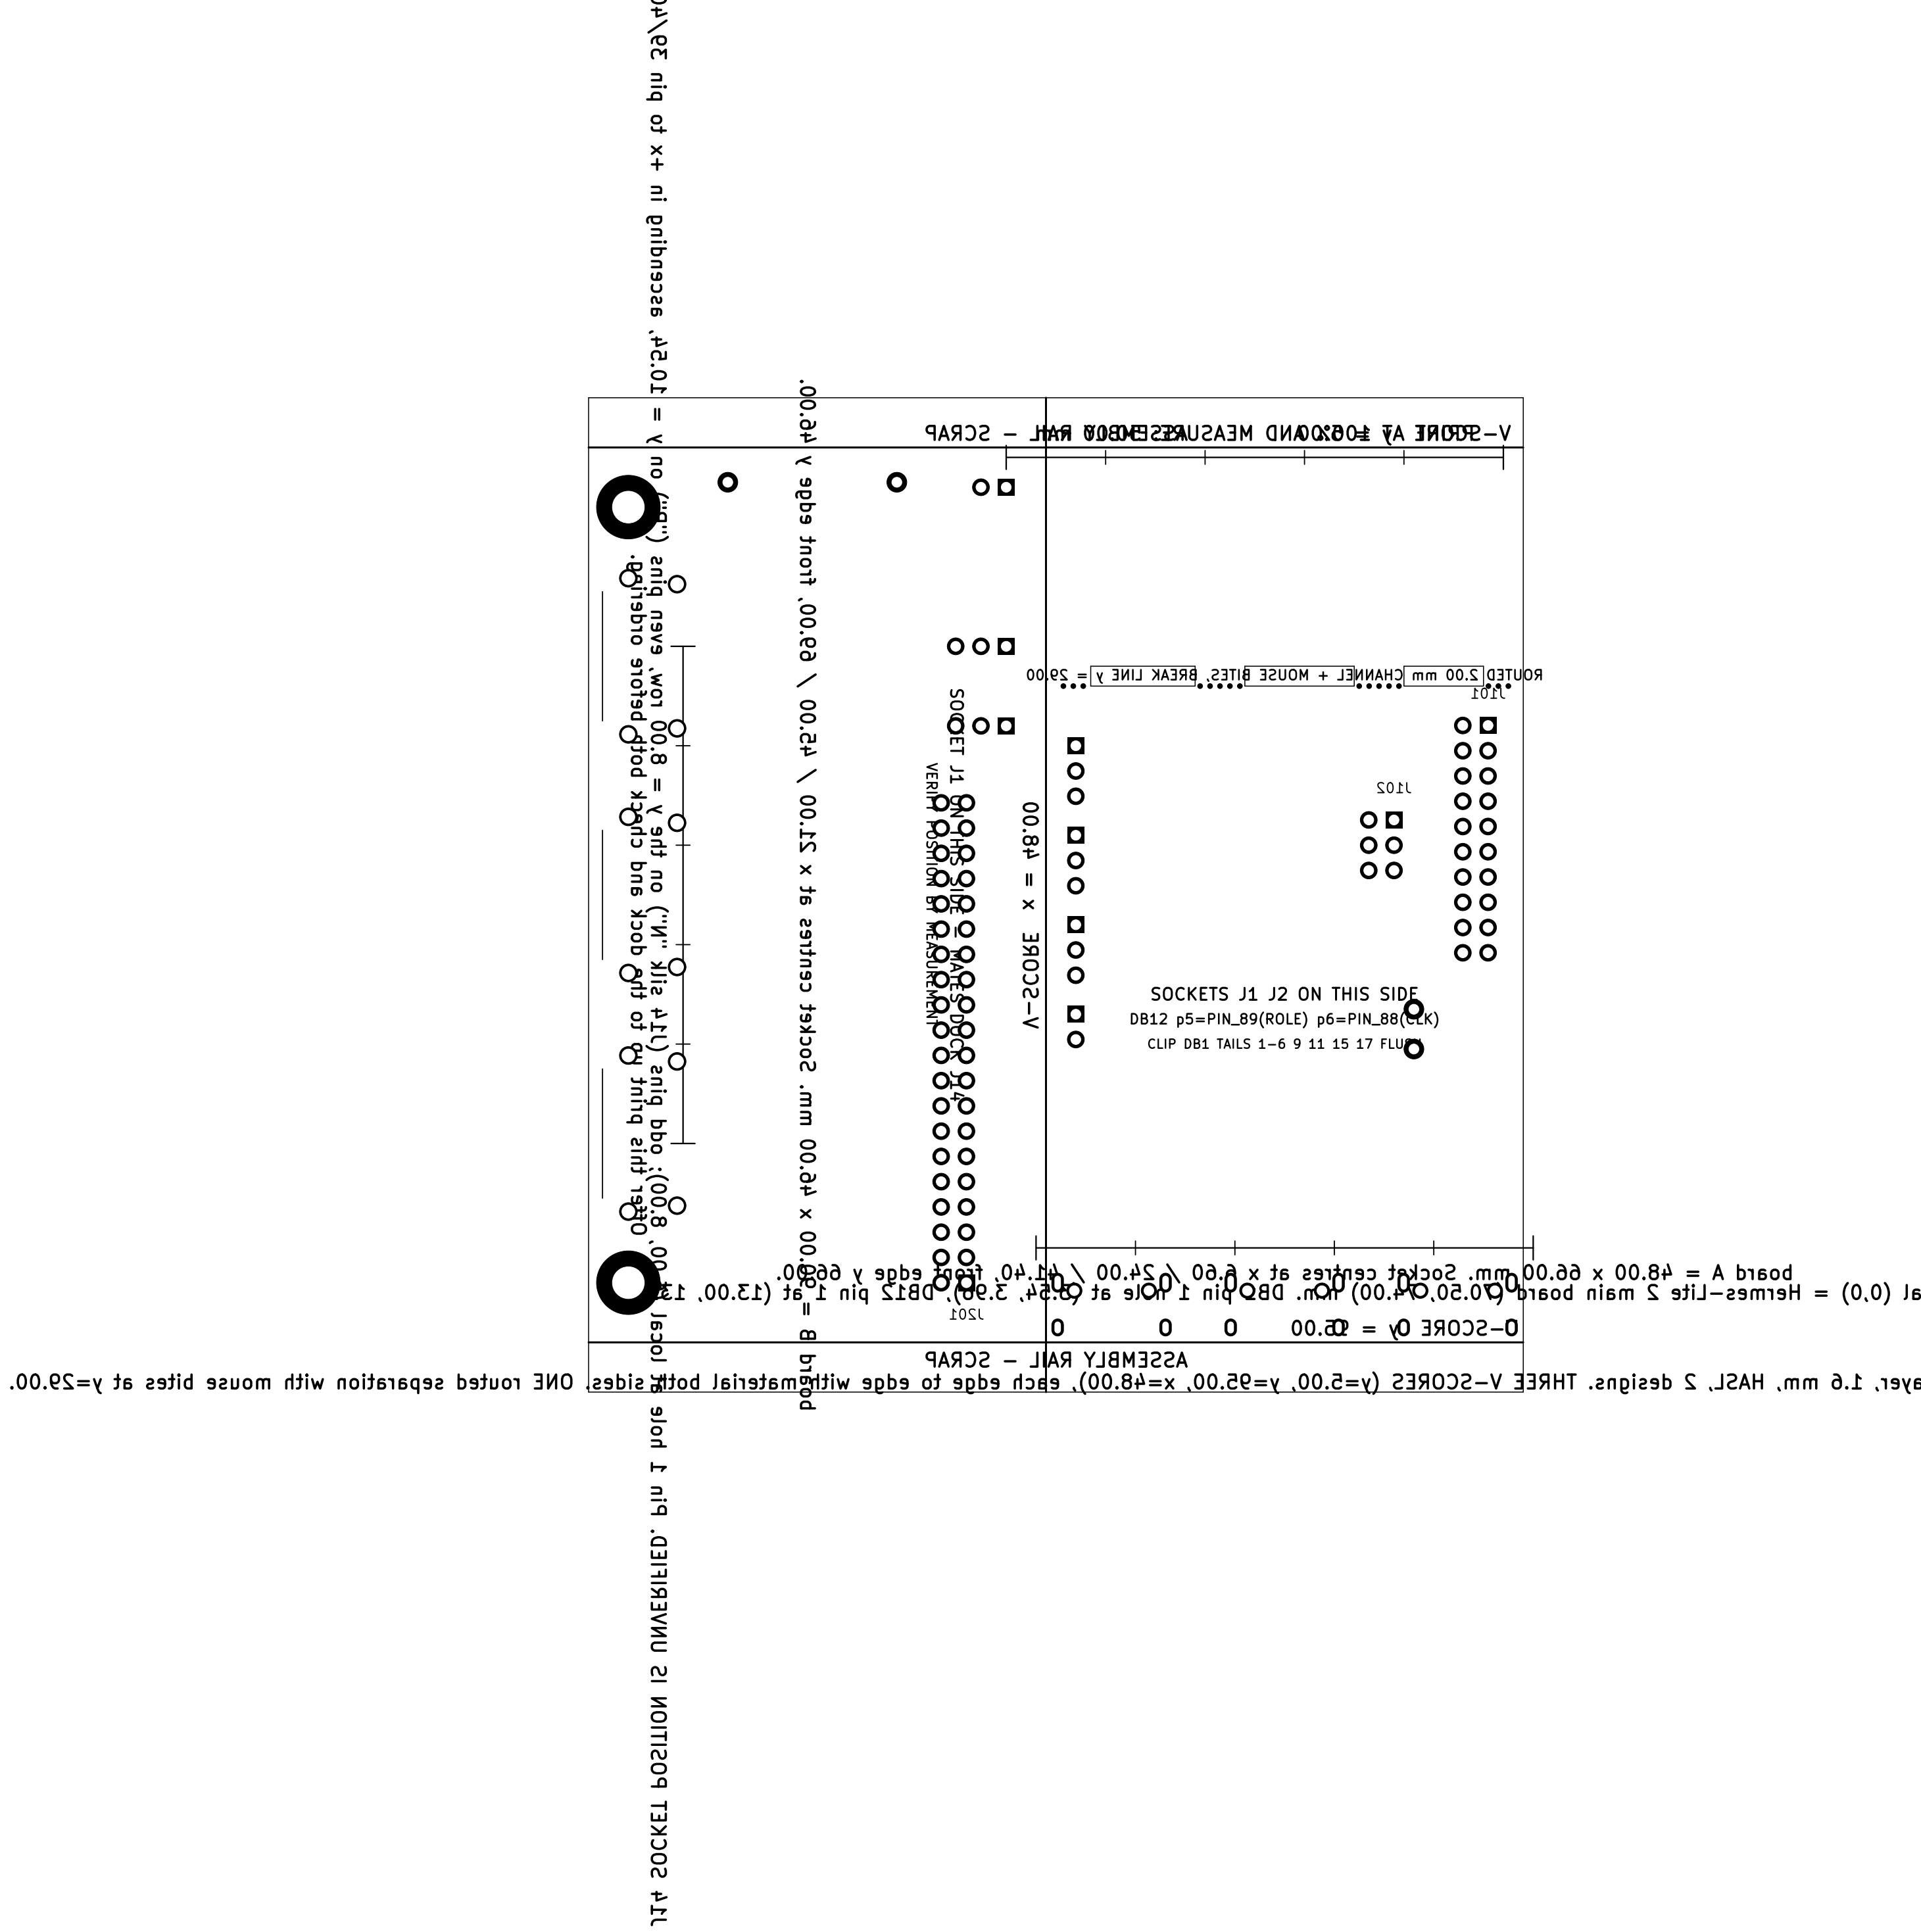
V-SCORE AT y=95.00 AND MEASUREMENT RAIL – SCRAP
ROUTED 2.00 mm CHANNEL + MOUSE BITES, BREAK LINE y = 29.00
J101
J102
J201
SOCKETS J1 J2 ON THIS SIDE
DB12 p5=PIN_89(ROLE) p6=PIN_88(CLK)
CLIP DB1 TAILS 1–6 9 11 15 17 FLUSH
SOCKET J1 ON THIS SIDE = MATES DOCK J14
V-SCORE x = 48.00
V-SCORE y = 5.00
ASSEMBLY RAIL – SCRAP
board A = 48.00 x 66.00 mm. Socket centres at x 6.60 / 24.00 / 41.40, front edge y 66.00.
(0,0) = Hermes-Lite 2 main board (70.50, 74.00) mm. DB0 pin 1 hole at (6.54, 3.96), DB12 pin 1 at (13.00, 13
1.6 mm, HASL, 2 designs. THREE V-SCORES (y=5.00, y=95.00, x=48.00), each edge to edge with material both sides. ONE routed separation with mouse bites at y=29.00.
board B = 48.00 x 94.00 mm. Socket centres at x 21.00 / 45.00 / 69.00, front edge y 69.00.
J14 SOCKET POSITION IS UNVERIFIED. Pin 1 hole location (8.00, 8.00); odd pins (14) on this silk, even pins on (...) y = 10.54, ascending in +x to pin 26
]