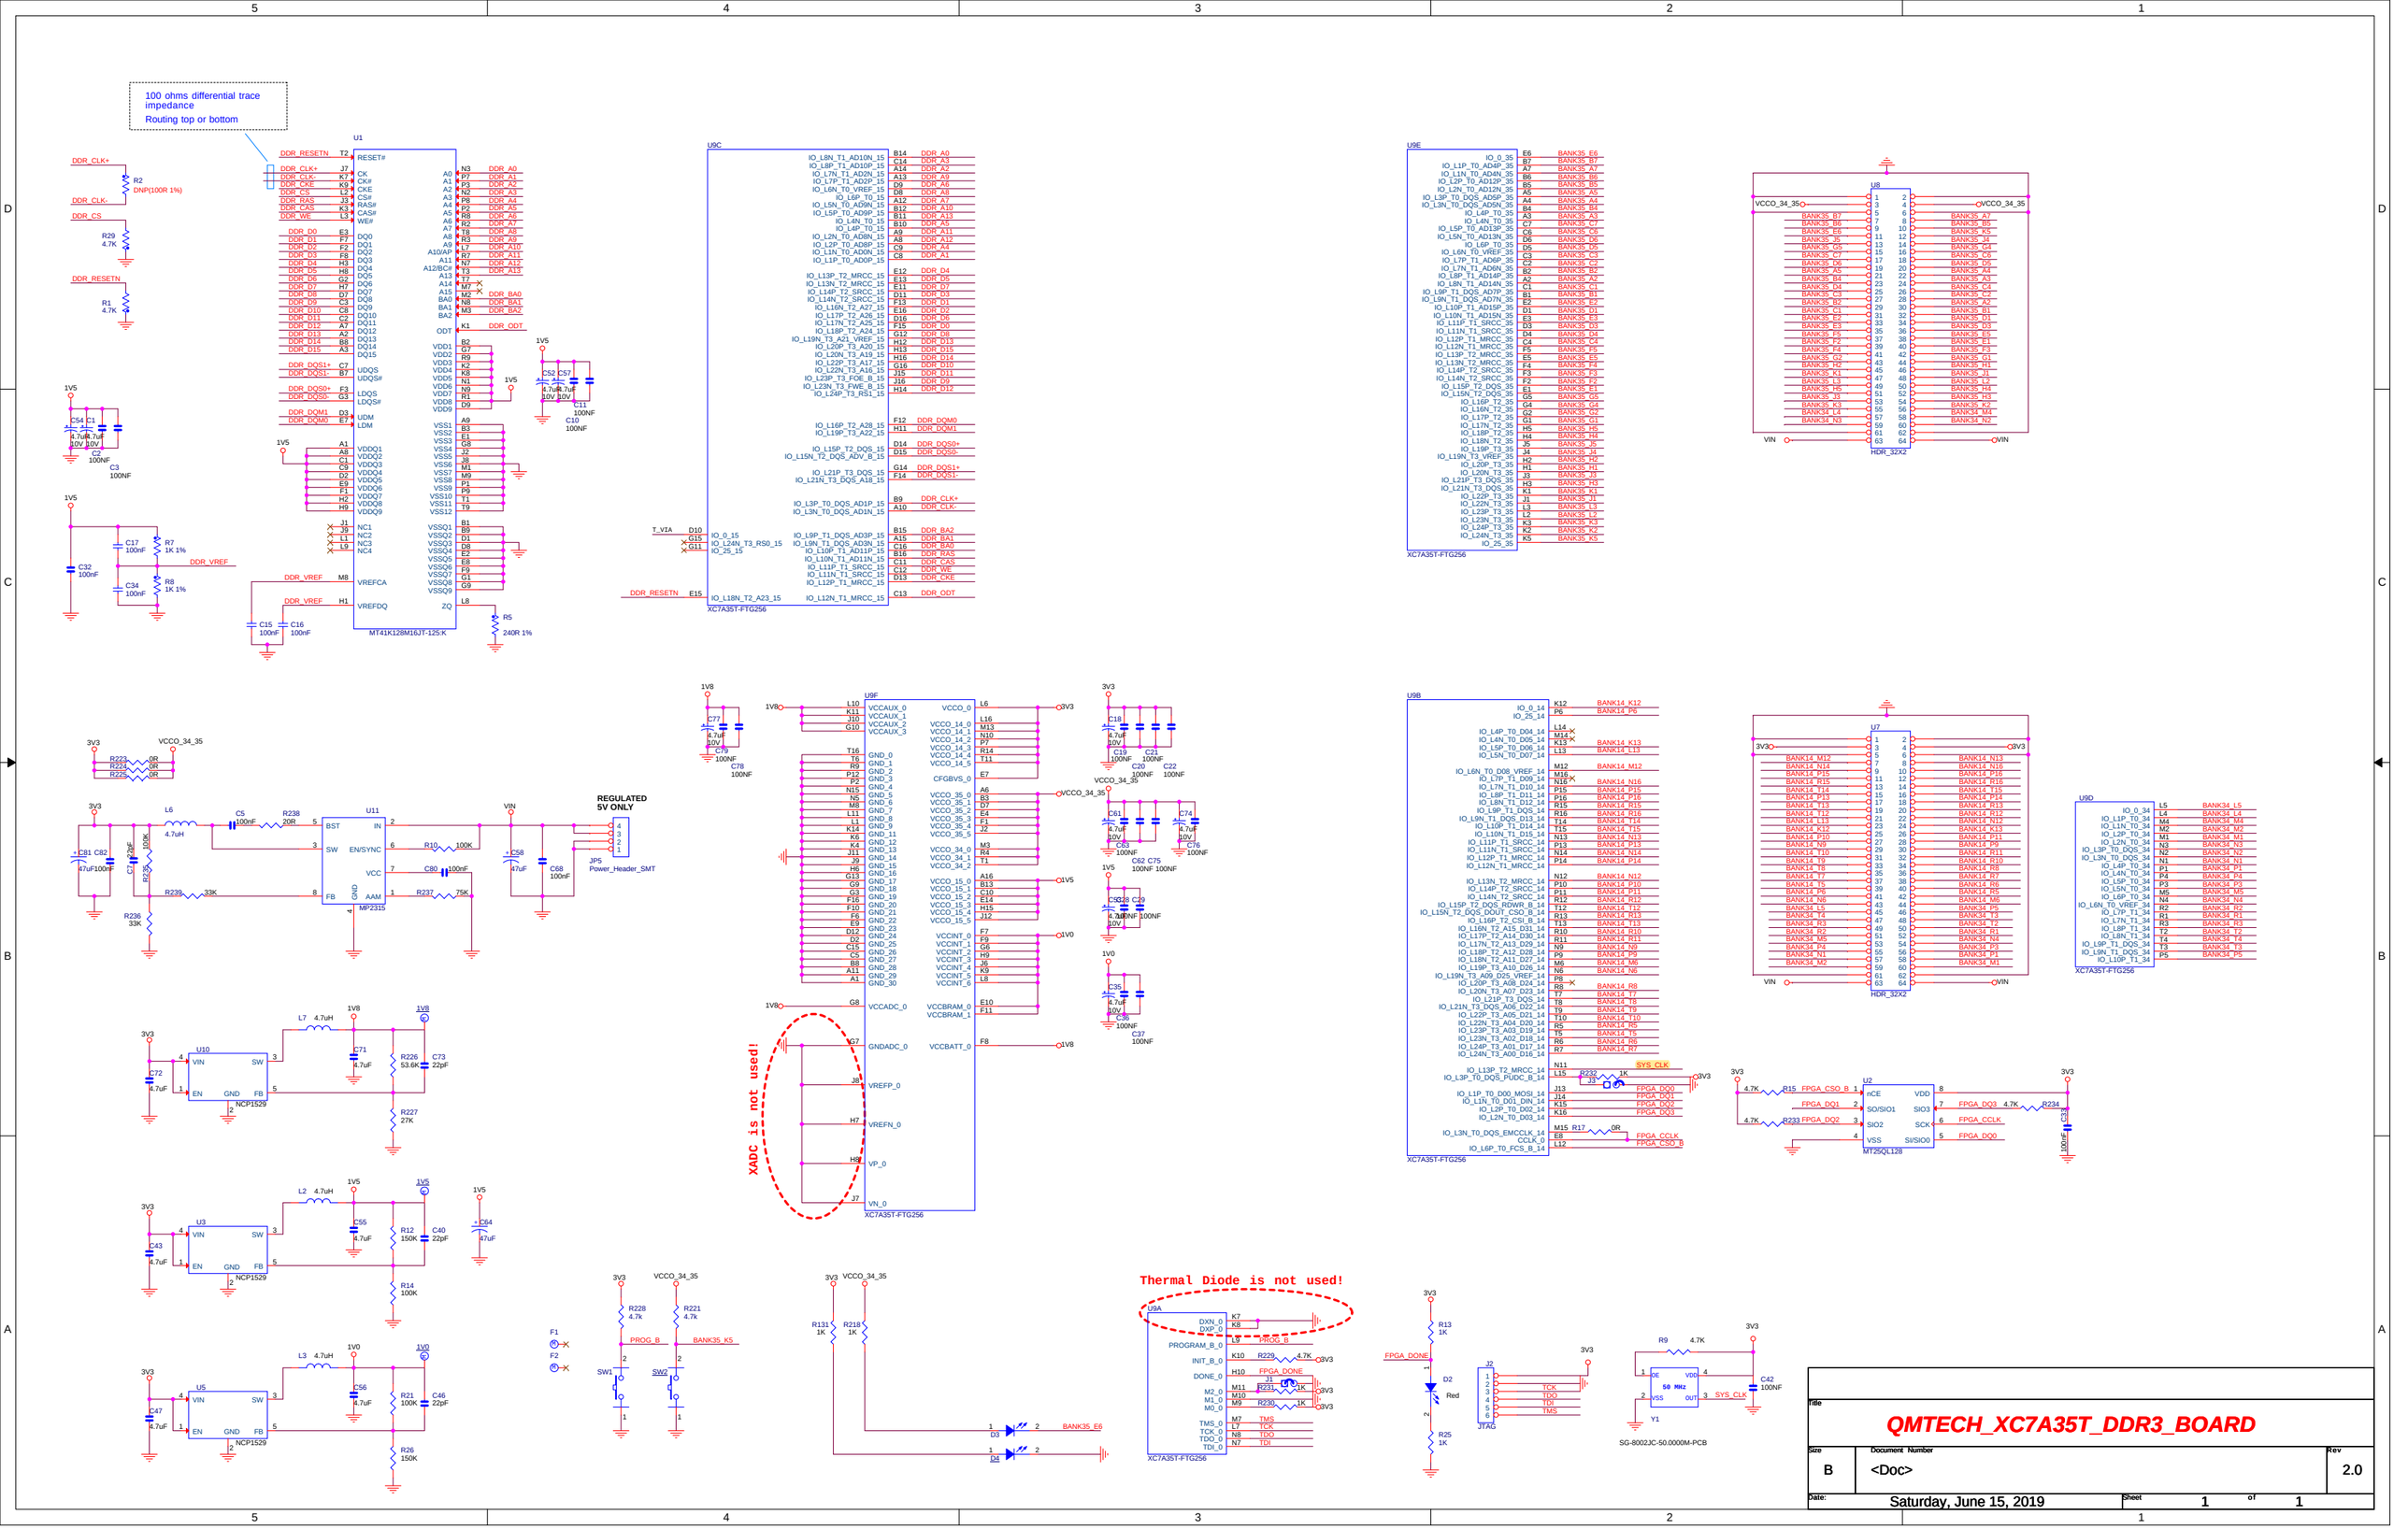
100 ohms differential trace impedance
Routing top or bottom
U1
MT41K128M16JT-125:K
U9C
XC7A35T-FTG256
U9E
XC7A35T-FTG256
U8
HDR_32X2
U9F
XC7A35T-FTG256
U9B
XC7A35T-FTG256
U7
HDR_32X2
U9D
XC7A35T-FTG256
U11
MP2315
REGULATED 5V ONLY
JP5
Power_Header_SMT
U10
NCP1529
U3
NCP1529
U5
NCP1529
XADC is not used!
Thermal Diode is not used!
U9A
XC7A35T-FTG256
U2
MT25QL128
SG-8002JC-50.0000M-PCB
JTAG
QMTECH_XC7A35T_DDR3_BOARD
Size
B
Document Number
<Doc>
Rev
2.0
Date:
Saturday, June 15, 2019
Sheet
1
of
1