


V0.2
1、增加HWD的电阻，R4706，R4707
2、增加R4923，默认NC


0801
1、更换esim为ST33J2M0

0805
1、交换spk P和N的线序

DVT1
1、增加QC3+，删除指纹预留1.8VLD0
2、删除闪光灯
3、增加C3480,C3481。
4、预留C6580
5、增加R1211
6、删除CC logic预留的并位电容（CC,IIC）
7、删除摄像头STC预留
8、增加VBUS电压采样
9、闪光灯增加二供




Note 10-1:	must be close to HIFI's ball Differential pair of DVDVD_GPU remote sense Remote sense trace with GND shielding to PMIC (Differential)
Note 10-2:	Remote sense trace with GND shielding to PMIC (Differential) Differential pair of DVDVD_PROC remote sense must be close to HIFI's ball
Note 10-3:	Differential pair of DVDVD_MODEIM remote sense must be close to HIFI's ball with GND shielding to PMIC (Differential)
Note 10-4:	Differential pair of DVDVD_CORE remote sense must be close to HIFI's ball with GND shielding to PMIC (Differential)




Note 11-1: C1111 closed DVDD18_MSDC0 150mil


Note 11-2: C1112 closed DVDD18 MSDC1 150ms


C1113 closed DVDD28_MSDC1 150mi





Note 12-5: Charger must have D+/D- pin for charger type USB detection.
Charger must have at least 500mA USB current for All charger type.

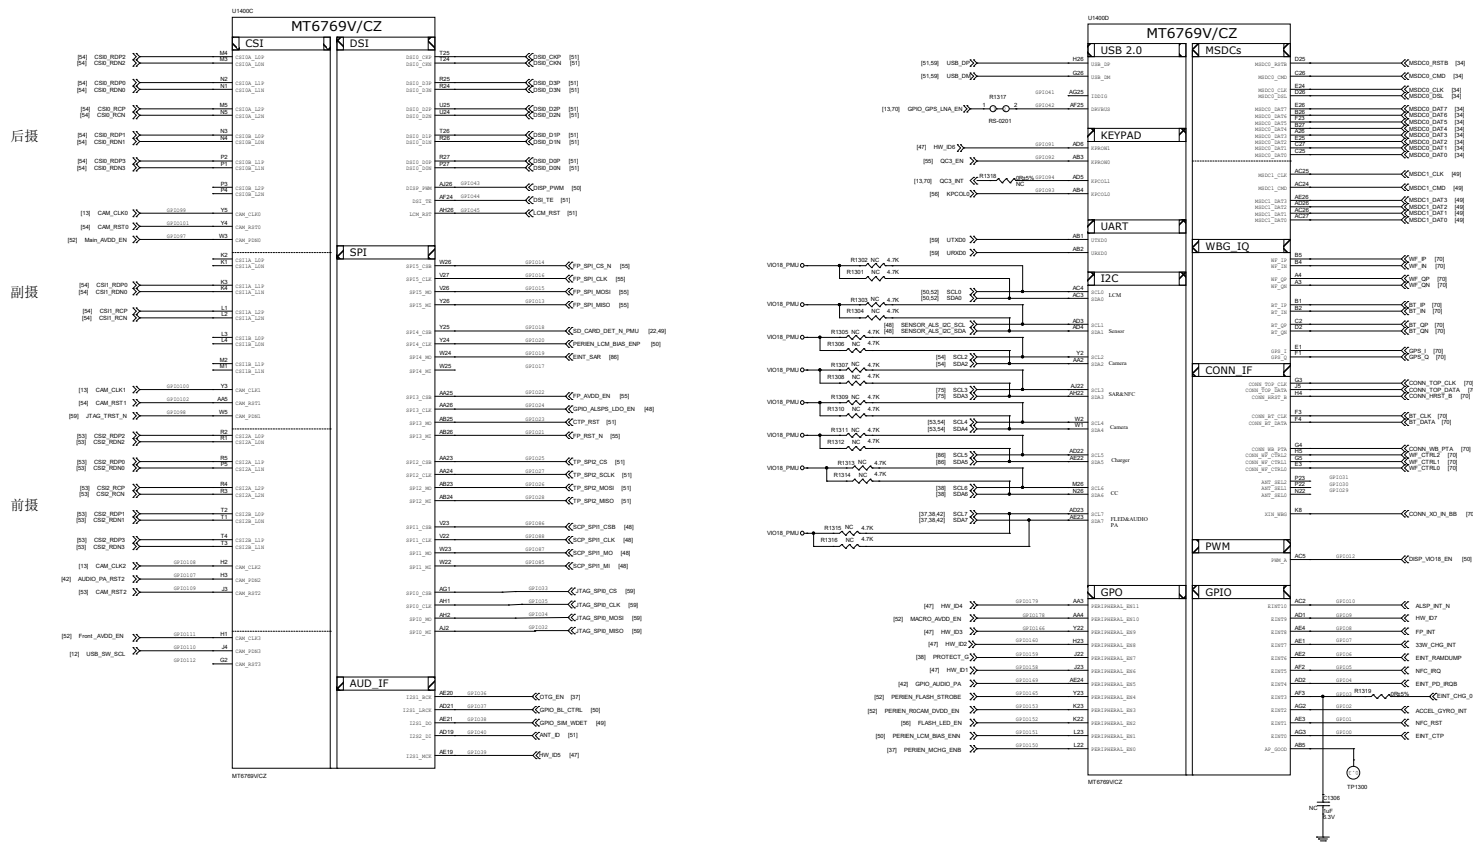

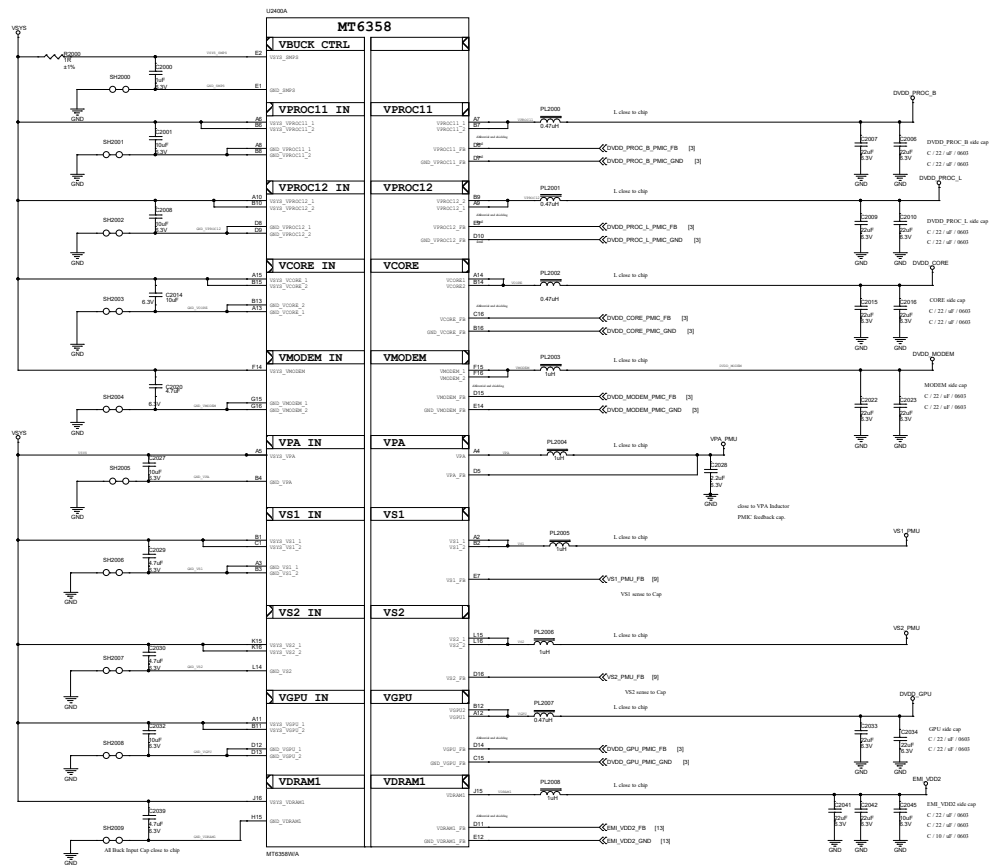





AU1_SPK and AU1_SPN should be connected as single end signal and be grounded by GND, up and down, left and right respectively
 *The suggested layout pattern of AU1_SPK, AU1_SPN, AU1_SPN is as follows: AU1_SPK, AU1_SPN, AU1_SPN

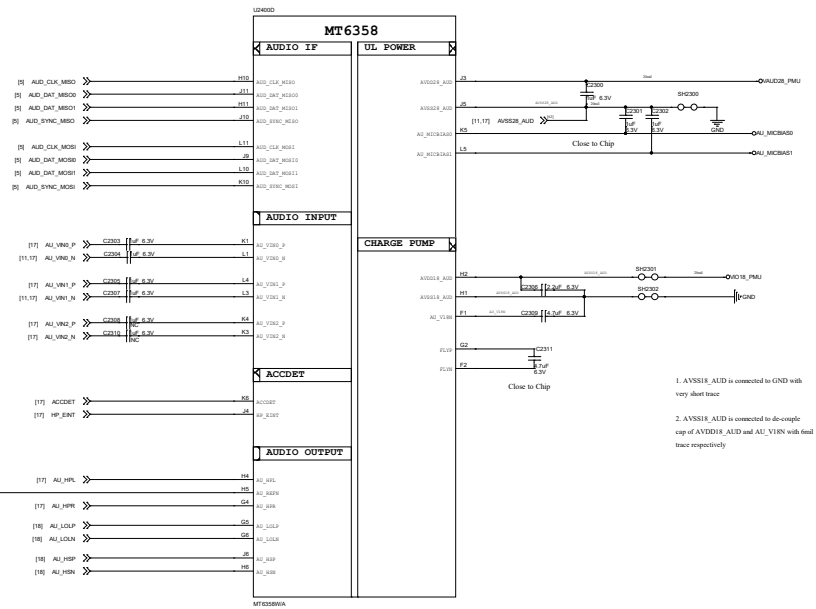


1. AVSS18_AVD is connected to GND with very short trace
2. AVSS18_AVD is connected to de-couple cap of AVDD18_AVD and AU1_VIN with 6mm trace respectively


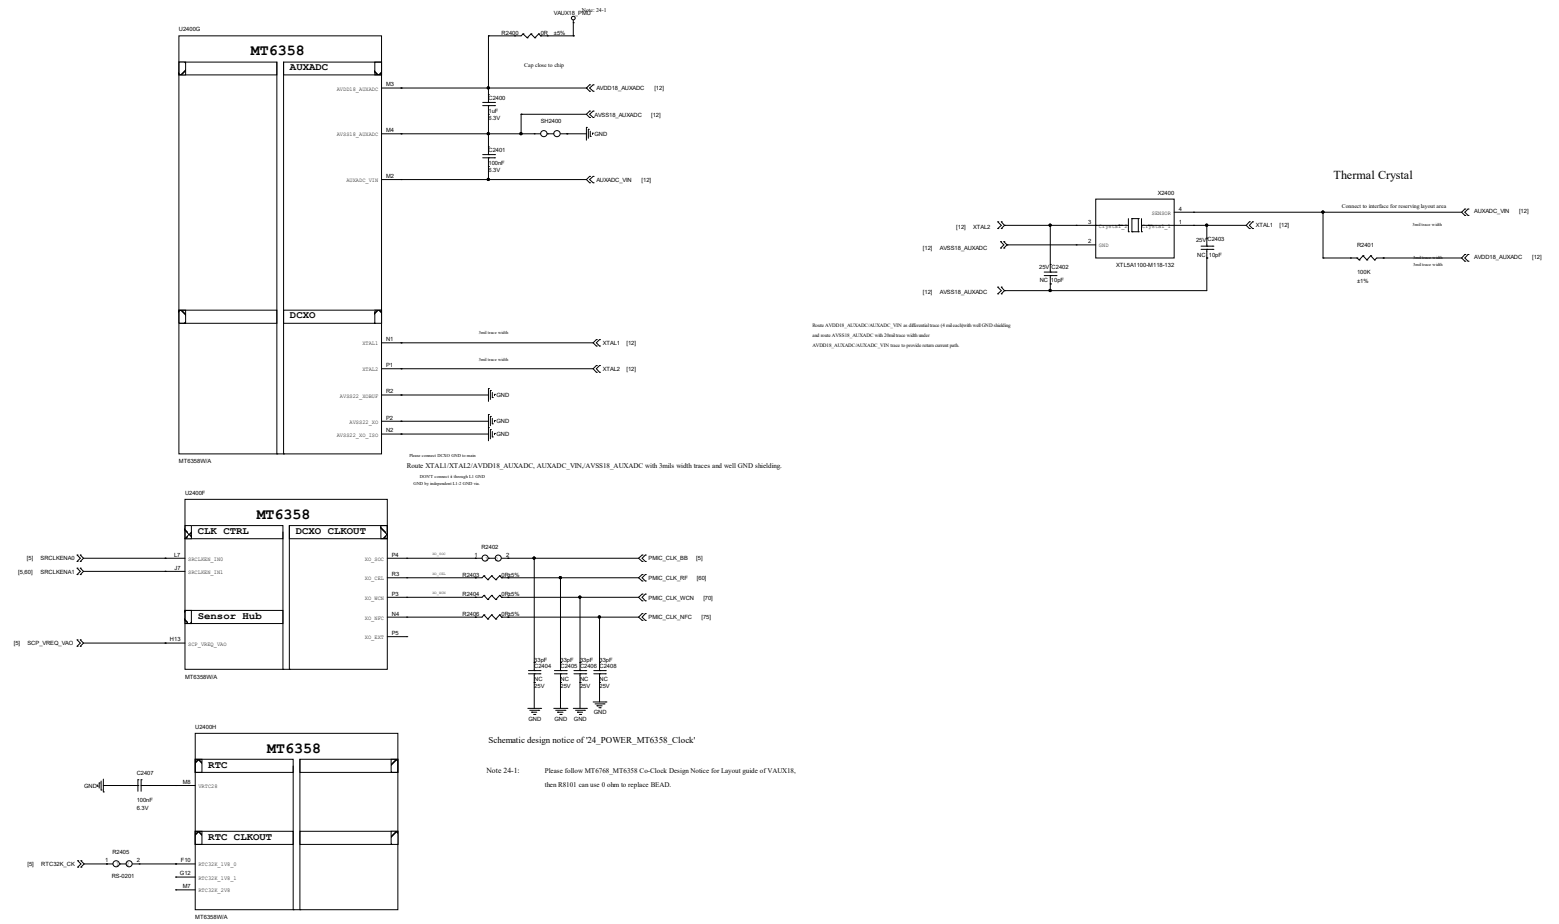


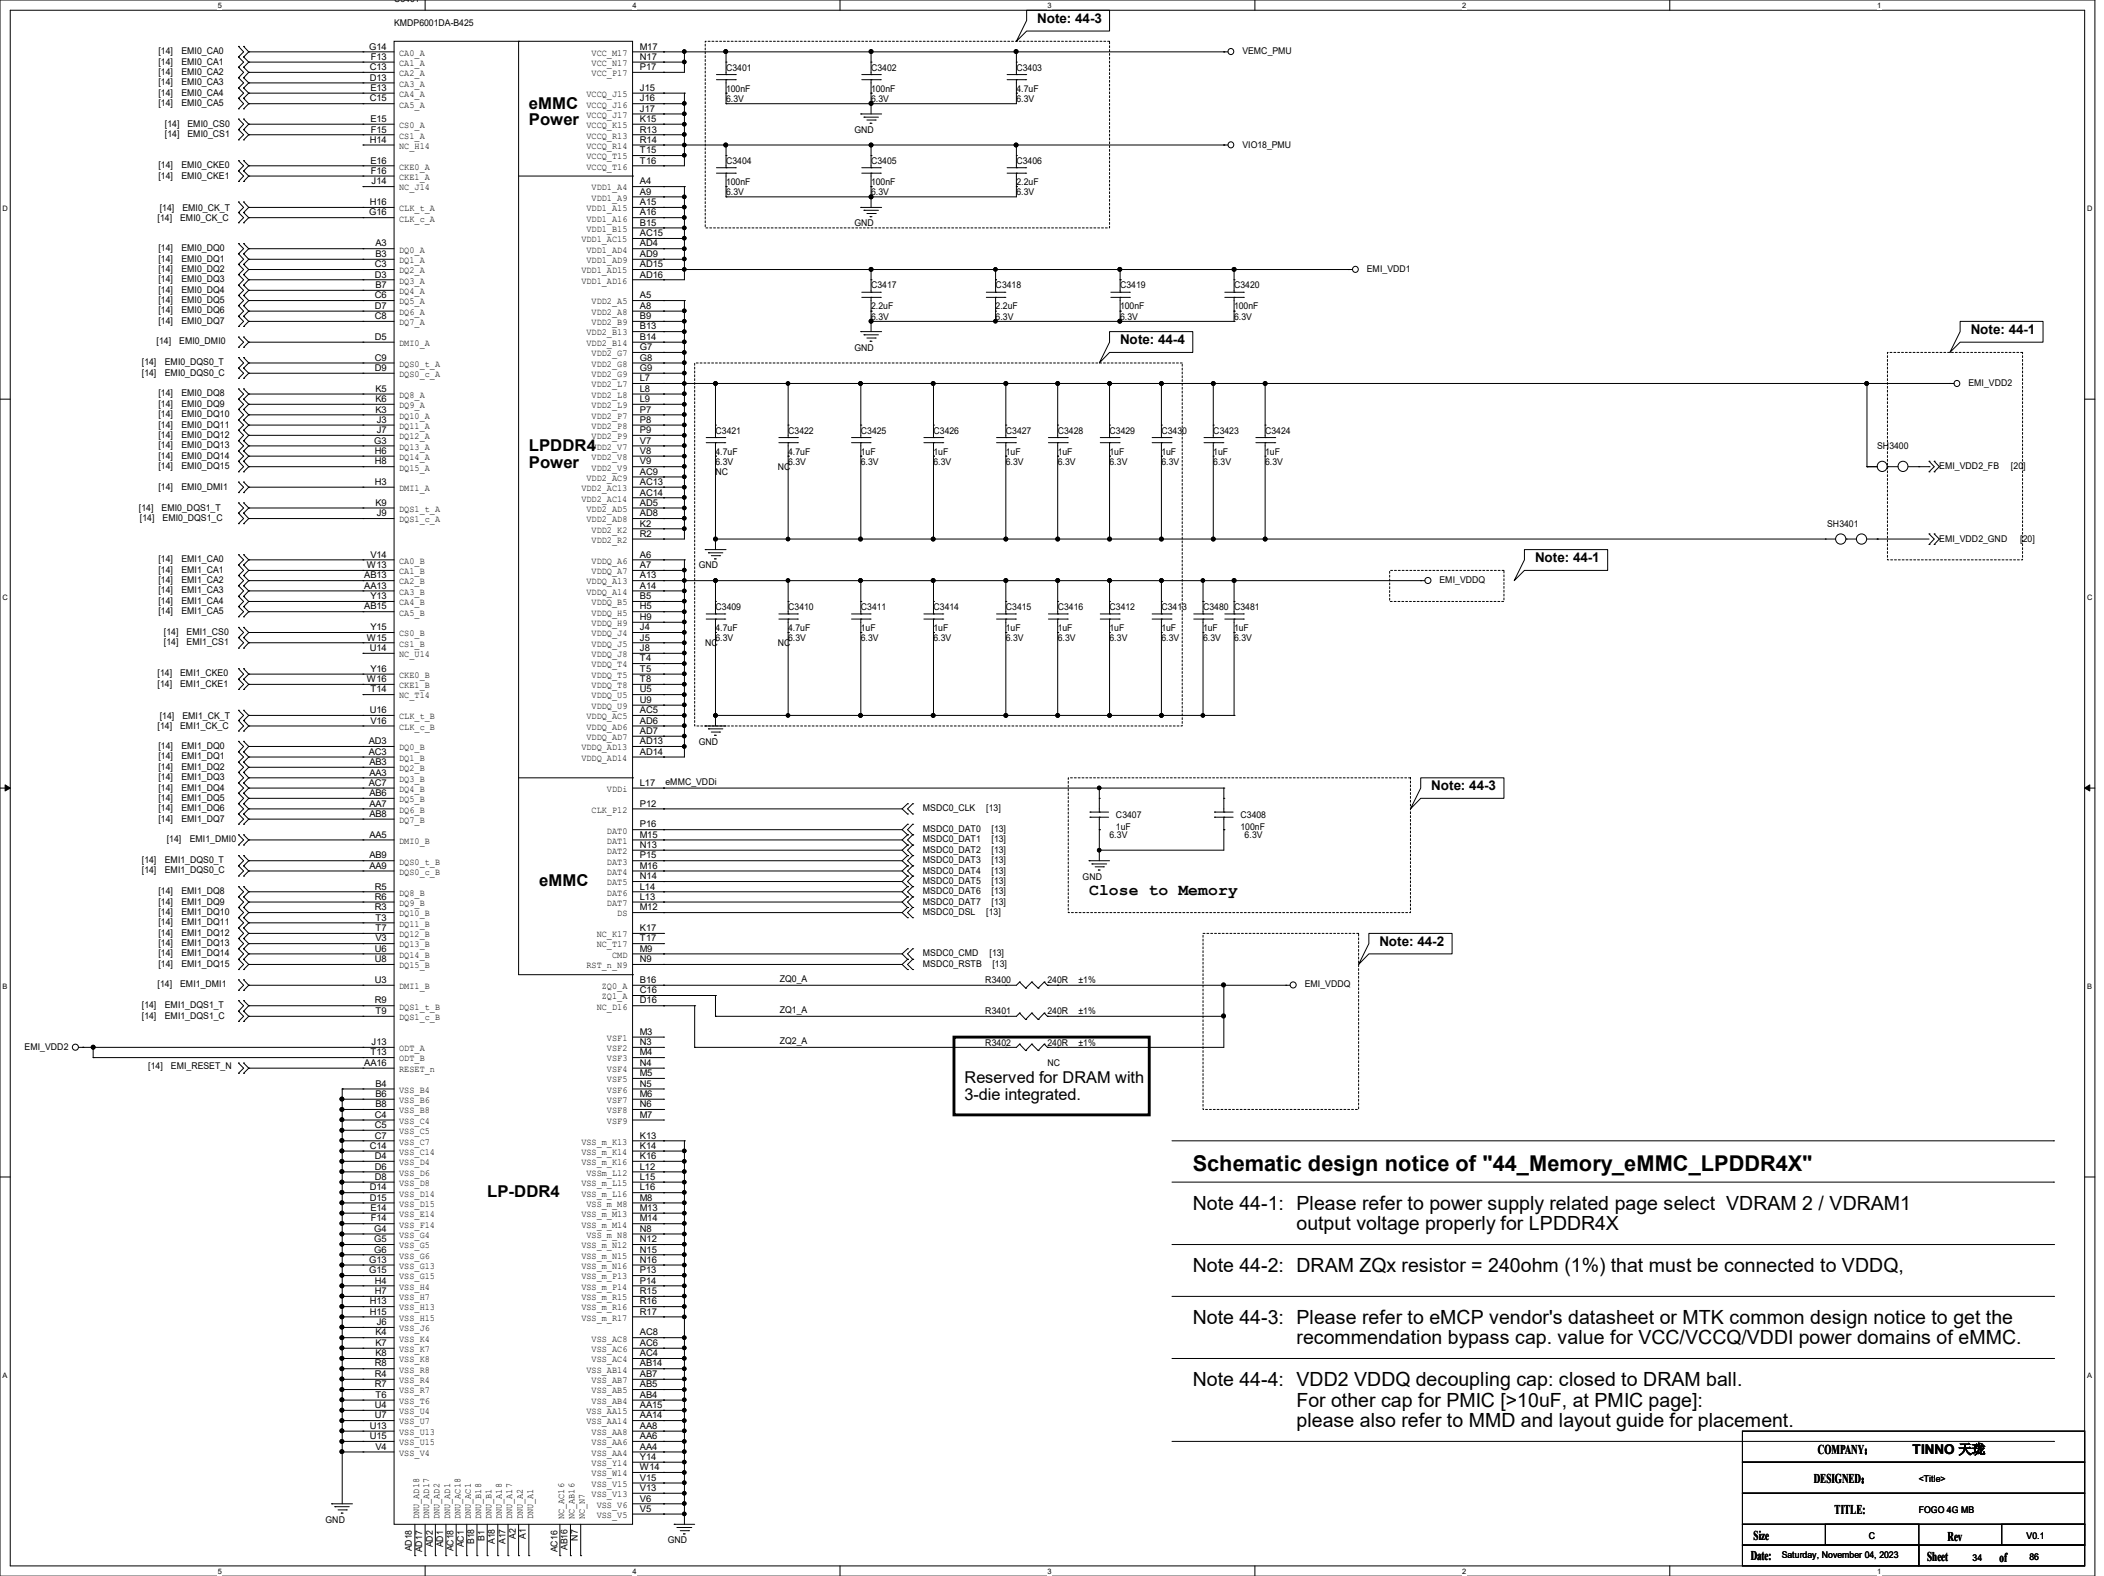

Ext. EMI_VDD1 for LPDDR4X VDD1




CHARGE_15W

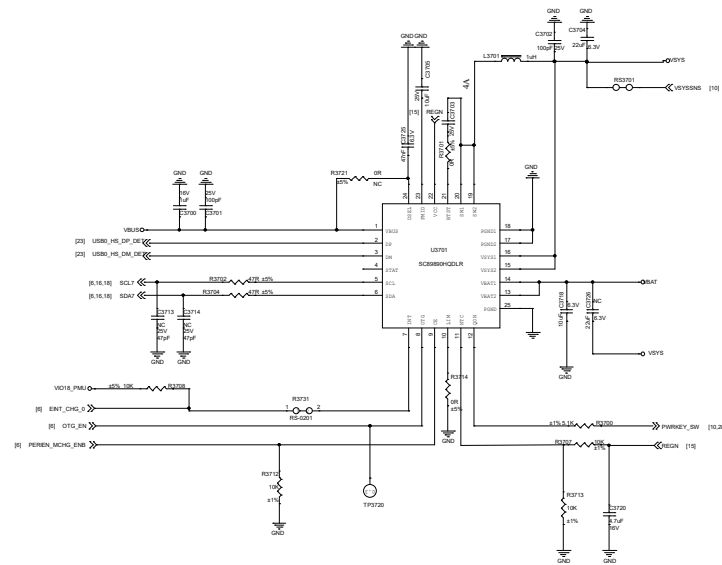


OVP


硬件门限8.96V,软件门限10.9V

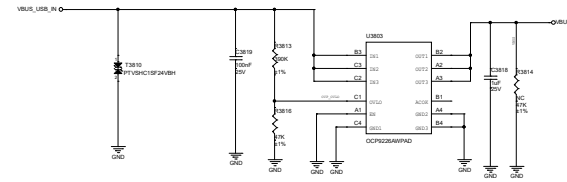


OVP	R3813	R3816	EQUATION
10.43V	300K	39K	$(300K+39K)/39K*1.2V$
11.16V	390K	47K	$(390K+47K)/47K*1.2V$
8.96V	330K	51K	$(330K+51K)/51K*1.2V$

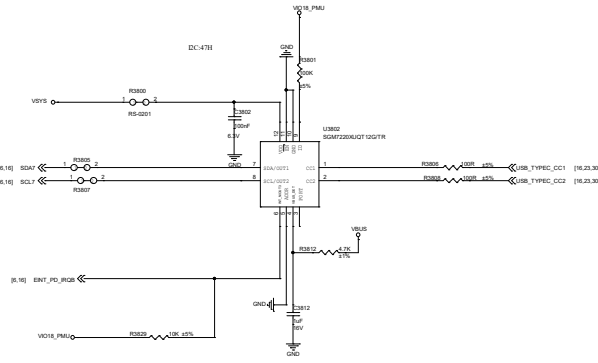



PD compatible design

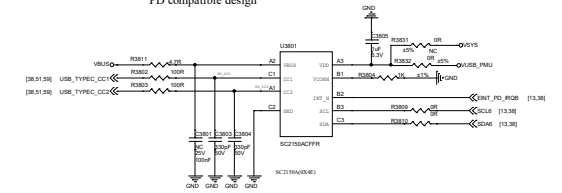


QC compatible design

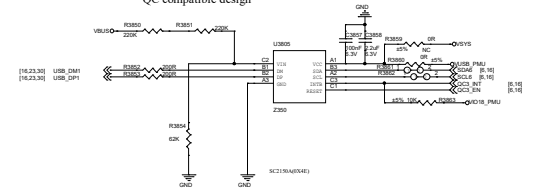


33W Charger

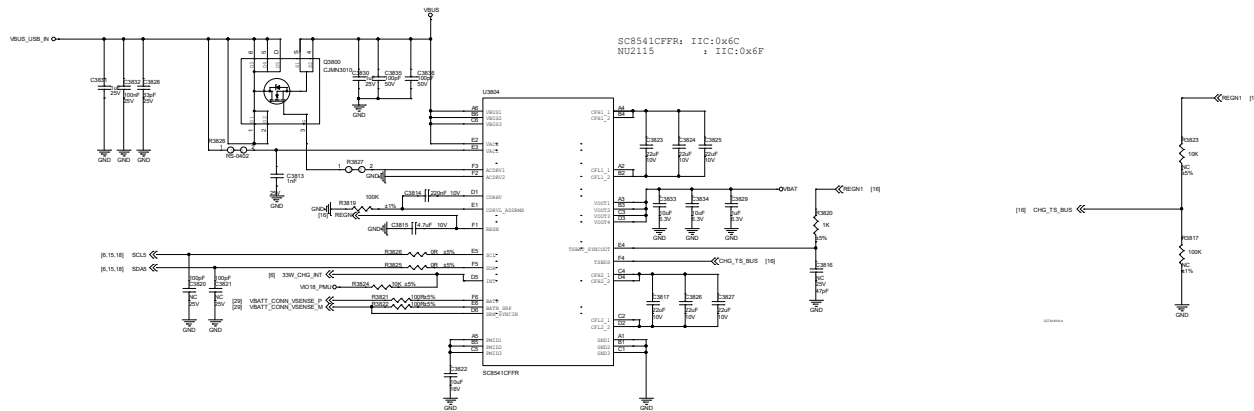


Sub Mic

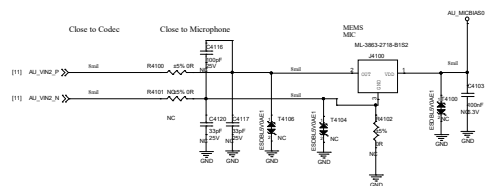



Handset Receiver

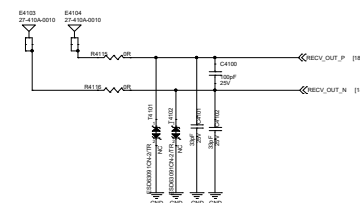

Main Mic






Headset Mic

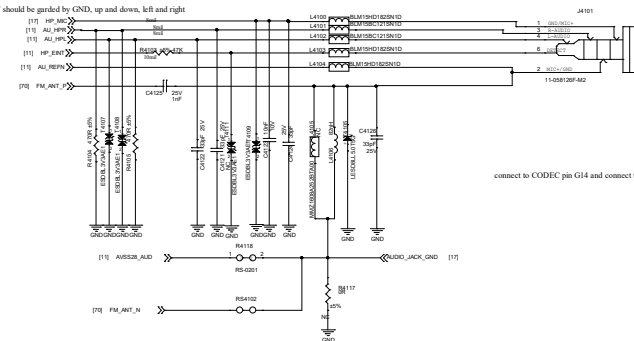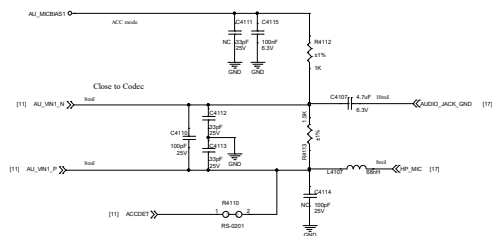


connect to CODEC pin G14 and connect to GND at CODEC

COBY-P352CE

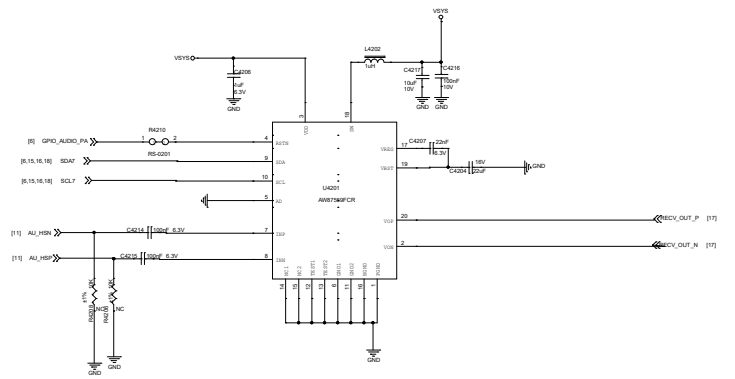
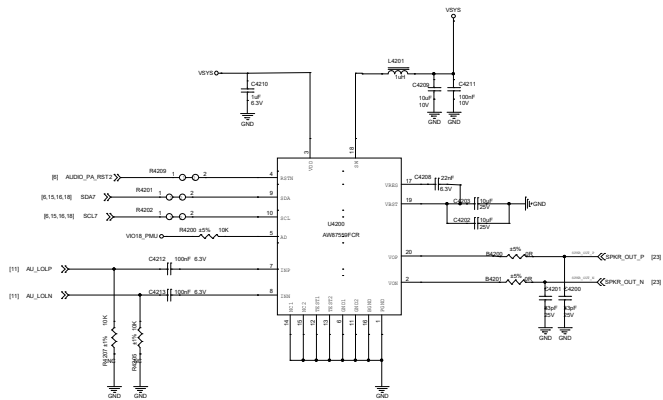


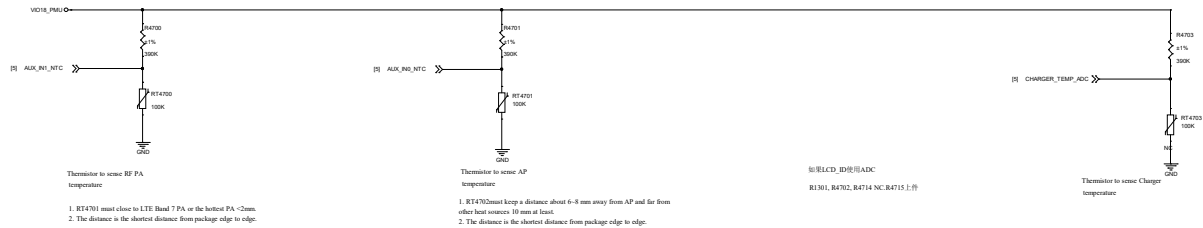



HW ID

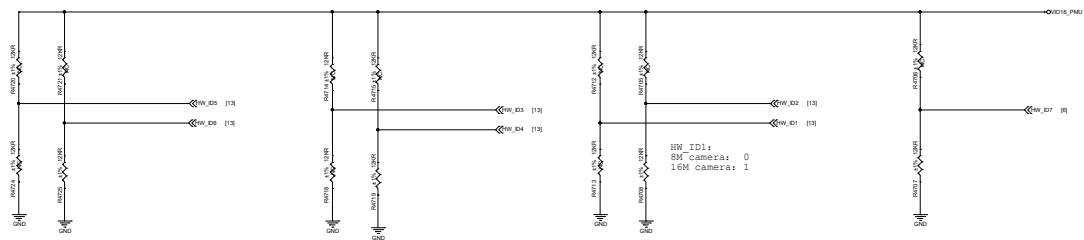

Optional E-Compass




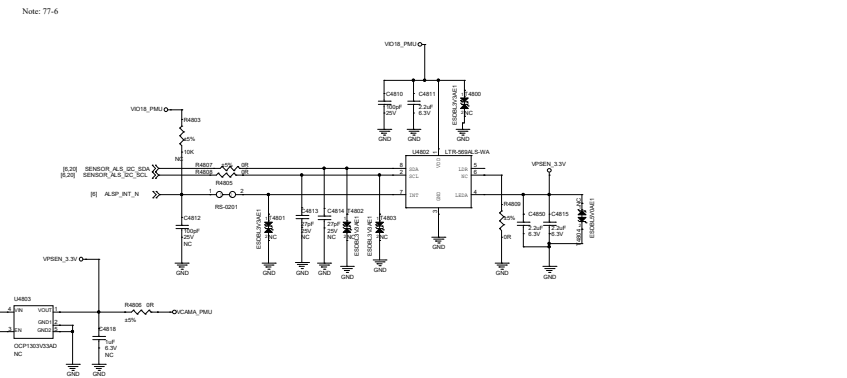
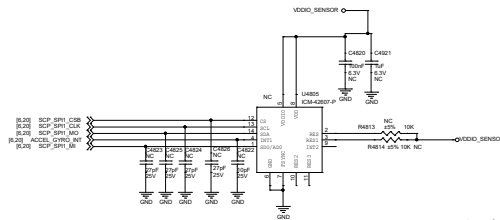


0X30W/0X31R 0X32W/0X33R

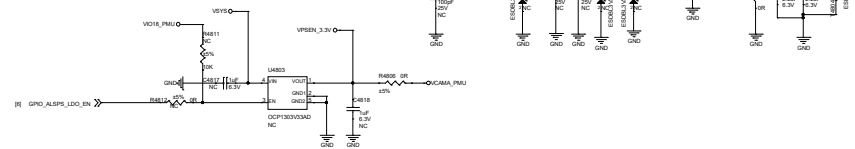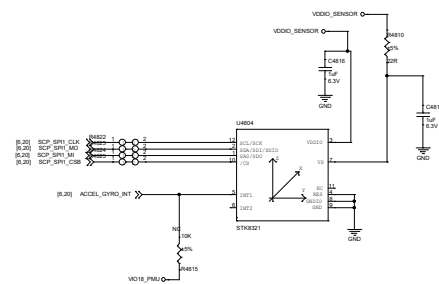


Base(BMP380) I2C address : 7h76 (SDO pin tied to GND)



Note 77-7: Interrupt pin of MEMS sensor must be assign to ball EINT[12:0]

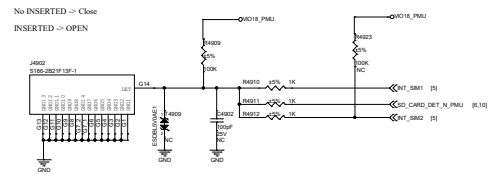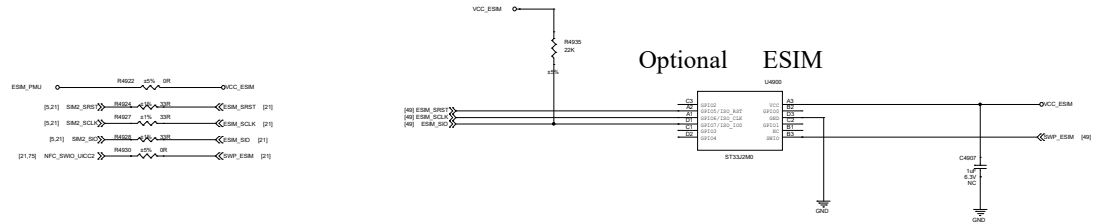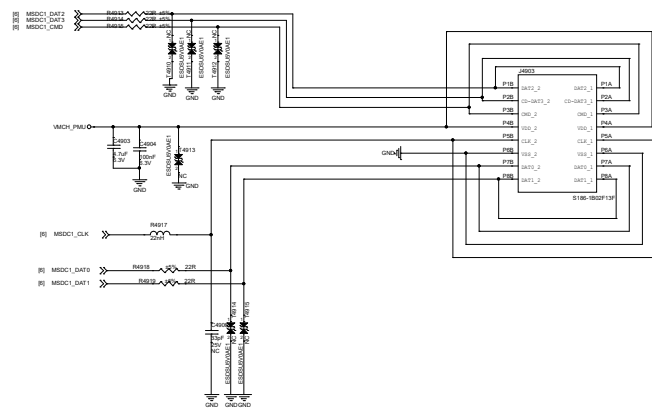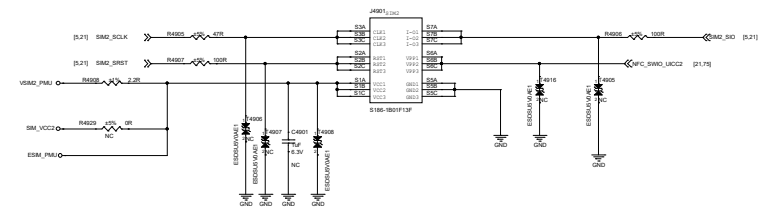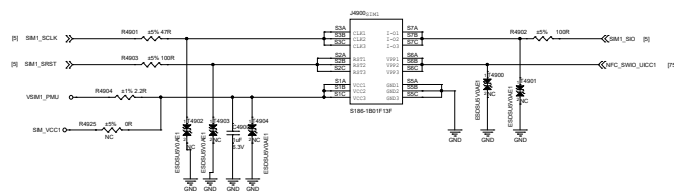

Normal:0
Insert:1




Optional ESIM

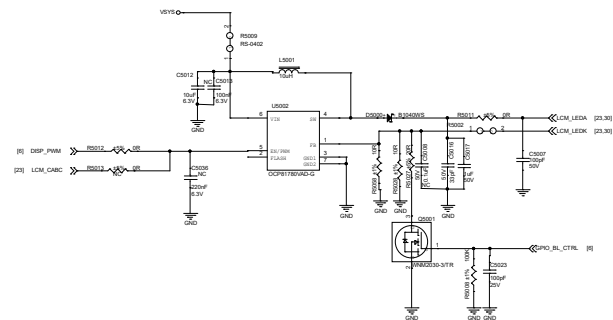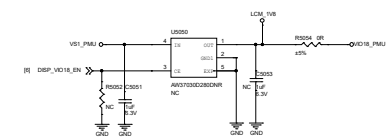

LCD Connector

替换60PIN连接器, 新物料, NEW_2024360603

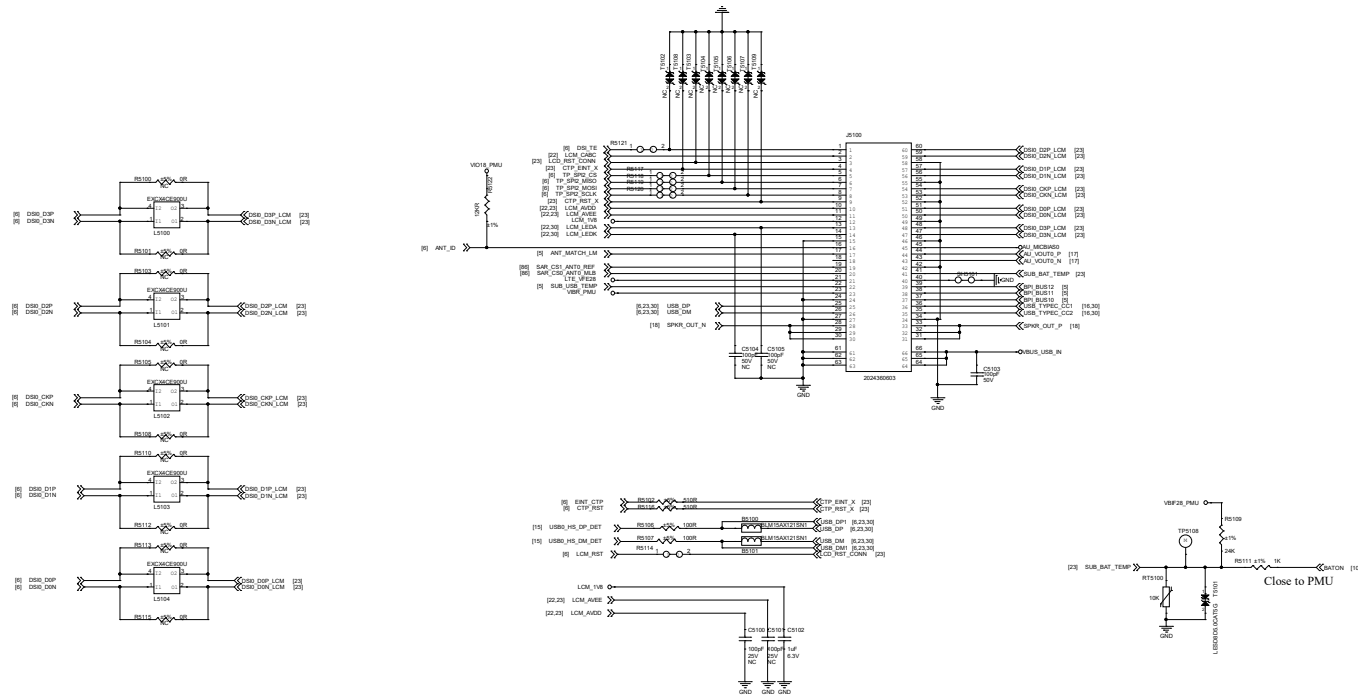

(AVDD) LDO for Rear Camera 2.8V

U5024

V5VS0

4

3

1

2

5

REAR_VCAMA_AVDD

10k

1.5V

R5203


1k

Main_AVDD_EN

GND


(AVDD) LDO for Front Camera 2.8V

AW36515:0X63
OCP81375:0X63
OCP81375:0X63

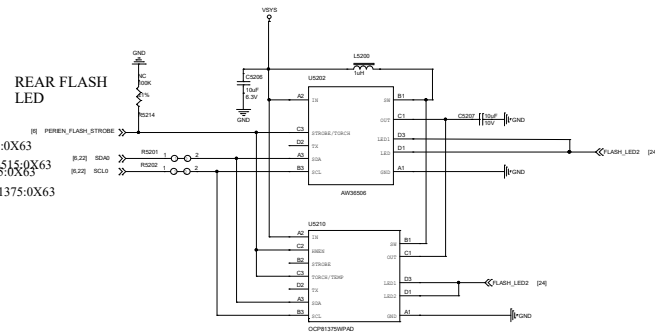

闪光灯放在闪光灯小板上


****前/后摄像头同时工作****

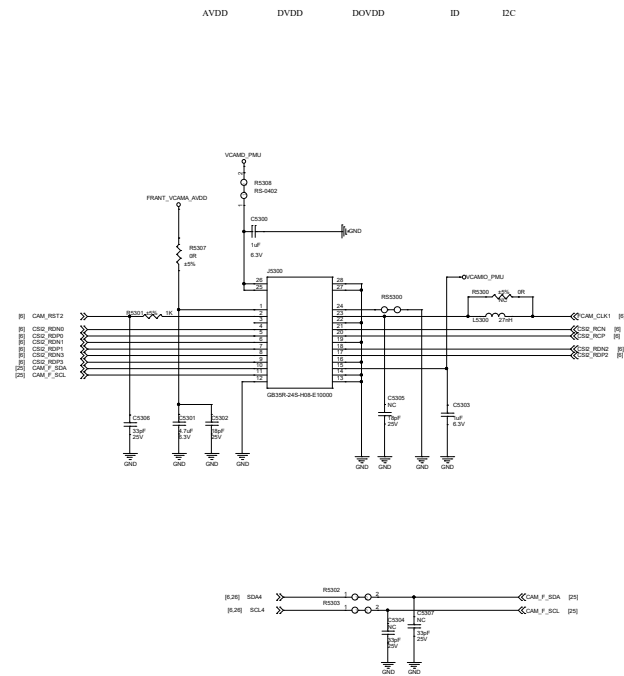


12C

Main-CAMERA

50M/13M

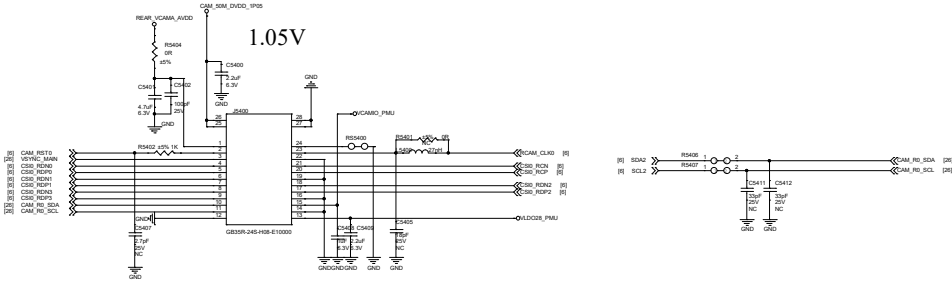
2M
FF-Macro


Optional

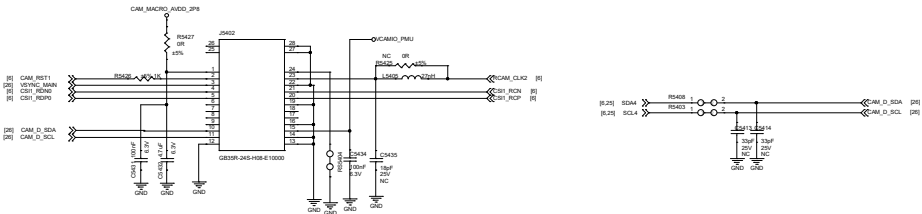





- | | |
|----|----------|
| 1 | GND |
| 2 | RST |
| 3 | ID(GND) |
| 4 | MOSI |
| 5 | INT |
| 6 | MISO |
| 7 | VDD2V8 |
| 8 | CLK |
| 9 | DOVDD1V8 |
| 10 | CS |
| 11 | GND |
| 12 | GND |
| 13 | GND |
| 14 | GND |

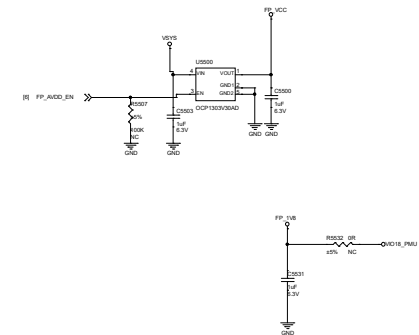

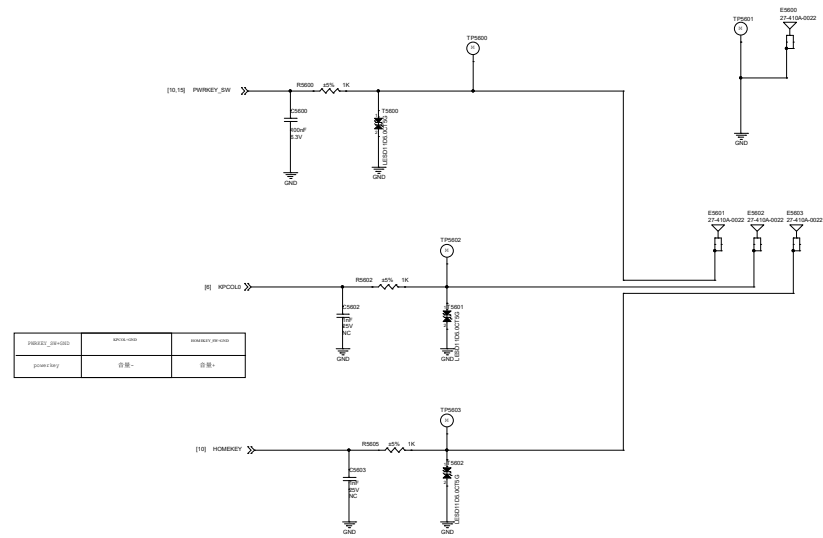


Charge Indicator





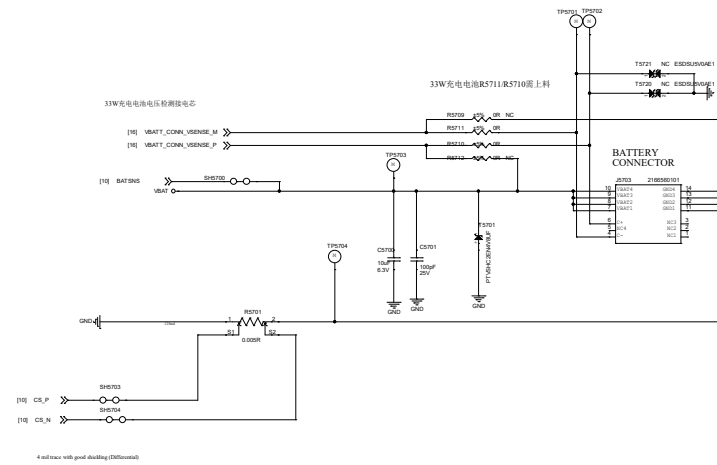


Debug Test Point

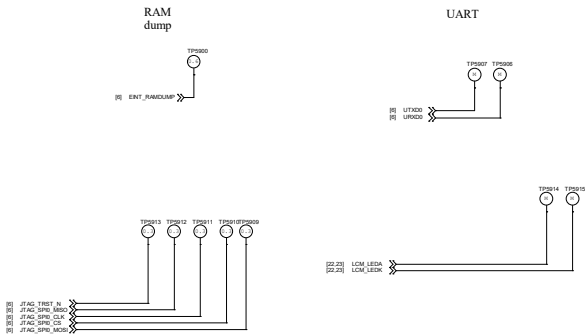

Fixture Test Point

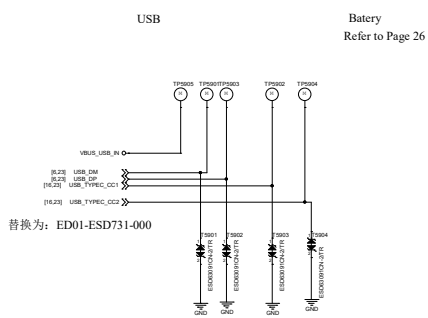


shielding can





Metal Grounding

Top

Bottom

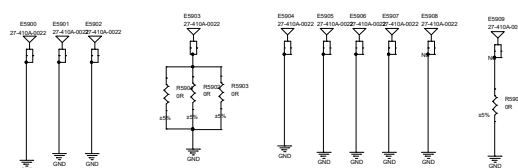

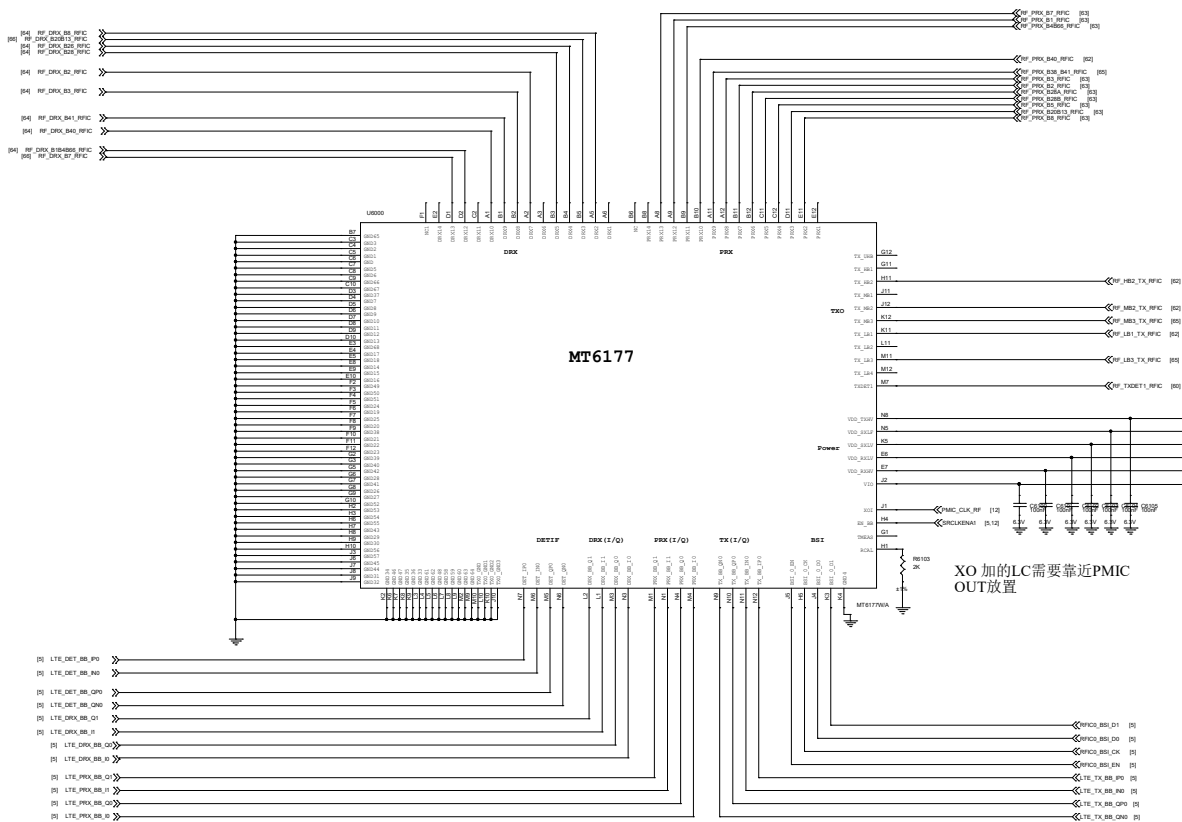

XO 加的LC需要靠近PMIC
OUT放置

D

D

C

C


B

B


A

A


B1 TRX

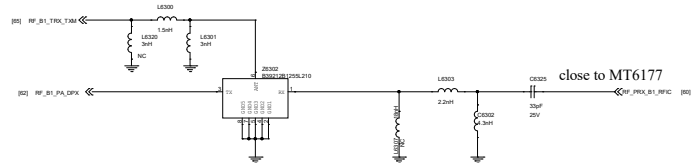


B8_TRX

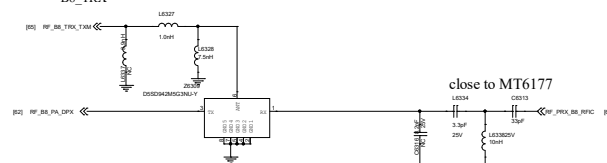


B2 TRX

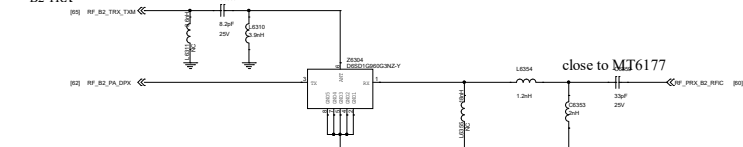


SKU1/2:B13 TRX.SKU3/4/5:B20 TRX

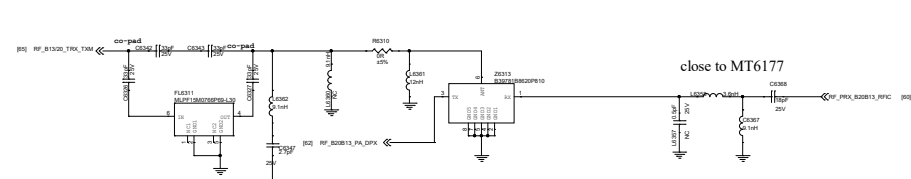


B3 TRX

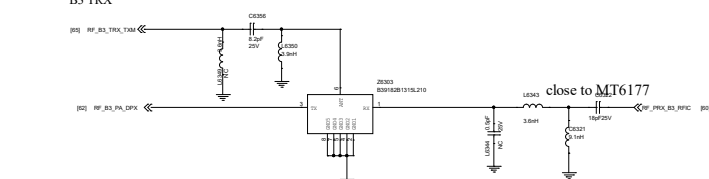


B28A TRX

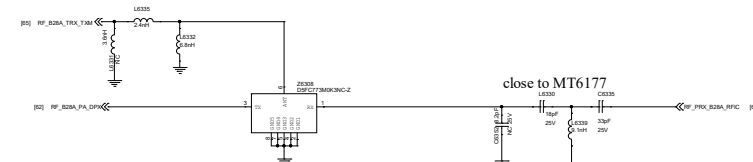


B4/66 TRX

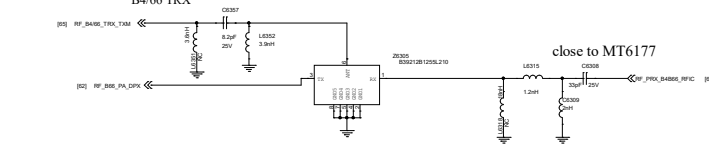


B28B TRX

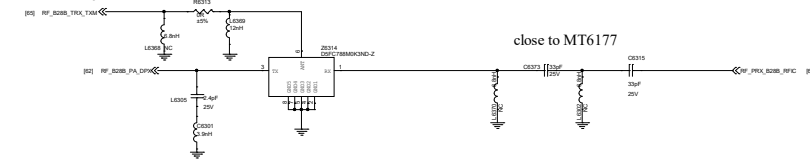


B5/26 TRX

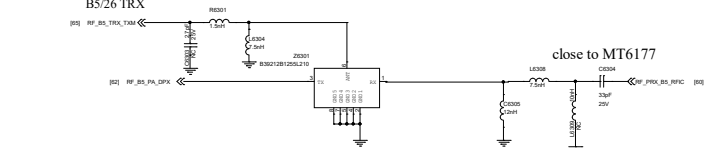


B7 TRX

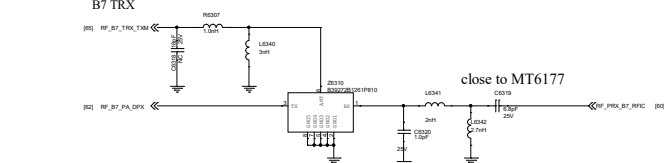


B1/4/66 DRX




B2 DRX




B3 DRX




B5 DRX




B7 DRX




B8 DRX




SKU1:B13 TRX,SKU2/3:B20 TRX




B28 DRX



B40 DRX




B41 DRX




B7 DRX LNA


Only SKU5 EU NFC+Sar 带B41 DRX_LNA


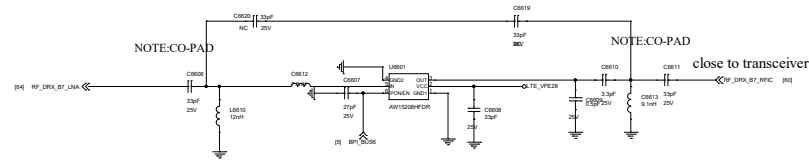


B20_DRX LNA

Only SKU5 EU NFC+Sar 带B41 DRX_LNA

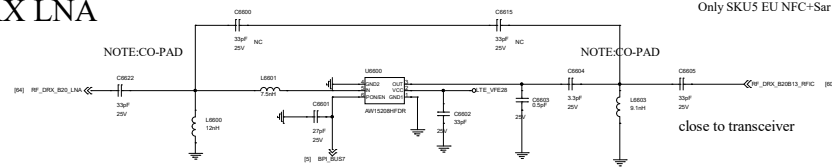

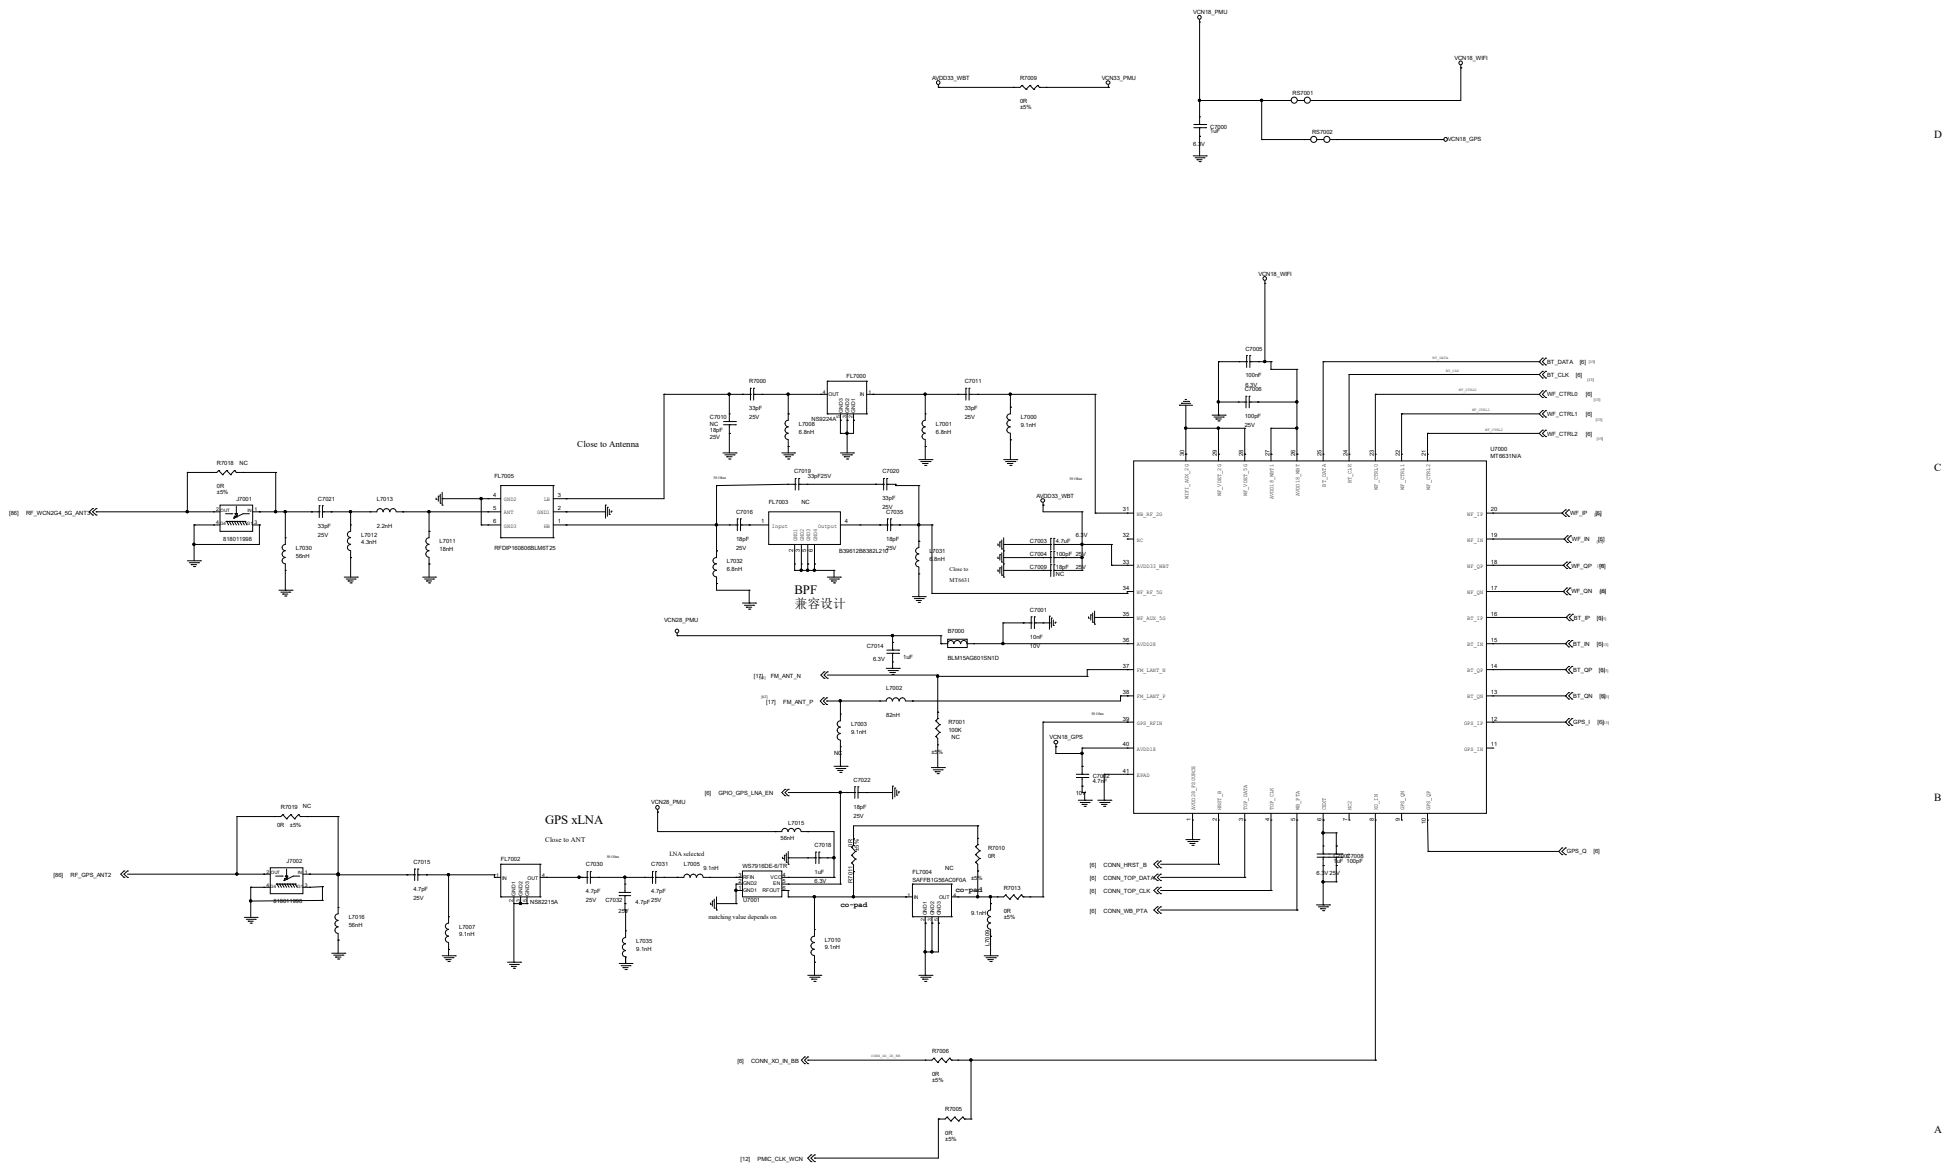


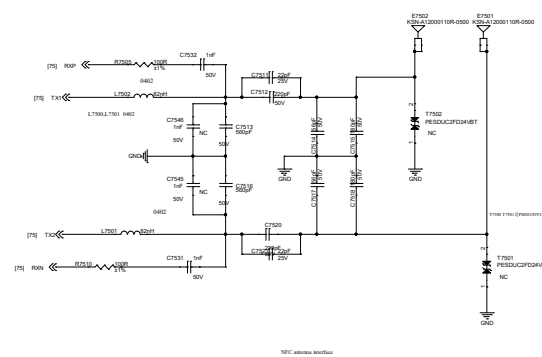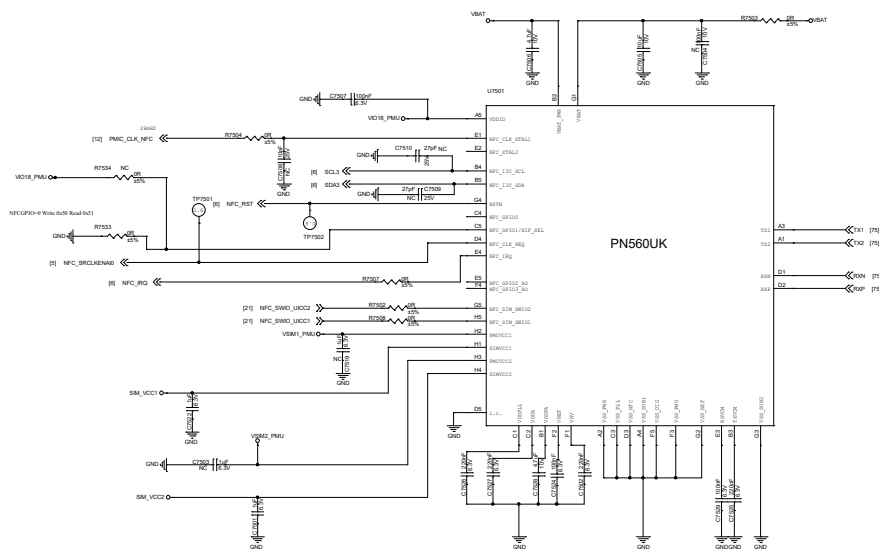


C

A



ANT5: WCN_2.4G/5GWIFI_BT

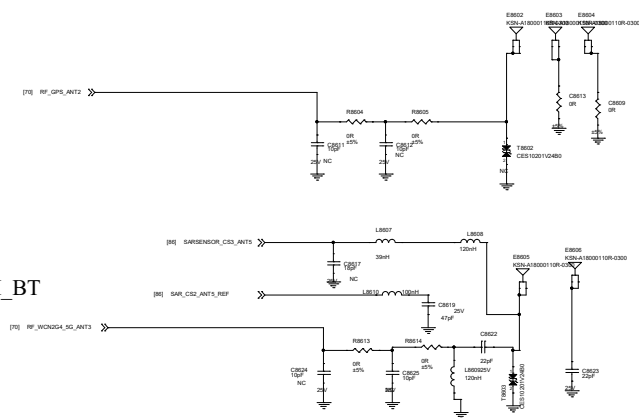

ANT3: LMHB
DRX

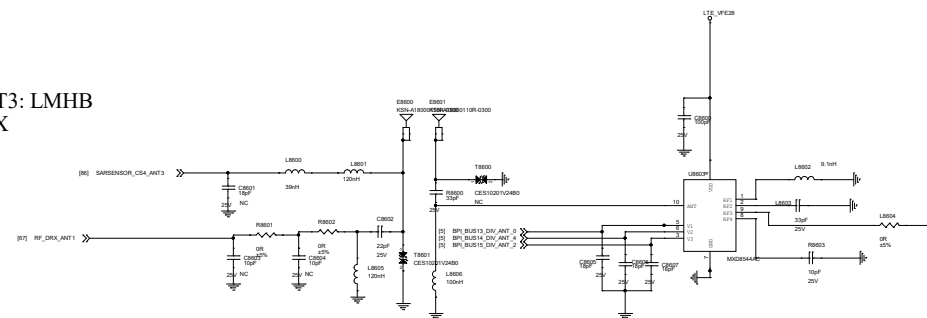

SAR Sensor IC
AW96105ADNR

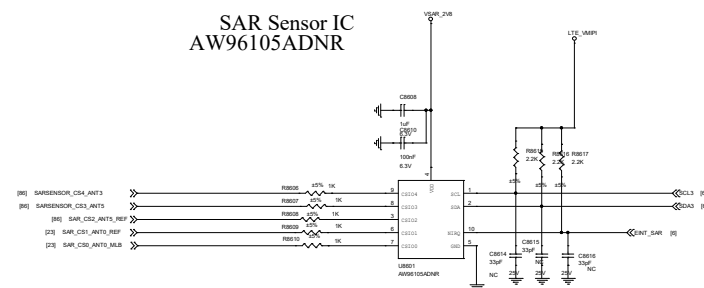

2.8V LDO: RP114K281D