



V0.2
1、增加HWD的电阻，R4706，R4707
2、增加R4923，默认NC

0801
1、更换esim为ST33J2M0


0805
1、交换spk P和N的线序

DVT1
1、增加QC3+，删除指纹预留1.8VLD0
2、删除闪光灯
3、增加C3480,C3481。
4、预留C6580
5、增加R1211
6、删除CC logic预留的并位电容（CC,IIC）
7、删除摄像头STC预留
8、增加VBUS电压采样
9、闪光灯增加二供





Note 10-1:	must be close to HIFI's ball Differential pair of DVDVD_GPU remote sense Remote sense trace with GND shielding to PMIC (Differential)
Note 10-2:	Remote sense trace with GND shielding to PMIC (Differential) Differential pair of DVDVD_PROC remote sense must be close to HIFI's ball
Note 10-3:	Differential pair of DVDVD_MODEIM remote sense must be close to HIFI's ball with GND shielding to PMIC (Differential)
Note 10-4:	Differential pair of DVDVD_COREI remote sense must be close to HIFI's ball with GND shielding to PMIC (Differential)

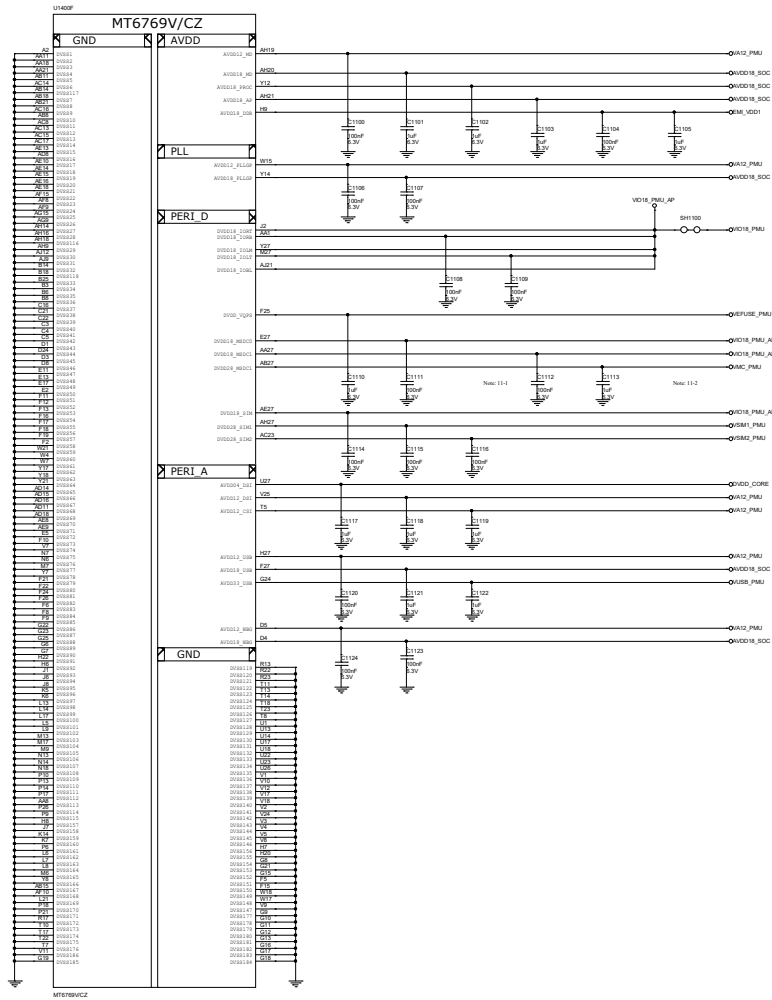


Schematic design notice of '11_BB_POWER_IO' page:


Note 11-1: C1111 closed DVDD18_MSDC0 150nF


Note 11-2: C1112 closed DVDD18_MSDC1 150nF


C1113 closed DVDD23_MSDC1 150nF






Note 12-5: Charger must have D+/D- pin for charger type USB detection.
Charger must have at least 500mA USB current for All charger type

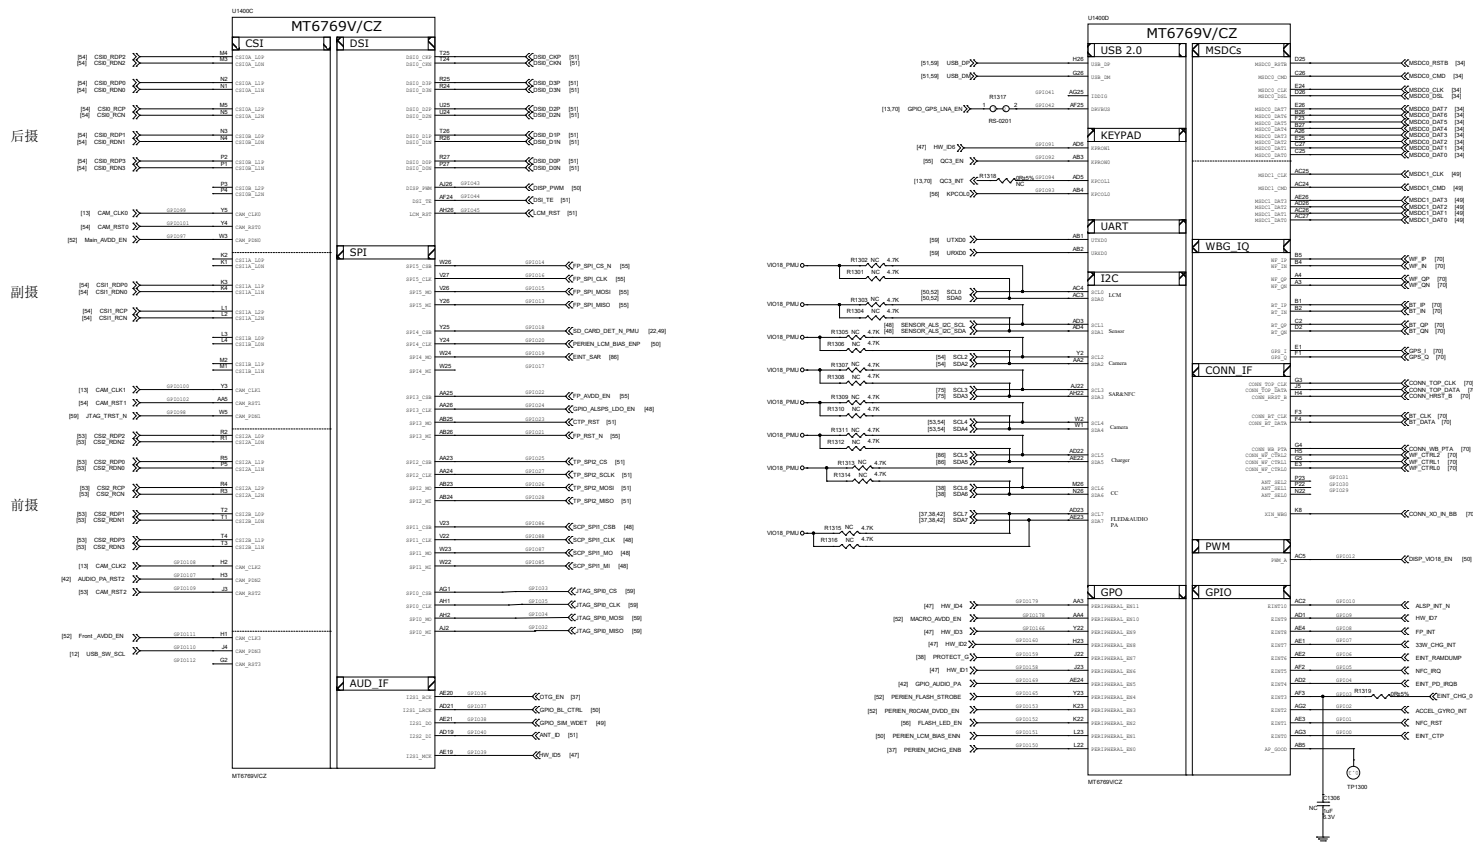


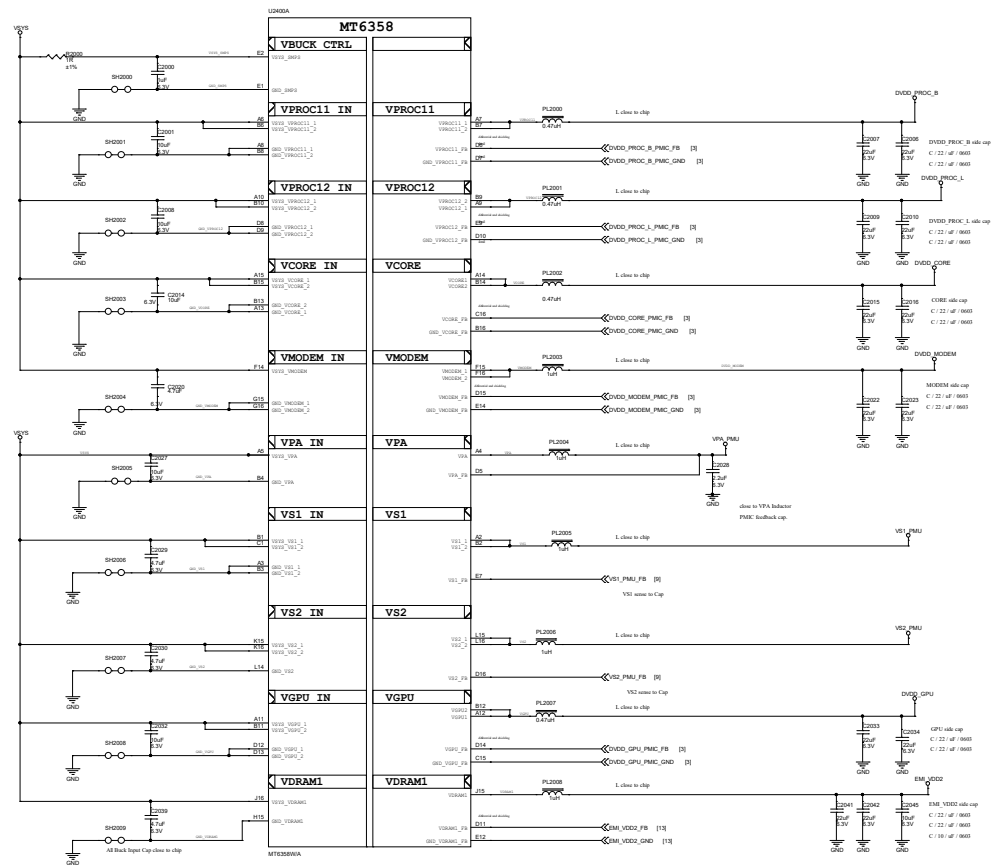




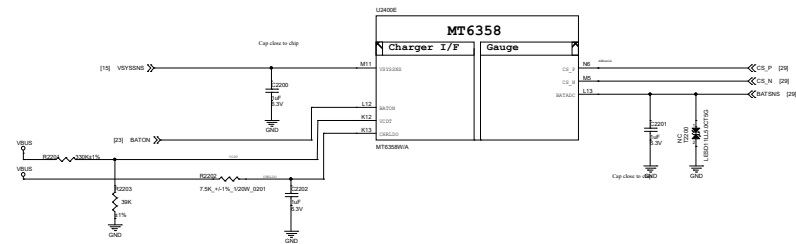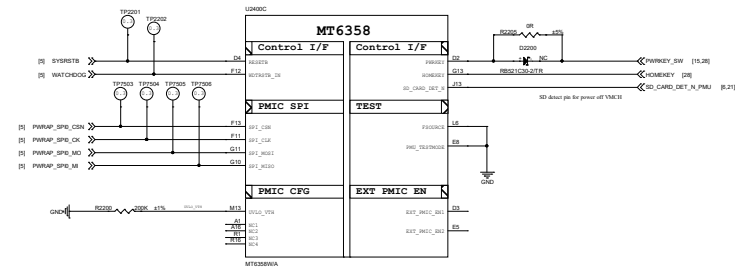


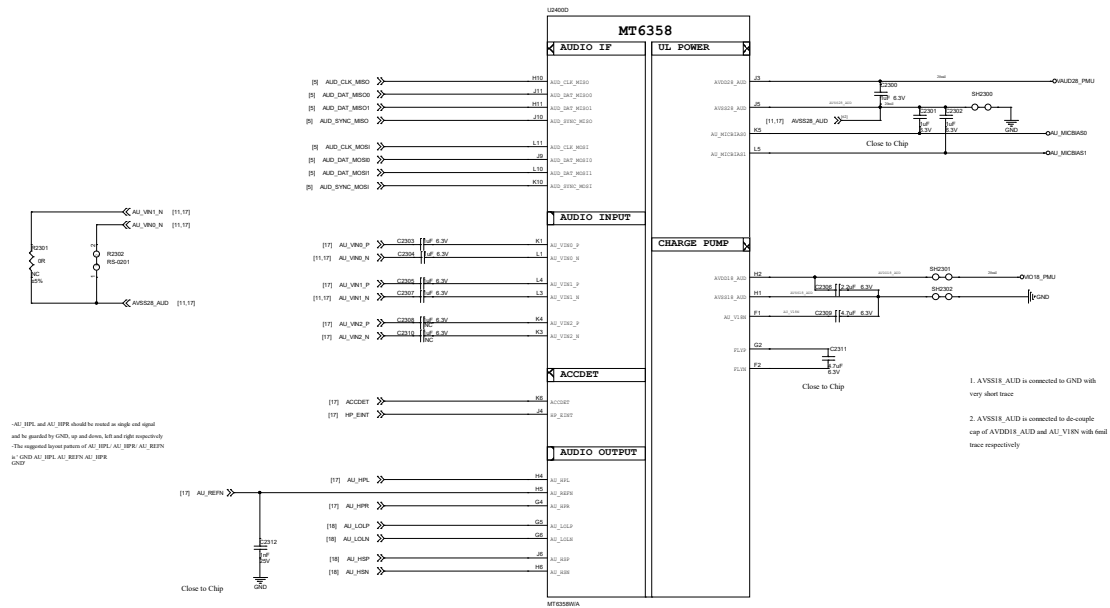


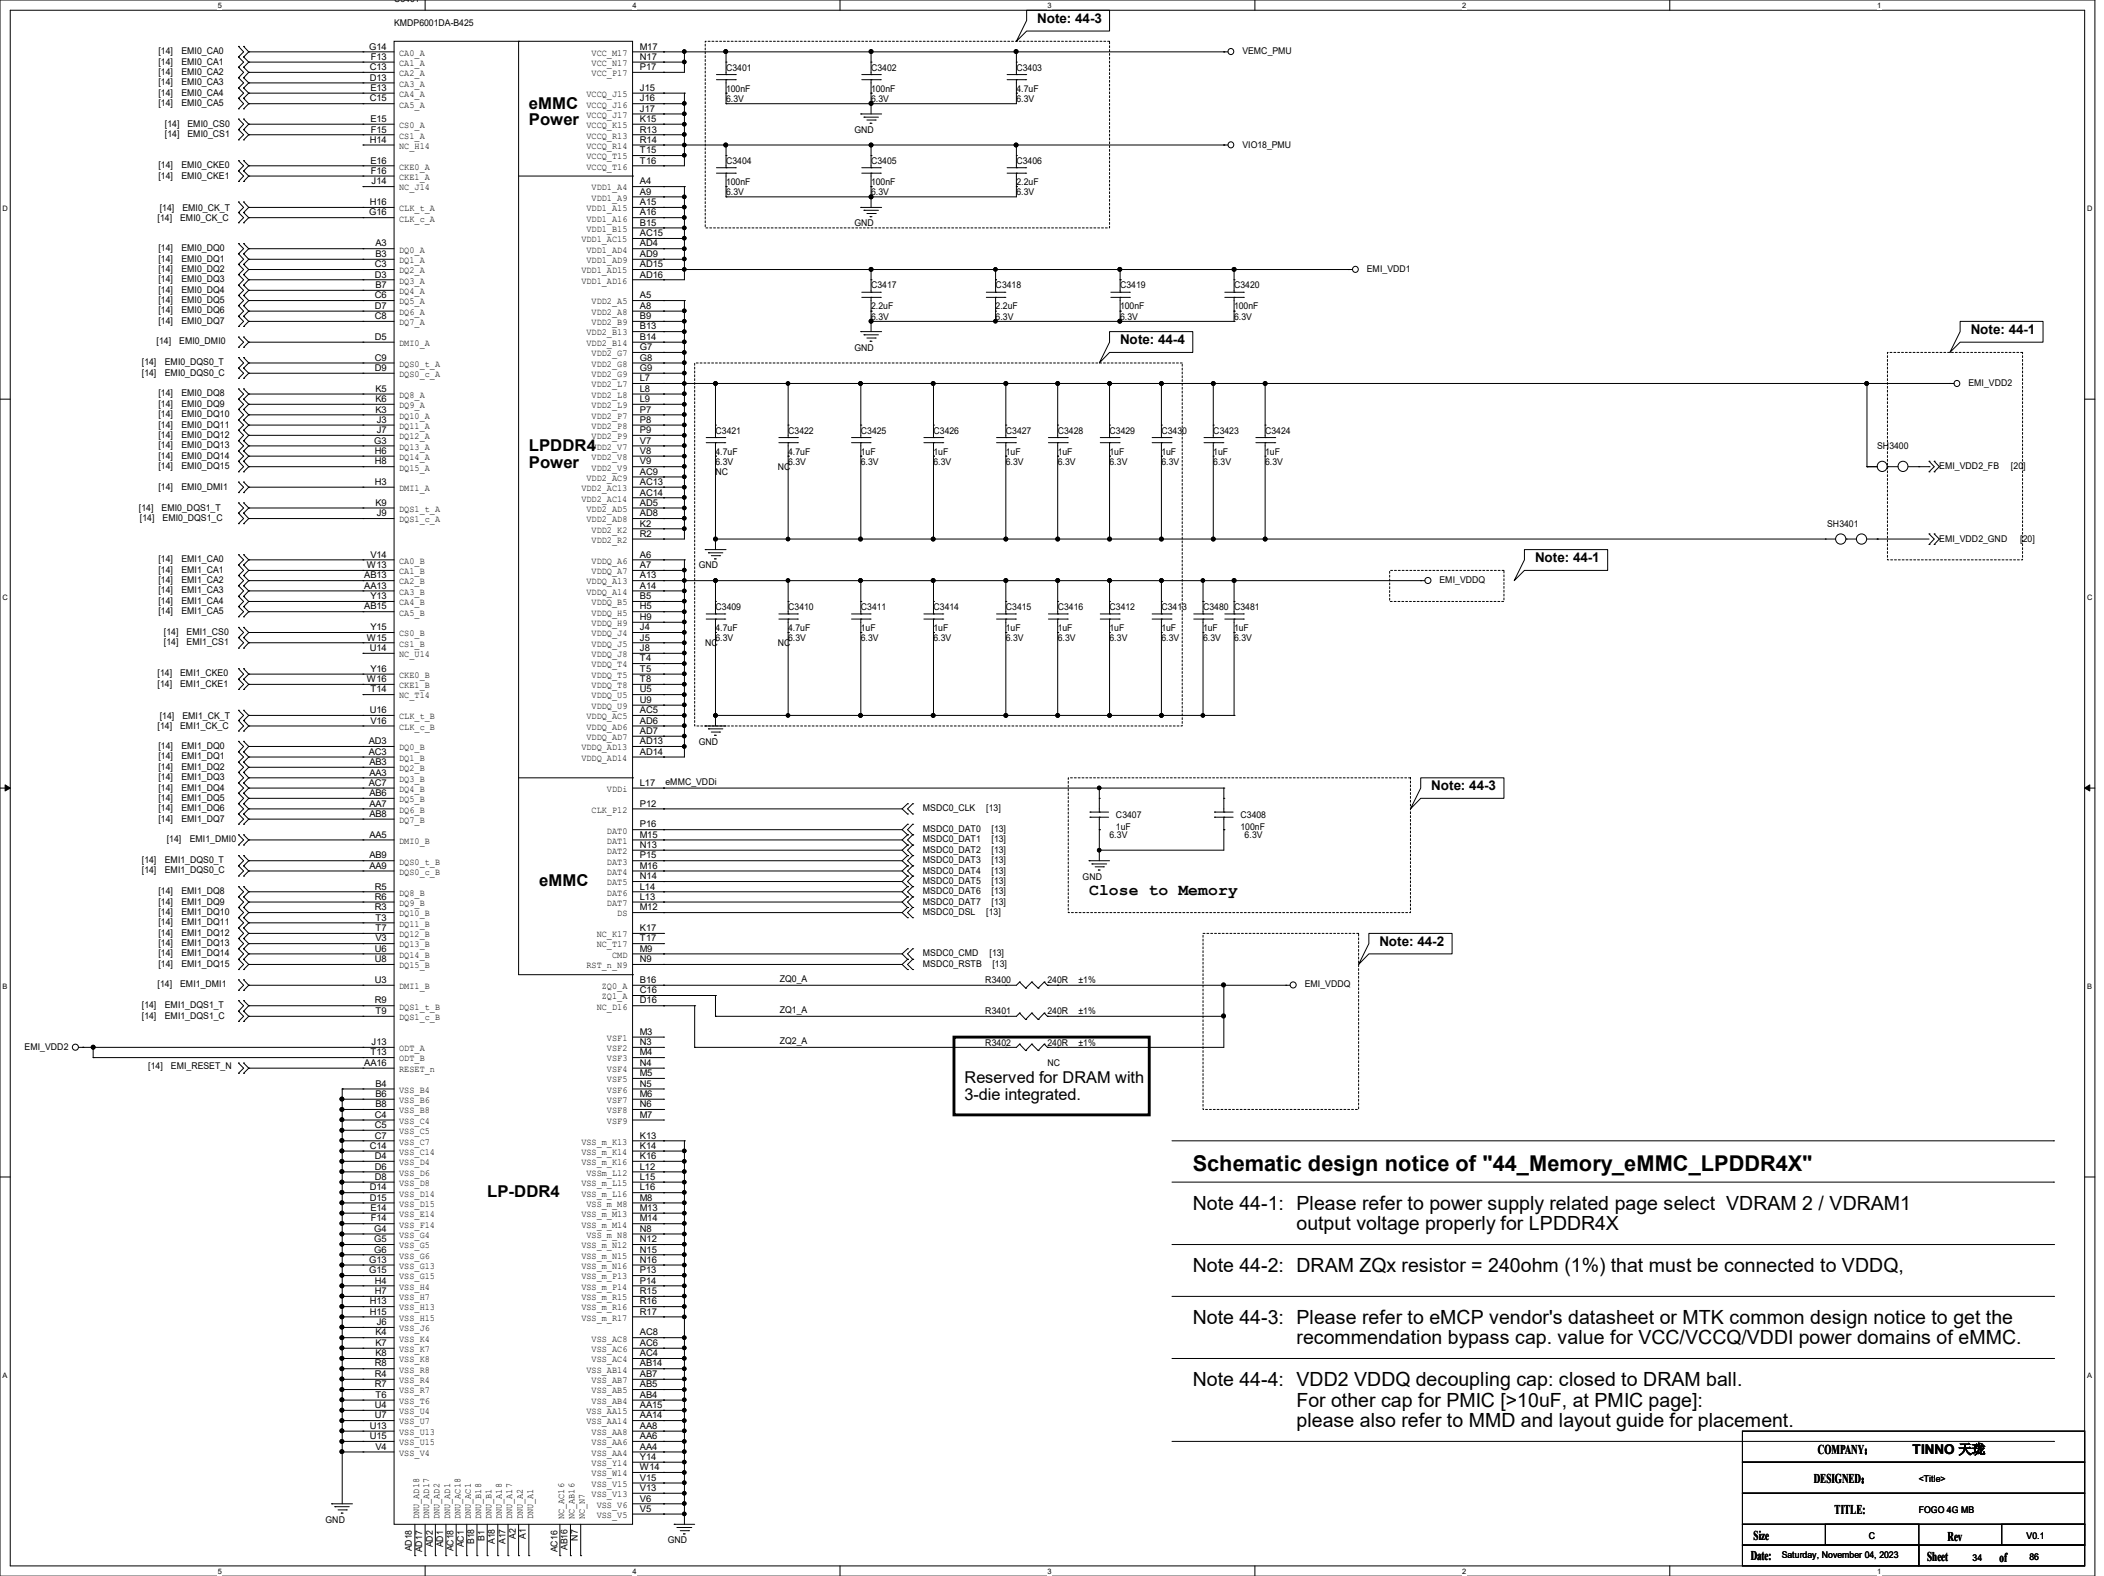

Ext. EMI_VDD1 for LPDDR4X VDD1




CHARGE_15W

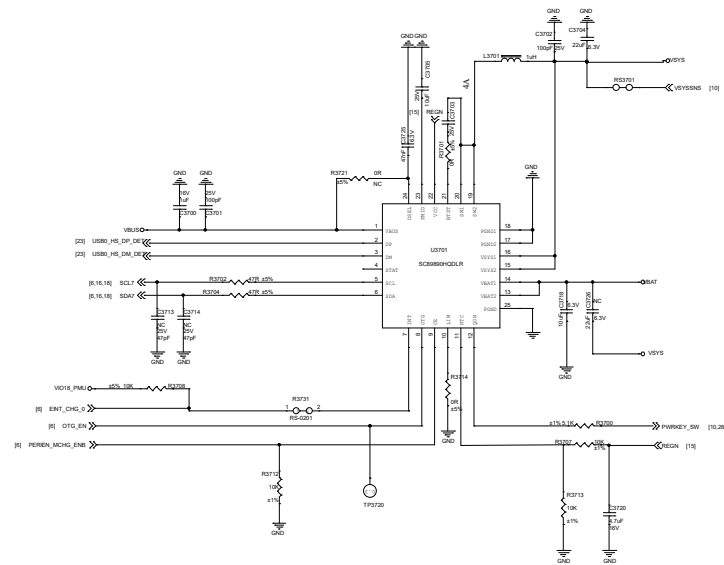


OVP


硬件门限8.96V,软件门限10.9V

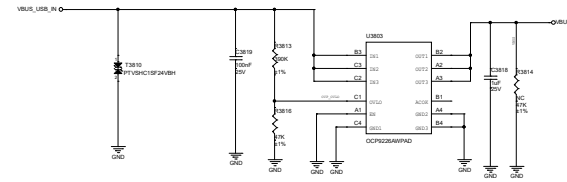


OVP	R3813	R3816	EQUATION
10.43V	300K	39K	$(300K+39K)/39K*1.2V$
11.16V	390K	47K	$(390K+47K)/47K*1.2V$
8.96V	330K	51K	$(330K+51K)/51K*1.2V$

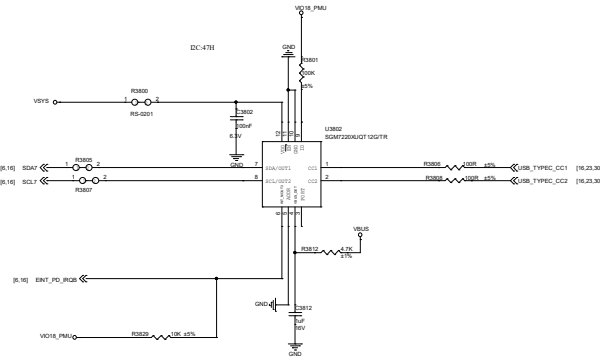



PD compatible design

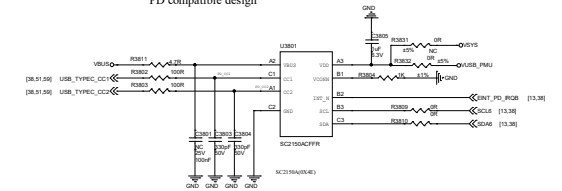


QC compatible design

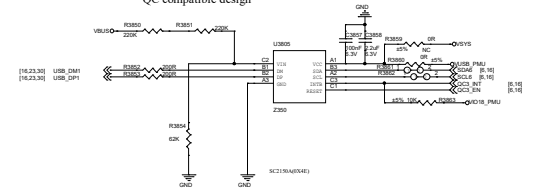


33W Charger

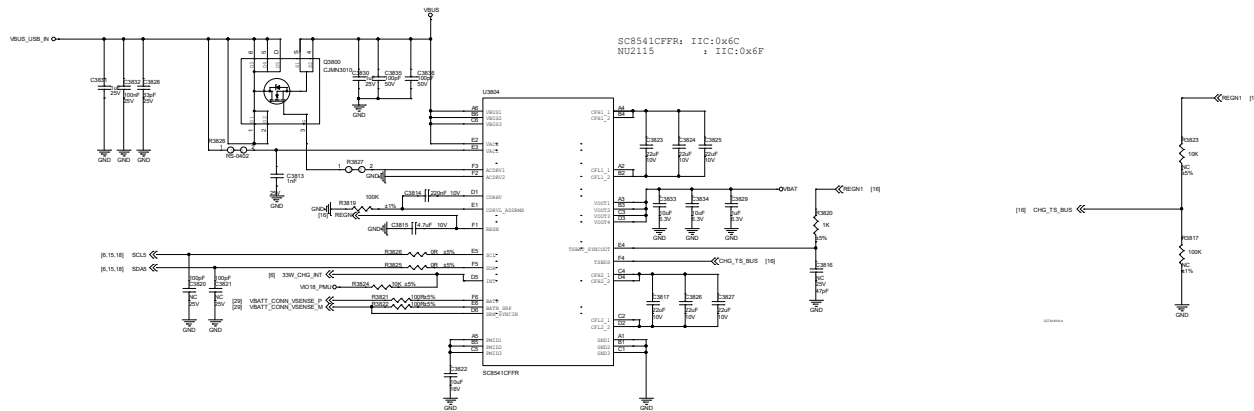

Sub Mic

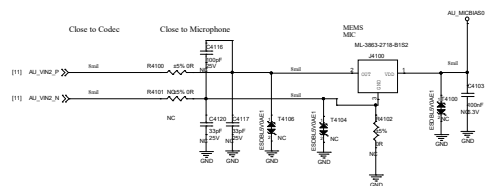


Handset Receiver

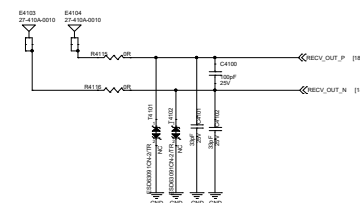


Main Mic

Main Mic


CLOSE TO
CODEC



Headset Mic


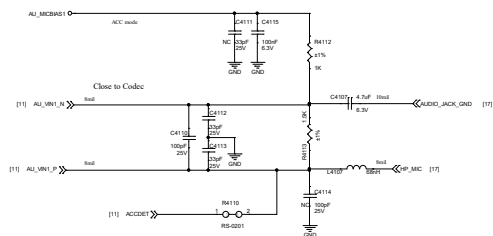



HP_EINT should be garded by GND, up and down, left and right

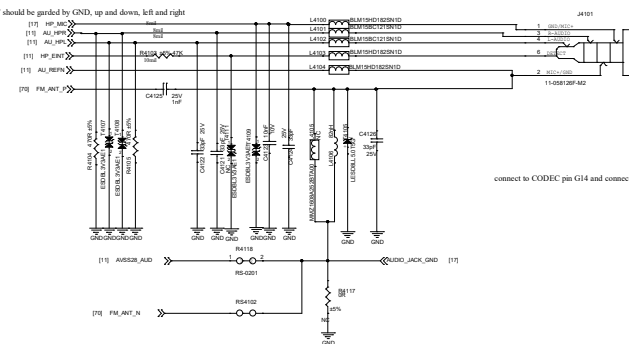


connect to CODEC pin G14 and connect to GND at CODEC

COBY-P352CE

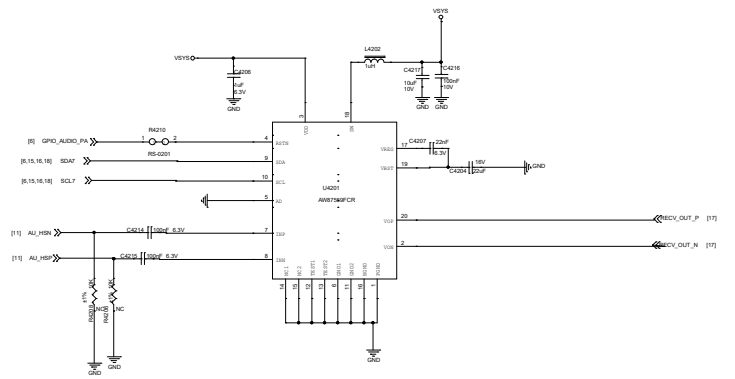
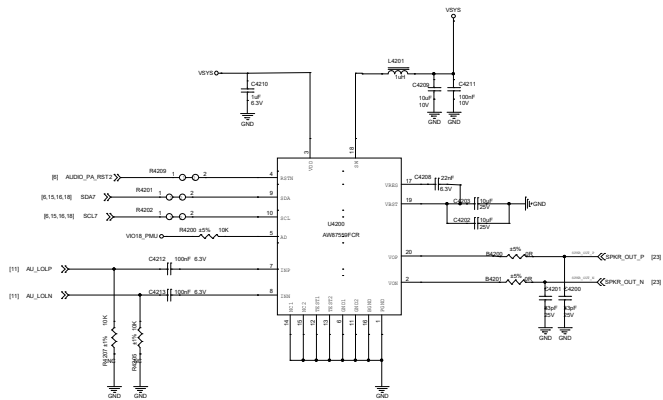


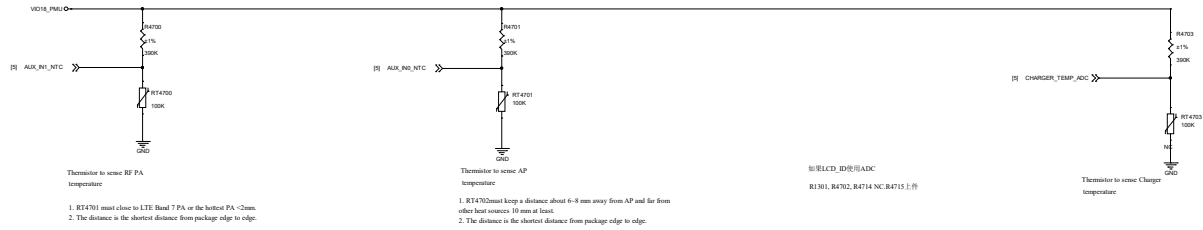


HW ID

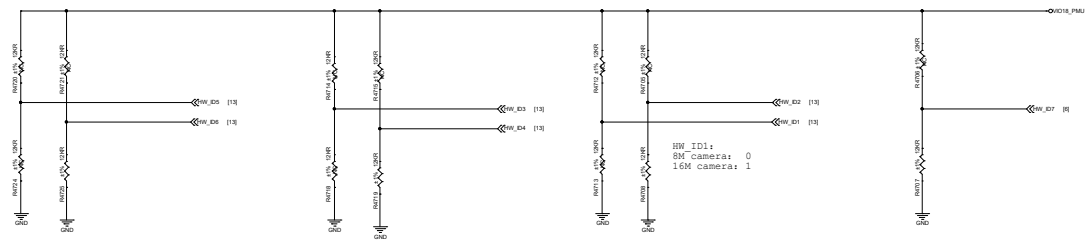

Optional E-Compass



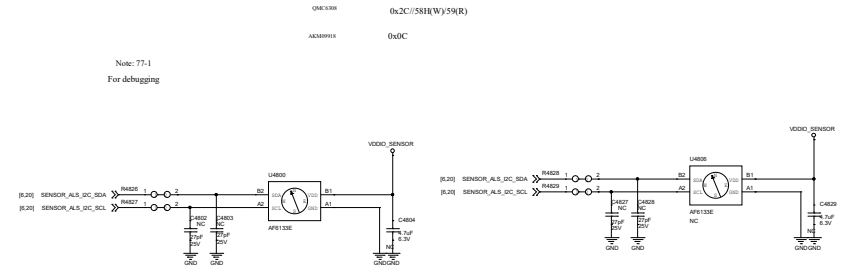
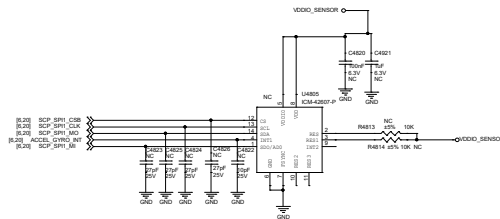


Proximity Sensor charge

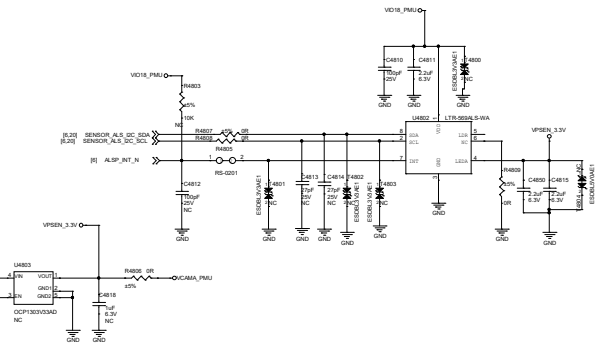

Bare(BMP380) I2C address : 76 (SDO pin tied to GND)


Note 77-7: Interrupt pin of MEMS sensor must be assign to ball EINT[12:0]

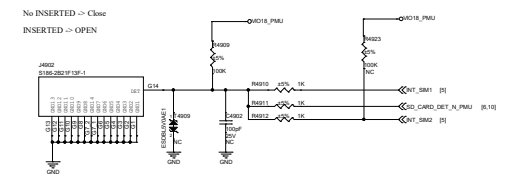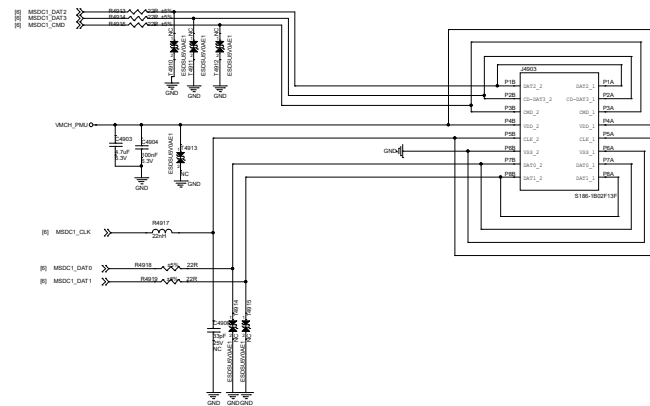
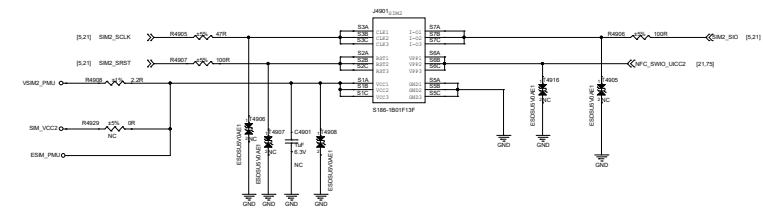


```


INT      Normal:0
         Insert:1

```




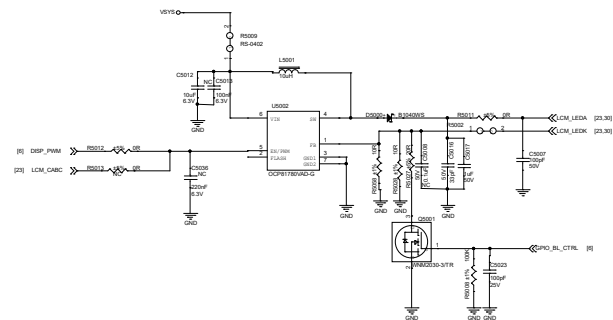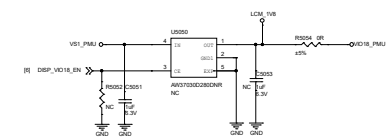


替换60PIN连接器, 新物料, NEW_2024360603




(DVDD) LDO for Rear Camera 1.05V

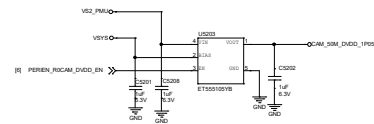



(AVDD) LDO for Macro Camera 2.8V

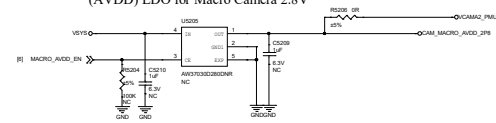

(AVDD) LDO for Rear Camera 2.8V

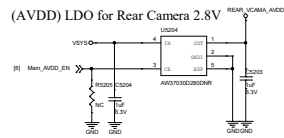


(AVDD) LDO for Front Camera 2.8V

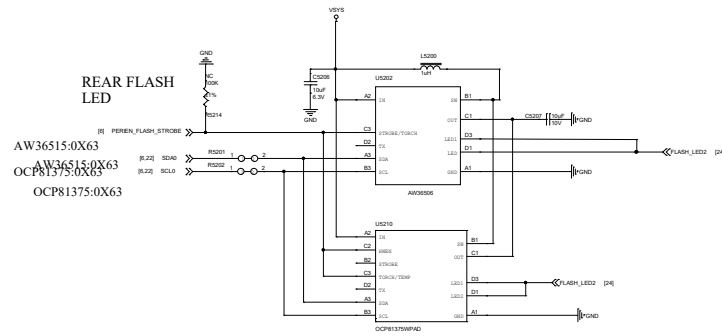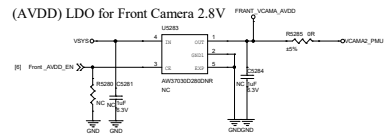

NOTE: common pads
NOTE: common pads

闪光灯放在闪光灯小板上


****前/后摄像头同时工作****

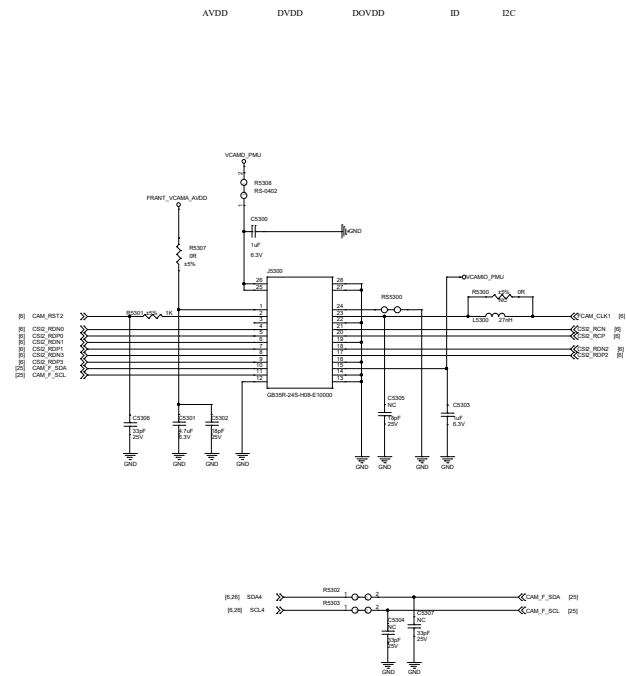


12C


Main-CAMERA

50M/13M

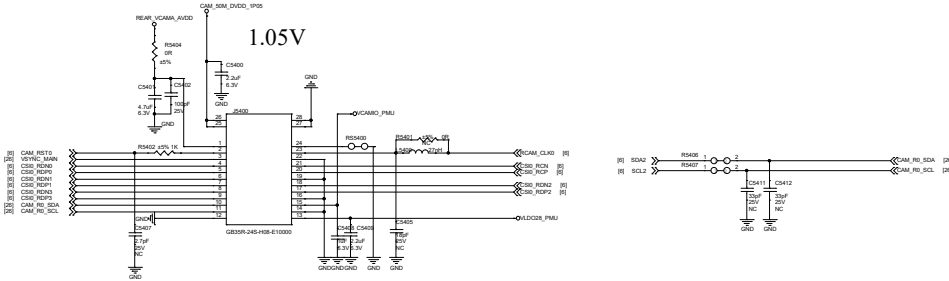2M
FF-Macro


Optional

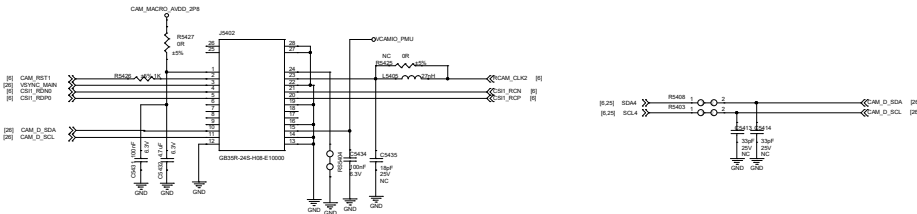


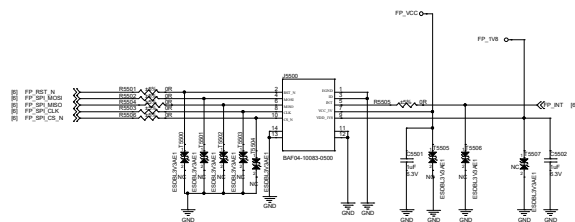


Fingerprint Connector


- 1 GND
- 2 RST
- 3 ID(GND)
- 4 MOSI
- 5 INT
- 6 MISO
- 7 VDD2V8
- 8 CLK
- 9 DOVDD1V8
- 10 CS
- 11 GND
- 12 GND
- 13 GND
- 14 GND

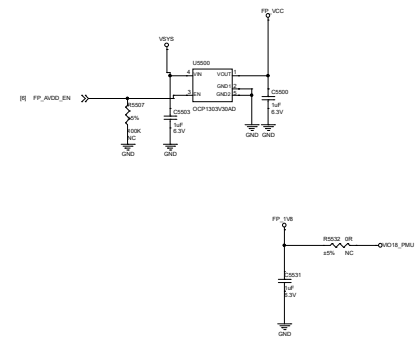

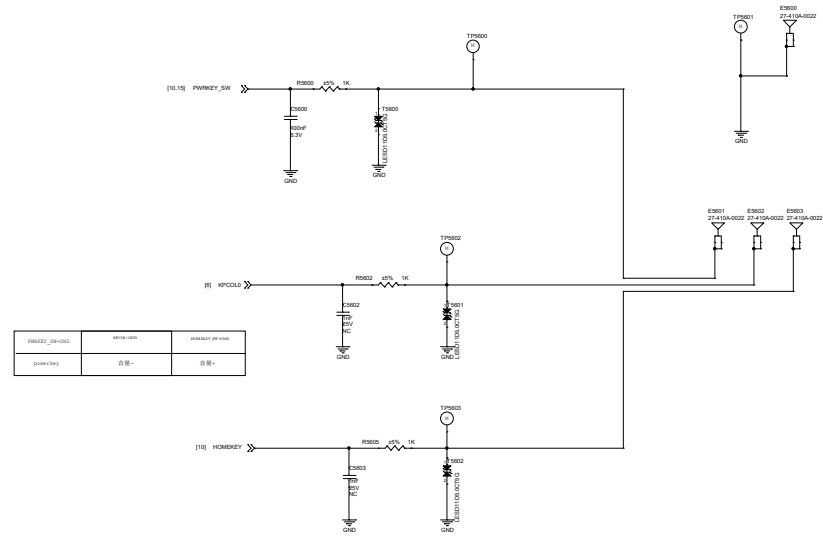


Charge Indicator




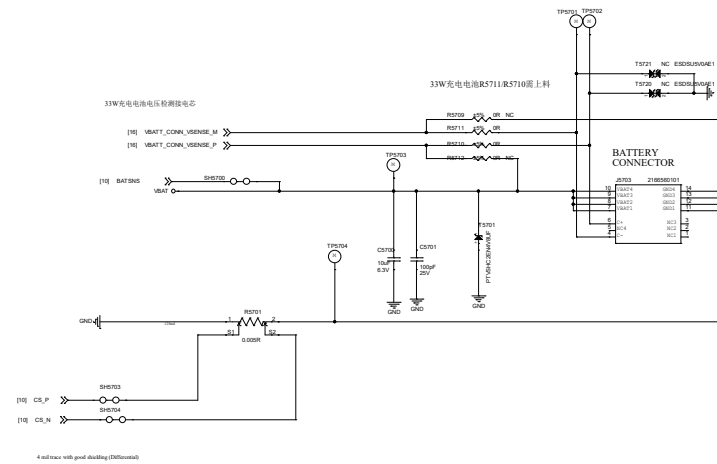


Debug Test Point

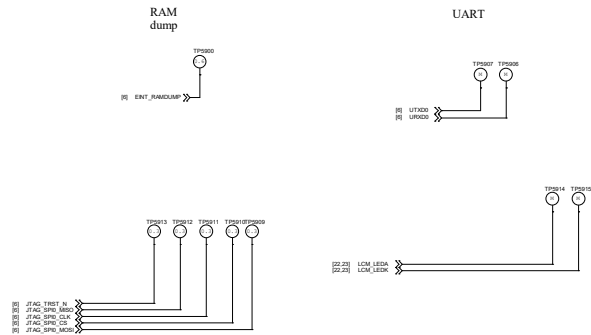


Mark




Fixture Test Point

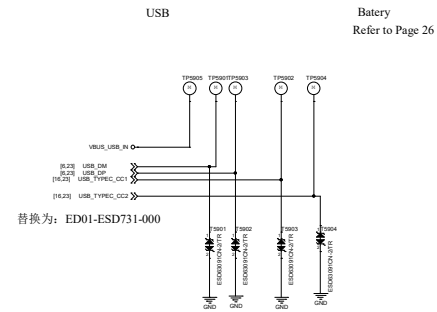



shielding can





Metal Grounding

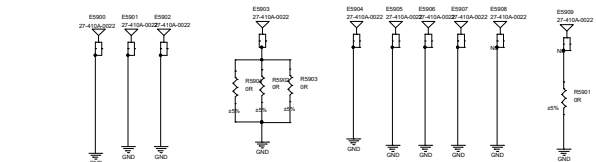



Bottom



Power For MT6177

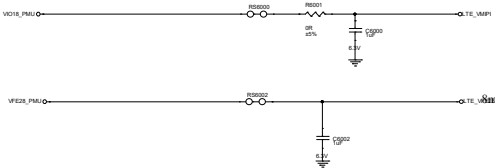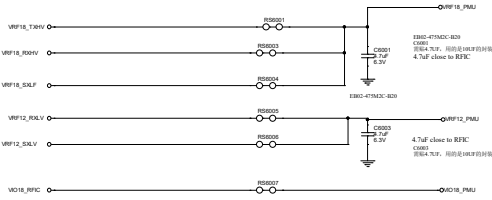

6dB Attenuator

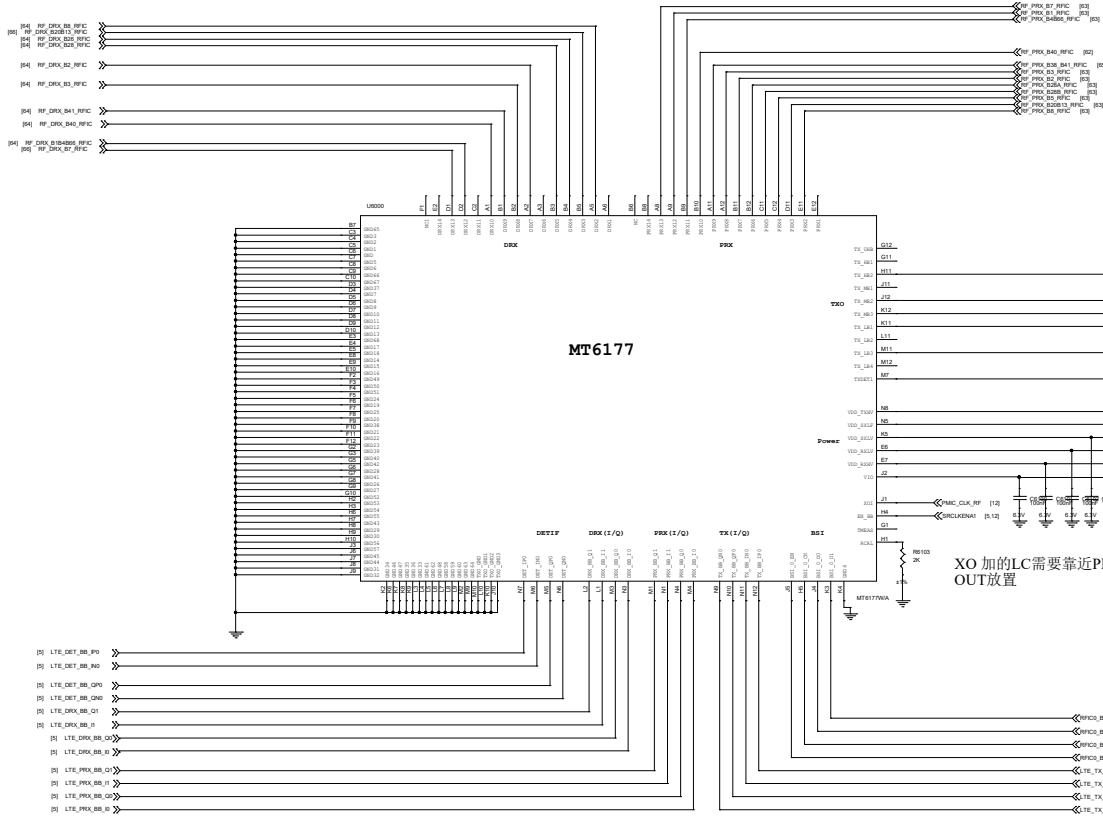

XO 加的LC需要靠近PMIC OUT放置

D

D

C

C


B

B


A

A


B1 TRX

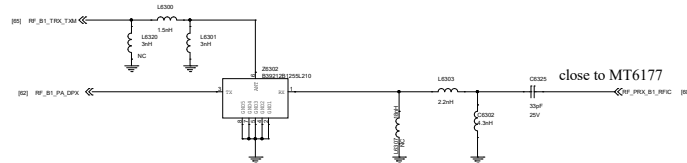


B8_TRX

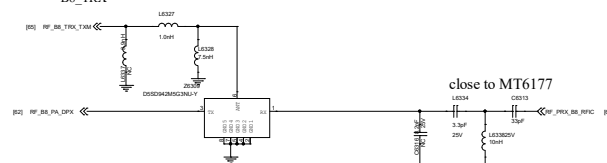


B2 TRX

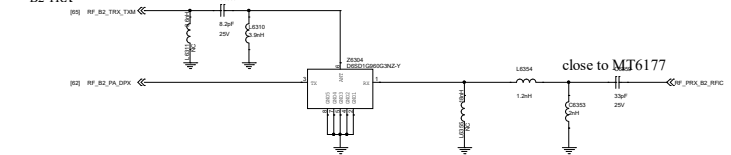


SKU1/2:B13 TRX.SKU3/4/5:B20 TRX

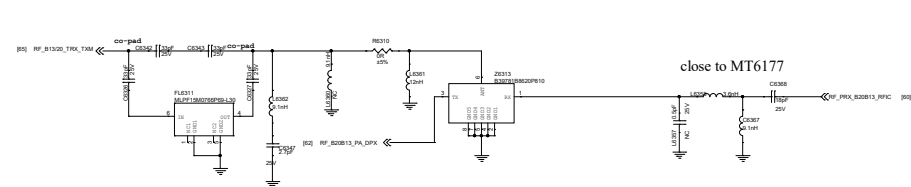


B3 TRX

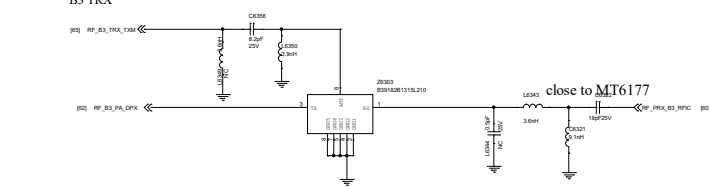


B28A TRX

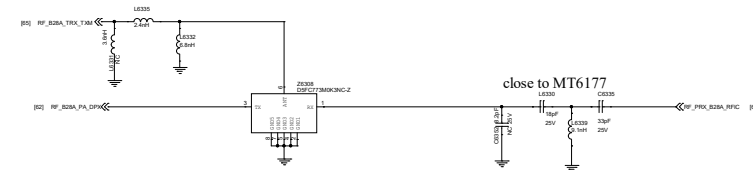


B4/66 TRX

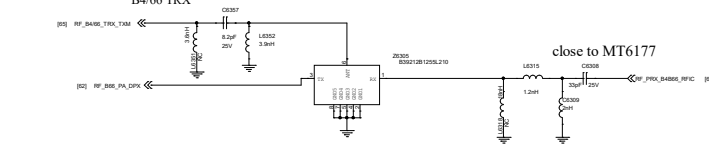


B28B TRX

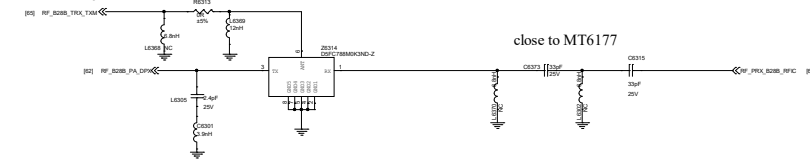


B5/26 TRX

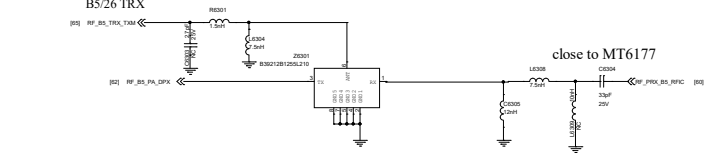


B7 TRX

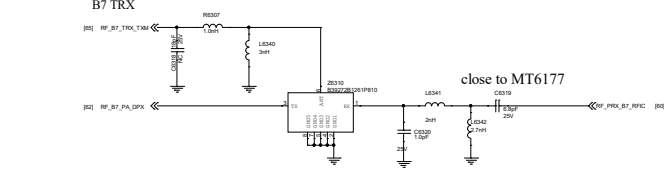


B1/4/66 DRX




B2 DRX




B3 DRX




B5 DRX




B7 DRX




B8 DRX




SKU1:B13 TRX,SKU2/3:B20 TRX




B28 DRX




B40 DRX



B41 DRX




更换为FX5596Y

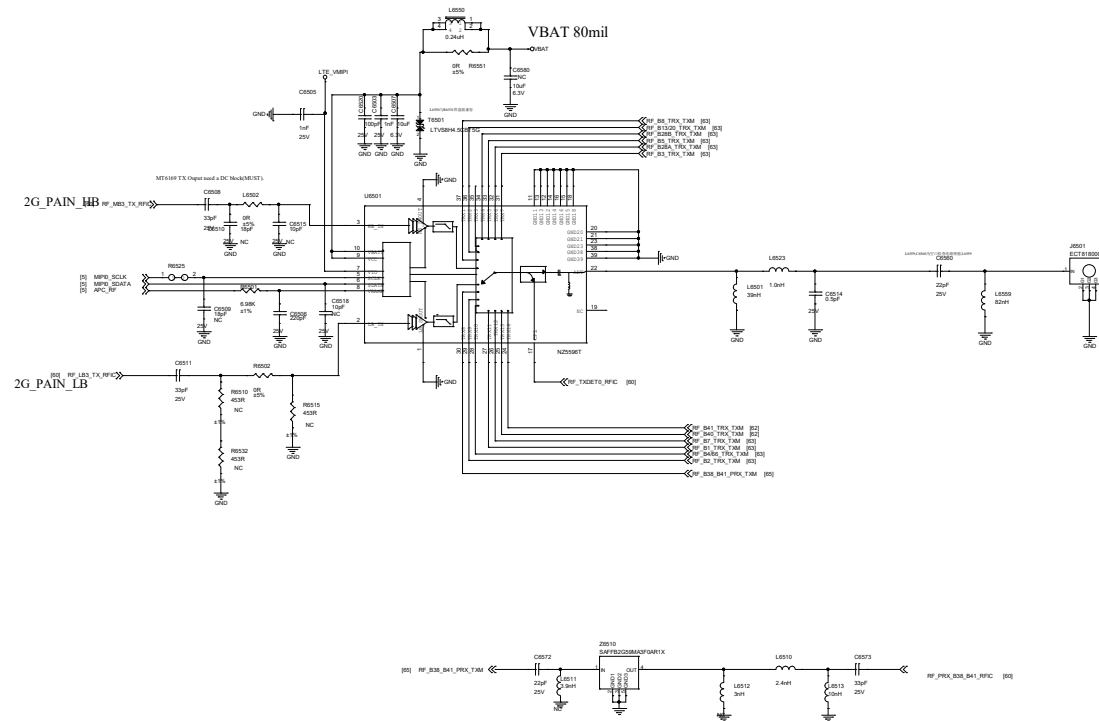


B7 DRX LNA


Only SKU5 EU NFC+Sar 带B41 DRX_LNA

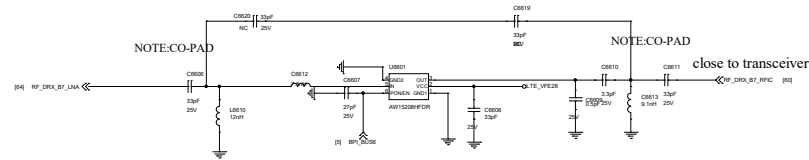


B20_DRX LNA



Only SKU5 EU NFC+Sar 带B41 DRX_LNA

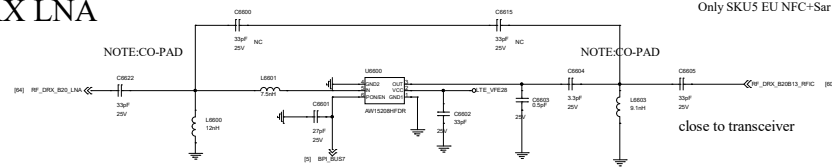

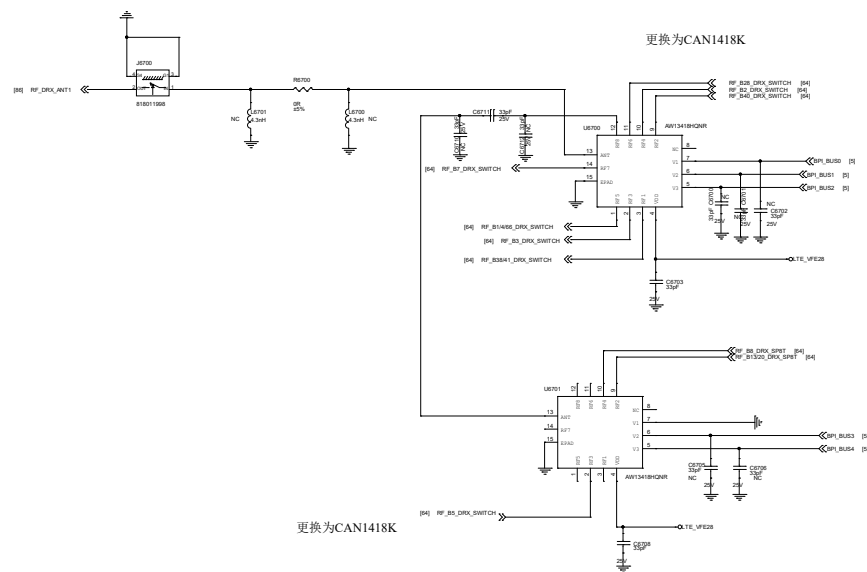


更换为CAN1418K

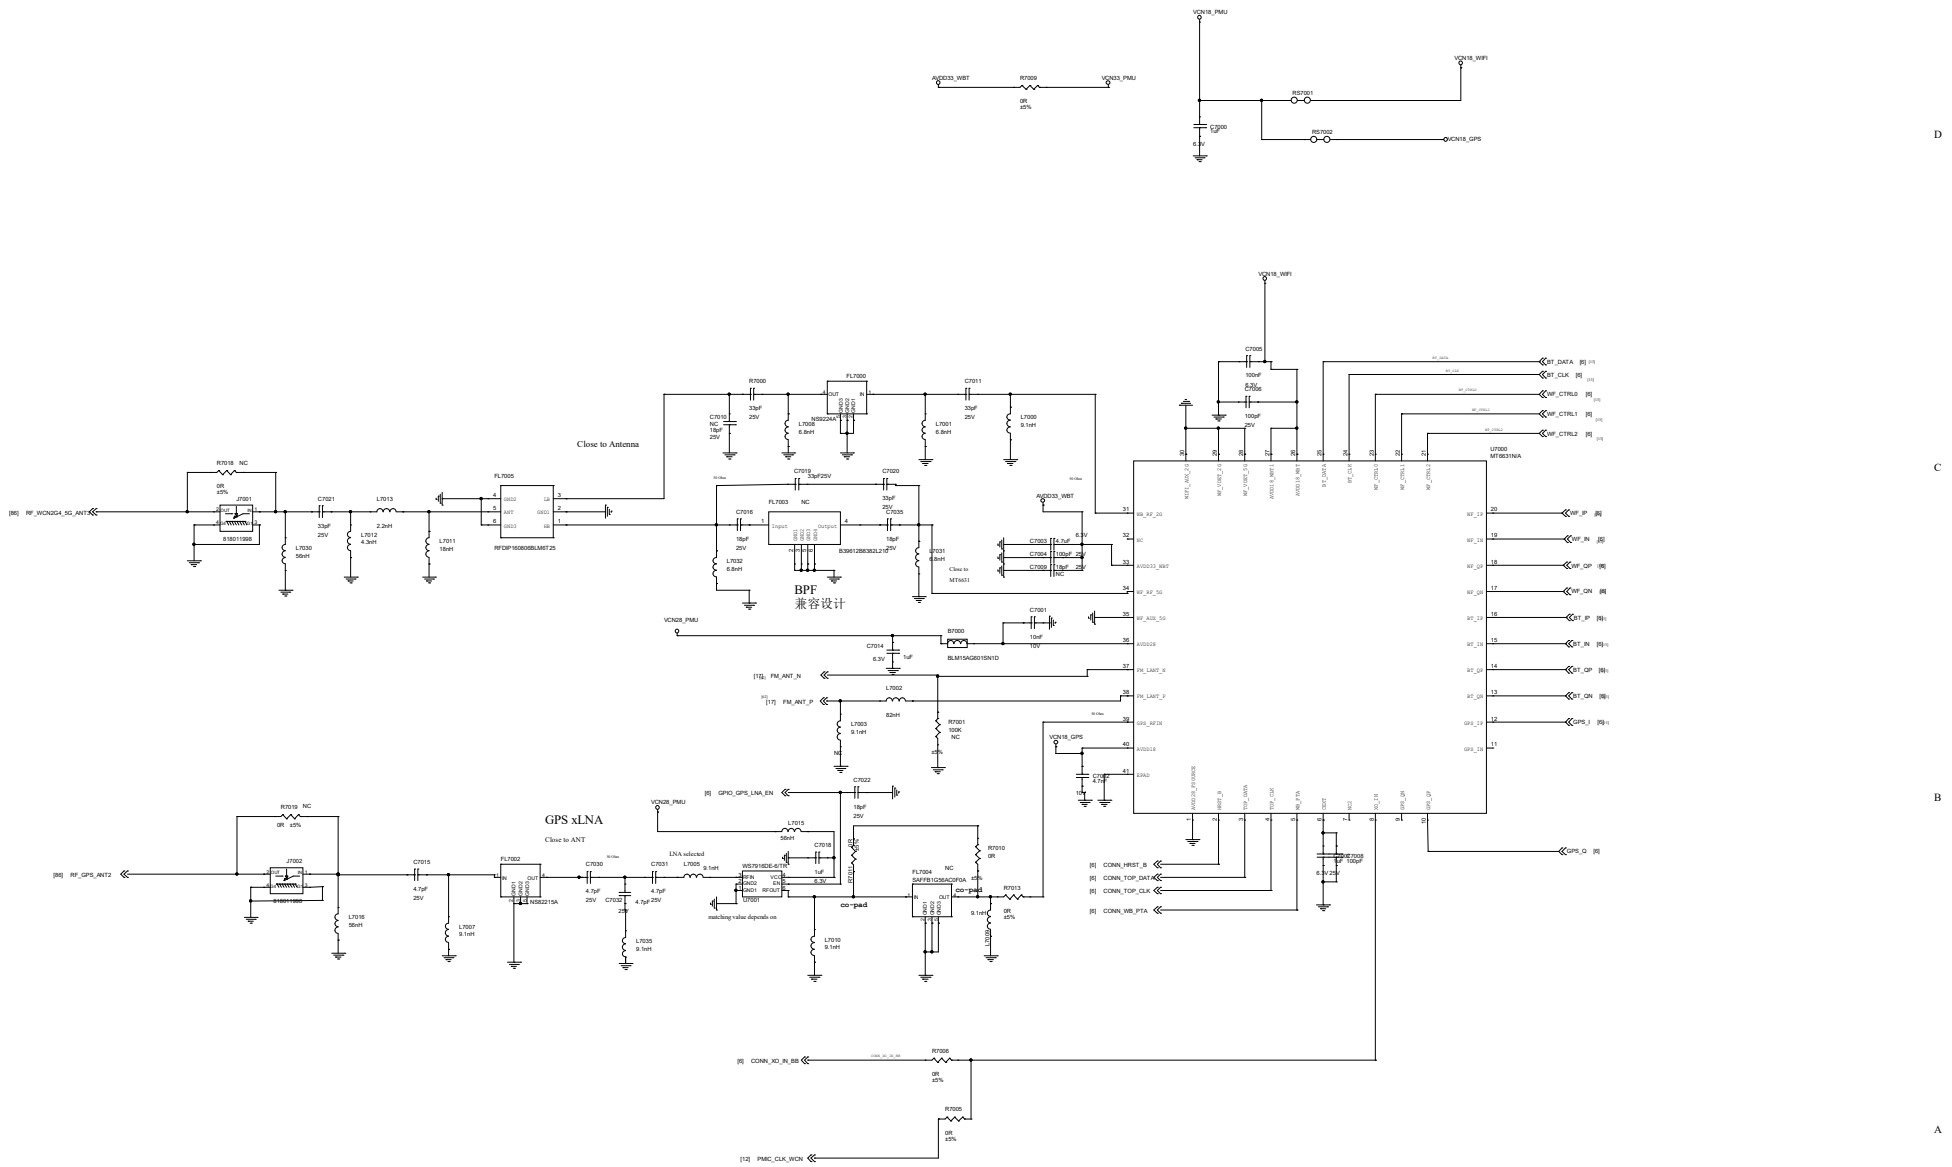

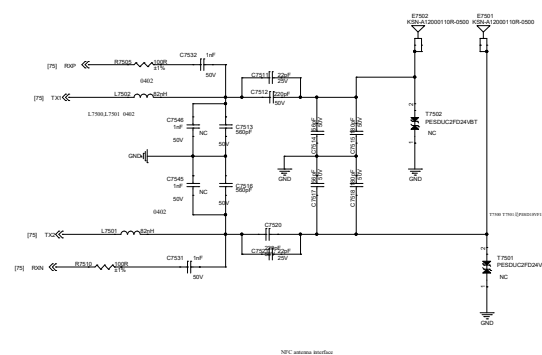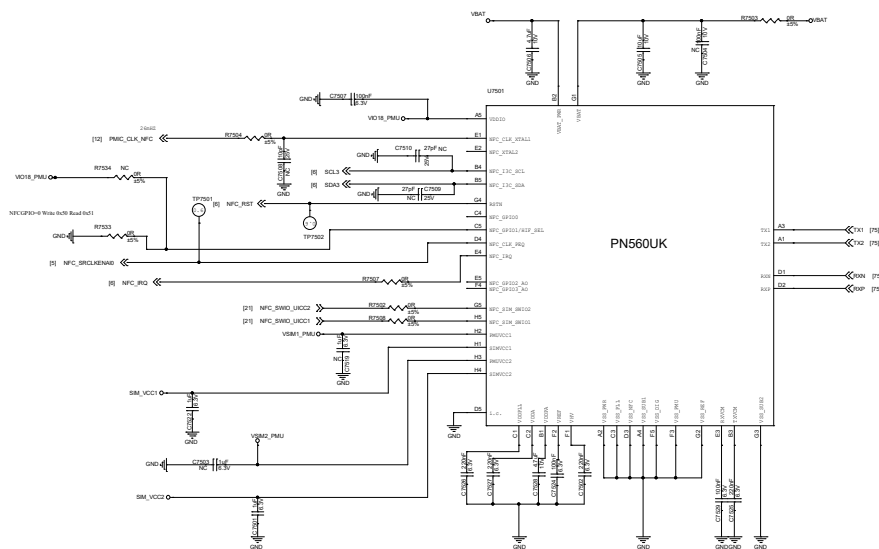


D

ANT3: LMHB DRX

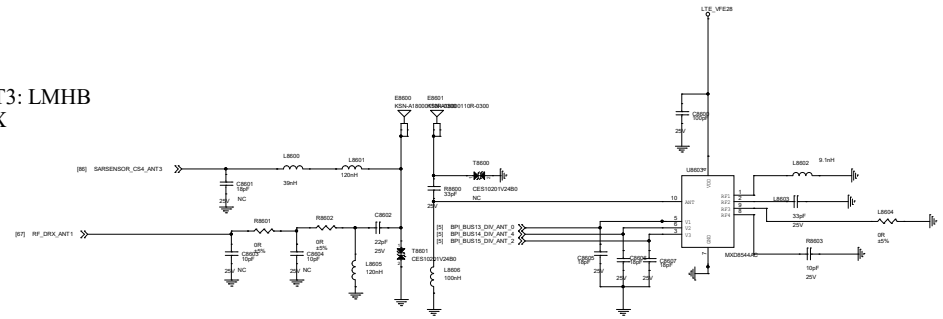

C

ANT4: GPS

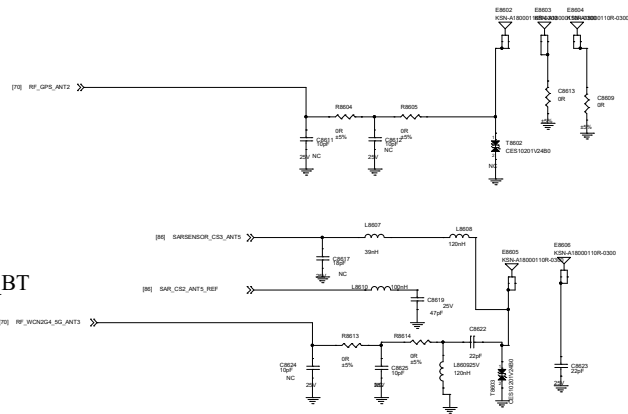

ANT5: WCN_2.4G/5GWIFI_BT

