



規制番号 名称	01-0101 本浦交番前	運用	平成25年2月7日	製造番号	K0000003
管制番号 名称	10101 本浦交番前 (UD-UC)	開始日時	2時20分 ~	製造年月	2012年12月
				メーカー	日本信号(株)

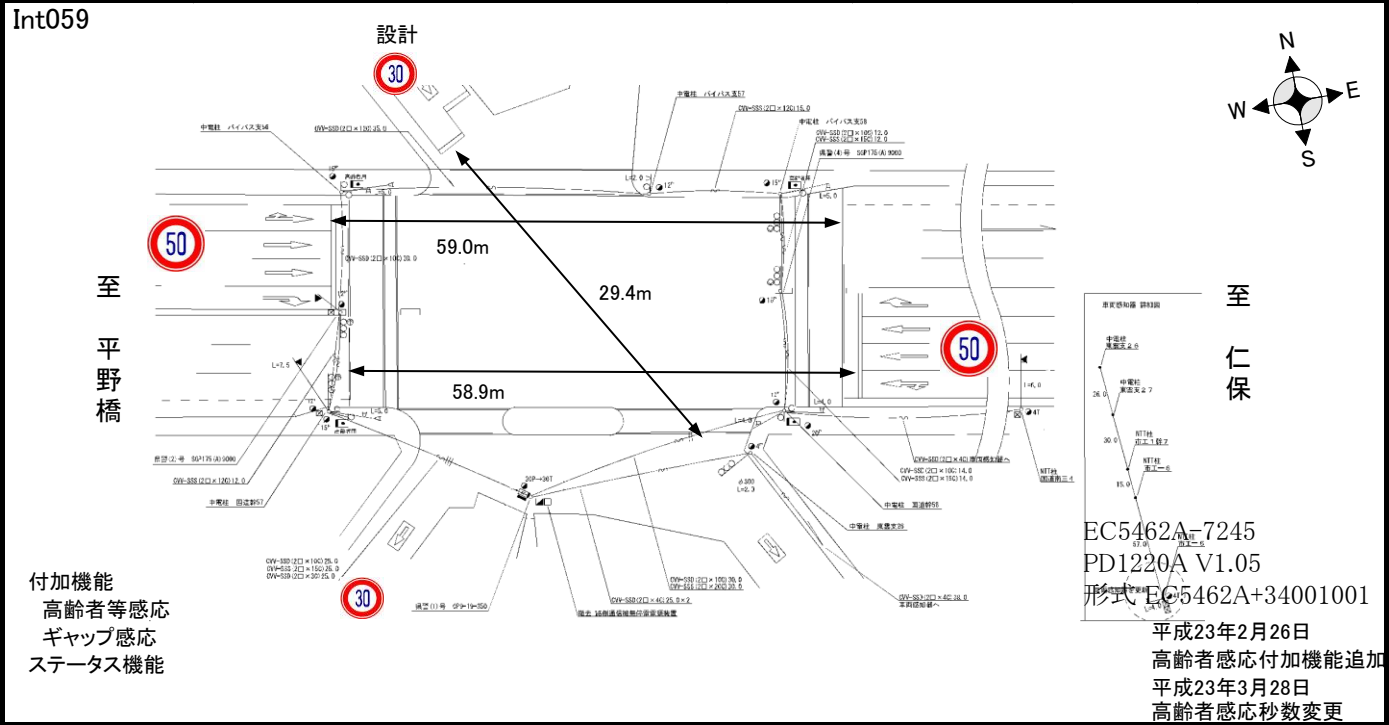

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PG	1PW	1G	1Y	1A	1Y	1R	2PG	2PW	2G	2Y	2R							
流れ図																				
1P [1P]																				
1 [1V]																				
1右矢 [1A]																				
2P [2P]																				
2V [2V]																				
ギャップ感应		補正				感应											単位青:D4=4秒, 短縮:10秒, 延長:8秒			
高齢者等感应		補正							33											
可変指定	○	○				○			○											
最終指定	○				○			○					○							
PU	109	109				109			109											
PL (96秒)	10	16	8	2	3	5	2	4	28	9	2	3	4							
保安秒数 (+60秒)	18	55	8	2	3	22	2	4	28	9	2	3	4							
最長時間(秒)	110	110	110	110	10	110	10	10	110	110	110	10	10							
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95							
AB連動出力	A	A	B	B	B	B	B	B	B	A	A	A	A							

規制番号 名称	10101 本浦交番前	運 用	H. 8年 2月19日	製造番号	2M2673
管制番号 名称	10101 本浦交番前 (A集中)		開始日時	14時30分 ~	製造年月
				メーカー	松下電器産業㈱

Int059

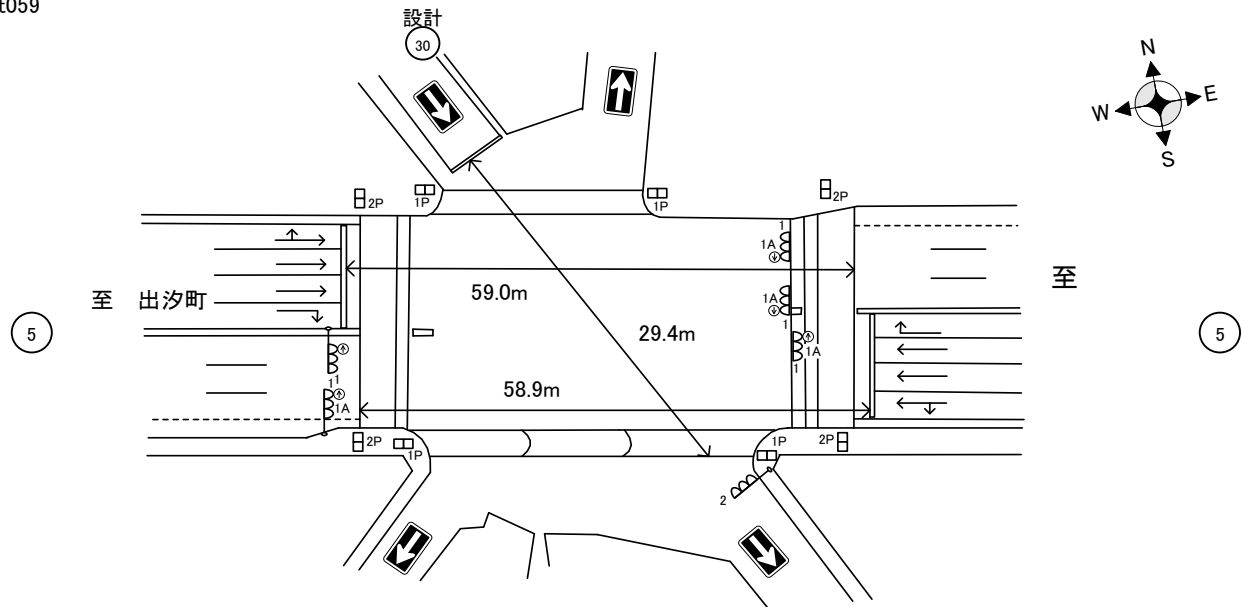

ステータス機能
S3:閃光
その他

平成23年2月26日
高齡者感応付加機能追加
平成23年3月28日
高齡者感応秒数変更
※1現示下限は1,2,3Step合計で保障

ステップ番号	1*	2	3	4	5*	6	7	8*	9	10	11	12	13*	14	15	16	17	18	19	20
ステップ名称	1PG	1PG	1PW	1 G	1 Y	1 A	1 Y	1 R	2PG	2PW	2 G	2 Y	2 R							
流動 図																				
1P [1P]																				
1 [1V]					~~~~~		~~~~~													
1右矢 [1A]						(→)														
2P [2P]																				
2 [2V]												~~~~~								
		弱者補正							弱者感応											
置換秒数									33											
PU	109	109				109			109											
PL (96秒)	10	16	8	2	3	5	2	4	28	9	2	3	4							
保安秒時(#####)	34	20	16	4	3	12	2	3	16	16	8	3	3							
最長時間(秒)	110	110	110	110	10	110	10	10	110	110	110	10	10							
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95							
AB運動出力	A	A	B	B	B	B	B	B	B	A	A	A	A							