



規制番号・名称	7-0119 三成分れ	運用	2008年3月4日	製造番号	HG90132
管制番号・名称	70119 三成分れ (U形)	開始日時	～	製造年月	2004年12月
				メーカー	住友電気工業(株)

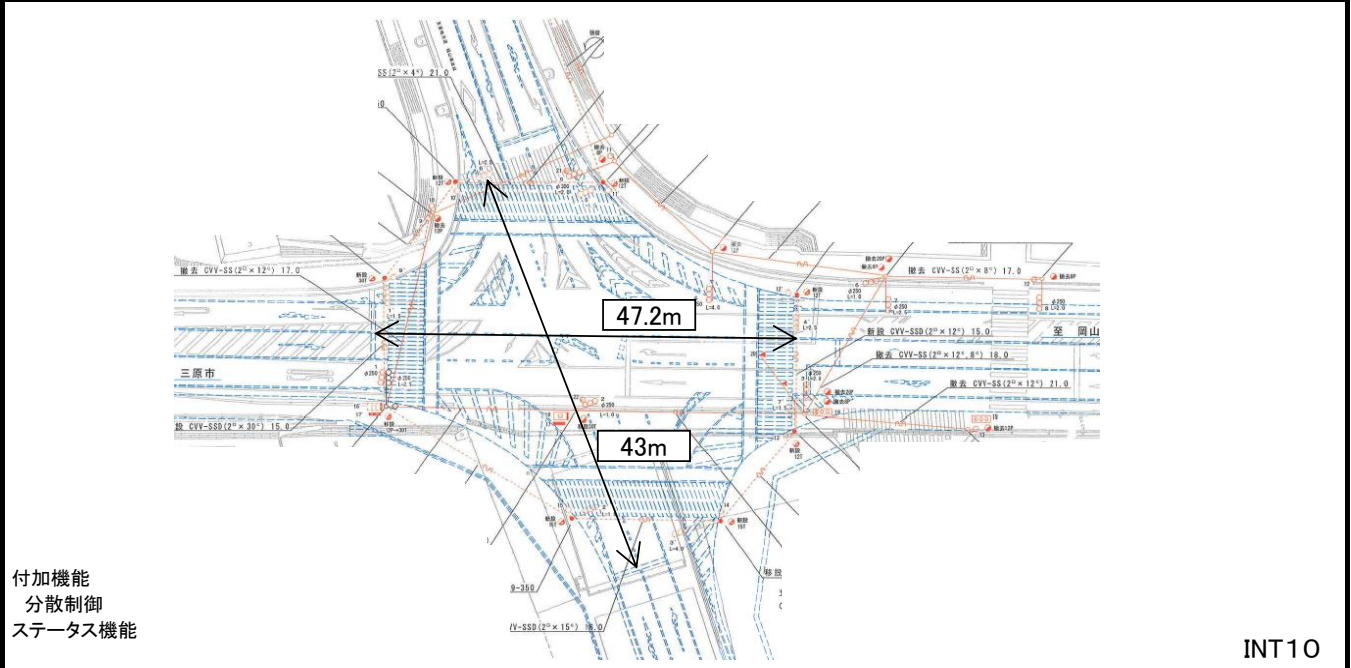

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PW	1G	1Y	1A	1Y	1R	2PG	2PW	2G	2Y	2R								
流動図	18.8m 歩灯2 16.7m 歩灯2								歩灯2 13.7m 歩灯2 16.2m											
1P [1P]																				
1 [1V]																				
1A [1A]																				
2P [2P]																				
2 [2V]																				
分散制御	感应												(短縮:10秒, 延長:15秒) 終日							
					感应								(短縮:10秒, 延長:10秒) 終日							
								感应					(短縮:15秒, 延長:15秒) 終日							
PU	109				109			109												
PL(74秒)	19	7	2	3	5	2	4	17	6	2	3	4								
保安秒数(130秒)	48	7	2	3	18	2	4	31	6	2	3	4								
最長時間(秒)	110	110	110	10	110	10	10	110	110	110	10	10								
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95								
AB連動出力	A	A	B	B	B	B	B	B	A	A	A	A								

規制番号・名称	7-0119 三成分れ	運用	2005年3月8日	製造番号	HG90132
管制番号・名称	70119 三成分れ (U形)	開始日時	~	製造年月	2004年12月
				メーカー	住友電気工業(株)

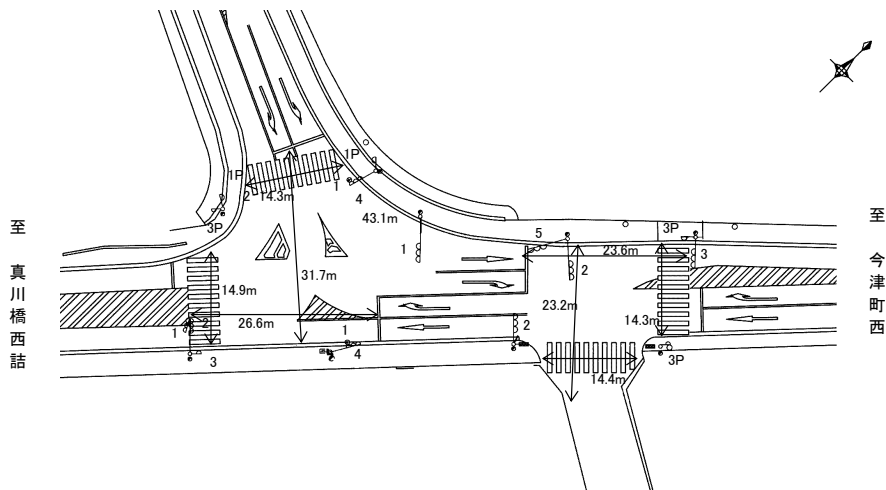

付加機能
分散制御
ステータス機能

INT10

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PW	1G	1Y	1R	2G	2G	2Y	2R	3G	3Y	3R	4PG	4PW	4G	4Y	4R			

流動図																				
1P [1P]																				
1 [1V]																				
(2P) [2P]																				
2 [2V]																				
3P [3P]																				
3 [3V]																				
4 [4V]																				
5 [5V]																				
1A [1A]																				
分散制御	感応																			
PU	109					109				109			109							
PL(80秒)	15	5	2	3	3	5	5	3	3	8	3	3	10	5	2	3	2			
保安秒数(+30秒)	53	5	2	3	3	12	5	3	3	13	3	3	10	5	2	3	2			
最長時間(秒)	110	10	110	10	10	110	10	10	10	110	10	10	110	10	110	10	10			
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95			
AB連動出力	A	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A			