


規制番号 名称		10-0040	尾引坂		運 用 開始日時	平成25年9月16日	製造番号	3E1054	
制御機機種		P 2－1－0		KS-16		15時30分 ～	製造年月	2013/8	
警交仕規1012号「版2」		製作所	コイト電工(株)		作動時間	終日閃光式押ボタン		施工会社	コイト電工(株)
署別	庄原	付加機能	閃光式押ボタン運用						

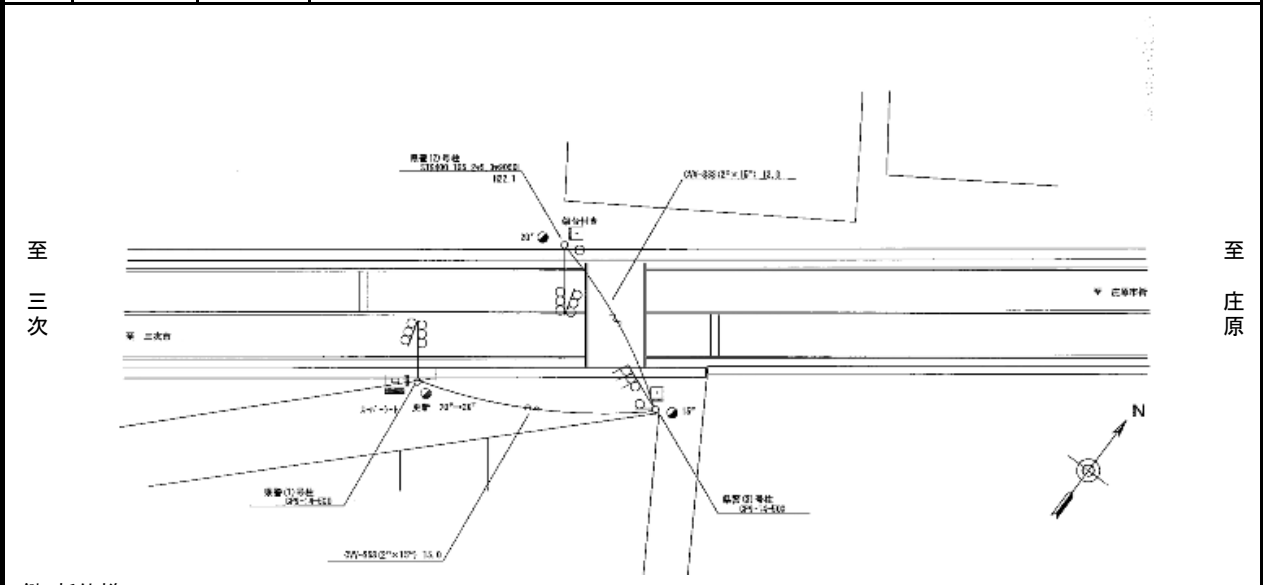

鍵:新仕様																										
ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20						
ステップ名称	1G	1G	1Y	1R	2PG	2PW	2G	2Y	2R																	
流動図	至 三次				至 庄原市内				6 . 8 m 歩灯 2				+42													
	1	[1V]								常時閃光																
	2P	[2P]																								
	2	[2V]																								
パターン	1	[1V]								(常時青)																
	2P	[2P]																								
	2	[2V]																								
パターン																		周期	オフセット 秒							
保安																		0								
P0	44	5	3	2	8	5	3	3	2									75								
P1	39	5	3	2	8	5	3	3	2									70								
P2	44	5	3	2	8	5	3	3	2									75								
P3	49	5	3	2	8	5	3	3	2									80								
P4	54	5	3	2	8	5	3	3	2									85								
P5	59	5	3	2	8	5	3	3	2									90								
P6	64	5	3	2	8	5	3	3	2									95								
P7	69	5	3	2	8	5	3	3	2									100								
P8	74	5	3	2	8	5	3	3	2									105								
P9	79	5	3	2	8	5	3	3	2									110								
PA	84	5	3	2	8	5	3	3	2									115								

備考: P0 はAプロのみ設定。

:

: 歩灯出力なしの場合、(1P)と表記する。

ギャップ感應時の延長ステップは初期青から最大限度青時間までの範囲で歩進します。

[illegible]