



規制番号 名称		01-0333	尾長西2丁目		運 用	2019年6月18日	製造番号	4C1301
制御機種種		UC-S 2-2-0		KS-17		開始日時	14時10分 ～	製造年月
警交仕規 1012号「版3」		製作所	コイト電工株式会社	作動時間	終日(常時閃光式 1ステップ停止型)		施工会社	(株)中電工
署別	広島東	付加機能	リコール					

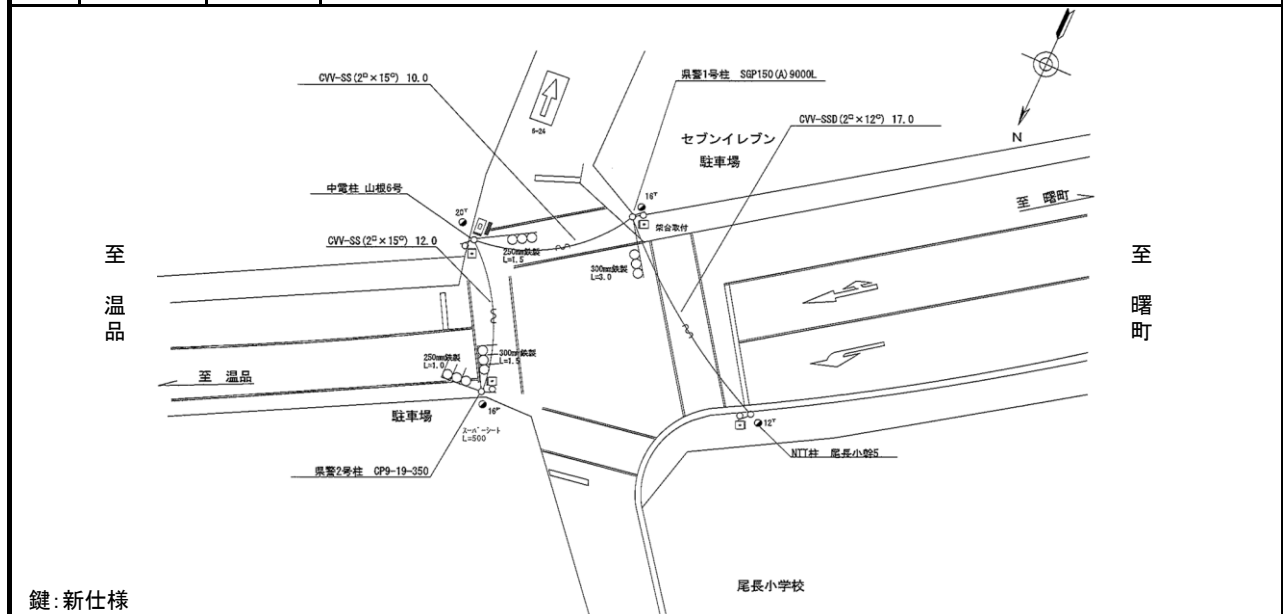

鍵:新仕様

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PG	1PW	1G	1Y	1R	2PG	2PW	2G	2Y	2R									

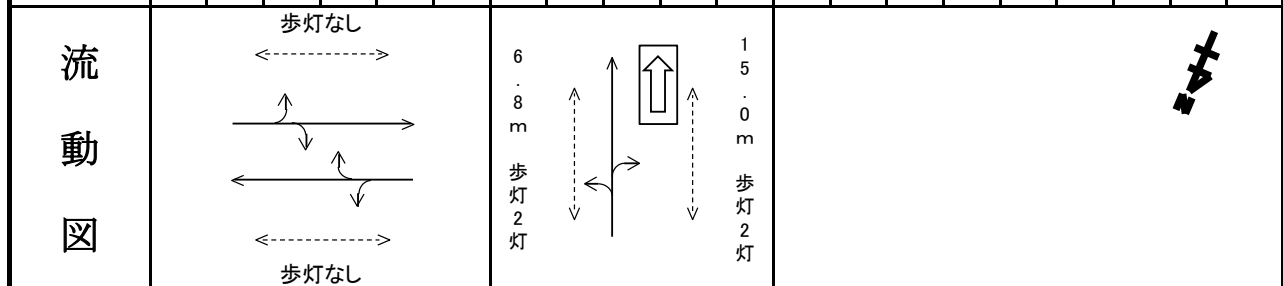

(1P) [1P]																				
1 [1V]																				
2P [2P]																				
2 [2V]																				
(1P) [1P]																				
1 [1V]																				
2P [2P]																				
2 [2V]																				
パターン																			周期	オフセット
保安																			0	
P0	40	3	4	2	3	2	15	5	1	3	2								80	
P1	40	3	4	2	3	2	15	5	1	3	2								80	
P2	40	13	4	2	3	2	15	5	1	3	2								90	
P3	40	53	4	2	3	2	15	5	1	3	2								130	
P4	35	13	4	2	3	2	20	5	1	3	2								90	
P5	50	3	4	2	3	2	15	5	1	3	2								90	
P6	60	3	4	2	3	2	15	5	1	3	2								100	
P7	70	3	4	2	3	2	15	5	1	3	2								110	
P8	80	3	4	2	3	2	15	5	1	3	2								120	
P9	90	3	4	2	3	2	15	5	1	3	2								130	
PA	90	3	4	2	3	2	15	5	1	3	2								130	

備考: P0 はAプロのみ設定。

: 歩灯出力なしの場合、(1P)と表記する。

: ギャップ感応時の延長ステップは初期青から最大限度青時間までの範囲で歩進します。

		(1) 平日			(2) 土曜			(3) 日曜			(4)特殊日1			(5)特殊日2			(6)特殊日3			(7)特殊日4		
パターン切替	切替番号	時	分	ハッ 番号	時	分	ハッ 番号	時	分	ハッ 番号	時	分	ハッ 番号	時	分	ハッ 番号	時	分	ハッ 番号	時	分	ハッ 番号
	1	6	00	3	6	00	3	7	00	2												
	2	9	00	2	9	00	2	20	00	1												
	3	9	30	4	20	00	1															
	4	11	30	2																		
	5	20	00	1																		
	6																					
	7																					
	8																					
	9																					
A																						
動作切替	リコール	00:00～00:00			00:00～00:00			00:00～00:00														
	特Ⅱ	00:00～00:00			00:00～00:00			00:00～00:00														