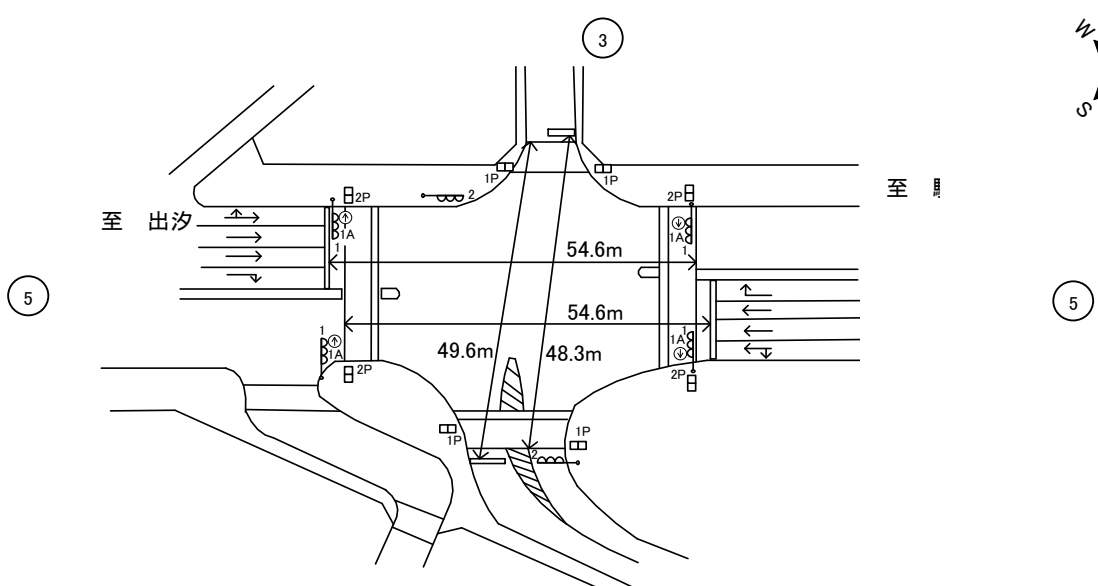


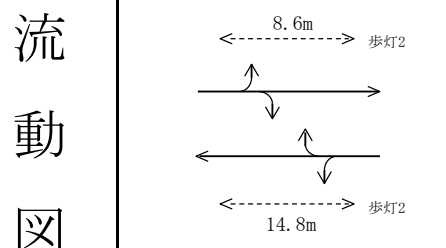

[illegible]

規制番号 名称		11123 出汐(北)								運 用		H. 8年 2月 8日				製造番号		4E0450					
管制番号 名称		11123 出汐(北)								(U集中)		開始日時		0時10分 ~				製造年月		平成 6年 8月			
																		メーカー		松下電器産業株			

Int122



付加機能
弱者感応
ステータス機能

ステップ番号	1*	2	3	4	5	6*	7	8	9*	10	11	12	13	14*	15	16	17	18	19	20
ステップ名称	1PG	1PG	1PW	1 G	1 Y	1 R	1 A	1 Y	1 R	2PG	2PW	2 G	2 Y	2 R						
流動図																				
1P [1P]																				
1 [1V]																				
1右矢 [1A]																				
2P [2P]																				
2 [2V]																				
PU	109	109					109			25							弱者補正7秒を2StepPLIに加算			
PL (91秒)	10	12	5	9	3	3	2	2	4	24	8	2	3	4			14Step: 計算上6秒			
初期PL (90秒)	10	12	5	9	3	3	2	2	3	24	8	2	3	4			弱者補正7秒を2StepPLIに加算			
ステップ機能		弱者補正								弱者感応										
置換秒数										31										
保安秒時(110秒)	15	20	10	4	3	3	5	2	3	21	15	3	3	3						
最長時間(秒)	110	110	110	110	10	10	110	10	10	110	110	110	10	10						
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95						
AB連動出力	A	A	B	B	B	B	B	B	B	B	A	A	A	A						