



規制番号 名称	12-0026 東部流通団地北口	運用	H.21年 2月11日	製造番号	80538
管制番号 名称	320026 東部流通団地北口 (UC形)	開始日時	15時 7分 ~	製造年月	H20年12月

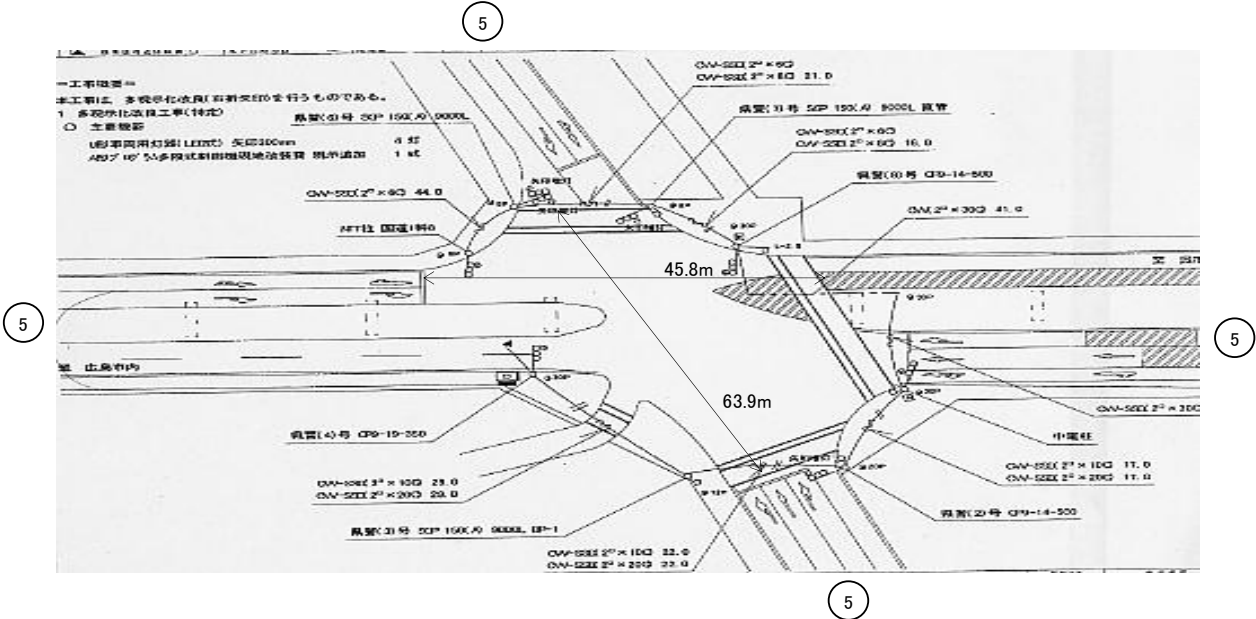

付加機能
運動出力
高齢者感応

ステップ番号	1	2	3	4*	5	6	7*	8	9	10	11*	12	13	14*	15	16	17	18	19	20
ステップ名称	1PG	1PW	1 G	1 Y	1A	1 Y	1 R	2PG	2PW	2 G	2 Y	2A	2 Y	2 R						
流動図																				
1P [1P]																				
1 [1V]																				
1右矢 [1A]																				
2P [2P]																				
2 [2V]																				
2右矢 [2A]																				
PU	109				109			109				109								
PL (94秒)	20	7	2	3	5	2	3	26	10	2	3	5	2	4						
最終指定				○			○				○			○	スプリット数: 4					
可変指定	○				○			○				○								
ステップ機能	高齢 補正							高齢 感応												
置換秒数								31												
保安秒時(160秒)	78	7	2	3	8	2	3	31	10	2	3	5	2	4						
最長時間(秒)	110	110	110	10	110	10	10	110	110	110	10	110	10	10						
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95	0.95	0.95						
AB運動出力	A	B	B	B	B	B	B	B	A	A	A	A	A	A						

規制番号 名称	12-0026	東部流通団地北口		運用	平成20年2月8日	製造番号	1H2506
制御機種	A-PR-S 3-3-3	PR-48VrT-11		開始日時	21時50分 ~	製造年月	H3/8
警交仕規 45号	製作所	小糸工業	作動時間	終日		施工会社	日本電設工業(株)
署別	海田	付加機能		連動子機, 弱者感応			

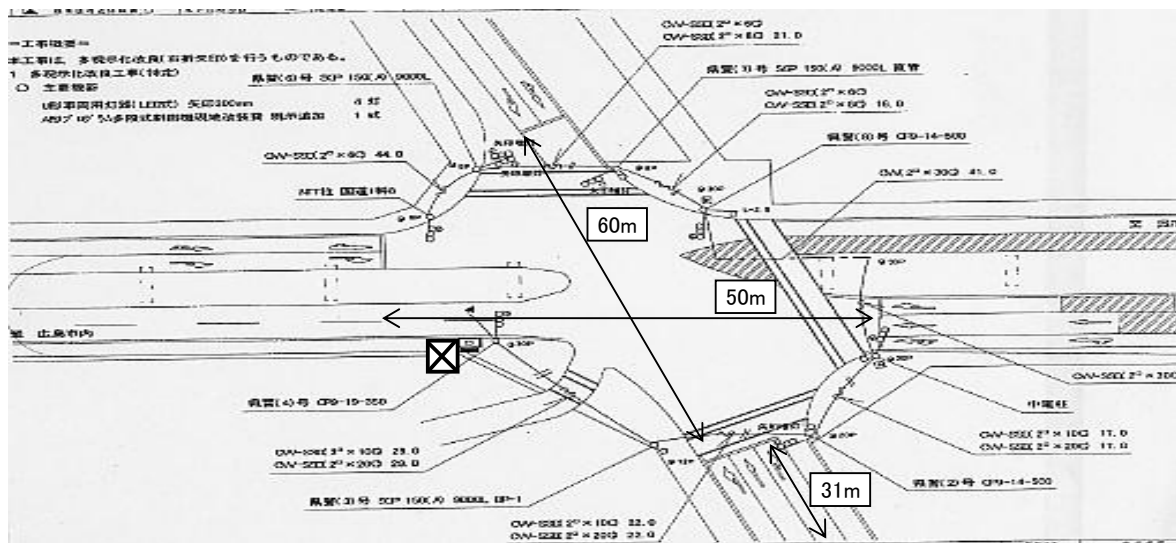至
広島市内至
呉市内

SPC-2 RSP29584

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PW	1G	1Y	1A	1Y	1R	3PG	3Y	3G	3Y	3A	3Y	3R						
流動図	17.8m 歩灯 2								31.9m 歩灯 2											
1P	[1P]																			
1	[1G]																			
(2)	[2V]																			
3P	[3P]																			
3	[3V]																			
1A	[1A]																			
(2A)	[2A]																			
3A	[3A]																			
パターン																				
保安	37	9	3	3	8	2	3	10	7	3	3	5	3	4					100	
P0	32	7	3	3	8	2	3	20	10	3	3	5	2	4					105	
P1	32	7	3	3	8	2	3	20	10	3	3	5	2	4					105	0
P2	27	7	3	3	13	2	3	20	10	3	3	5	2	4					105	0
P3	24	7	3	3	13	2	3	20	10	3	3	8	2	4					105	0
P4	27	7	3	3	13	2	3	25	10	3	3	5	2	4					110	0
P5	24	7	3	3	13	2	3	25	10	3	3	8	2	4					110	0
P6																			0	
P7																			0	
P8																			0	
P9																			0	
PA																			0	

備考: P0 はAプロのみ設定。

: 歩灯出力なしの場合、(1P)と表記する。

: ギャップ感応時の延長ステップは初期青から最大限度青時間までの範囲で歩進します。