



規制番号 名称		02-0331	早瀬大橋東口		運 用	2011年12月19日		製造番号	K0000003	
制御機種		交通信号制御機(UC形)	EC5450A+34001001		開始日時	15時45分	～	製造年月	2011年12月	
警交仕規1012号版2		製作所	日本信号株式会社	作動時間	6:00～22:00以後閃光			施工会社	PSSJ(株)	
署別	音戸	付加機能	ギャップ感応						新型錠	

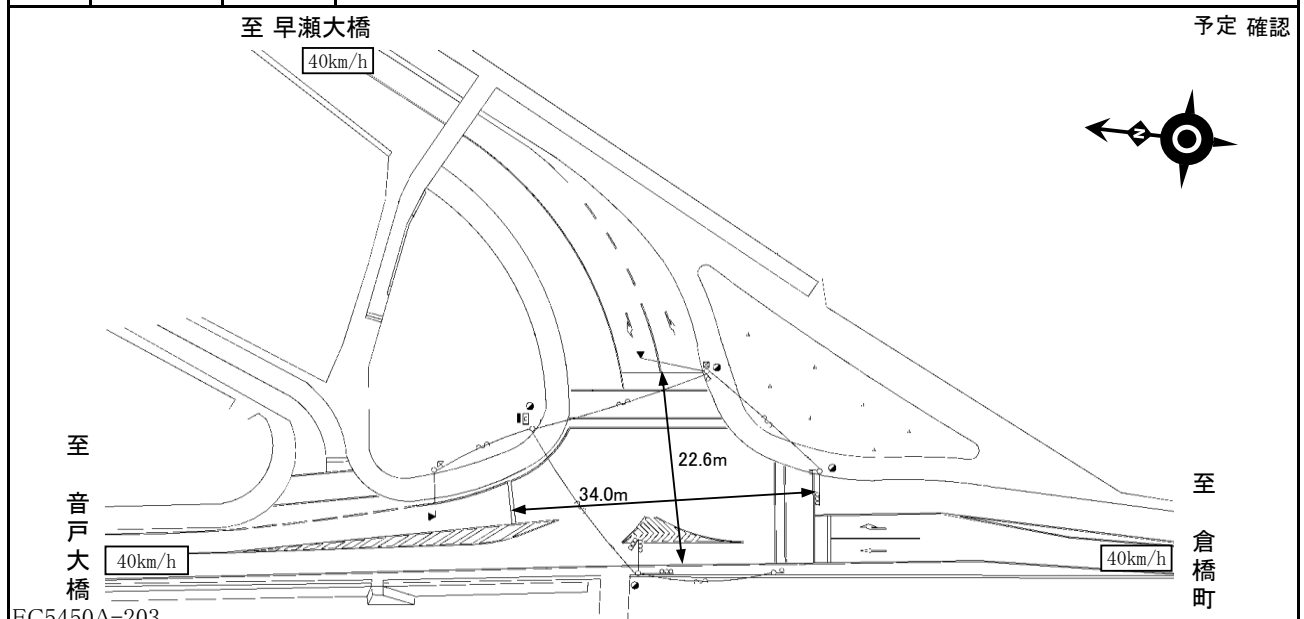

EC5450A-203
PD1219A V1.06

ステップ番号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ステップ名称	1PG	1PG	1PW	1G	1Y	1R	2PG	2PG	2PW	2G	2Y	2R								

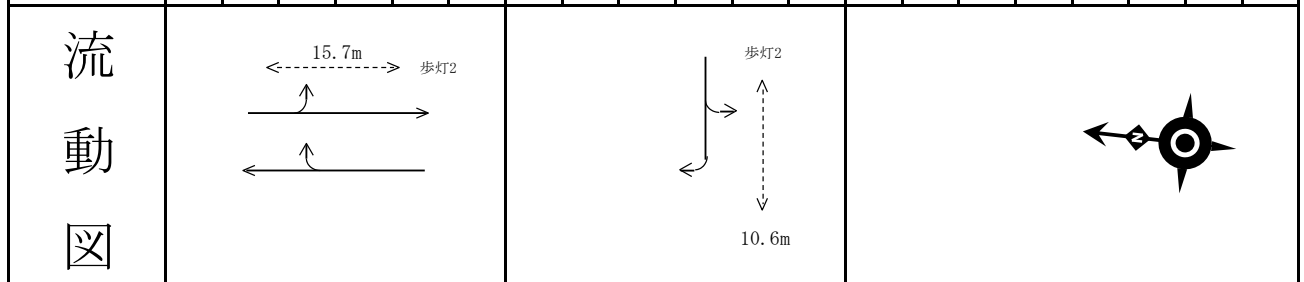

1P [1P]																				
1 [1V]																				
2P [2P]																				
2 [2V]																				
パターン																			周期	オフセット秒
保安	15	3	6	2	3	3	23	3	5	2	3	2							70	
P0																				
P1	15	3	6	2	3	3	13	3	5	2	3	2							60	
P2	25	3	6	2	3	3	13	3	5	2	3	2							70	
P3	15	3	6	2	3	3	23	3	5	2	3	2							70	
P4	25	3	6	2	3	3	23	3	5	2	3	2							80	
P5	35	3	6	2	3	3	23	3	5	2	3	2							90	
P6	45	3	6	2	3	3	23	3	5	2	3	2							100	
P7	55	3	6	2	3	3	23	3	5	2	3	2							110	
P8	65	3	6	2	3	3	23	3	5	2	3	2							120	
P9	75	3	6	2	3	3	23	3	5	2	3	2							130	
PA	85	3	6	2	3	3	23	3	5	2	3	2							140	
最長時間(秒)	110	110	110	110	10	10	110	110	110	110	10	10								
最短時間(秒)	6	0.95	0.95	0.95	0.95	0.95	6	0.95	0.95	0.95	0.95	0.95								
AB出力	A	B	B	B	B	B	B	B	A	A	A	A								

パ タ ン 切 替	A	(1) 平日			(2) 土曜			(3) 日曜			(4) 特殊日1			(5) 特殊日2			(6) 特殊日3			(7) 特殊日4				
	切替 番号	時	分	ハタン 番号	時	分	ハタン 番号	時	分	ハタン 番号	時	分	ハタン 番号	時	分	ハタン 番号	時	分	ハタン 番号	時	分	ハタン 番号		
	1	6	00	3	6	00	3	6	00	3														
	2	8	00	1	8	00	1	8	00	1														
	3	16	00	2	16	00	2	16	00	2														
	4	20	00	1	20	00	1	20	00	1														
	5																							
	6																							
	7																							
	8																							
9																								
A																								
動 作 切 替	閃光	22:00～6:00			22:00～6:00			22:00～6:00																
	ギャップ感応	00:00～00:00			00:00～00:00			00:00～00:00																
系 統 動 作 定 数	同期点																							
	追従幅																							
	追従階梯秒数配分																							
	主現示追従階梯																							
	従現示追従階梯																							
運 動 子 機 能 定 数	時刻修正																							
	DC方式																							
	AC方式																							
	同期階梯1(B/Y1)																							
	同期階梯2(A/Y2)																							
	周期監視時間																							
	共通オフセット1																							
	共通オフセット2																							
連動親機																								
																実行しきい値								
																分 周 期 連 動 機 能 定 数	連動パターン							
交通弱者感応定数																								
感応階梯										ステップ														
補正階梯										ステップ														
倍率指定 (10～19)										×0.1倍														
弱者用保証青時間(0～99)										秒														
ギ ャ ッ プ 感 応 定 数	単位1								単位2															
		短縮	延長	単位青	単位青		短縮	延長	単位青	単位青		短縮	延長	単位青	単位青									
		Ts	Te	上り0.1秒	下り0.1秒		Ts	Te	上り0.1秒	下り0.1秒		Ts	Te	上り0.1秒	下り0.1秒									
	P1		27	30		P1		27	30		P1		27	30										
	P2		57	30		P2		27	30		P2		27	30										
	P3		27	30		P3		57	30		P3		57	30										
	P4		0	0		P4		0	0		P4		0	0										
	P5		0	0		P5		0	0		P5		0	0										
	P6		0	0		P6		0	0		P6		0	0										
	P7		0	0		P7		0	0		P7		0	0										
	P8		0	0		P8		0	0		P8		0	0										
	P9		0	0		P9		0	0		P9		0	0										
	PA		0	0		PA		0	0		PA		0	0										
	感応階梯				2				感応階梯				8											
リ コ ー ル 定 数	感応階梯		ステップ																					
	補正階梯		ステップ																					