



4K COMMERCIAL SIGNAGE · BRIGHTSIGN BUILT-IN

Moy-DS60 Series

All-in-one commercial signage — 43" 4K UHD & 32" 2K

A professional BrightSign player built **inside** the display — no external media box, no extra cabling, no clutter. A slim, symmetrical anti-glare panel rated for 24/7 duty, that mounts in minutes and runs the content you already have. Manufactured for Interactive Displays Ireland and backed by our nationwide install and support team.

4K UHD 43" panel

500-nit anti-glare

24/7 rated

BrightSign built-in SoC

Dual-band Wi-Fi

Landscape & portrait

Moy-43DS60

43" · 4K ULTRA-HD

3840 × 2160 4K UHD panel

500-nit anti-glare, 178° view

40 mm slim · 8.7 mm bezel

9.1 kg · VESA 400×300

Contact IDI for pricing & availability

Moy-32DS60

32" · 2K FULL-HD CLASS

2K commercial panel

500-nit anti-glare, 178° view

40 mm slim · 8.8 mm bezel

5.4 kg · compact footprint

Contact IDI for pricing & availability

Built for real commercial signage — not a TV on a wall

Every Moy-DS60 combines a premium anti-glare panel with a genuine BrightSign HS145 player on a single board. The result is one of the simplest, most reliable ways to put professional 4K content on a wall.




True 4K Ultra-HD clarity

The Moy-43DS60 renders 3840×2160 detail with life-like colour and depth — menus, product shots and brand video that stop people mid-stride.




Ultra-narrow bezel, ultra-slim body

An 8.7 mm bezel and a 40 mm symmetrical chassis sit almost flush to the wall. Slim, clean and content-first from every angle.

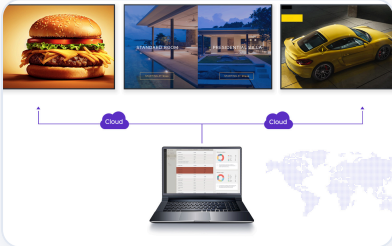

Cloud-managed, any CMS

A free BSN.cloud Control Cloud subscription lets you push content and monitor every screen remotely — and it works with your choice of BrightSign-compatible CMS.

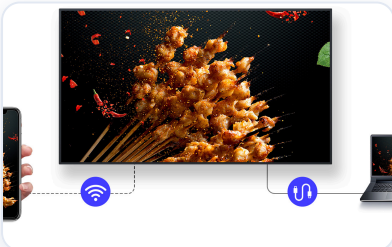

Dual-band Wi-Fi & wired

Dual-antenna 2.4/5 GHz Wi-Fi plus Gigabit-class Ethernet keep every display reliably online. HDMI, USB and RS-232 are on board too.



Landscape or portrait, 24/7

Mount it either way. The 500-nit anti-glare panel is rated for round-the-clock commercial duty in retail, hospitality, education and reception spaces.

Technical specifications

Moytronix Moy-DS60 Series · based on the TCL MOKA DS60P commercial platform with BrightSign Built-In

Specification	Moy-43DS60 (43")	Moy-32DS60 (32")
DISPLAY		
Screen size	43 in	32 in
Native resolution	4K UHD (3840 × 2160)	2K Full-HD class
Panel	Commercial-grade TFT LCD	Commercial-grade TFT LCD
Aspect ratio	16:9	16:9
Brightness	500 cd/m² (500-nit)	500 cd/m² (500-nit)
Anti-glare surface	Yes · 25% haze · 3H hard-coat	Yes · 25% haze · 3H hard-coat
Viewing angle	178°	178°
Contrast ratio	4000:1 dynamic	4000:1 dynamic
Response time	8 ms	8 ms
Refresh rate	60 Hz	60 Hz
Colour gamut	≥ 85%	≥ 85%
Backlight lifespan	50,000 hours	50,000 hours
Rated operation	24 / 7	24 / 7
MEDIA PLAYER & PLAYBACK		
Built-in player	BrightSign HS145 SoC	BrightSign HS145 SoC
Operating system	BrightSignOS™	BrightSignOS™
Video decoding	Single 4K60p or dual Full-HD	Single 4K60p or dual Full-HD
4K codecs	H.265 (60p), H.264 (30p)	H.265 (60p), H.264 (30p)
Full-HD codecs	H.265, H.264, MPEG-2	H.265, H.264, MPEG-2
Containers	.ts .mov .mp4 .mkv	.ts .mov .mp4 .mkv
Audio formats	MP2, MP3, AAC, WAV (AC3 pass-through)	MP2, MP3, AAC, WAV (AC3 pass-through)
Images	BMP, JPEG, PNG	BMP, JPEG, PNG
HTML5	HTML widgets & graphic animations	HTML widgets & graphic animations
Real-time clock	14-day	14-day

Technical specifications — continued

Specification	Moy-43DS60 (43")	Moy-32DS60 (32")
CONNECTIVITY		
Wi-Fi	Dual-antenna 2.4 / 5 GHz (802.11ac)	Dual-antenna 2.4 / 5 GHz (802.11ac)
Bluetooth	Yes	Yes
Ethernet	1 × RJ45	1 × RJ45
HDMI	1 × HDMI input	1 × HDMI input
USB	1 × USB-A	1 × USB-A
Serial	1 × RS-232 (mini-jack)	1 × RS-232 (mini-jack)
MicroSD	1 × slot (side, card not incl.)	1 × slot (side, card not incl.)
AUDIO & POWER		
Speakers	2 × 10 W (6 Ω) built-in	2 × 10 W (6 Ω) built-in
Power input	100–240 V AC, 50/60 Hz	100–240 V AC, 50/60 Hz
Rated power	≤ 140 W	≤ 140 W
Standby power	≤ 0.5 W	≤ 0.5 W
PHYSICAL		
Dimensions (W×H×D)	967.4 × 555.9 × 40 mm	724.6 × 419.8 × 40 mm
Depth	40 mm (ultra-slim)	40 mm (ultra-slim)
Bezel width	8.7 mm sides / 11.5 mm base	8.8 mm sides / 11.6 mm base
Mounting pitch (W×H)	400 × 300 mm	150 × 200 mm
Net weight	9.1 kg	5.4 kg
Orientation	Landscape & portrait	Landscape & portrait
SOFTWARE, CLOUD & SUPPORT		
Remote management	BSN.cloud Control Cloud (free)	BSN.cloud Control Cloud (free)
Authoring	BrightAuthor:connected (Win/Mac/Chrome)	BrightAuthor:connected (Win/Mac/Chrome)
Compatible CMS	Any BrightSign-compatible CMS	Any BrightSign-compatible CMS
In the box	Display, remote control, mains lead	Display, remote control, mains lead
Operating temp.	-10 °C to 40 °C	-10 °C to 40 °C
Warranty	3 years parts & labour	3 years parts & labour



3-year warranty as standard · nationwide install & support

Talk to us about Moytronix

+353 44 967 2855 · sales@interactivedisplays.ie

interactivedisplays.ie

Dromone, Oldcastle, Co. Meath, A82 E0W4, Ireland