


Interruption curves for binary monitoring


35% vs 30% event rates; 5,000 trials per scenario; OBF calibrated at N = 2,690

OBF two-sided Pocock two-sided Haybittle-Peto e-RTb adaptive e-RTb design directional

Alternative: 35% vs 30%

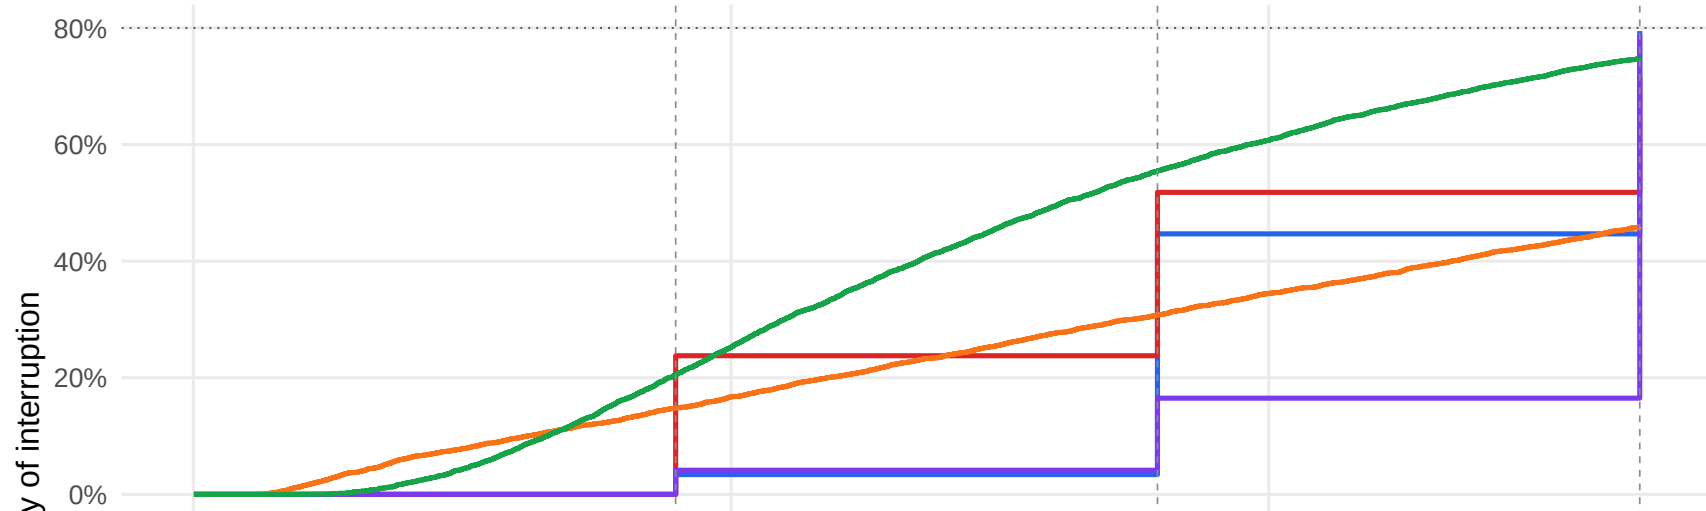

Null: 35% vs 35%

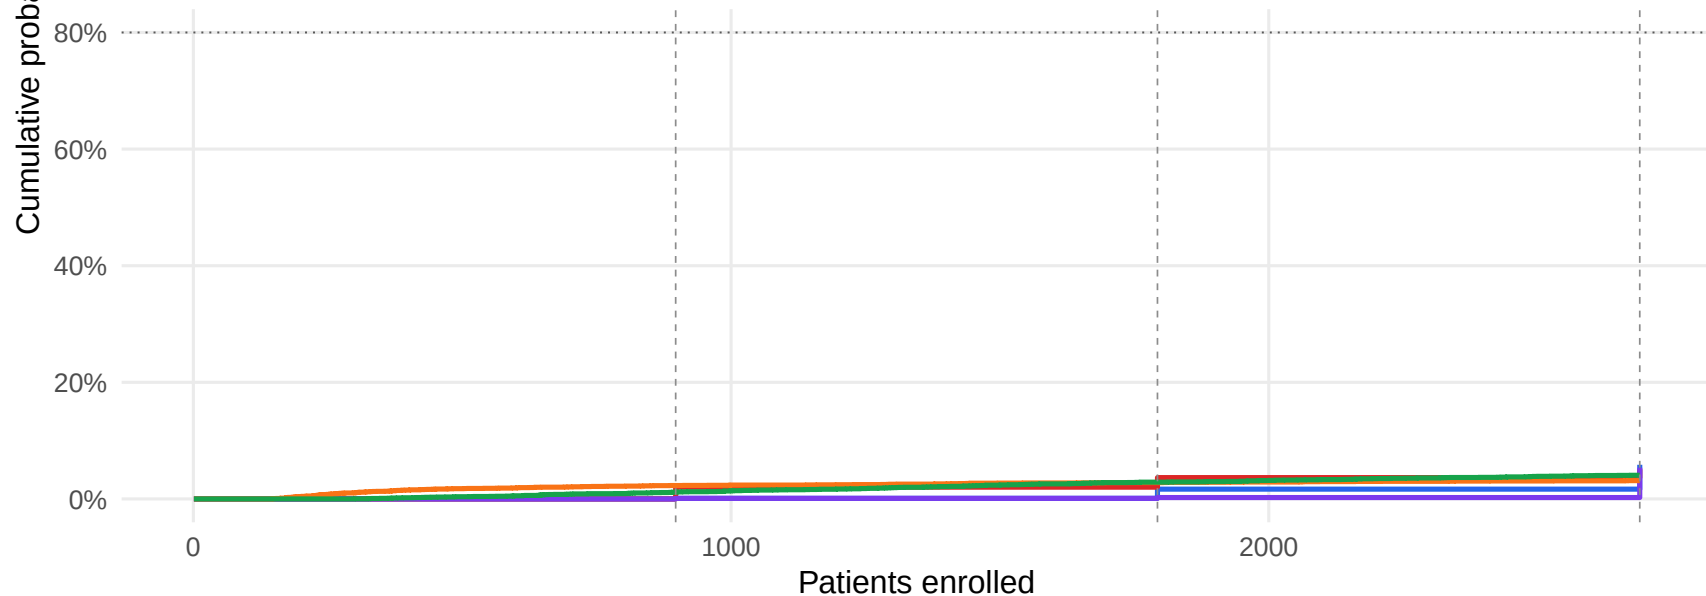

Looks: 897, 1,793, 2,690. OBF $|Z|$: 3.39, 2.40, 1.96. Pocock $|Z|$: 2.29, 2.29, 2.29. Haybittle-Peto $|Z|$: 3.29, 3.29, 1.96. e-RT W=20.