

# PhD Thesis

## Real-Time EKF-Based Structure from Motion

Defended by  
Javier CIVERA  
on September 9th, 2009

Advisor: Dr. José María MARTÍNEZ MONTIEL  
Robotics, Perception and Real Time Group  
Aragón Institute of Engineering Research (I3A)  
Universidad de Zaragoza, Zaragoza, Spain.

### Jury :

<i>Reviewers :</i>	Joan SOLÀ	- LAAS, Toulouse, France.
	Gabe SIBLEY	- Oxford University, United Kingdom.
<i>President :</i>	Wolfram BURGARD	- Universitat Freiburg, Germany.
<i>Examinators :</i>	Juan Domingo TARDÓS	- Universidad de Zaragoza, Spain.
	Patric JENSFELT	- KTH, Stockholm, Sweeden.
	Miguel Ángel SALICHS	- Universidad Carlos III, Madrid, Spain.
	Víctor F. MUÑOZ	- Universidad de Málaga, Spain.





---

## Abstract

Automated tridimensional scene and egomotion estimation from the only input of a set of images taken by a monocular camera has been a long-term aim in the Computer Vision community since the decade of the eighties. As the result of intense research, the so-called Structure from Motion (SfM) problem has experienced great advances.

Automated detection of salient features in natural images and the posterior establishment of correspondences along the rest of the images has been one of the first milestones in this thread of research. Also, geometric relationships between pairs of images have been modeled based on projective geometry concepts including the most general cases; assuming no known information about the scene and including degenerate configurations and uncalibrated settings. From these relations and a set of matches, relative transformations between pairs of camera poses and scene structure can be estimated. This initial solution can be refined in a non-linear optimization stage –known as Bundle Adjustment (BA)– in order to obtain a globally consistent estimation.

Differently from this main trend based on pairwise initial estimation followed by Bundle Adjustment, filtering-based SfM estimation have received considerably less attention and still lacks a thorough analysis of the main geometric issues tackled by SfM research along the latest three decades: projective modeling of the scene, estimation under degenerate configurations and self-calibration. This thesis’ main aim is to assess the efficacy, accuracy and quality of the filtering-based SfM incorporating all the previously mentioned subjects. Real-time performance at 30 frames per second has been demonstrated for the contributions presented in this thesis, opening the path for real applications.

Specifically, the main contributions in this thesis are 1) the introduction of the projective concepts of low-parallax points and points at infinity in a filtering framework and, based on that, the proposal of a drift-free real-time mosaicing algorithm; 2) a projective coding for 3D points based on explicit inverse depth parametrization, able to cope with low and high parallax configurations in an undelayed and unified manner; 3) the use of a camera-centered filtering scheme that reduces linearization errors; 4) an efficient 1-Point RANSAC that exploits prior knowledge from filtering; 5) a probabilistic approach to model selection –opposed to the standard one based on geometric reprojection error and regularization terms– well suited to a Bayesian filtering scheme; and 6) a Sum of Gaussians filter that allows accurate full camera self-calibration in a filtering framework.

---



# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Real-Time Sequential Structure from Motion . . . . .	2
1.2	Keyframe Methods . . . . .	3
1.3	Filtering Methods . . . . .	4
1.4	Aims and Contributions of this Thesis . . . . .	7
<b>2</b>	<b>Points at Infinity, Rotation Estimation and Mosaic Building</b>	<b>13</b>
2.1	Introduction . . . . .	13
2.1.1	Points at Infinity . . . . .	13
2.1.2	Real-Time EKF-based Mosaicing . . . . .	14
2.2	Related Work . . . . .	16
2.2.1	Image Mosaicing . . . . .	16
2.2.2	SLAM . . . . .	18
2.2.3	Off-line SfM vs. EKF SLAM . . . . .	18
2.3	Geometrical Modeling . . . . .	20
2.4	Simultaneous Localization and Mapping . . . . .	22
2.5	Meshing and Mosaicing . . . . .	24
2.5.1	Updating the Mesh . . . . .	24
2.5.2	Tile Texture Mapping . . . . .	25
2.6	Experimental Results . . . . .	25
2.6.1	360° Pan and Cyclotorsion . . . . .	26
2.6.2	Real-Time Mosaic Building . . . . .	30
2.6.3	Processing Time . . . . .	31
2.7	Discussion . . . . .	31
<b>3</b>	<b>Unified Inverse Depth Parametrization for Close and Distant Features</b>	<b>35</b>
3.1	Introduction . . . . .	36
3.1.1	Delayed and Undelayed Initialization . . . . .	37
3.1.2	Inverse Depth Representation . . . . .	38

3.1.3	Inverse Depth in Computer Vision and Tracking . . . . .	39
3.2	State Vector Definition . . . . .	41
3.2.1	Camera Motion . . . . .	41
3.2.2	Euclidean XYZ Point Parametrization . . . . .	41
3.2.3	Inverse Depth Point Parametrization . . . . .	42
3.2.4	Full State Vector . . . . .	42
3.3	Measurement Equation . . . . .	42
3.4	Measurement Equation Linearity . . . . .	44
3.4.1	Linearized propagation of a Gaussian . . . . .	44
3.4.2	Linearity of XYZ Parametrization . . . . .	45
3.4.3	Linearity of Inverse Depth Parametrization . . . . .	46
3.4.4	Depth vs. Inverse Depth Comparison . . . . .	46
3.5	Feature Initialization . . . . .	47
3.6	Switching from Inverse Depth to XYZ . . . . .	49
3.6.1	Conversion from Inverse Depth to XYZ Coding . . . . .	49
3.6.2	Linearity Index Threshold . . . . .	49
3.7	Robust Data Association . . . . .	50
3.7.1	Patch Warping . . . . .	51
3.7.2	Active Search . . . . .	52
3.7.3	Joint Compatibility Branch and Bound (JCBB) . . . . .	53
3.8	Experimental Results . . . . .	54
3.8.1	Indoor Sequence . . . . .	55
3.8.2	Real-Time Outdoor Sequence . . . . .	57
3.8.3	Loop Closing Sequence . . . . .	57
3.8.4	Simulation Analysis for Inverse Depth to XYZ Switching	62
3.8.5	Parametrization Switching with Real Images . . . . .	64
3.8.6	Processing Time . . . . .	65
3.9	Discussion . . . . .	66
<b>4</b>	<b>1-Point RANSAC for EKF-Based Structure from Motion</b> . . . . .	<b>69</b>
4.1	Introduction . . . . .	70
4.2	Related Work . . . . .	73
4.2.1	Random Sample Consensus (RANSAC) . . . . .	73
4.2.2	Joint Compatibility Branch and Bound (JCBB) . . . . .	74
4.2.3	Structure from Motion and Visual Odometry . . . . .	75
4.2.4	Benchmarking . . . . .	76
4.3	1-Point RANSAC Extended Kalman Filter Algorithm . . . . .	77
4.3.1	EKF Prediction and IC Search . . . . .	77
4.3.2	1-Point Hypotheses . . . . .	79
4.3.3	Partial Update with Low-Innovation Inliers . . . . .	79
4.3.4	Partial Update with High-Innovation Inliers . . . . .	80
4.4	1-Point RANSAC EKF from a Monocular Sequence . . . . .	81
4.4.1	State Vector Definition . . . . .	81
4.4.2	Dynamic Model . . . . .	81

---

**CONTENTS**

4.4.3	Camera-Centered Estimation . . . . .	82
4.5	Experimental Results . . . . .	84
4.5.1	Benchmark Method for 6 DOF Camera Motion . . . . .	84
4.5.2	1-Point RANSAC . . . . .	86
4.5.3	JCBB . . . . .	90
4.5.4	Trajectory Benchmarking against GPS. . . . .	93
4.5.5	EKF-Based Estimation for Long Sequences . . . . .	95
4.5.6	Visual Odometry . . . . .	99
4.6	Discussion . . . . .	102
4.7	Conclusions . . . . .	103
<b>5</b>	<b>Degenerate Camera Motion and Filter-based Model Selection</b>	<b>105</b>
5.1	Introduction . . . . .	105
5.2	Bayesian Model Selection for Sequences . . . . .	107
5.3	Interacting Multiple Model . . . . .	109
5.4	Interacting Multiple Model Monocular SLAM Algorithm . . .	110
5.5	Experimental Results . . . . .	111
5.5.1	Consistent start up even with rotation . . . . .	112
5.5.2	Low risk of spurious matches due to small search regions	112
5.5.3	Camera motion model identification . . . . .	115
5.5.4	Computational cost considerations . . . . .	116
5.6	Discussion . . . . .	116
<b>6</b>	<b>Filter-Based Estimation from Uncalibrated Sequences</b>	<b>117</b>
6.1	Introduction . . . . .	117
6.2	Related Work . . . . .	118
6.3	Sum of Gaussians (SOG) Filter . . . . .	120
6.4	Self-Calibration Using SOG Filtering . . . . .	122
6.4.1	State vector definition . . . . .	122
6.4.2	Robust Data Association . . . . .	122
6.4.3	Pruning of Gaussians with Low Weight . . . . .	123
6.5	Experimental Results . . . . .	124
6.5.1	Indoor Sequence . . . . .	125
6.5.2	Loop-Closing Sequence . . . . .	126
6.6	Discussion . . . . .	130
<b>7</b>	<b>Conclusions and Future Directions</b>	<b>131</b>
7.1	Conclusions . . . . .	131
7.2	Future Directions . . . . .	133

<b>A Implementation Details</b>	<b>137</b>
1 Extended Kalman Filter . . . . .	137
2 Calibrated EKF-Based SfM . . . . .	139
21 Dynamic Model and Derivatives . . . . .	139
22 Measurement Model and Derivatives . . . . .	140
23 Inverse Depth Point Feature Initialization and Deriva- tives . . . . .	145
24 Quaternion Normalization . . . . .	148
3 Uncalibrated EKF-Based SfM . . . . .	148
31 Dynamic Model and Derivatives . . . . .	148
32 Measurement Model and Derivatives . . . . .	149
33 Inverse Depth Point Feature Initialization and Deriva- tives . . . . .	151
<b>B Filter Tuning Understanding via Dimensional Analysis</b>	<b>155</b>
1 Introduction . . . . .	155
2 Monocular SLAM Estimation Process . . . . .	156
3 Buckingham's $\Pi$ Theorem Applied to Monocular SLAM . . .	157
4 Dimensionless Monocular SLAM Model . . . . .	158
5 Image interpretation of dimensionless parameters and image filter tuning . . . . .	159
6 Real Image Results . . . . .	160
61 Dependence of scene scale on a priori parameters . . .	160
62 Image tuning in a pure rotation sequence . . . . .	161
63 The same image tuning for different sequences . . . . .	162
7 Conclusions . . . . .	163
<b>Bibliography</b>	<b>165</b>

# List of Figures

2.1	Mosaic scheme and geometric modelling of features at infinity	15
2.2	New features initialization and patch prediction.	22
2.3	Triangular mosaic update algorithm.	25
2.4	Mosaic mesh update example	26
2.5	Triangular tile subdivision	27
2.6	Mosaicing experimental results: 360° pan and cyclotorsion	28
2.7	Mosaicing experimental results: superimposed meshes before and after loop closing	29
2.8	Mosaicing experimental results: feature initialized on a mov- ing object	30
2.9	Mosaicing experimental results: real-time mosaicing with loop-closure	33
3.1	Inverse depth parametrization and measurement equation	43
3.2	Inverse depth linearity analysis	44
3.3	Uncertainty propagation in inverse depth and cartesian pa- rameterization	45
3.4	Test rejections as a function of the linearity index $L_d$	49
3.5	Simulation algorithm to test the linearity of the measurement equa- tion.	51
3.6	Inverse depth experimental results: First and last frame of the indoor sequence	55
3.7	Inverse depth experimental results: Feature initialization over the indoor sequence	56
3.8	Inverse depth experimental results: Outdoors sequence	58
3.9	Inverse depth experimental results: Close and distant feature estimation in outdoors sequence	59
3.10	Inverse depth experimental results: Loop closing sequence	60
3.11	Inverse depth experimental results: Estimated covariance in the loop closing sequence	61

---

LIST OF FIGURES

3.12	Inverse depth experimental results: Simulation configuration for the inverse depth to cartesian switching . . . . .	62
3.13	Inverse depth experimental results: Simulation results for the inverse depth to cartesian switching . . . . .	63
3.14	Inverse depth experimental results: Computational savings switching from inverse depth to cartesian parameterization .	64
3.15	Inverse depth experimental results: Loop closing sequence switching from inverse depth to cartesian parameterization .	65
4.1	Standard RANSAC . . . . .	71
4.2	1-Point RANSAC . . . . .	72
4.3	Camera-centered and World-referenced EKF estimation. . . . .	83
4.4	Benchmarking method based on Bundle Adjustment. . . . .	86
4.5	Camera location error for different RANSAC configurations .	88
4.6	Number of iterations for 5-points and 1-point RANSAC. . . . .	89
4.7	Camera location error for different JCBB configurations . .	91
4.8	Spurious match rate for JCBB and RANSAC . . . . .	92
4.9	Cost and map sizes for RANSAC and JCBB . . . . .	94
4.10	Image from the 650 metres sequence, showing the high number of tracked features. . . . .	96
4.11	Estimated trajectories from pure monocular data and GPS data . . . . .	97
4.12	Histograms of the errors for the three experiments using only monocular information . . . . .	98
4.13	Visual odometry results compared against RTK GPS over a Google Maps plot. . . . .	99
4.14	Computational cost for RANSAC and JCBB . . . . .	100
4.15	Pure monocular, raw odometry and visual odometry estimations . . . . .	101
5.1	Interacting Multiple Model algorithm scheme . . . . .	109
5.2	Interacting Multiple Model algorithm . . . . .	110
5.3	Model selection experimental results: Comparison between single model and multiple model approaches . . . . .	113
5.4	Model selection experimental results: Probability of models along the sequence . . . . .	114
5.5	Model selection experimental results: Search ellipses . . . . .	115
6.1	Scheme of the Sum of Gaussians (SOG) filter . . . . .	121
6.2	Autocalibration experimental results: Probability density function for the focal length . . . . .	124
6.3	Autocalibration experimental results: Probability density function for distortion parameters $\kappa_1$ and $\kappa_2$ . . . . .	125

---

**LIST OF FIGURES**

---

6.4	Autocalibration experimental results: 3D estimation for an indoors sequence . . . . .	126
6.5	Autocalibration experimental results: calibration estimation for an indoors sequence . . . . .	127
6.6	Autocalibration experimental results: 3D estimation for a loop closing sequence . . . . .	128
6.7	Autocalibration experimental results: calibration estimation for a loop closing sequence . . . . .	129
51	Dimensionless monocular SLAM parameters. . . . .	159
61	Dependence of scene scale on a priori parameters . . . . .	161
62	Image tuning in a pure rotation sequence. . . . .	161
63	Same image tuning for sequences with equivalent image motion.	162

# Chapter 1

## Introduction

### Contents

---

1.1	Real-Time Sequential Structure from Motion . . . . .	2
1.2	Keyframe Methods . . . . .	3
1.3	Filtering Methods . . . . .	4
1.4	Aims and Contributions of this Thesis . . . . .	7

---

If it is true that, as Einstein used to say, you do not really understand something unless you can explain it to your grandmother, Computer Vision researchers are really lucky to be able to summarize the main aim of our discipline with a simple and understandable sentence like “making a computer see”. On the other hand, the lexical simplicity of this objective hides a very complex reality which very often people are tricked into. Even known researchers of the field have fallen into the trap: The anecdote that Marvin Minsky, Artificial Intelligence pioneer from MIT, assigned to solve the computer vision problem as a summer project to a degree student back in the sixties is an illustrative and well-known example.

The truth behind this apparent simplicity is that, although we all have a clear experience about what is “to see”, the biological mechanisms of visual processing are still not fully understood. But even if we knew it, we could also wonder if a machine needs –or will be able to run– a visual sensing similar to ours. This lack of a precise definition about what “to see” really means have made computer vision research rather diverse and fragmented.

In spite of this, Computer Vision has experienced great advances since its appearance. Computers still cannot see, but some of them already use visual information in one or another sense. One of the uses of visual information is the general frame of this thesis, specifically how visual information can be processed to extract a three-dimensional estimation of the imaged scenario and location of the camera into it.

## 1.1 Real-Time Sequential Structure from Motion

Inside the Computer Vision field, Structure from Motion (SfM) is the line of research that takes as input the 2D motion from images and seeks to infer in a totally automated manner the 3D structure of the scene viewed and the camera locations where the images were captured. SfM has been one of the most active areas of research for the latest three decades, reaching such a state of maturity that some of its algorithms have climbed to the commercial application level [2d3 2009, Autostitch 2009, PhotoTourism 2009].

SfM origins can be traced back to the so-called Photogrammetry, that since the second half of 19th century aimed to extract geometric information from images. Starting with a set of features manually identified by the user, Photogrammetry make use of non-linear optimization techniques to minimize the reprojection error known as Bundle Adjustment (BA) [Mikhail *et al.* 2001]. Computer Vision research has been oriented to achieve the complete automation of the problem, producing remarkable progress in two aspects: first, the constraints imposed on the motion of the features in two –or three– images under the assumption of the rigidity of the scene have been formalized, even in the case of degenerate motion and uncalibrated camera [Hartley & Zisserman 2004]. And second, intense research on salient feature detection and description [Canny 1986, Harris & Stephens 1988, Lowe 2004] and spurious rejection [Fischler & Bolles 1981] has provided an automated way of robustly matching –points or lines– features along images.

Based on these two achievements, several methods have been proposed that, from only a set of images from a scene can estimate the three-dimensional structure and camera locations up to a projective transformation in the most general case of uncalibrated cameras. With some extra knowledge about camera calibration, a solution up to scale can be obtained. In most cases, the SfM pairwise initial estimation is followed by a Bundle Adjustment (BA) step [Triggs *et al.* 2000] that minimizes the reprojection error and refines the estimation into a globally consistent one.

One of the main drawbacks of the traditional SfM plus BA combination is that it was initially thought for the processing of sparse sets of images, being unable to deal with long sequences of images. SfM methods relate feature motion between pairs –at most triplets– of images, but lack a global formulation for an image stream. Compositing consecutive motions can serve in the short term; but errors will eventually accumulate and drift will appear. A global BA cannot be applied over a long sequence either. Even taking advantage of the sparsity of the problem, its complexity is cubic in the number of frames. At the current video frequencies of tens of images per second, the computation rapidly becomes intractable.

Only very recently there has been significant novel research in the field aiming to extend the capabilities of SfM methods to sequentially process

## 1.2. Keyframe Methods

---

large image sequences, being the estimation carried out in real-time. Its interest resides in the fact that many fields that could benefit from visual estimation, like Augmented Reality or Robotics, receive visual information in the form of a stream of images. In these two cases, an online real-time estimation at each frame is needed in order to augment the scene with virtual objects and perform the necessary control actions of a robot respectively.

Algorithms that support real-time Structure from Motion for long sequences have been developed under two radically different points of view. On the one hand, algorithms that will be called in this thesis *keyframe methods* –following the nomenclature in [Klein & Murray 2007]– try to adapt traditional pairwise offline SfM + BA methods to achieve sequential online estimation. In order to do so, a sparse set of keyframes is chosen and SfM methods and BA are applied over a subset of them that are close to the current frame. On the other hand, *filtering methods* apply Bayesian filtering techniques that, at each step, integrate the information from this image into a multidimensional probability distribution that summarize the information gathered along the sequence up to the current frame. Both approaches are extensively detailed in the next sections.

## 1.2 Keyframe Methods

The first of the real-time keyframe methods can be considered the so-called Visual Odometry [Nistér *et al.* 2004, Nistér *et al.* 2006]. This seminal work describes two algorithms, for both monocular and stereo streams. Nevertheless, experimental results focus on the stereo case. In a few words, the proposed algorithms work as follows: first, Harris corners [Harris & Stephens 1988] are extracted and tracked along the sequence using normalized correlation. Full 3D scene structure and camera motion is estimated in keyframes, via the 5-point algorithm [Nistér 2004] in the monocular scheme or by plain triangulation in the stereo case. Only the camera pose is tracked between keyframes, using the 3-point algorithm [Haralick *et al.* 1994] in both cases. Experimental results report errors relative to the distance traveled of around 1% for trajectories of hundreds of metres.

Stereo images have been predominantly used in Visual Odometry approaches derived from Nister’s seminal paper. In [Comport *et al.* 2007], quadrifocal geometry is estimated from dense image correspondence between stereo pairs, showing also great accuracy in urban environments. [Konolige *et al.* 2007] shows that the combination of stereo images plus inertial measurements from an IMU offers impressive accuracy over trajectories of around 10 kilometres. Bundle Adjustment is applied in the latter over a sliding window of keyframes and it is shown to improve the accuracy with respect to the plain composition of pairwise relative motion.

Using a monocular stream, [Mouragnon *et al.* 2006, ?] uses a visual odometry very similar to the one proposed by Nister but adding a local Bundle Adjustment. This approach constitutes the state of the art in monocular Visual Odometry, with reported trajectories of around 500 metres.

Visual Odometry approaches presented so far offer clear evidence about the accuracy of visual estimation over large sequences where long trajectories are covered. The demonstration of real-time online operation is also an important part of these papers, making these approaches suitable for, among others, robotic applications. Nevertheless, a major shortcoming of these pieces of research is that they do not provide a globally consistent estimation –as bundle adjustment is applied locally.

Oftenly undervalued in some contexts, consistency issues can be considered essential in other ones. In mobile robotics, where automated robust systems that can be deployed in an area and be able to navigate for years are pursued, even the lowest drift in its three-dimensional model will accumulate and result in gross errors –leading to wrong control actions. There is very recent work that try to overcome this problem presenting sequential but also globally consistent estimation schemes based on keyframes.

[Klein & Murray 2007, Klein & Murray 2008] presents a keyframe method based on two parallel processing threads. The first one performs camera tracking assuming a known map of natural features at 30 fps. The second thread constructs a consistent map performing global BA over selected frames of the sequence. The proposed global BA cannot be maintained if the camera is constantly explorating –a local BA, similar to the visual odometry ones will be carried out in this case–, but the presented approach runs in real-time in a room-sized scenario with maps of thousands of features. Another desirable characteristic of this work is its resilience and recovery under sudden motion, thanks to the use of short segments –called edgelets [Eade & Drummond 2006a]– and relocation techniques.

[Konolige & Agrawal 2008] follows also a parallel processing approach to achieve globally consistent keyframe-based estimation. One thread performs visual odometry estimation as described in [Konolige *et al.* 2007]. The other one marginalizes out all features and almost all frames of the trajectory, ending up with a skeleton of frames in which the constraints of the whole trajectory are summed up and updated each time a keyframe is added to the skeleton. Loop-closing techniques are also performed by this thread being the whole skeleton updated if a loop closure is detected.

### 1.3 Filtering Methods

The key difference of filtering methods from keyframe ones is that they do not operate in a pairwise manner –estimating location from one frame with respect to another as SfM methods do– nor do they pile up measurements

### 1.3. Filtering Methods

---

waiting for a local BA optimisation. Instead of that, the overall state of the system is summarized into a multidimensional probability distribution, and measurements are processed and their information integrated in this probability distribution at every step as they arrive. Therefore, its computational complexity scales with the size of the state and not with the number of frames, being naturally suited for the processing of large streams of measurements.

Filtering methods for 3D estimation from sensor information have been extensively used and developed in the robotic SLAM (Simultaneous Localization and Mapping). In general terms, SLAM seeks to estimate a map of the environment and the location of the robot inside of it from the information gathered by sensors attached to the robot. In the most typical SLAM problem, sensory information comes from proprioceptive sensors –odometry or inertial measurement units– and exteroceptive sensors, that measure entities external to the robot. Traditionally, laser has been the predominant exteroceptive sensor used in SLAM, although other sensors, like sonars, have also been used.

It is only very recently that cameras have been adopted massively by the robotic community as the main SLAM sensor. In this thesis, a monocular camera is used as the unique sensor –no odometry information is used– and full 3D SLAM is performed –the camera moving in six degrees of freedom. Although this configuration is usually named monocular SLAM and will be referred to as that in some parts of the thesis, most of the times we will call it filtering-based SfM. Both nomenclatures seem valid to us, but with the use of the second we would like to remark that research presented here (e.g. mosaicing, model selection or self-calibration) are closer to SfM research than current SLAM areas of interest (e.g. large mapping or dense reconstruction).

Some SLAM research has attacked this estimation problem as an offline global optimization from all gathered data, in a very similar manner than global BA does [Lu & Milios 1997, Dellaert & Kaess 2006]. The so-called Graph-SLAM or full SLAM estimates an a posteriori solution for the whole robot trajectory and map from all measured data. But, in parallel with this offline approach, an equally important stream on filtering algorithms that aims to achieve globally consistent mapping by sequential processing of measurements has been developed and reached excellent results. It is very remarkable here the difference with Computer Vision research, where offline estimation methods have focused almost all the SfM research while online filtering ones have been very rarely used –[Azarbayejani & Pentland. 1995, Chiuso *et al.* 2000, Qian & Chellappa 2004b, Jin *et al.* 2003] are some of the few existing references.

It is precisely because of the scarce use of filtering techniques by Structure From Motion researchers and the young trajectory of SLAM using cameras that the deep understanding of the camera as projective sensor that

pairwise SfM and BA methods have achieved has not been translated yet to the filtering approaches. The main aim of this thesis is to contribute to fill this gap, tackling the particular problems that arise when cameras are used as sensors and provide with models and methods appropriate to its projective nature under a sequential filtering scheme.

SLAM has been, as well as SfM, a very active area of research that has produced a rich literature. Historically, the Extended Kalman filter (EKF) was the first filtering technique to offer a solution to the SLAM task [Smith *et al.* 1987, Dissanayake *et al.* 2001, Castellanos *et al.* 1999], and also the first one to demonstrate real-time performance in visual SLAM [Davison 2003, Davison *et al.* 2007]. Several other filters have been used that try to relax the EKF assumptions and show better consistency properties, generally incurring in higher computational cost: Particle filters (e.g. [Montemerlo *et al.*]), Sum of Gaussians filtering [Durrant-Whyte *et al.* 2003] and the Unscented Kalman Filter [Julier & Uhlmann 1997]. Particle filters and the Unscented Kalman filter have also been used recently for visual SLAM in [Eade & Drummond 2006b] and [Holmes *et al.* 2008] respectively.

Robust data association has demonstrated to be essential in SLAM when real data is used. Among data association research in the SLAM context, it is specially interesting the Joint Compatibility Branch and Bound (JCBB) algorithm in [Neira & Tardós 2001]. As the main difference with robust data association used in pairwise SfM –RANSAC [Fischler & Bolles 1981] in most cases–, JCBB takes advantage of the information carried out by filtering and tests the rigidity of the scene by checking that correspondences follow the a priori probability distribution. It can be said that operates in an image-to-map manner, opposed to the image-to-image scheme of RANSAC-like approaches. In the absence of prior information, RANSAC-like approaches estimate partial models from a random subset of matches and test the rigidity of the scene checking the reprojection error for the rest of the matches.

JCBB's ability for spurious rejection resides in its full exploitation of the correlations between image features, where the rigidity of the scene is coded. Another very interesting and recent contribution that also makes use of the correlation information is [Chli & Davison 2008]. There, correspondences are fused with prior information one by one being the first the most informative ones. As a result of integrating one feature, correlations make search regions for other features to greatly reduce, dropping the spurious risk. This work also allows multiple matching hypothesis to be evaluated, further increasing its strength against outliers.

Reducing the quadratic cost of the EKF-SLAM with respect to the state size has been one of the goals of SLAM research that has lead to interesting research. Information filters have taken advantage of the sparsity of the problem when presented in information form –dual of the covariance

#### 1.4. Aims and Contributions of this Thesis

---

form–, e.g. [Thrun *et al.* 2004, Eustice *et al.* 2005b]. Submapping-based techniques have also developed to cope with the complexity of the filtering-based SLAM estimation [Estrada *et al.* 2005]. EKF-based submapping has also been applied to the visual estimation case in [Clemente *et al.* 2007, Paz *et al.* 2008a, Piniés & Tardós 2008].

### 1.4 Aims and Contributions of this Thesis

As already commented, the main aim of this thesis is to develop models and methods fitting the projective nature of the camera under a Bayesian filtering framework. Extended Kalman Filter has been chosen as the main estimation tool, but most of the discussions and contributions of the thesis are not constrained to a particular filtering scheme. We have two reasons to use a plain Extended Kalman Filter in this thesis, in spite of its known drawbacks (basically, consistency and scalability problems). In first place, we believe that a correct projective modeling of the estimation problem will result in accuracy and robustness improvements of the estimation independently of the particular implementation used. So, once demonstrated its benefits in the basic estimation techniques, it is clear that more complex estimation algorithms will inherit them. As evidence of this, some of the most interesting work on visual filter-based estimation have made use of contributions from this thesis; e.g. [Clemente *et al.* 2007, Paz *et al.* 2008a, Piniés & Tardós 2008] regarding submapping; [Gee *et al.* 2007, Gee *et al.* 2008] regarding the introduction of high semantic level features; and [Williams *et al.* 2007, Williams *et al.* 2008] dealing with relocation and loop closure techniques.

Secondly, in spite of the reported consistency problems [Julier & Uhlmann 2001, Bailey *et al.* 2006, Castellanos *et al.* 2007] due to the non-fulfillment of linear-Gaussian assumptions, we will show in this thesis that consistent estimations can be achieved for medium-sized scenarios –e.g. a room–. In fact, we believe that violation of the linear-Gaussian assumptions is in many cases falsely accused when inconsistency appears. It will be evidenced in some results of this thesis that inconsistency issues are sometimes due to an incorrect modeling of the problem. Also, in spite of the well-known quadratic complexity of the EKF, it will be shown in this thesis that real-time at 30 fps estimation can be achieved for a sparse point map in a room-sized scenario. Some of the newly proposed EKF-based submapping techniques [Clemente *et al.* 2007, Paz *et al.* 2008a, Piniés & Tardós 2008] would reach real-time even for larger environments.

Finally, we find important to remark that another important consequence of this thesis is to expand the range of image sequences that can be processed by sequential filtering; from indoor sequences to –with the algorithms described– outdoor sequences, sequences where the camera performs

degenerate motion and uncalibrated sequences.

Going into more detail, the main contributions in this thesis are:

- **Points at Infinity and EKF-based Mosaicing [Civera *et al.* 2009b].**

In offline Structure From Motion methods it is well known that cameras, as projective sensors, are able to image very distant points, theoretically even points at infinity. Several illustrative examples can be taken from our daily lives: for example, we are able to see the stars even when they are several million light years away. Homogeneous coordinates have provided an algebraic manner to manipulate very distant points in SFM, being proved to be very useful to estimate camera orientation. As another example, we cannot estimate our position in the earth looking at the stars, but we can extract very precisely directions –where the North is– by looking at them.

Early visual filtering estimation techniques [Davison 2003] did not include distant points in estimation. Doing that, they were losing a rich source of information and limiting the use of cameras in outdoors scenarios where these type of features are rather common. First contribution of this thesis is a real-time algorithm that using only distant points is able to estimate camera orientation and a map of feature directions in a consistent way. Loop closures of  $360^\circ$  are achieved as a proof of consistency.

An EKF-based mosaicing algorithm has been developed that stitches image textures over the map of feature directions. This mosaicing algorithm directly inherits the advantages of the EKF, being to the knowledge of the author the first mosaicing technique that presents real-time drift-free spherical mosaics of  $360^\circ$ .

- **Inverse Depth Parameterization for Close and Distant Point Features [Montiel *et al.* 2006, Civera *et al.* 2007a, Civera *et al.* 2007b, Civera *et al.* 2008a].**

Next natural step to the rotation estimation with points at infinity was to unify close and distant –even infinity– point features into a unified coding. The key concept of the inverse depth coding proposed is direct parametrization of the inverse depth of features relative to the camera locations from which they were first viewed, which produces measurement equations with a high degree of linearity. Importantly, this parametrization can cope with features over a huge range of depths maintaining sufficient representative uncertainty that these points retain the opportunity to ‘come in’ smoothly from infinity if the camera makes larger movements.

#### 1.4. Aims and Contributions of this Thesis

---

Inverse depth coding solves the delayed feature initialization problem: points in initial monocular SLAM approaches must follow in early monocular SLAM algorithms a separated initialization procedure to acquire parallax enough to be properly modeled as a Gaussian, and then to be included in the main filter. Features initialized in that delayed manner would not contribute to the estimation until inserted into the filter. Inverse depth feature initialization is undelayed in the sense that even distant features are immediately used to improve camera motion estimates, acting initially as bearing references but not permanently labeled as such.

The inverse depth parametrization remains well behaved for features at all stages of SLAM processing, but has the drawback in computational terms that each point is represented by a six dimensional state vector as opposed to the standard three of a Euclidean XYZ representation. We show that once the depth estimate of a feature is sufficiently accurate, its representation can safely be converted to the Euclidean XYZ form, and propose a linearity index which allows automatic detection and conversion to maintain maximum efficiency — only low parallax features need be maintained in inverse depth form for long periods.

- **Camera-centered Estimation and 1-Point RANSAC for EKF-Based Structure from Motion [Civera *et al.* 2009c].**

This chapter has a double objective: first, it is aimed to illustrate for the first time how filtering-based visual SLAM methods, without adding submapping nor loop closure, can reach an accuracy and trajectory length comparable to keyframe methods. Specifically, a camera-centered Extended Kalman Filter is used to process a monocular sequence as the only input, with 6DOF motion estimated. Features are kept live in the filter while visible as the camera explores forward, and are deleted from the state once they go out of view.

This permits an increase in the number of tracked features per frame from tens to around a hundred. While improving the accuracy of the estimation, it makes computationally infeasible the exhaustive Branch and Bound search performed by standard JCBB for match outlier rejection. As the second contribution that overcomes this problem, we present here a RANSAC-like algorithm that exploits the probabilistic prediction of the filter. This use of prior information makes it possible to reduce the size of the minimal data subset to instantiate a hypothesis to the minimum possible of 1 point, greatly increasing the efficiency of the outlier rejection stage.

Experimental results from real image sequences covering trajectories of hundreds of meters are presented and compared against RTK GPS ground truth. Estimation errors are about 1% of the trajectory for

trajectories up to 650 metres.

- **Degenerate Camera Motion and Filter-based Model Selection [Civera *et al.* 2008b].**

Degenerate camera motions have a capital importance from a practical point of view of implementing real systems. If the camera is attached to a mobile robot, there will occur frequently that the robot is going to be stopped. Pure rotation motion is also very frequent in industrial robotic arms. Even in hand-held camera motion estimation, there will be periods where the camera is almost still, and rotations are more easily performed than large translations –particularly in outdoor environments.

Any estimation algorithm modeling a general camera motion in any of the above situations will fail. What happens is that image noise is interpreted by overparameterized models as part of the model, being estimated the unnecessary parameters based on this noise. SfM methods devote part of its bibliography to deal with this topic and propose model selection schemes when degenerate motion may be encountered. This schemes discriminate models based on two terms: a term based on the reprojection error, which basically discards simplistic models; and an ad hoc penalty term based on the complexity of the model that avoids selecting overparameterized models.

What we propose here is a model selection scheme that computes probabilities over models, based on research on model selection carried out by the tracking community. In a probability-based scheme, simplistic methods will receive low probabilities, but also overparameterized ones as their probability distribution function expands over unnecessary dimensions. Heuristic penalty terms are not needed anymore in the proposed approach.

- **Filter-Based Estimation from Uncalibrated Sequences [Civera *et al.* 2009a].**

SfM methods in the decade of the 90's were developed to estimate 3D structure from uncalibrated images, that is, images taken from cameras with unknown and possibly varying calibration parameters. It was also theoretically formalized under what conditions uncalibrated parameters could be estimated, stating the basis for camera self-calibration. Based on the evidence that autocalibration is possible, it is aimed in this thesis to develop real-time autocalibration algorithms under a filtering approach.

Camera models used in SfM autocalibration algorithms did not include non-projective lens effects, like radial distortion, that should be estimated in a posterior BA step. Models including radial distortion

#### **1.4. Aims and Contributions of this Thesis**

---

are of interest, as it has been proved that wide-angle cameras achieve better estimation results in SfM+BA algorithms and in filtering-based ones.



# Points at Infinity, Rotation Estimation and Mosaic Building

## Contents

---

<b>2.1</b>	<b>Introduction</b>	<b>13</b>
2.1.1	Points at Infinity	13
2.1.2	Real-Time EKF-based Mosaicing	14
<b>2.2</b>	<b>Related Work</b>	<b>16</b>
2.2.1	Image Mosaicing	16
2.2.2	SLAM	18
2.2.3	Off-line SfM vs. EKF SLAM	18
<b>2.3</b>	<b>Geometrical Modeling</b>	<b>20</b>
<b>2.4</b>	<b>Simultaneous Localization and Mapping</b>	<b>22</b>
<b>2.5</b>	<b>Meshing and Mosaicing</b>	<b>24</b>
2.5.1	Updating the Mesh	24
2.5.2	Tile Texture Mapping	25
<b>2.6</b>	<b>Experimental Results</b>	<b>25</b>
2.6.1	360° Pan and Cyclotorsion	26
2.6.2	Real-Time Mosaic Building	30
2.6.3	Processing Time	31
<b>2.7</b>	<b>Discussion</b>	<b>31</b>

---

## 2.1 Introduction

### 2.1.1 Points at Infinity

In SfM, the well-known concept of a point at infinity is a feature which exhibits no parallax during camera motion due to its extreme depth. A

star for instance would be observed at the same image location by a camera which translated through many kilometers pointed up at the sky without rotating. Such a feature cannot be used for estimating camera translation but is a perfect bearing reference for estimating rotation. Homogeneous coordinates, used in SfM, allow explicit representation of points at infinity, and they have proven to play an important role during off-line structure and motion estimation.

The first of the contributions in this chapter is a real-time EKF filtering algorithm for consistently estimating the motion of a rotating camera observing such points at infinity. This algorithm introduces the use of infinity points in filtering SfM approaches, stepping forward to the use of those algorithms in outdoors environments where low-parallax features are very common. This step is culminated in next chapter with a unified parameterization for close and distant –even infinity– points. Here, the accuracy and consistency of the estimated camera rotation and feature map is shown in 360° loop closures experiments using real-image sequences.

### 2.1.2 Real-Time EKF-based Mosaicing

The second novel contribution is to use the consistent map of point features as the basis for a real-time, drift-free mosaicing system. We believe that this is the first algorithm which can build drift-free mosaics over the whole view-sphere in seamless real-time: no expensive backtracking, batch optimization or learning phase is required, and arbitrarily long image sequences can be handled without slow-down.

Mosaicing involves accurately aligning a set of overlapping images based on correspondences, normally between automatically-detected salient features. While mosaicing does not require full 3D camera motion and scene structure to be estimated, it can be considered as a reduced SfM problem since it has the key requirements of simultaneously solving for camera pose (in this case rotation) and feature locations (in this case directions without a depth coordinate). Many different approaches to mosaicing have been published, being the most relevant for our work summarized in section 2.2. All are based on pair-wise image matching to estimate local camera motion. Those which aim to operate sequentially and in real-time simply concatenate multiple motion estimates and are prone to drift as errors accumulate. Those whose goal is globally consistent mosaics have a final off-line optimization step which re-adjusts the motion estimates to bring them into consensus.

As key difference from previous works, image alignment is based here on a filtering scheme. Under this approach, it is built a persistent, *probabilistic* representation of the state of the sensor and scene map which evolves in response to motion and new sensor measurements. Specifically, it is used an Extended Kalman Filter (EKF) with a state vector consisting of stacked parameters representing the 3D orientation and angular velocity of the cam-

## 2.2. Related Work

---

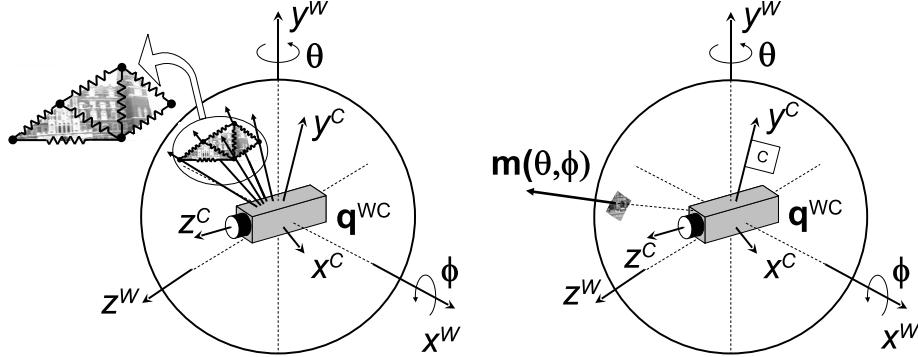


Figure 2.1: Left, An elastic textured triangular mesh is built over a map of scene directions over the unit sphere. Right a scene feature,  $\mathbf{y}_i^W$ , stamped with its texture patch.

era and the directions (i.e. viewsphere coordinates, since no depth can be estimated for the scene points) of a set of automatically acquired features, none of which need to be known in advance.

As a brief summary of the complete mosaicing algorithm, we take first the image stream from a rotating camera, build an efficient, persistent SLAM map of infinite points — *directions* mapped onto the unit sphere — and use these as the anchor points of a triangular mesh, built sequentially as the map eventually covers the whole viewsphere (see Figure 2.1.) Every triangle in the mesh is an elastic tile where scene texture is accumulated to form a mosaic. As each new image arrives, the probabilistic map of infinite points is updated in response to new measurements and all the texture tiles are re-warped accordingly. So, every measurement of a point potentially improves *the whole mosaic*, even parts not currently observed by the camera thanks to probabilistic knowledge of the correlations between estimates of different features. This attribute is especially valuable when a loop is closed because the whole map benefits from a large correction, removing drift.

The following chapter is organised as follows: After a literature review and comparison between off-line and sequential approaches in section 2.2; section 2.3 covers the essentials of the EKF estimation of infinite points and camera rotation. Section 2.4 describes how features are added to or removed from the map. Section 2.5 is devoted to the mesh for the mosaic given a map of feature directions. Finally experimental results and discussion are presented in Sections 2.6 and 2.7.

## 2.2 Related Work

### 2.2.1 Image Mosaicing

Mosaicing is the process of stitching together data from a number of images, usually taken from a rotating camera or from a translating camera observing a plane, in order to create a composite image which covers a larger field of view than the individual views. While a variety of approaches have been published for matching up sets of overlapping images with a high degree of accuracy, all have relied on off-line optimization to achieve global consistency. Other previous methods which operate sequentially in a pair-wise manner and in real-time suffer from the accumulation of drift.

Mosaic building requires estimates of the relative rotations of the camera when each image was captured. Classically, the computation of such estimates has been addressed as an off-line computation, using pair-wise image matching to estimate local alignment and then global optimization to ensure consistency. The goal has normally been to produce visually pleasing panoramic images and therefore after alignment blending algorithms are applied to achieve homogeneous intensity distributions across the mosaics, smoothing over image joins. We focus here only on the alignment part of the process, achieving registration results of quality comparable to off-line approaches but with the advantage of sequential, real-time performance. Blending or other algorithms to improve the aesthetic appearance of mosaics could be added to our approach straightforwardly, potentially also running in real-time.

Szeliski and Shum in [Szeliski & Shum 1997] presented impressive spherical mosaics built from video sequences, explicitly recognizing the problem of closing a loop when building full panoramas (from sequences consisting of a single looped pan movement). However, their method needed manual detection of loop closing frames. The non-probabilistic approach meant that the misalignment detected during loop closing was simply evenly distributed around the orientation estimates along the sequence.

Sawhney et al. [Sawhney *et al.*] tackled sequences with more complicated zig-zag pan motions, requiring a more general consideration of matching frames which were temporally distant as loops of various sizes are encountered. Having first performed pairwise matching of consecutive images they could estimate an approximate location for each image in the sequence. This was followed by an iterative hypotheses verification heuristic, applied to detect matching among geometrically close but temporally distant images to find the topology of the camera motion, and then finally global optimization. Both [Szeliski & Shum 1997] and [Sawhney *et al.*] use whole image intensities without feature detection for the optimization.

Capel and Zisserman in [Capel & Zisserman 1998] proposed methods based on matching discrete features; RANSAC is applied to detect outlier-

## 2.2. Related Work

---

free sets of pairwise matches among the images. A global bundle adjustment optimization produces the final mosaic, achieving super-resolution. Agapito et al. [de Agapito *et al.* 2001] also used robust feature matching to perform self-calibration and produce mosaics from sequences from a rotating and zooming camera.

Brown and Lowe in [Brown 2003] considered the problem of mosaicing not video sequences but sets of widely separated, uncalibrated still images. Their method used SIFT features to perform wide-baseline matching among the images, and automatically align them into a panorama, optimizing over the whole set for global consistency using bundle adjustment.

The recent work of Steedly et al. [Steedly *et al.* 2005] is perhaps closest to the presented approach because it explicitly considers questions of computational cost in efficiently building mosaics from long video sequences (on the order of a thousand frames), though not arriving at real-time performance. The key to efficient processing in their system is the use of automatically assigned key-frames throughout the sequence — a set of images which roughly span the whole mosaic. Each frame in the sequence is matched against the nearest keyframes as well as against its temporal neighbors. In fact, the idea of building a persistent map of keyframes as the backbone of the mosaic can be thought of as very similar to [Klein & Murray 2007, Klein & Murray 2008] in the case of SfM estimation under general motion, where global optimisation is applied to a sparse set of keyframes that summarise the viewed scene.

To our knowledge, up to now mosaicing algorithms which truly operate in real-time have been much more limited in scope. Several authors have shown that the straightforward approach of real-time frame to frame image matching can produce mosaics formed by simply concatenating local alignment estimates. Marks et al. [Marks *et al.* 1995] presented a real-time system for mosaicing underwater images using correlation-based image alignment, and Morimoto and Chellappa a system based on point feature matching which estimated frame-to-frame rotation at 10Hz [Morimoto & Chellappa ]. It should be noted that while Morimoto and Chellappa used the EKF in their approach, the state vector contained only camera orientation parameters and not the locations of feature points as in our SLAM method.

The clear limitation of such approaches to real-time mosaicing is that inevitable small errors in frame to frame alignment estimates accumulate to lead to misalignments which become especially clear when the camera trajectory loops back on itself — a situation our SLAM approach can cope with seamlessly.

Some recent approaches have attempted to achieve global consistency in real-time by other means — Kim and Hong [Kim & Hong 2006] demonstrated sequential real time mosaic building by performing ‘frame to mosaic’ matching and global optimization at each step. However, this approach is limited to small-scale mosaics because the lack of a probabilistic treatment

means that the cost of optimization will rise over time as the camera continues to explore. Zhu et al. [Zhu *et al.* 2006] on the other hand combine a frame to frame alignment technique with an explicit check on whether the current image matches to the first image of the sequence, detection of which leads to the correction of accumulated drift. Again, the method is not probabilistic and works only in the special case of simple panning motions.

### 2.2.2 SLAM

The standard approach to SLAM is to use a single Gaussian state vector and covariance to represent stacked sensor and feature estimates and to update this with the Extended Kalman Filter (EKF) — this approach was called the ‘stochastic map’ when proposed initially by Smith and Cheeseman in [Smith & Cheeseman 1986]. It has been widely used in mobile robotics with a range of different sensors; odometry, laser range finders, sonar, and vision among others (e.g. [Castellanos & Tardós 1999, Feder *et al.* 1999, Ortín *et al.* 2003]). This amounts to a rigorous Bayesian solution in the case that the sensor and motion characteristics of the sensor platform in question are governed by linear processes with Gaussian uncertainty profiles — conditions which are closely enough approximated in real-world systems for this approach to be practical in most cases, and in particular for small-scale mapping.

Visual sensing has been relatively slow to come to the forefront of robotic SLAM research. Davison and Murray [Davison & Murray 1998] implemented a real-time system where a 3D map of visual template landmarks was build and observed using fixating stereo vision. Castellanos et al. [Castellanos *et al.* 1994] built a 2D SLAM system combining straight segments from monocular vision and odometry, and trinocular straight segments and odometry. In [Davison 2003] Davison demonstrated 3D SLAM using monocular vision as the only sensor, also using a smooth motion model for the camera to take the place of odometry this system exhibited unprecedented demonstrable real time performance for general indoors scenes observed with a low cost hand-held camera. After this seminal work, many other interesting 3D SLAM systems which rely only on visual sensing started to emerge (e.g. [Eustice *et al.* 2005a, Kim & Sukkarieh 2003, Jung & Lacroix 2003]).

### 2.2.3 Off-line SFM vs. EKF SLAM

In order to directly compare the previous off-line approaches to mosaicing with our sequential one, we will focus on methods which rely on discrete feature matching. The off-line approaches generally match features between images in a pairwise fashion (usually between temporal neighbours) and then perform a final global bundle adjustment optimization to achieve good

## 2.2. Related Work

---

drift-free solutions.

In our sequential approach, scene structure — a set of selected points we call a map — and the camera motion are estimated by iterating the following steps:

1. Predict the locations of *all* the map features in the next image, along with a gated search region for each. The information from all previous images is implicitly accumulated in this state-based prediction and this leads to tight search regions.
2. Use template matching to exhaustively search for the feature match only within its search region.
3. Update estimates of the locations of *all* the mapped features and the current camera location.
4. Map maintenance, adding new features when new scene areas are explored and marginalizing out features predicted to be visible but persistently not matched.

The resulting sparse set of map features, autonomously selected and matched has — when compared with ‘first match and then optimize’ approaches — the following desirable qualities for producing consistent mosaics:

**Long tracks** — Only features persistently observed when predicted to be visible are kept in the map, and are allowed to build up immunity to future deletion. Highly visible and identifiable features tend to live on in this process of ‘survival of the fittest’.

**Loop closing tracks** — When the camera revisits an area of the scene previously observed, it has the natural ability to identify and re-observe ‘old’, loop closing, features seamlessly.

To achieve the highest accuracy in every update of a scene map after matching image features, the update step should ideally be done using an iterative non-linear bundle adjustment optimization, but this would be prohibitively expensive. Instead of that, the EKF can serve as a sequential approximation to bundle adjustment. Update by bundle adjustment after processing every single image means a non linear optimization for *all camera locations* and all scene features, so processing long image sequences results in an increasing number of camera locations and hence an increasing dimension for the bundle adjustment of  $(3m_k + 2n_k)$ , where  $m_k$  is the number of images, and  $n_k$  is the number of scene points. Also, calculating search regions requires the inversion of a matrix of dimension  $3m_k + 2n_k$  to compute the estimation covariance.

To compare the EKF with bundle adjustment, it should be considered that, as stated in [Triggs *et al.* 2000], the EKF is a sequential approximation to bundle adjustment where:

1. A motion model is included to relate one camera location with the next.
2. The EKF is just bundle adjustment’s first half-iteration because only the most recent camera location is computed. The estimated state is reduced, subsuming all historic camera location estimates in the feature covariance matrix. The estimated state, dimension  $(7 + 2n_k)$ , is composed of the last camera pose and all map features. In our model the camera state vector has dimension 7: an orientation quaternion and 3D angular velocity.
3. At each step, information about the previous camera pose is marginalized out. In doing so, linearization for previous camera poses is not computed as in the optimal solution, and hence linearization errors will remain in the covariance matrix. However, mosaicing with a rotating camera is a very constrained, highly linear problem, so the results that can obtain in real-time are highly accurate, only falling a little short of the result a full optimization would produce.

## 2.3 Geometrical Modeling

We start the exposition of our method by explaining the mathematical models used for features, camera motion and the measurement process, before proceeding in Section 2.4 to the EKF formulation. The estimation scheme presented was first proposed in [Montiel & Davison 2006], being its real-time implementation and application to mosaicing published in [Civera *et al.* 2009b].

**Feature Model** Feature points are modeled by storing both geometric and photometric information (see Figure 2.1). Geometrically, the feature’s direction relative to world frame  $W$  is parameterized as an angular azimuth/elevation pair:

$$\mathbf{y}_i^W = (\theta_i \quad \phi_i)^\top. \quad (2.1)$$

To represent each infinite point photometrically, a texture patch of fixed size is extracted and stored when the point is imaged for the first time. This patch is used for correlation-based matching.

**Camera Motion Model** It is assumed that the camera translation is small compared with actual feature depths — true for any camera on a tripod, or well approximated by a camera rotated in the hand outdoors. The real-world camera dynamics are modeled as a smooth angular motion: specifically a ‘constant angular velocity model’, which states that at each time-step an unknown angular acceleration impulse drawn from a zero-mean

### 2.3. Geometrical Modeling

---

Gaussian distribution is received by the camera. The camera state vector is:

$$\mathbf{x}_v = \begin{pmatrix} \mathbf{q}^{WC} \\ \omega^C \end{pmatrix}, \quad (2.2)$$

where  $\omega^C$  is the angular velocity and  $\mathbf{q}^{WC}$  is a quaternion defining orientation. See Figure 2.1.

At every time-step, an angular acceleration  $\alpha^C$  having zero mean and fixed diagonal ‘process noise’ covariance matrix  $\mathbf{P}_\alpha$  is assumed to affect the camera’s motion. Therefore at each processing step of duration  $\Delta t$  the camera receives an impulse of angular velocity:  $\Omega^C = \alpha^C \Delta t$ .

So the state update equation is:

$$\mathbf{f}_v(\mathbf{x}_v, \mathbf{n}) = \begin{pmatrix} \mathbf{q}_{new}^{WC} \\ \omega_{new}^C \end{pmatrix} = \begin{pmatrix} \mathbf{q}^{WC} \times \mathbf{q} ((\omega^C + \Omega^C) \Delta t) \\ \omega^C + \Omega^C \end{pmatrix} \quad (2.3)$$

**Measurement Model** We consider first the projection of infinite points in a standard perspective camera. The camera orientation  $\mathbf{q}^{WC}$  in the state vector defines the rotation matrix  $R^{CW}$ . So the coordinates of a point  $\mathbf{y}^W = (\theta \ \phi)^T$  on the unit sphere  $\mathbf{m}$  expressed in frame  $C$  are:

$$\mathbf{m}^C = R^{CW} \begin{pmatrix} \cos \phi \sin \theta & -\sin \phi & \cos \phi \cos \theta \end{pmatrix}^T \quad (2.4)$$

The image coordinates where the point is imaged are obtained applying the pinhole camera model to  $\mathbf{m}^C$ :

$$\mathbf{h}(\mathbf{m}^C) = \begin{pmatrix} u_u \\ v_u \end{pmatrix} = \begin{pmatrix} u_0 - \frac{f}{d_x} \frac{\mathbf{m}_x^C}{\mathbf{m}_z^C} \\ v_0 - \frac{f}{d_y} \frac{\mathbf{m}_y^C}{\mathbf{m}_z^C} \end{pmatrix}, \quad (2.5)$$

where  $u_0, v_0$  define the camera’s principal point,  $f$  is the focal length and  $d_x$  and  $d_y$  define the size of a pixel.

Finally, a distortion model has to be applied to deal with real camera lenses. In this work we have used the standard two parameter distortion model from photogrammetry [Mikhail *et al.* 2001], which is described next.

To recover the ideal projective undistorted coordinates  $\mathbf{h}_u = (u_u, v_u)^T$ , from the actually distorted ones gathered by the camera,  $\mathbf{h}_d = (u_d, v_d)^T$ , the classical two parameters radial distortion model [Mikhail *et al.* 2001] is applied:

$$\begin{pmatrix} u_u \\ v_u \end{pmatrix} = \mathbf{h}_u \begin{pmatrix} u_d \\ v_d \end{pmatrix} = \begin{pmatrix} u_0 + (u_d - u_0)(1 + \kappa_1 r_d^2 + \kappa_2 r_d^4) \\ v_0 + (v_d - v_0)(1 + \kappa_1 r_d^2 + \kappa_2 r_d^4) \end{pmatrix}$$

$$r_d = \sqrt{(d_x(u_d - u_0))^2 + (d_y(v_d - v_0))^2} \quad (2.6)$$

Where,  $u_0, v_0$  are the image center and,  $\kappa_1, \kappa_2$  are the radial distortion coefficients.

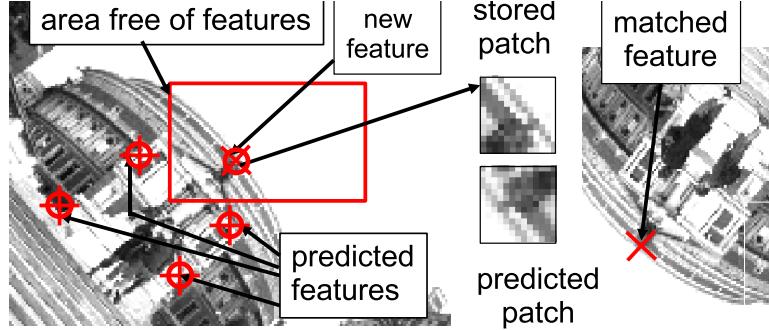


Figure 2.2: New features initialization and patch prediction.

To compute the distorted coordinates from the undistorted:

$$\begin{pmatrix} u_d \\ v_d \end{pmatrix} = \mathbf{h}_d \begin{pmatrix} u_u \\ v_u \end{pmatrix} = \begin{pmatrix} u_0 + \frac{(u_u - u_0)}{(1 + \kappa_1 r_d^2 + \kappa_2 r_d^4)} \\ v_0 + \frac{(v_u - v_0)}{(1 + \kappa_1 r_d^2 + \kappa_2 r_d^4)} \end{pmatrix} \quad (2.7)$$

$$r_u = r_d (1 + \kappa_1 r_d^2 + \kappa_2 r_d^4) \quad (2.8)$$

$$r_u = \sqrt{(d_x (u_u - u_0))^2 + (d_y (v_u - v_0))^2} \quad (2.9)$$

$r_u$  is readily computed from (214), but  $r_d$  has to be numerically solved from (213), e.g. using Newton-Raphson, hence (212) can be used to compute the distorted point.

## 2.4 Simultaneous Localization and Mapping

The algorithm to estimate camera rotation and scene point directions follows the standard EKF loop [Bar-Shalom & Fortmann 1988] of prediction based on the motion model (Equation 2.3), and measurement (Equation 210). All the estimated variables (the camera state  $\mathbf{x}_v$  and all the estimated feature directions  $\mathbf{y}_i^W, i = 1 \dots, n$ ) are stacked in a single state vector  $\mathbf{x} = (\mathbf{x}_v^\top \ \mathbf{y}_1^\top \ \dots \ \mathbf{y}_n^\top)^\top$  with corresponding covariance  $\mathbf{P}$  representing Gaussian-distributed uncertainty. Crucial to the method is the usage of the measurement prediction to actively guide matching. Next we explain in detail the matching process, the initialization of system state and feature initialization and deletion.

**Matching** Every predicted measurement of a feature in the map,  $\hat{\mathbf{h}}_i$ , and its corresponding innovation covariance,  $\mathbf{S}_i$ , define an gated elliptical acceptance image region where the feature should lie with high probability. In our experiments, defining acceptance regions at 95% probability typically produce ellipses of diameter 10–20 pixels.

## 2.4. Simultaneous Localization and Mapping

---

The first time a feature is observed, we store both a texture patch and the current camera orientation. When that feature is later selected for measurement after camera movement, its predicted texture patch from the current camera orientation is synthesized via a warping of the original patch. This permits efficient matching of features from any camera orientation without the need for invariant feature descriptors. Figure 2.2 shows an example of the stored and predicted patches. Further details of the warping algorithm can be found in section 3.7.1 of the present document.

Search for a feature during re-measurement is carried out by calculating a normalized correlation score for every possible patch position lying within the search region. The position with the highest score, providing the match score is above a threshold, is considered to be matching measurement  $\mathbf{h}_i$ .

**State Initialization** We initialize the state of the camera with zero rotation — its initial pose defines the world coordinate frame, and therefore we also assign zero uncertainty to initial orientation in the covariance matrix. The angular velocity estimate is also initialized at zero, but a high value is assigned to  $\sigma_\Omega$ , in our case  $\sqrt{2}$  rad/sec, in order to deal with an initial unknown velocity. This is a remarkable system characteristic: the map can be initialized from a camera which is already rotating. In fact in the experiments, the camera was already rotating when tracking commenced.

**Feature Initialization and Deletion** When a new image is obtained, if the number of features predicted to be visible inside the image goes below a threshold, in our case around 15, a new feature is initialized. A rectangular area without features is selected randomly in the image, and searched for a single salient point by applying the Harris detector [Harris & Stephens 1988]. Figure 2.2 shows an initialization example.

This simple rule means that at the start of tracking the field of view is quickly populated with features which tend to be well-spaced and covering the image. As the camera rotates and some features go out of view, it will then demand that new features are initialized — but if regions of the viewsphere are revisited, new features will not be added to the map since old features (still held in the state vector) are simply re-observed.

When an initial measurement of a new feature is obtained, the state vector is expanded with the new feature estimate  $\hat{\mathbf{y}}_j^W$ . Defining  $\mathbf{R}_j$  the image measurement noise covariance, the covariance matrix is expanded as follows:

$$\begin{aligned}\mathbf{P}_{new} &= \mathbf{J} \begin{pmatrix} \mathbf{P} & 0 \\ 0 & \mathbf{R}_j \end{pmatrix} \mathbf{J}^\top \\ \mathbf{J} &= \left( \frac{I}{\mathbf{J}_1} \right), \quad \mathbf{J}_1 = \left( \frac{\partial \mathbf{h}_i^{-1}}{\partial \mathbf{x}_v}, 0, \dots, \frac{\partial \mathbf{h}_i^{-1}}{\partial \mathbf{z}_i} \right)\end{aligned}$$

Features with a low successes/attempts ratio in matching — in practice 0.5 — are deleted from the map if at least 10 matches have been attempted. This simple map maintenance mechanism allows deletion of non-trackable features — for example those detected on moving objects or people. Non persistent static scene features (for instance caused by reflections) are also removed.

## 2.5 Meshing and Mosaicing

At any step  $k$  we have available a map of infinite points:

$$\mathcal{Y}^k = \{\mathbf{y}_i^W\}, \quad i = 1 \dots n_k. \quad (2.10)$$

After processing every image, the location estimate of *every* point in the map is updated and hence changed. Additionally, on each step some map points might be deleted or added as new.

The mosaics we build are made up of a set of textured elastic triangular tiles attached to the map of infinite points. A mesh triangle  $T_j$  is defined as:

$$T_j = \{j_1, j_2, j_3, \text{TX}_j\}, \quad (2.11)$$

where  $\{j_1, j_2, j_3, \}$  identify the map points to which the triangle is attached and  $\text{TX}_j$  defines the triangle texture. The triangle is termed as *elastic* because the location estimates of the points to which it is attached are updated at every step, and hence the triangle and texture are deformed accordingly.

The triangular mesh mosaic at step  $k$  is defined as:

$$\mathcal{M}^k = \{T_j^k\}, \quad j = 1 \dots m_k. \quad (2.12)$$

### 2.5.1 Updating the Mesh

As the map is updated at every step, the mosaic has to be updated sequentially as well. The mosaic update consists of updating the elastic triangles, and potential deletion and creation of triangles.

Figure 2.3 summarizes the algorithm to sequentially update the mosaic  $\mathcal{M}^{k-1}$  into  $\mathcal{M}^k$ . After processing image  $k$ , the map  $\mathcal{Y}^k$  is available. A spherical Delaunay triangulation  $\mathcal{D}^k$  for the map  $\mathcal{Y}^k$  points is computed using Renka's [Renka 1997] algorithm:

$$\mathcal{D}^k = \{D_l^k\}, \quad (2.13)$$

where every triangle  $D_l^k = \{l_1, l_2, l_3\}$  is defined by the corresponding 3 map features. The complexity of the triangulation is  $O(n_k \log n_k)$  where  $n_k$  is the number of map features. The triangles which will be included in  $\mathcal{M}^k$

## 2.6. Experimental Results

---

**Input data:**  $\mathcal{M}^{k-1}$ ,  $\mathcal{Y}^k$ , image at step  $k$ .

**Output data:**  $\mathcal{M}^k$ .

**Algorithm:**

1.-  $\mathcal{D}^k = \{D_l^k\}$ , Spherical Delaunay triangulation.

2.-  $\mathcal{M}^k$  is a subset of  $\mathcal{D}^k$ . Every  $D_l^k$  is classified as:

**Elastically updated triangle:**  $D_l^k$  already in  $\mathcal{M}^{k-1}$ , but not in  $\mathcal{M}^k$ . If visible in current image, the tile texture can be updated.

**New and visible:**  $D_l^k$  not in  $\mathcal{M}^{k-1}$  and the visible in image  $k$ .  $D_l^k$  is included in  $\mathcal{M}^k$ . Texture is gathered from image  $k$ .

**New but not visible:**  $D_l^k$  not in  $\mathcal{M}^{k-1}$  but not fully visible in image  $k$ . It is not added to  $\mathcal{M}^k$ .

Figure 2.3: Triangular mosaic update algorithm.

are a subset of the triangles in the full triangulation  $\mathcal{D}^k$ . Every triangle  $D_l^k$  in  $\mathcal{D}^k$  is classified to determine its inclusion in  $\mathcal{M}^k$  mosaic according to the algorithm described in Figure 2.3: triangles are either carried over from the previous mosaic or newly created if texture can be immediately captured from the current image. Notice that triangles in  $\mathcal{M}^{k-1}$  but not in  $D_l^k$  (due to a change in mesh topology) are deleted. Figure 2.4 illustrates with an example the different cases in the triangular mesh mosaic update.

### 2.5.2 Tile Texture Mapping

The three points defining a triangular tile are positions on a unit sphere. The texture to attach to each tile is taken from the region in the image between projections of these three vertices. In a simple approach to mosaic building, the triangles could be approximated as planar, and the mosaic surface a rough polyhedral. However better results can be achieved if the triangular tile is subdivided into smaller triangles that are backprojected over the spherical mosaic surface. Additionally, the camera radial distortion is better compensated by the subtriangles. Figure 2.5 illustrates the improvement due to the division of a triangular tile into subtriangles.

## 2.6 Experimental Results

We present experiments demonstrating sequential mosaic building using images acquired with a low cost Unibrain IEEE1394 camera with a  $90^\circ$  field of view and  $320 \times 240$  monochrome resolution at 30 fps. The first experiment shows the result from a sequence taken from a hand-held camera performing a  $360^\circ$  pan and cyclotorsion rotation — this early experiment performed offline in a Matlab implementation. The second experiment shows results

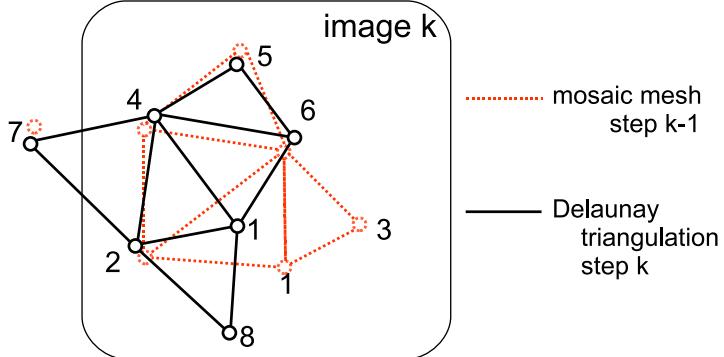


Figure 2.4: Mesh update example. Triangle {456} is elastically updated. {128} new and visible: created because of new map point 8. {247} new not visible; the triangle was not in  $\mathcal{M}^{k-1}$ , but it is not totally visible in image  $k$ . {136} is deleted as map point 3 is removed. Points 1, 2, 4 and 6 are kept in the map but a significant change in the estimated position of point 1 has caused the triangulation to ‘flip’, so, {126}, {246} are deleted, while {124}, {146} are new and visible.

obtained in real-time in a full C++ implementation with the more sophisticated sub-triangle mosaicing method. Both sequences were challenging because there were pedestrians walking around, and the camera’s automatic exposure control introduced a great deal of change in the image contrast and brightness in response to the natural illumination conditions.

### 2.6.1 360° Pan and Cyclotorsion

The hand-held camera was turned right around about 1.5 times about a vertical axis, so that the originally-viewed part of the scene came back into view in ‘loop closure’. Care was taken to ensure small translation, but relatively large angular accelerations were permitted and the camera rotated significantly about both pan and cyclotorsion axes.

Figure 2.6 shows selected frames showing the search region for every predicted feature and the matched observations. The frames we show are at the beginning of the sequence, at loop closure and during the camera’s second lap. At the loop closure, we can see that of the first two re-visited features, one was not matched immediately and the other was detected very close to the limit of its search region. However, in the following frames most of the re-visited features were correctly matched despite the challenging illumination changes. It should be noticed that the loop is closed seamlessly by the normal sequential prediction-match-update process, without need any additional steps — no back-tracking or optimization. The mosaic after processing all the images is also shown.

We believe that the seamless way that loop closing is achieved is in itself a very strong indication of the achieved angular estimation accuracy with

## 2.6. Experimental Results

---

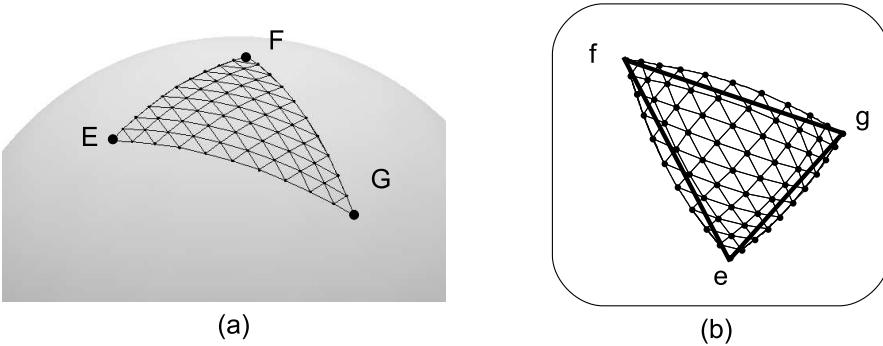


Figure 2.5: (a) Triangular tile defined by map points E,F,G, meshed as subtriangles represented over the unit sphere. (b) Shows the backprojection in the image; notice how the subtriangles also compensate the radial distortion.

this algorithm. The predictions of feature positions just before redetection at loop closure only differ from their true values by around 6 pixels (corresponding to less than 2 degrees) when the camera has moved through a full  $360^\circ$ . After loop closing and the correction this forces on the map, this error is significantly improved. On the second lap, where the rotation of the camera takes it past parts of the scene already mapped, previously observed features are effortlessly matched in their predicted positions, the map having settled into a satisfyingly consistent state.

It is worth noting the effect that loop closing has on the mesh, and hence on the mosaic. Figure 2.7 displays superimposed all of the meshes for the 90 steps before the loop closure (we plot one in every five steps in red), along with meshes for the 90 steps after the loop closure (plotted in green). Every sequential step improves our estimates of the locations of all the map features, but in a loop closure step the improvement is much greater. As the initial camera orientation is chosen to be the base reference, the first features in the map are very accurately located (with respect to the first camera frame). These features' locations are hardly modified by the loop closure, but all other parts of the mesh are updated significantly. We particularly draw attention to an area of the mesh  $180^\circ$  opposite the loop closure point, where the feature estimates and therefore the mesh are noticeably modified in the update corresponding to loop closure thanks to the correlation information held in covariance matrix, despite the fact that these features are not observed in any nearby time-step.

Figure 2.7 also shows graphs of the estimate history for the two magnified features, along with the standard deviation in their elevation angles. The feature far from the loop close area clearly shows a loop closing correction and covariance reduction. The feature observed at the start of the sequence shows almost no loop closing effect because it was observed when the camera

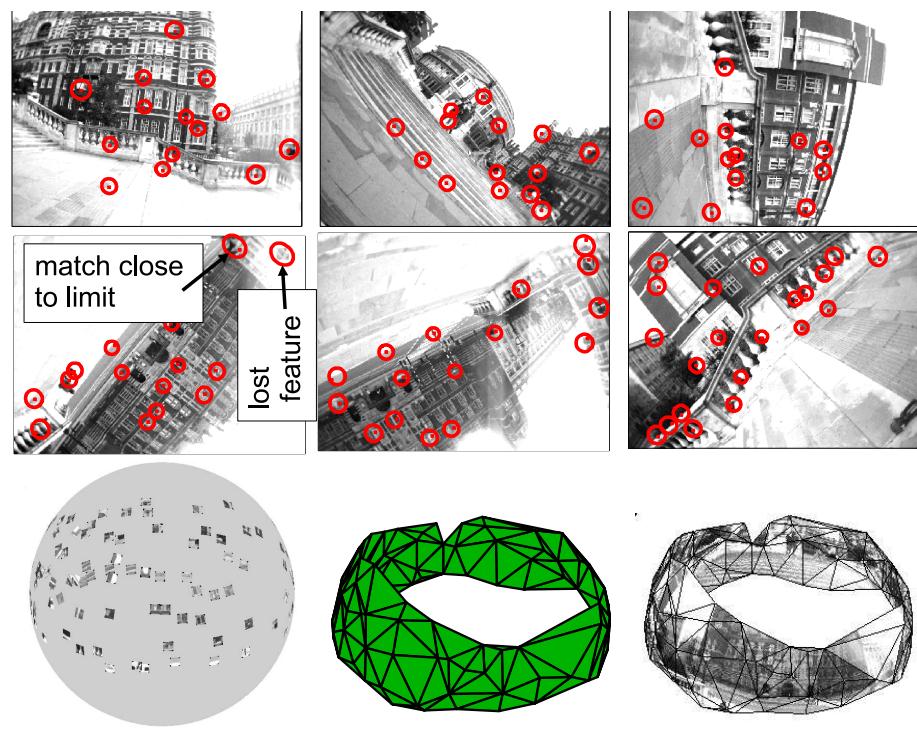


Figure 2.6:  $360^\circ$  pan and cyclotorsion. Top left: first image in sequence. The first image on the second row is at the loop closure point; notice the challenging illumination conditions. Third row: unit sphere with feature patches, triangular mesh and simple texture.

## 2.6. Experimental Results

---

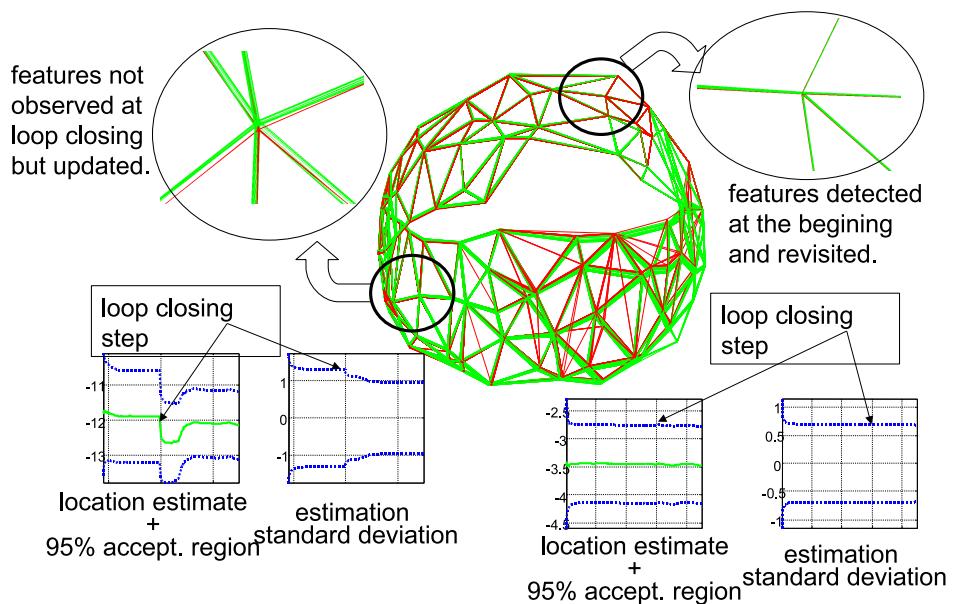


Figure 2.7: Superimposed meshes for 90 frames before loop closure (red) and 90 frames after loop closure (green). The part of the mesh opposite the loop closure is magnified at the left of the figure. The first features detected in the map are magnified at the right of the figure. We also show the camera elevation estimation history along with its standard deviation; notice the uncertainty reduction at loop closure.

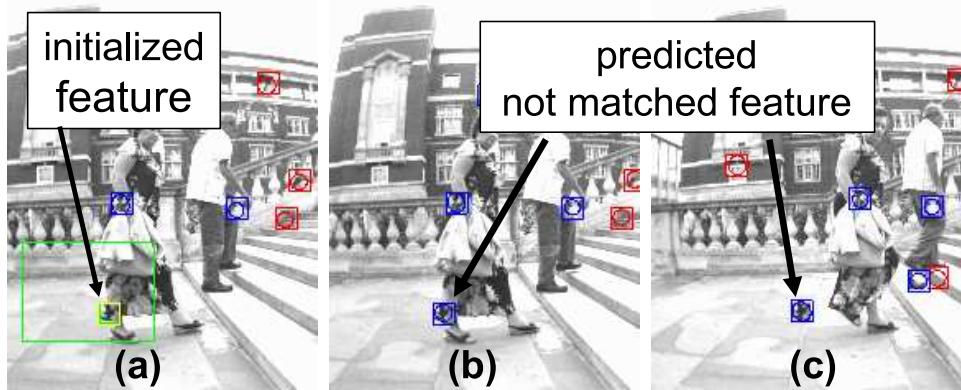


Figure 2.8: (a) Feature initialized on a moving object. (b) after 1 and (c) 10 frames, the feature is no longer matched because it is outside its acceptance region. Eventually this non matching feature is deleted from the map.

location had low uncertainty.

### 2.6.2 Real-Time Mosaic Building

A version of the system has been implemented in C++ achieving real time performance at  $320 \times 240$  pixels resolution, 30 frames/second. We show results from a  $360^\circ$  pan rotation and map size of around a hundred features.

Figure 2.9 shows the evolution of the mosaic. We focus on the texture alignment at loop closure. Figures 2.9(g) and 2.9(i) display two magnified mosaic views close to the loop closure. In each magnified view, the left-hand part of the mosaic seen got its texture from a frame at the beginning of the sequence while the right area got texture from a frame after the loop closure (frames nearly a thousand images apart). The excellent texture alignment achieved is an indicator of the advantages of our sequential SLAM approach to mosaic building. No blending technique has been applied to reduce the seam effects.

Figure 2.8 shows an example of robustness with respect to moving objects. A feature was initialized on the skirt of a walking pedestrian. As the feature corresponds to a moving object, after some time it is no longer matched *inside* the acceptance region, and finally it is deleted from the map. It is also important to remark that no outlier rejection technique – like RANSAC or JCBB – was used here to detect the false match, being its rejection only due to the restricted search inside the gated 95% probability region.

### 2.6.3 Processing Time

Real-time experiments were run on a 1.8 GHz Pentium laptop with OpenGL accelerated graphics card. In a typical run, we might have: a) 70 map features, implying a state vector dimension of  $7 + 70 \times 2 = 147$ . b) 15 features measured per frame, implying a measurement vector dimension of  $15 \times 2 = 30$ . c) 30 fps, so 33.3 ms available for processing. d) Process noise with standard deviation  $4\text{rad s}^{-2}$  modeling expected angular accelerations.

Under these conditions, an approximate breakdown of typical processing time 21.5ms per frame is as follows: a)Image acquisition 1 ms. b) EKF prediction 3 ms. c) Image matching 2 ms. d) EKF update 10 ms. e), f) Delaunay triangulation 0.5 ms. g) Mosaic update 5ms.

The remaining time processing is used for the graphics functions, scheduled at low priority, so a graphics refresh might take place every two or three processed images.

It should be noticed that the computational complexity of the EKF updates is of order  $O(N^2)$ , where  $N$  is the number of map features. The Delaunay triangulation step has complexity of order  $O(N \log N)$ , while updating the triangles of the mosaic currently has order  $O(N^2)$  (since each triangle is compared with every other one, though it should be possible to improve this). In our algorithm the EKF update dominates the computational cost. It should be noticed that within the bounds of a spherical mosaicing problem (where the whole viewsphere can be mapped with on the order of 100 features) the complexity is well within practical limits for a standard laptop.

## 2.7 Discussion

A mosaic built from an elastic triangular mesh sequentially built over a EKF SLAM map of points at infinity inherits the advantages of the sequential SLAM approach: probabilistic prior knowledge management through the sequence, sequential updating, real-time performance and consistent loop closing.

The experimental results presented using real images from a low cost camera display the validity of the approach in a challenging real scene with jittery hand-held camera movement, moving people and changing illumination conditions. Real-time seamless loop closing is demonstrated, removing all the drift from rotation estimation and allowing arbitrarily long sequences of rotations to be stitched into mosaics: the camera could rotate all day and estimates would not drift from the original coordinate frame as long as the high-quality features of the persistent map could still be observed. We think that as well as its direct application to mosaicing, this work shows in general the power of the SLAM framework for processing image sequences and its ability, when compared with off-line methods, to efficiently extract impor-

tant information: pure sequential processing, long track matches, and loop closing matches.

EKF-based mosaicing is intended to offer a contribution when compared with other mosaicing approaches. Full 3D mosaicing in real-time is still some way off, so we have focused on building 2D mosaics from sequences with homography geometry — in this piece of work, specifically from a purely rotating camera, though we believe that our method could be straightforwardly modified to also cope with mosaicing a plane observed by a rotating and translating camera.

We believe that there are many applications which open up with real-time mosaicing — in any situation where the goal is to build a living mosaic which is built up instantly in reaction to camera motion our approach will be useful. This mosaic can find application especially in augmented reality because it provides a real-time link between the camera images and real scene points. An interesting application that is partly based in the algorithms described in this and next chapter is the one described at [Grasa *et al.* 2009b, Grasa *et al.* 2009a]. There, texture patches are attached to a backbone of 3D points in order to improve visualization of cavities inside human body, helping the medical team in laparoscopic surgery.

Another interesting possibility real-time mosaicing gives is that a user could control the rotation of the camera while looking at the growing mosaic in order to extend and improve it actively. In future work, we intend to look at such issues as real-time super-resolution, where we envisage a mosaic sharpening before a user’s eyes thanks to the quality of repeatable rotation registration.

## 2.7. Discussion

---

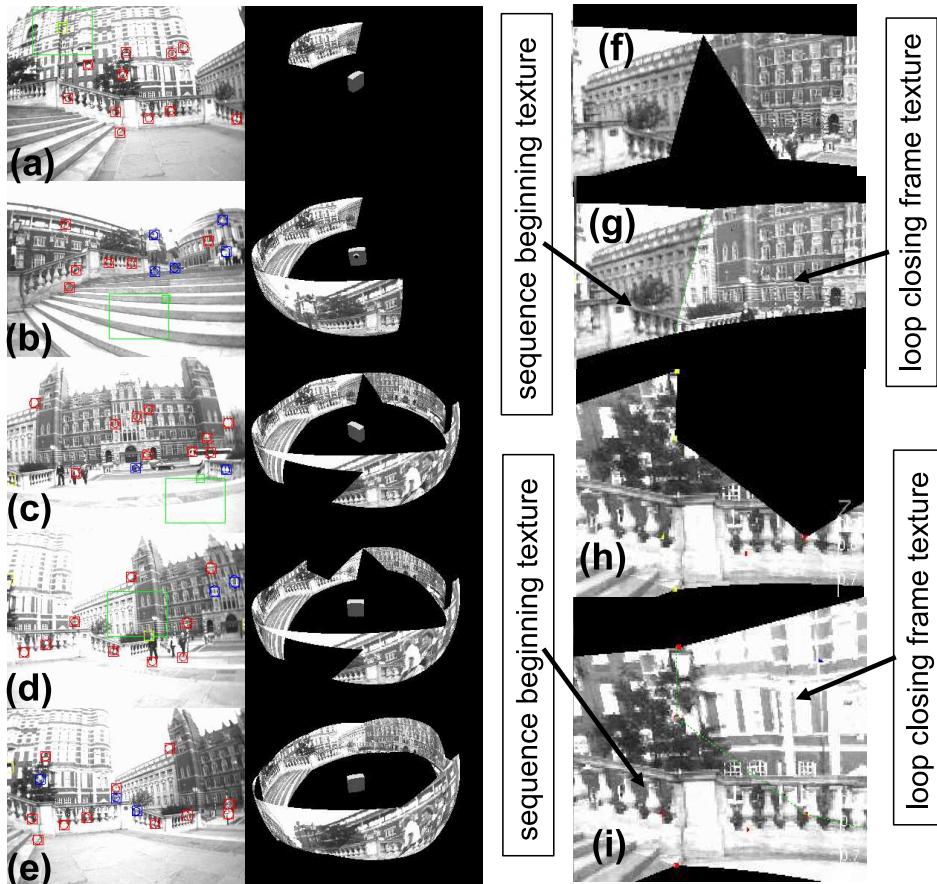


Figure 2.9: Real-time mosaicing with loop closure. (a), (b) sequence start; (c) the frame after the first loop closing match; (d) a few frames after loop closing (e) the mosaic after almost two full laps. (f) (magnification of (c)) and (g) show two consecutive steps after loop closing; (g) is a close-up view of two adjacent mosaic areas. In (g) the left-most mosaic tiles got their texture early in the sequence, while those on the right obtained texture after loop closing. Notice the high accuracy in texture alignment; the line highlights the seam. (h) (magnification of (d)) and (i) show two consecutive steps after several loop closing matches. (i) is a close-up view of two adjacent mosaic areas with textures taken from early and loop closing frames; again notice the alignment quality. A line highlights the seam —otherwise difficult to observe.



Chapter **3**

# Unified Inverse Depth Parametrization for Close and Distant Features

## Contents

---

<b>3.1</b>	<b>Introduction</b>	<b>36</b>
3.1.1	Delayed and Undelayed Initialization	37
3.1.2	Inverse Depth Representation	38
3.1.3	Inverse Depth in Computer Vision and Tracking	39
<b>3.2</b>	<b>State Vector Definition</b>	<b>41</b>
3.2.1	Camera Motion	41
3.2.2	Euclidean XYZ Point Parametrization	41
3.2.3	Inverse Depth Point Parametrization	42
3.2.4	Full State Vector	42
<b>3.3</b>	<b>Measurement Equation</b>	<b>42</b>
<b>3.4</b>	<b>Measurement Equation Linearity</b>	<b>44</b>
3.4.1	Linearized propagation of a Gaussian	44
3.4.2	Linearity of XYZ Parametrization	45
3.4.3	Linearity of Inverse Depth Parametrization	46
3.4.4	Depth vs. Inverse Depth Comparison	46
<b>3.5</b>	<b>Feature Initialization</b>	<b>47</b>
<b>3.6</b>	<b>Switching from Inverse Depth to XYZ</b>	<b>49</b>
3.6.1	Conversion from Inverse Depth to XYZ Coding	49
3.6.2	Linearity Index Threshold	49
<b>3.7</b>	<b>Robust Data Association</b>	<b>50</b>
3.7.1	Patch Warping	51

3.7.2	Active Search . . . . .	52
3.7.3	Joint Compatibility Branch and Bound (JCBB) . . . . .	53
<b>3.8</b>	<b>Experimental Results . . . . .</b>	<b>54</b>
3.8.1	Indoor Sequence . . . . .	55
3.8.2	Real-Time Outdoor Sequence . . . . .	57
3.8.3	Loop Closing Sequence . . . . .	57
3.8.4	Simulation Analysis for Inverse Depth to XYZ Switching	62
3.8.5	Parametrization Switching with Real Images . . . . .	64
3.8.6	Processing Time . . . . .	65
<b>3.9</b>	<b>Discussion . . . . .</b>	<b>66</b>

---

### 3.1 Introduction

One of the main achievements in the short life of Computer Vision has been the rigorous formalization of the SfM problem. Playing an important role in this formalization and as a key difference from previous works –mainly from Photogrammetry–, Homogeneous Coordinates are adopted instead of the traditional Euclidean parametrization to algebraically represent geometric objects [Hartley & Zisserman 2004]. Homogeneous coordinates have led to a more compact and general formulation of the SfM problem and have allowed to deal naturally with points situated at infinity, points that are imaged like any other by a projective camera. Those points have proven to be a valuable source of information to estimate camera orientation in the general SfM problem.

In the particular case of Bayesian filtering SfM estimation, previous chapter described a particular feature coding that can cope with features at infinity when the camera rotates or performs small translation compared with the depth of the scene –low parallax motion. Real-time accurate and consistent rotation estimation was experimentally shown to be feasible using the presented approach. As a logical continuance of this work, this chapter proposes a new point parametrization that is able to deal in a unified manner with distant –even infinity– and close points under general camera motion.

Initial filtering-based approaches to SfM estimation from general camera motion –e.g. [Davison 2003]– relied, as Photogrammetry does, on an Euclidean point coding that faces the same inability to deal with very distant points. The problem is even worse in SfM or SLAM than in Photogrammetry due to the goal of each discipline. Photogrammetry only aims to extract *some* metric information from images; so in general images are captured in order to have enough parallax for the objects that are measured. The low parallax case appears then rarely. Differently, the final aim of SfM and

### 3.1. Introduction

---

SLAM is to construct a *complete* model of a viewed scene from the available images. Low parallax features not only can appear but should also be correctly represented like that in the estimated model of the environment.

The problem of representing low parallax features resides in initialising uncertain depth estimates for distant and newly born features: in the straightforward Euclidean XYZ feature parametrization, position uncertainties for low parallax features are not well represented by the Gaussian distributions implicit in the EKF. The depth coordinate of such features has a probability density which rises sharply at a well-defined minimum depth to a peak, but then tails off very slowly towards infinity — from low parallax measurements it is very difficult to tell whether a feature has a depth of 10 units rather than 100, 1000 or more. For the rest of the thesis we refer to Euclidean XYZ parametrization simply as XYZ.

Several methods have been proposed for coping with the low parallax feature representation problem, relying on generally undesirable special treatment of newly initialized features. Feature parametrization described in this chapter is able smoothly to cope with initialization of features at all depths — even up to ‘infinity’ — within the standard EKF framework. The key concept is direct parametrization of inverse depth relative to the camera position from which a feature was first observed.

#### 3.1.1 Delayed and Undelayed Initialization

The most obvious approach to dealing with feature initialization within a monocular SLAM system is to treat newly detected features separately from the main map, accumulating information in special processing over several frames to reduce depth uncertainty before insertion into the full filter with a standard XYZ representation. Such *delayed initialization* schemes (e.g. [Davison 2003, Kim & Sukkarieh 2003, Bryson & Sukkarieh 2005]) have the drawback that new features, held outside the main probabilistic state, are not able to contribute to the estimation of the camera position until finally included in the map. Further, features which retain low parallax over many frames (those very far from the camera, or close to the motion epipole) are usually rejected completely because they never pass the test for inclusion. In this case, far features cannot be represented in the main SLAM map and their valuable information cannot be incorporated to the filter.

In the delayed approach of Bailey [Bailey 2003], initialization is delayed until the measurement equation is approximately Gaussian and the point can be safely triangulated; here the problem was posed in 2D and validated in simulation. A similar approach for 3D monocular vision with inertial sensing was proposed in [Bryson & Sukkarieh 2005]. Davison [Davison 2003] reacted to the detection of a new feature by inserting a 3D semi-infinite ray into the main map representing everything about the feature except its depth, and then used an auxiliary particle filter to explicitly refine the depth

estimate over several frames, taking advantage of all the measurements in a high frame-rate sequence but again with new features held outside the main state vector until inclusion.

More recently, several *undelayed initialization* schemes have been proposed, which still treat new features in a special way but are able to benefit immediately from them to improve camera motion estimates — the key insight being that while features with highly uncertain depths provide little information on camera translation, they are extremely useful as bearing references for orientation estimation. The undelayed method proposed by Kwok and Dissanayake [Kwok & Dissanayake 2004] was a multiple hypothesis scheme, initializing features at various depths and pruning those not reobserved in subsequent images.

Sola et al. [Solà *et al.* 2005, Solà 2007] described a more rigorous undelayed approach using a Gaussian Sum Filter approximated by a Federated Information Sharing method to keep the computational overhead low. An important insight was to spread the Gaussian depth hypotheses along the ray according to inverse depth, achieving much better representational efficiency in this way. This method can perhaps be seen as the direct stepping stone between Davison’s particle method and our new inverse depth scheme; a Gaussian sum is a more efficient representation than particles (efficient enough that the separate Gaussians can all be put into the main state vector), but not as efficient as the single Gaussian representation that the inverse depth parametrization allows. Note that neither [Kwok & Dissanayake 2004] nor [Solà *et al.* 2005] consider features at very large ‘infinite’ depths.

### 3.1.2 Inverse Depth Representation

Our contribution is to show that in fact there is a unified and straightforward parametrization for feature locations which can handle both initialisation and standard tracking of both close and very distant features within the standard EKF framework. An explicit parametrization of the *inverse depth* of a feature along a semi-infinite ray from the position from which it was first viewed allows a Gaussian distribution to cover uncertainty in depth which spans a depth range from nearby to infinity, and permits seamless crossing over to finite depth estimates of features which have been apparently infinite for long periods of time. The unified representation means that our algorithm requires no special initialisation process for features. They are simply tracked right from the start, immediately contribute to improved camera estimates and have their correlations with all other features in the map correctly modelled. Note that our parameterization would be equally compatible with other variants of Gaussian filtering such as sparse information filters.

We introduce a linearity index and use it to analyze and prove the representational capability of the inverse depth parametrization for both low

### 3.1. Introduction

---

and high-parallax features. The only drawback of the inverse depth scheme is the computational issue of increased state vector size, since an inverse depth point needs six parameters rather than the three of XYZ coding. As a solution to this, we show that our linearity index can also be applied to the XYZ parametrization to signal when a feature can be safely switched from inverse depth to XYZ; the usage of the inverse depth representation can in this way be restricted to low parallax feature cases where the XYZ encoding departs from Gaussianity. Note that this ‘switching’, unlike in delayed initialization methods, is purely to reduce computational load; SLAM accuracy with or without switching is almost the same.

#### 3.1.3 Inverse Depth in Computer Vision and Tracking

The fact is that the projective nature of a camera means that the image measurement process is nearly linear in this inverse depth coordinate. Inverse depth is a concept used widely in computer vision: it appears in the relation between image disparity and point depth in stereo vision; it is interpreted as the parallax with respect to the plane at infinity in [Hartley & Zisserman 2004]. Inverse depth is also used to relate the motion field induced by scene points with the camera velocity in optical flow analysis [Heeger & Jepson 1992]. In the tracking community, ‘modified polar coordinates’ [Aidala & Hammel 1983] also exploit the linearity properties of the inverse depth representation in the slightly different, but closely related, problem of target motion analysis (TMA) from measurements gathered by a bearing-only sensor with known motion.

However, the inverse depth idea has not previously been properly integrated in sequential, probabilistic estimation of motion and structure. It has been used in EKF based sequential depth estimation from camera known motion [Matthies *et al.* 1989] and in multi-baseline stereo Okutomi and Kanade [Okutomi & Kanade 1993] used the inverse depth to increase matching robustness for scene symmetries; matching scores coming from multiple stereo pairs with different baselines were accumulated in a common reference coded in inverse depth, this paper focusing on matching robustness and not on probabilistic uncertainty propagation. In [Chowdhury & Chellappa 2003] it is proposed a sequential EKF process using inverse depth but this was some way short of full SLAM in its details. Images are first processed pairwise to obtain a sequence of 3D motions which are then fused with an individual EKF per feature.

It is our parametrization of inverse depth *relative to the positions from which features were first observed* which means that a Gaussian representation is uniquely well behaved, and this is the reason why a straightforward parametrization of monocular SLAM in the homogeneous coordinates of SFM will not give a good result — that representation only meaningfully represents points which appear to be infinite relative to the coordinate origin.

It could be said in projective terms that our method defines separate but correlated projective frames for each feature. Another interesting comparison is between our method, where the representation for each feature includes the camera position from which it was first observed and smoothing/Full SLAM schemes where all historical sensor pose estimates are maintained in a filter.

Two recently published papers from other authors have developed methods which are quite similar to ours. Trawny and Roumeliotis in [Trawny & Roumeliotis 2006] proposed an undelayed initialization for 2D monocular SLAM which encodes a map point as the intersection of two projection rays. This representation is overparametrized but allows undelayed initialization and encoding of both close and distant features, the approach validated with simulation results.

Eade and Drummond presented an inverse depth initialisation scheme within the context of their FastSLAM-based system for monocular SLAM [Eade & Drummond 2006b], offering some of the same arguments about advantages in linearity as in this thesis. The position of each new partially initialised feature added to the map is parametrized with three coordinates representing its direction and inverse depth relative to the camera pose at the first observation, and estimates of these coordinates are refined within a set of Kalman Filters for each particle of the map. Once the inverse depth estimation has collapsed, the feature is converted to a fully initialised standard XYZ representation. While retaining the differentiation between partially and fully-initialised features, they go further and are able to use measurements of partially initialised features with unknown depth to improve estimates of camera orientation and translation via a special epipolar update step. Their approach certainly appears appropriate within a Fast-SLAM implementation. However, it lacks the satisfying unified quality of the parametrization we present in this paper, where the transition from partially to fully initialised need not be explicitly tackled and full use is automatically made of all of the information available in measurements.

Experimental validation with real-time software has shown the important role of an accurate camera calibration to improve the system performance especially with wide angle cameras. It has been also confirmed the need for an spurious rejection algorithm in order to perform large experiments. Our results section includes real-time experiments –50-70 maps features, at 30 $fps$  in a standard laptop–, including the key result of vision-only loop closing.

Section 3.2 is devoted to defining the state vector, including the camera motion model, XYZ point coding and inverse depth point parametrization. The measurement equation is described in Section 3.3. Section 3.4 presents a discussion about measurement equation linearization errors. Next, feature initialization from a single feature observation is detailed in Section 3.5. In Section 3.6 the switch from inverse depth to XYZ coding is presented.

### 3.2. State Vector Definition

---

Section 3.7 refers the details of the exploitation of the Bayesian priors in the matching step: the patch warping algorithm in subsection 3.7.1; the active search for correspondences [Davison *et al.* 2007] in subsection 3.7.2; and JCBB [Neira & Tardós 2001] in subsection 3.7.3. In Section 3.8 experimental validation over real image sequences captured at 30Hz in large scale environments, indoors and outdoors, including real-time performance and a loop closing experiment is presented; links to movies showing the system performance are provided. Finally Section 3.9 is devoted to discussion.

## 3.2 State Vector Definition

### 3.2.1 Camera Motion

A constant angular and linear velocity model is used to model hand-held camera motion. The camera state  $\mathbf{x}_v$  is composed of pose terms:  $\mathbf{r}^{WC}$  camera optical center position and  $\mathbf{q}^{WC}$  quaternion defining orientation; and linear and angular velocity  $\mathbf{v}^W$  and  $\omega^C$  relative to world frame  $W$  and camera frame  $C$ .

We assume that linear and angular accelerations  $\mathbf{a}^W$  and  $\alpha^C$  affect the camera, producing at each step an impulse of linear velocity,  $\mathbf{V}^W = \mathbf{a}^W \Delta t$ , and angular velocity  $\Omega^C = \alpha^C \Delta t$ , with zero mean and known Gaussian distribution. We currently assume a diagonal covariance matrix for the unknown input linear and angular accelerations.

The state update equation for the camera is:

$$\mathbf{f}_v = \begin{pmatrix} \mathbf{r}_{k+1}^{WC} \\ \mathbf{q}_{k+1}^{WC} \\ \mathbf{v}_{k+1}^W \\ \omega_{k+1}^C \end{pmatrix} = \begin{pmatrix} \mathbf{r}_k^{WC} + (\mathbf{v}_k^W + \mathbf{V}_k^W) \Delta t \\ \mathbf{q}_k^{WC} \times \mathbf{q}((\omega_k^C + \Omega^C) \Delta t) \\ \mathbf{v}_k^W + \mathbf{V}_k^W \\ \omega_k^C + \Omega^C \end{pmatrix}, \quad (3.1)$$

where  $\mathbf{q}((\omega_k^C + \Omega^C) \Delta t)$  is the quaternion defined by the rotation vector  $(\omega_k^C + \Omega^C) \Delta t$ .

### 3.2.2 Euclidean XYZ Point Parametrization

The standard representation for scene points  $i$  in terms of Euclidean XYZ coordinates (see Fig 3.1) is:

$$\mathbf{x}_i^W = (X_i \ Y_i \ Z_i)^\top. \quad (3.2)$$

In the thesis we refer to the Euclidean XYZ coding simply as XYZ coding.

### 3.2.3 Inverse Depth Point Parametrization

In our new scheme, a scene 3D point  $i$  can be defined by the dimension 6 state vector:

$$\mathbf{y}_i^W = (x_i \ y_i \ z_i \ \theta_i \ \phi_i \ \rho_i)^\top, \quad (3.3)$$

which models a 3D point located at (see Fig 3.1):

$$\mathbf{x}_i = \begin{pmatrix} X_i \\ Y_i \\ Z_i \end{pmatrix} = \begin{pmatrix} x_i \\ y_i \\ z_i \end{pmatrix} + \frac{1}{\rho_i} \mathbf{m}(\theta_i, \phi_i) \quad (3.4)$$

$$\mathbf{m} = (\cos \phi_i \sin \theta_i, -\sin \phi_i, \cos \phi_i \cos \theta_i)^\top. \quad (3.5)$$

The  $\mathbf{y}_i$  vector encodes the *ray from the first camera position from which the feature was observed* by  $x_i, y_i, z_i$ , the camera optical center, and  $\theta_i, \phi_i$  azimuth and elevation (coded in the world frame) defining unit directional vector  $\mathbf{m}(\theta_i, \phi_i)$ . The point's depth along the ray  $d_i$  is encoded by its inverse  $\rho_i = 1/d_i$ .

It is important to remark that all tridimensional points and camera positions are represented with respect to a world reference frame in this chapter. Next chapter will show that expressing them in the camera reference frame will imply the reduction of the linearization error when the trajectory covered by the camera is very large.

### 3.2.4 Full State Vector

As in standard EKF SLAM, we use a single joint state vector containing camera pose and feature estimates, with the assumption that the camera moves with respect to a static scene. The whole state vector  $\mathbf{x}$  is composed of the camera and all the map features:

$$\mathbf{x} = (\mathbf{x}_v^\top, \mathbf{y}_1^\top, \mathbf{y}_2^\top, \dots, \mathbf{y}_n^\top)^\top. \quad (3.6)$$

## 3.3 Measurement Equation

Each observed feature imposes a constraint between the camera location and the corresponding map feature (see Fig 3.1). Observation of a point  $\mathbf{y}_i$  ( $\mathbf{x}_i$ ) defines a ray coded by a directional vector in the camera frame  $\mathbf{h}^C = (h_x \ h_y \ h_z)^\top$ . For points in XYZ:

$$\mathbf{h}^C = \mathbf{h}_{XYZ}^C = \mathbf{R}^{CW} \begin{pmatrix} X_i \\ Y_i \\ Z_i \end{pmatrix} - \mathbf{r}^{WC}. \quad (3.7)$$

### 3.3. Measurement Equation

---

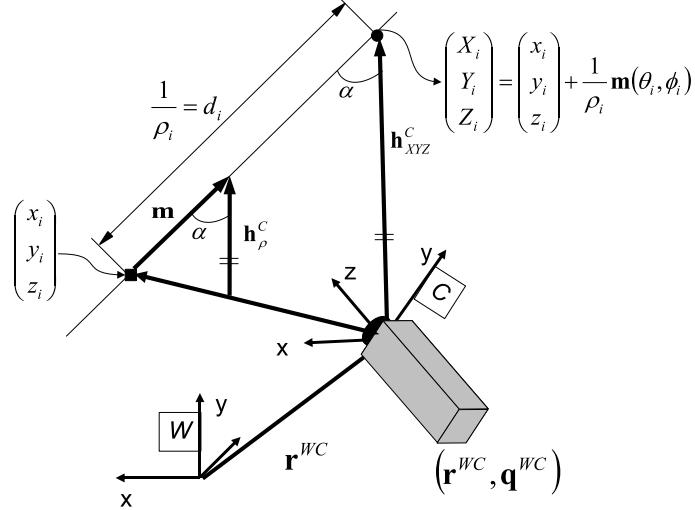


Figure 3.1: Feature parametrization and measurement equation.

For points in inverse depth:

$$\mathbf{h}^C = \mathbf{h}_\rho^C = \mathbf{R}^{CW} \left( \rho_i \left( \begin{pmatrix} x_i \\ y_i \\ z_i \end{pmatrix} - \mathbf{r}^{WC} \right) + \mathbf{m}(\theta_i, \phi_i) \right), \quad (3.8)$$

where the directional vector has been normalized using the inverse depth. It is worth noting that (28) can be safely used even for points at infinity i.e  $\rho_i = 0$ .

The camera does not directly observe  $\mathbf{h}^C$  but its projection in the image according to the pinhole model. Projection to a normalized retina and then camera calibration is applied:

$$\mathbf{h} = \begin{pmatrix} u \\ v \end{pmatrix} = \begin{pmatrix} u_0 - \frac{f}{d_x} \frac{h_x}{h_z} \\ v_0 - \frac{f}{d_y} \frac{h_y}{h_z} \end{pmatrix}, \quad (3.9)$$

where  $u_0, v_0$  is the camera's principal point,  $f$  is the focal length and  $d_x, d_y$  the pixel size. Finally, a distortion model has to be applied to deal with real camera lenses. In this work we have used the standard two parameter distortion model from photogrammetry [Mikhail *et al.* 2001] (see Appendix for details.)

It is worth noting that the measurement equation in inverse depth has a sensitive dependency on the parallax angle  $\alpha$  (see Figure 3.1). At low parallax, Equation (28) can be approximated by  $\mathbf{h}^C \approx \mathbf{R}^{CW}(\mathbf{m}(\theta_i, \phi_i))$ , and hence the measurement equation only provides information about the camera orientation and the directional vector  $\mathbf{m}(\theta_i, \phi_i)$ .

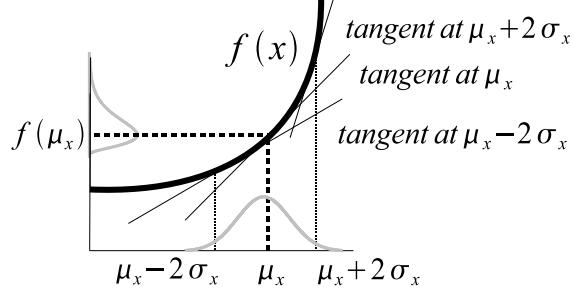


Figure 3.2: The first derivative variation in  $[\mu_x - 2\sigma_x, \mu_x + 2\sigma_x]$  codes the departure from Gaussianity in the propagation of the uncertain variable through a function.

### 3.4 Measurement Equation Linearity

The more linear the measurement equation is, the better a Kalman Filter performs. This section is devoted to presenting an analysis of measurement equation linearity for both XYZ and inverse depth codings. These linearity analyses theoretically support the superiority of the inverse depth coding.

#### 3.4.1 Linearized propagation of a Gaussian

Let  $x$  be an uncertain variable with Gaussian distribution  $x \sim N(\mu_x, \sigma_x^2)$ . The transformation of  $x$  through the function  $f$  is a variable  $y$  which can be approximated with Gaussian distribution:

$$y \sim N(\mu_y, \sigma_y^2), \quad \mu_y = f(\mu_x), \quad \sigma_y^2 = \left. \frac{\partial f}{\partial x} \right|_{\mu_x} \sigma_x^2 \left. \frac{\partial f}{\partial x} \right|_{\mu_x}^\top, \quad (3.10)$$

if the function  $f$  is linear in an interval around  $\mu_x$  (Figure 3.2). The interval size in which the function has to be linear depends on  $\sigma_x$ ; the bigger  $\sigma_x$  the wider the interval has to be to cover a significant fraction of the random variable  $x$  values. In this work we fix the linearity interval to the 95% confidence region defined by  $[\mu_x - 2\sigma_x, \mu_x + 2\sigma_x]$ .

If a function is linear in an interval, the first derivative is constant in that interval. To analyze the first derivative variation around the interval  $[\mu_x - 2\sigma_x, \mu_x + 2\sigma_x]$  consider the Taylor expansion for the *first derivative*:

$$\frac{\partial f}{\partial x}(\mu_x + \Delta x) \approx \left. \frac{\partial f}{\partial x} \right|_{\mu_x} + \left. \frac{\partial^2 f}{\partial x^2} \right|_{\mu_x} \Delta x. \quad (3.11)$$

We propose to compare the value of the derivative at the interval center,  $\mu_x$ , with the value at the extremes  $\mu_x \pm 2\sigma_x$ , where the deviation from linearity

### 3.4. Measurement Equation Linearity

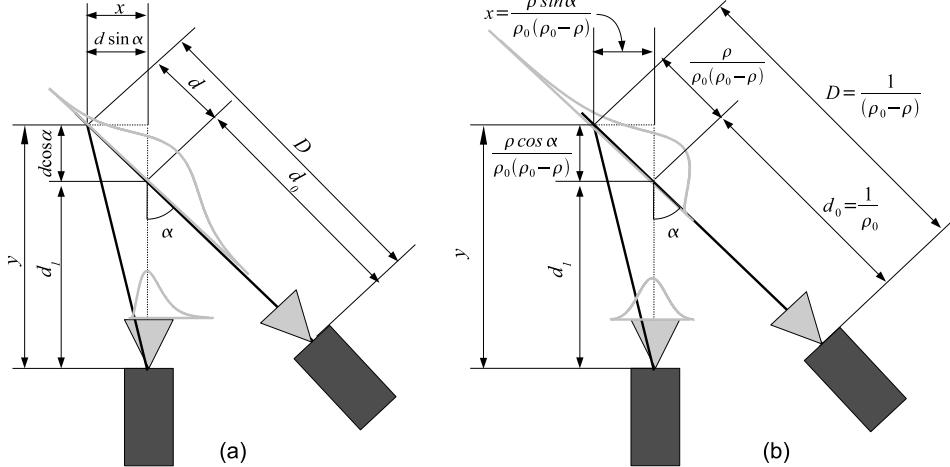


Figure 3.3: Uncertainty propagation from the scene point to the image. (a) XYZ coding. (b) Inverse depth coding.

will be maximal, using the following dimensionless linearity index:

$$L = \left| \frac{\frac{\partial^2 f}{\partial x^2} \Big|_{\mu_x}}{\frac{\partial f}{\partial x} \Big|_{\mu_x}} \frac{2\sigma_x}{\rho_0(\rho_0 - \rho)} \right|. \quad (3.12)$$

When  $L \approx 0$ , the function can be considered linear in the interval, and hence Gaussianity is preserved during transformation.

#### 3.4.2 Linearity of XYZ Parametrization

The linearity of the XYZ representation is analyzed by means of a simplified model which only estimates the depth of a point with respect to the camera. In our analysis, a scene point is observed by two cameras (Figure 3.3a), both of which are oriented towards the point. The first camera detects the ray on which the point lies. The second camera observes the same point from a distance  $d_1$ ; the parallax angle  $\alpha$  is approximated by the angle between the cameras' optic axes.

The point's location error,  $d$ , is encoded as Gaussian in depth:

$$D = d_0 + d, \quad d \sim N(0, \sigma_d^2). \quad (3.13)$$

This error  $d$  is propagated to the image of the point in the second camera,  $u$  as:

$$u = \frac{x}{y} = \frac{d \sin \alpha}{d_1 + d \cos \alpha}. \quad (3.14)$$

The Gaussianity of  $u$  is analyzed by means of (3.12), giving linearity

index:

$$L_d = \left| \frac{\frac{\partial^2 u}{\partial d^2} 2\sigma_d}{\frac{\partial u}{\partial d}} \right| = \frac{4\sigma_d}{d_1} |\cos\alpha| \quad (3.15)$$

### 3.4.3 Linearity of Inverse Depth Parametrization

The inverse depth parametrization is based on the same scene geometry as the direct depth coding, but the depth error is encoded as Gaussian in inverse depth (Fig 3.3b):

$$D = \frac{1}{\rho_0 - \rho}, \quad \rho \sim N(0, \sigma_\rho^2) \quad (3.16)$$

$$d = D - d_0 = \frac{\rho}{\rho_0(\rho_0 - \rho)}, \quad d_0 = \frac{1}{\rho_0}. \quad (3.17)$$

So the image of the scene point is computed as:

$$u = \frac{x}{y} = \frac{d \sin \alpha}{d_1 + d \cos \alpha} = \frac{\rho \sin \alpha}{\rho_0 d_1 (\rho_0 - \rho) + \rho \cos \alpha}, \quad (3.18)$$

and the linearity index  $L_\rho$  is now:

$$L_\rho = \left| \frac{\frac{\partial^2 u}{\partial \rho^2} 2\sigma_\rho}{\frac{\partial u}{\partial \rho}} \right| = \frac{4\sigma_\rho}{\rho_0} \left| 1 - \frac{d_0}{d_1} \cos \alpha \right|. \quad (3.19)$$

### 3.4.4 Depth vs. Inverse Depth Comparison

When a feature is initialized, the depth prior has to cover a vast region in front of the camera. With the inverse depth representation, the 95% confidence region with parameters  $\rho_0, \sigma_\rho$  is:

$$\left[ \frac{1}{\rho_0 + 2\sigma_\rho}, \frac{1}{\rho_0 - 2\sigma_\rho} \right]. \quad (3.20)$$

This region cannot include zero depth but can easily extend to infinity.

Conversely, with the depth representation the 95% region with parameters  $d_0, \sigma_d$  is  $[d_0 - 2\sigma_d, d_0 + 2\sigma_d]$ . This region can include zero depth but cannot extend to infinity.

In the first few frames after a new feature has been initialized, little parallax is likely to have been observed. Therefore  $\frac{d_0}{d_1} \approx 1$  and  $\alpha \approx 0 \implies \cos \alpha \approx 1$ . In this case the  $L_d$  linearity index for depth is high (bad), while the  $L_\rho$  linearity index for inverse depth is low (good): during initialization the inverse depth measurement equation linearity is superior to the XYZ coding.

As estimation proceeds and  $\alpha$  increases, leading to more accurate depth estimates, the inverse depth representation continues to have a high degree

### 3.5. Feature Initialization

---

of linearity. This is because in the expression for  $L_\rho$  the increase in the term  $|1 - \frac{d_0}{d_1} \cos\alpha|$  is compensated by the decrease in  $\frac{4\sigma_\rho}{\rho_0}$ . For inverse depth features a good linearity index is achieved along the whole estimation history. So the inverse depth coding is suitable for both low and high parallax cases if the feature is continuously observed.

The XYZ encoding has low computational cost, but achieves linearity only at low depth uncertainty and high parallax. In Section 3.6 we explain how the representation of a feature can be switched over such that the inverse depth parametrization is only used when needed — for features which are either just initialized or at extreme depths.

## 3.5 Feature Initialization

From just a single observation no feature depth can be estimated (although it would be possible in principle to impose a very weak depth prior by knowledge of the type of scene observed). What we do is to assign a general Gaussian prior in inverse depth which encodes probabilistically the fact that the point has to be in front of the camera. Hence, thanks to the linearity of inverse depth at low parallax, the filter can be initialized from just one observation. Experimental tuning has shown that infinity should be included with reasonable probability within the initialization prior, despite the fact that this means that depth estimates can become negative. Once initialized, features are processed with the standard EKF prediction-update loop — even in the case of negative inverse depth estimates — and immediately contribute to camera location estimation within SLAM.

It is worth noting that while a feature retains low parallax, it will automatically be used mainly to determine the camera orientation. The feature's depth will remain uncertain, with the hypothesis of infinity still under consideration (represented by the probability mass corresponding to negative inverse depths). If the camera translates to produce enough parallax then the feature's depth estimation will be improved and it will begin to contribute more to camera location estimation.

The initial location for a newly observed feature inserted into the state vector is:

$$\hat{\mathbf{y}}(\hat{\mathbf{r}}^{WC}, \hat{\mathbf{q}}^{WC}, \mathbf{h}, \rho_0) = (\hat{x}_i \ \hat{y}_i \ \hat{z}_i \ \hat{\theta}_i \ \hat{\phi}_i \ \hat{\rho}_i)^\top, \quad (3.21)$$

a function of the current camera pose estimate  $\hat{\mathbf{r}}^{WC}, \hat{\mathbf{q}}^{WC}$ , the image observation  $\mathbf{h} = (u \ v)^\top$  and the parameters determining the depth prior  $\rho_0$ ,  $\sigma_\rho$ .

The end-point of the initialization ray (see Figure 3.1) is taken from the current camera location estimate:

$$(\hat{x}_i \ \hat{y}_i \ \hat{z}_i)^\top = \hat{\mathbf{r}}^{WC}, \quad (3.22)$$

and the direction of the ray is computed from the observed point, expressed in the world coordinate frame:

$$\mathbf{h}^W = \mathbf{R}_{WC} \left( \mathbf{q}^{\hat{W}C} \right) \begin{pmatrix} v & \nu & 1 \end{pmatrix}^\top, \quad (3.23)$$

where  $v$  and  $\nu$  are normalized retina image coordinates. Despite  $\mathbf{h}^W$  being a non-unit directional vector, the angles by which we parametrize its direction can be calculated as:

$$\begin{pmatrix} \theta_i \\ \phi_i \end{pmatrix} = \begin{pmatrix} \arctan(\mathbf{h}_x^W, \mathbf{h}_z^W) \\ \arctan(-\mathbf{h}_y^W, \sqrt{\mathbf{h}_x^{W2} + \mathbf{h}_z^{W2}}) \end{pmatrix}. \quad (3.24)$$

The covariance of  $\hat{x}_i, \hat{y}_i, \hat{z}_i, \hat{\theta}_i$  and  $\hat{\phi}_i$  is derived from the image measurement error covariance  $\mathbf{R}_i$  and the state covariance estimate  $\hat{\mathbf{P}}_{k|k}$ .

The initial value for  $\rho_0$  and its standard deviation are set empirically such that the 95% confidence region spans a range of depths from close to the camera out to infinity. In our experiments we set  $\hat{\rho}_0 = 0.1, \sigma_\rho = 0.5$ , which gives an inverse depth confidence region  $[1.1, -0.9]$ . Notice that infinity is included in this range. Experimental validation has shown that the precise values of these parameters are relatively unimportant to the accurate operation of the filter, as long as infinity is clearly included in the confidence interval.

The state covariance after feature initialization is:

$$\hat{\mathbf{P}}_{k|k}^{\text{new}} = \mathbf{J} \begin{pmatrix} \hat{\mathbf{P}}_{k|k} & 0 & 0 \\ 0 & \mathbf{R}_i & 0 \\ 0 & 0 & \sigma_\rho^2 \end{pmatrix} \mathbf{J}^\top \quad (3.25)$$

$$\mathbf{J} = \left( \frac{I}{\frac{\partial \mathbf{y}}{\partial \mathbf{r}^{WC}}, \frac{\partial \mathbf{y}}{\partial \mathbf{q}^{WC}}, 0, \dots, 0}, \left| \frac{\partial \mathbf{y}}{\partial \mathbf{h}}, \frac{\partial \mathbf{y}}{\partial \rho} \right. \right). \quad (3.26)$$

The inherent scale ambiguity in monocular SLAM has usually been fixed by observing some known initial features that fix the scale (e.g. [Davison 2003]). A very interesting experimental observation we have made using the inverse depth scheme is that sequential monocular SLAM can operate successfully without *any* known features in the scene, and in fact the experiments we present in this paper do not use an initialization target. In this case, of course the overall scale of the reconstruction and camera motion is undetermined, although with the formulation of the current paper the estimation will settle on a (meaningless) scale of some value. In [Civera *et al.* 2007b] it is investigated this issue and a new dimensionless formulation of monocular SLAM is proposed. Full details of this understanding of filter parameters as dimensionless quantities in image terms plus a scale term can be found in appendix B.

### 3.6. Switching from Inverse Depth to XYZ

---

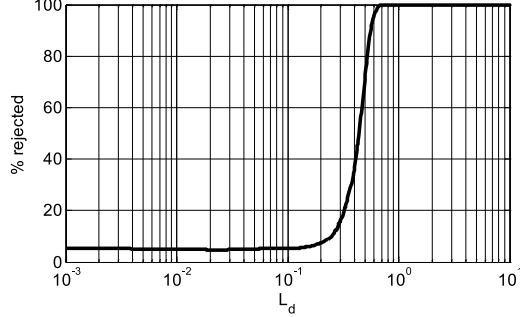


Figure 3.4: Percentage of test rejections as a function of the linearity index  $L_d$

## 3.6 Switching from Inverse Depth to XYZ

While the inverse depth encoding can be used at both low and high parallax, it is advantageous for reasons of computational efficiency to restrict inverse depth to cases where the XYZ encoding exhibits non linearity according to the  $L_d$  index. This section details switching from inverse depth to XYZ for high parallax features.

### 3.6.1 Conversion from Inverse Depth to XYZ Coding

After each estimation step, the linearity index  $L_d$  (Equation 3.15) is computed for every map feature coded in inverse depth:

$$\begin{aligned} \mathbf{h}_{\text{XYZ}}^W &= \hat{\mathbf{x}}_i - \hat{\mathbf{r}}^{WC}, \quad \sigma_d = \frac{\sigma_\rho}{\rho_i^2}, \quad \sigma_\rho = \sqrt{\mathbf{P}_{\mathbf{y}_i \mathbf{y}_i}(6, 6)} \\ d_i &= \|\mathbf{h}_{\text{XYZ}}^W\|, \quad \cos \alpha = \mathbf{m}^\top \mathbf{h}_{\text{XYZ}}^W \|\mathbf{h}_{\text{XYZ}}^W\|^{-1}. \end{aligned} \quad (3.27)$$

where  $\hat{\mathbf{x}}_i$  is computed using equation (3.4) and  $\mathbf{P}_{\mathbf{y}_i \mathbf{y}_i}$  is the submatrix  $6 \times 6$  covariance matrix corresponding the considered feature.

If  $L_d$  is below a switching threshold, the feature is transformed using Equation (3.4) and the *full state* covariance matrix  $\mathbf{P}$  is transformed with the corresponding Jacobian:

$$\mathbf{P}_{\text{new}} = \mathbf{J} \mathbf{P} \mathbf{J}^\top, \quad \mathbf{J} = \text{diag} \left( \mathbf{I}, \frac{\partial \mathbf{x}_i}{\partial \mathbf{y}_i}, \mathbf{I} \right). \quad (3.28)$$

### 3.6.2 Linearity Index Threshold

We propose to use index  $L_d$  (3.15) to define a threshold for switching from inverse depth to XYZ encoding at the point when the latter can be considered linear. If the XYZ representation is linear, then the measurement  $u$  is Gaussian distributed (Equation 3.10):

$$u \sim N(\mu_u, \sigma_u^2), \quad \mu_u = 0, \quad \sigma_u^2 = \left( \frac{\sin \alpha}{d_1} \right)^2 \sigma_d^2. \quad (3.29)$$

To determine the threshold in  $L_d$  which signals a lack of linearity in the measurement equation a simulation experiment has been performed. The goal was to generate samples from the uncertain distribution for variable  $u$  and then apply a standard Kolmogorov-Smirnov Gaussianity [Canavos 1984] test to these samples, counting the percentage of rejected hypotheses,  $h$ . When  $u$  is effectively Gaussian, the percentage should match the test significance level  $\alpha_{sl}$  (5% in our experiments); as the number of rejected hypotheses increases the measurement equation departs from linearity. A plot of the percentage of rejected hypotheses  $h$  with respect to the linearity index  $L_d$  is shown in Figure 3.4. It can be clearly seen than when  $L_d > 0.2$ ,  $h$  sharply departs from 5%. So we propose the  $L_d < 10\%$  threshold for switching from inverse depth to XYZ encoding.

Notice that the plot in Figure 3.4 is smooth (log scale in  $L_d$ ), which indicates that the linearity index effectively represents the departure from linearity.

The simulation has been performed for a variety of values of  $\alpha$ ,  $d_1$  and  $\sigma_d$ ; more precisely all triplets resulting from the following parameter values:

$$\begin{aligned}\alpha(\text{deg}) &\in \{0.1, 1, 3, 5, 7, 10, 20, 30, 40, 50, 60, 70\} \\ d_1(\text{m}) &\in \{1, 3, 5, 7, 10, 20, 50, 100\} \\ \sigma_d(\text{m}) &\in \{0.05, 0.1, 0.25, 0.5, 0.75, 1, 2, 5\}.\end{aligned}$$

The simulation algorithm detailed in Figure 3.5 is applied to every triplet  $\{\alpha, d_1, \sigma_d\}$  to count the percentage of rejected hypotheses  $h$  and the corresponding linearity index  $L_d$ .

### 3.7 Robust Data Association

The information contained in the updated probability distribution function over the estimated parameters that filtering-based approaches maintain along the image sequence can be exploited in the matching step, resulting in an increase of robustness. Following the nomenclature in [Williams *et al.* 2008], correspondences are not searched in an image-to-image but in an image-to-map basis that takes into account the knowledge over the structure of the scene and camera motion. First, the patch which serves as photometric identifier of the feature can be warped according to the predicted camera motion facilitating the matching under large or cyclotorsion motions. Second, the propagation of the probabilistic estimation through the projection model can be used to define small regions where map features should be searched –this is called Active Search in [Davison *et al.* 2007]. And third, the rigidity constraint can be tested using JCBB algorithm [Neira & Tardós 2001], where the largest jointly compatible subset of matches is obtained taking as input the probabilistic measurement prediction. This three stages are detailed in next sections.

### 3.7. Robust Data Association

---

```

input:  $\alpha, d_1, \sigma_d$ 
output:  $h, L_d$ 
 $\sigma_u = \left| \frac{\sin \alpha}{d_1} \right| \sigma_d; \mu_u = 0; // (3.29)$ 
 $\alpha_{sl} = 0.05; // \text{Kolm. test sign. level}$ 
 $L_d = \frac{4\sigma_d}{d_1} |\cos \alpha|$ 
n_rejected=0 ;
N_GENERATED_SAMPLES=1000;
SAMPLE_SIZE=1000;

for j=1 to N_GENERATED_SAMPLES repeat
     $\{d_i\}_j = \text{random\_normal}(0, \sigma_d^2, \text{SAMPLE\_SIZE});$ 
    //generate a normal sample from  $N(0, \sigma_d^2)$ ;
     $\{u_i\}_j = \text{propagate\_from\_dept\_to\_image}(\{d_i\}_j, \alpha, d_1); // (3.14)$ 
    if rejected==Kolmogorov_Smirnov( $\{u_i\}_j, \mu_u, \sigma_u, \alpha_{sl}$ )
        n_rejected=n_rejected+1;
endfor
 $h=100 \frac{[n\_rejected]}{[N\_GENERATED\_SAMPLES]};$ 

```

Figure 3.5: Simulation algorithm to test the linearity of the measurement equation.

#### 3.7.1 Patch Warping

The performance of any SfM system depends on its ability to successfully measure visual features from one image to another. The task of finding correspondences becomes more difficult as the motion between images increases and the appearance of the feature in the image strongly vary. Pairwise SfM methods, that usually takes as input wide baseline images, usually perform the correspondence search task by looking for the nearest neighbour of invariant descriptors extracted from points of interest [Lowe 2004, Bay *et al.* 2008, Mikolajczyk *et al.* 2005].

This type of invariant descriptors are rarely used in real-time SfM from image sequences mainly due to two reasons: first, invariant descriptors are usually much more expensive to extract and match than performing cross-correlation between image patches. And second, closeness of images in a sequence makes the correspondence search much easier for image sequences than for pairwise SfM.

Nevertheless, as the performance of the whole algorithm will be improved by the capability of repeatedly measure the same features from distant points of view, significant work has been carried out that tries to increase the invariance of the matching while keeping real-time capabilities. In [Chekhlov *et al.* 2007], patches at different scales are generated when a feature is first detected and are used depending of the predicted change of scale in the matching stage. In [Molton *et al.* 2004], the patch is warped according to the predicted motion previous to the correspondence search.

Cyclotorsion motion has been found in this thesis to be the most problematic case for matching via cross-correlation, due to the large change in the appearance of a patch even under small angle motion. To be able to cope with this type of motion, a simplified version of [Molton *et al.* 2004] has been added to the real-time software of this thesis. Assuming local planarity around the feature, the appearance of its patch can be predicted via the homography

$$H = K \left( R - tn^\top / d \right) K^{-1}. \quad (3.30)$$

In the above formula,  $K$  stands for the known calibration matrix.  $R$  and  $t$  are the relative rotation and translation between the frame where the feature was initialised and the current one; and  $d$  is the distance from the first camera to the point. These three parameters can be extracted from the estimation vector, being the only unknown in this formula the normal of the patch  $n$ . As a difference from [Molton *et al.* 2004], this normal is not estimated in this work but it is supposed to be frontoparallel to the camera when first initialized. This simplification experimentally proves to be enough to successfully match the map features under cyclotorsion motion and provides a slight improvement in the general case. Computational overhead is small enough to maintain real-time.

### 3.7.2 Active Search

Active Search or Guided Matching is achieved in filtering-based visual estimation by projecting in the image its estimated probabilistic map. The 95% probability region from this distribution results in tiny ellipses where the matches should be found. Looking for the correspondences inside these ellipses instead of in the whole image greatly reduces the computational cost and the rate of outliers.

In our Gaussian case, propagating the EKF prediction  $\mathcal{N}(\hat{\mathbf{x}}_{k|k-1}, \mathbf{P}_{k|k-1})$  through the measurement equation  $\mathbf{h}(\mathbf{x})$  –assumed linear enough– results in a Gaussian in the image  $\mathcal{N}(\hat{\mathbf{h}}_{k|k-1}, \mathbf{S}_{k|k-1})$ ; being its mean and covariance

$$\hat{\mathbf{h}}_{k|k-1} = \mathbf{h}(\hat{\mathbf{x}}_{k|k-1}) \quad (3.31)$$

$$\mathbf{S}_{k|k-1} = \mathbf{H}_{k|k-1} \mathbf{P}_{k|k-1} \mathbf{H}_{k|k-1}^\top + \mathbf{R}_{k|k-1}. \quad (3.32)$$

$\mathbf{H}_{k|k-1}$  are the derivatives for the measurement equation and  $\mathbf{R}_{k|k-1}$  the image noise covariance.

It can be seen in any of the figures in the experimental results section where images are displayed –figures 3.6, 3.8 and 3.10– and other figures along the thesis –e.g. figures 2.9, 4.10 and 6.4– the small ellipses around

feature image predictions where the matches are looked for. Efficiency gain come across straightforwardly if it is compared the size of these ellipses with the whole image. Spurious rate greatly falls down as a consequence of the reduction of search region. As a matter of fact, for the experiments presented in previous and current chapter –which are around a thousand of frames long each–, outlier rejection techniques were not needed to obtain accurate and consistent estimation results.

### 3.7.3 Joint Compatibility Branch and Bound (JCBB)

Although guided matching previously detailed drops the spurious rate and can make unnecessary the use of any other robust matching algorithm for some short and simple sequences, the truth is that outliers eventually appear as longer and more complex sequences are processed. The need for spurious rejection algorithms in filtering-based SfM was first experimentally shown in [Clemente *et al.* 2007]. Intensive experimentation with real-time software developed in this thesis has provided enough evidence in this topic.

A particular implementation of the Joint Compatibility Branch and Bound (JCBB) [Neira & Tardós 2001] algorithm is used in this part of the thesis. JCBB performs an exhaustive search in the space of measurements-features correspondences; and can be said to work in an image-to-map manner as it takes advantage of the estimated map to check the rigidity constraint without any measurement fusing. This is in contrast of RANSAC-like algorithms, which we consider image-to-image, as they randomly select a subset of measurements to provide a partial estimation solution which is used to check the rigidity of the rest of the matches.

For the algorithms presented in this chapter, we consider the JCBB to be superior to any RANSAC-like approach due to its exhaustive search for missmatches without recurring to a randomized selection of subsets.

Experimentation with real-time software and results in chapters 5 and 6 have proven excellent performance of this algorithm when applied to EKF-based SfM. The only drawback detected has been its exponential computational complexity in the number of matches, derived from the exhaustive search in the measurement space. Computation time is acceptable for the ten to twenty matches per frame considered in this chapter, but it becomes infeasible at the relatively low number of 50 matches.

As rising the number of matches is convenient in order to increase the accuracy and reduce linearization errors, JCBB’s computational complexity ends up being a problem. Next chapter analyses this fact and proposes a RANSAC-based spurious rejection algorithm but in an image-to-map basis that takes full advantage of the probabilistic priors of the estimation.

---

**Algorithm 1** Joint Compatibility Outlier Rejection

---

INPUT:  $\mathcal{H}_{from\_correlation}, \nu, S$  {Correspondences found by normalized cross-correlation}  
 OUTPUT:  $\mathcal{H}_{jointly\_compatible}$  {A set of jointly compatible correspondences}  
**if**  $\nu^\top \mathbf{S}^{-1} \nu < \chi_{n,\alpha}^2$  **then**  
 $\mathcal{H}_{jointly\_compatible} = \mathcal{H}_{from\_correlation}$   
**else**  
 $\mathcal{H}_{best} = []$   
 $JCBB([], 1)$   
 $\mathcal{H}_{jointly\_compatible} = \mathcal{H}_{best}$   
**end if**

---

**Algorithm 2** Joint Compatibility Branch and Bound  $JCBB(\mathcal{H}, i)$ 


---

INPUT:  $\mathcal{H}, i$  {Partial Matching Hypothesis and Match Candidate}  
**if**  $i = m$  **then**  
**if** pairings( $\mathcal{H}$ ) $\neq$ pairings( $\mathcal{H}_{best}$ ) **then**  
 $\mathcal{H}_{best} = \mathcal{H}$   
**else if** pairings( $\mathcal{H}$ ) $=$ pairings( $\mathcal{H}_{best}$ ) **then**  
**if**  $D^2(\mathcal{H}) < D^2(\mathcal{H}_{best})$  **then**  
 $\mathcal{H}_{best} = \mathcal{H}$   
**end if**  
**end if**  
**end if**  
**else**  
**if** *jointly-compatible*( $[\mathcal{H}, i]$ ) **then**  
 $JCBB([\mathcal{H}, i], i + 1)$   
**end if**  
**if** pairings( $\mathcal{H}$ ) $+m-i\neq$ pairings( $\mathcal{H}_{best}$ ) **then**  
 $JCBB([\mathcal{H}], i + 1)$   
**end if**  
**end if**

---

### 3.8 Experimental Results

The performance of the new parametrization has been tested on real image sequences acquired with a hand-held low cost Unibrain IEEE1394 camera, with a  $90^\circ$  field of view and  $320 \times 240$  resolution, capturing monochrome image sequences at 30 fps.

Five experiments were performed. The first was an indoor sequence processed offline with a Matlab implementation, the goal being to analyze initialization of scene features located at different depths. The second experiment shows an outdoor sequence processed in real-time with a C++ implementation. The focus was on distant features, observed under low

### 3.8. Experimental Results

---

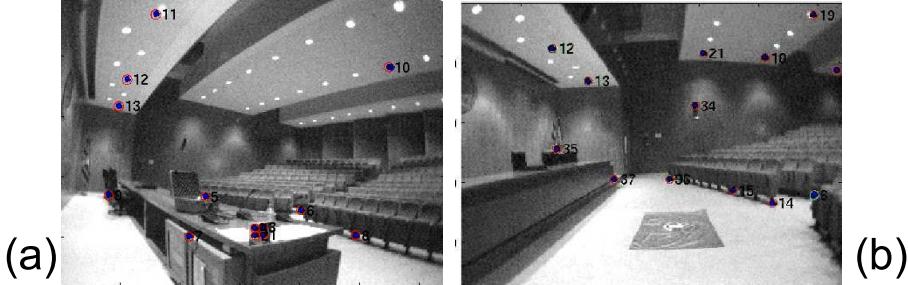


Figure 3.6: First (a) and last (b) frame in the sequence of the indoor experiment of Section 3.8.1. Features 11, 12, 13 are analyzed. These features are initialized in the same frame but are located at different distances from the camera.

parallax along the whole sequence. The third experiment was a loop closing sequence, concentrating on camera covariance evolution. Fourth was a simulation experiment to analyze the effect of switching from inverse depth to XYZ representations. In the last experiment the switching performance was verified on the real loop closing sequence. This section ends with a computing time analysis. It is worth noting that no initial pattern to fix the scale was used in any of the last three experiments.

#### 3.8.1 Indoor Sequence

This experiment analyzes the performance of the inverse depth scheme as several features at a range of depths are tracked within SLAM. We discuss three features, which are all detected in the same frame but have very different depths. Figure 3.6 shows the image where the analyzed features are initialized (frame 18 in the sequence) and the last image in the sequence. Figure 3.7 focuses on the evolution of the estimates corresponding to the features, with labels 11, 12 and 13, at frames 1, 10, 25 and 100. Confidence regions derived from the inverse depth representation (thick red line) are plotted in XYZ space by numerical Monte Carlo propagation from the six-dimensional multivariate Gaussians representing these features in the SLAM EKF. For comparison, standard Gaussian XYZ acceptance ellipsoids (thin black line) are linearly propagated from the six-dimensional representation by means of the Jacobian of equation (3.28). The parallax  $\alpha$  in degrees for each feature at every step is also displayed.

When initialized, the 95% acceptance region of all the features includes  $\rho = 0$  so infinite depth is considered as a possibility. The corresponding confidence region in depth is highly asymmetric, excluding low depths but extending to infinity. It is clear that Gaussianity in inverse depth is not mapped to Gaussianity in XYZ, so the black ellipsoids produced by Jacobian transformation are far from representing the true depth uncertainty. As stated in Section 3.4.4, it is at low parallax that the inverse depth

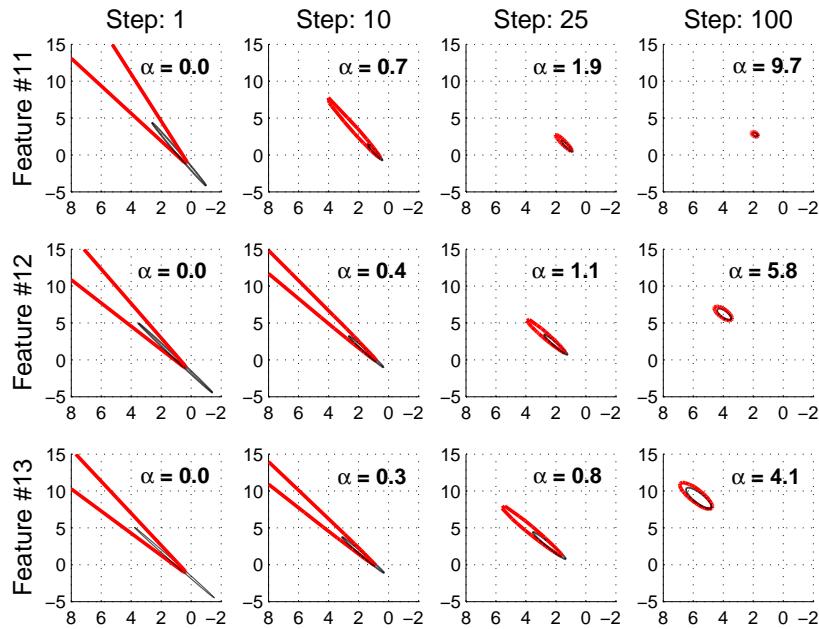


Figure 3.7: Feature initialization. Each column shows the estimation history for a feature horizontal components. For each feature, the estimates after 1, 10, 25 and 100 frames since initialization are plotted; the parallax angle  $\alpha$  in degrees between the initial observation and the current frame is displayed. The thick (red) lines show (calculated by a Monte Carlo numerical simulation) the 95% confidence region when coded as Gaussian in inverse depth. The thin (black) ellipsoids show the uncertainty as a Gaussian in XYZ space propagated according to Equation (3.28). Notice how at low parallax the inverse depth confidence region is very different from the elliptical Gaussian. However, as the parallax increases, the uncertainty reduces and collapses to the Gaussian ellipse.

### 3.8. Experimental Results

---

parametrization plays a key role.

As rays producing bigger parallax are gathered, the uncertainty in  $\rho$  becomes smaller but still maps to a non-Gaussian distribution in XYZ. Eventually, at high parallax, for all of the features the red confidence regions become closely Gaussian and well-approximated by the linearly-propagated black ellipses — but this happens much sooner for nearby feature 11 than distant feature 13.

#### 3.8.2 Real-Time Outdoor Sequence

This 860 frame experiment was performed with a C++ implementation which achieves real-time performance at 30 fps with hand-held camera. Here we highlight the ability of our parametrization to deal with both close and distant features in an outdoor setting.

Figure 3.8 shows two frames of the movie illustrating the performance. For most of the features, the camera ended up gathering enough parallax to accurately estimate their depths. However, being outdoors, there were distant features producing low parallax during the whole camera motion.

The inverse depth estimation history for two features is highlighted in Figure 3.9. It is shown that distant, low parallax features are persistently tracked through the sequence, despite the fact that their depths cannot be precisely estimated. The large depth uncertainty, represented with the inverse depth scheme, is successfully managed by the SLAM EKF, allowing the orientation information supplied by these features to be exploited.

Feature 3, on a nearby car, eventually gathers enough parallax enough to have an accurate depth estimate after 250 images where infinite depth is considered as a possibility. Meanwhile the estimate of Feature 11, on a distant tree and never displaying significant parallax, never collapses in this way and zero inverse depth remains within its confidence region. Delayed initialization schemes would have discarded this feature without obtaining any information from it, while in our system it behaves like a bearing reference. This ability to deal with distant points in real time is a highly advantageous quality of our parametrization. Note that what does happen to the estimate of Feature 11 as translation occurs is that hypotheses of nearby depths are ruled out — the inverse depth scheme correctly recognizes that measuring little parallax while the camera has translated some distance allows a minimum depth for the feature to be set.

#### 3.8.3 Loop Closing Sequence

A loop closing sequence offers a challenging benchmark for any SLAM algorithm. In this experiment a hand-held camera was carried by a person walking in small circles within a very large student laboratory, carrying out two complete laps.

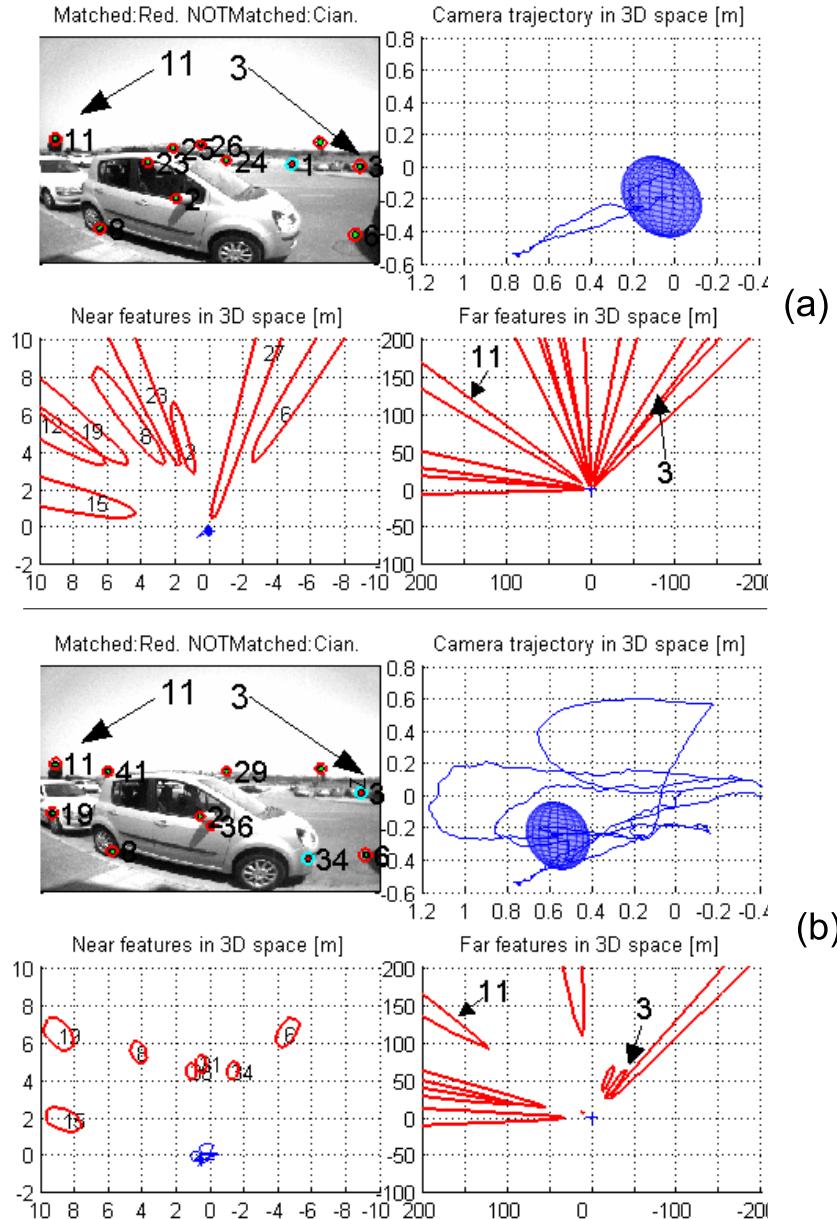


Figure 3.8: Subfigures (a) and (b) show frames #163 and #807 from the outdoor experiment of Section 3.8.2. This experiment was processed in real time. The focus was two features: 11 (tree on the left) and 3 (car on the right) at low parallax. Each of the two subfigures shows the current images, and top-down views illustrating the horizontal components of the estimation of camera and feature locations at three different zoom scales for clarity: the top-right plots (maximum zoom) highlight the estimation of the camera motion; bottom-left (medium zoom) views highlight nearby features; and bottom-right (minimum zoom) emphasizes distant features.

### 3.8. Experimental Results

---

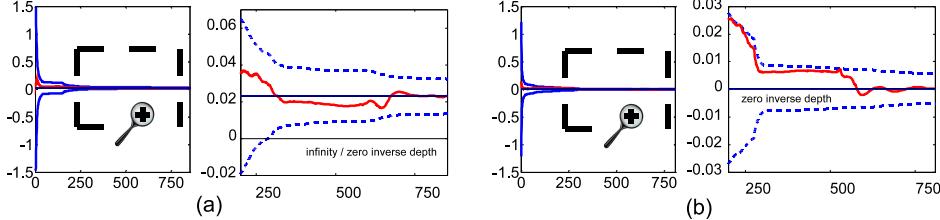


Figure 3.9: Analysis of outdoor experiment of Section 3.8.2. (a) Inverse depth estimation history for feature 3, on the car, and (b) for feature 11, on a distant tree. Due to the uncertainty reduction during estimation, two plots at different scales are shown for each feature. It is show the 95% confidence region, and with a thick line the estimated inverse depth. The thin solid line is the inverse depth estimated after processing the whole sequence. In (a), for the first 250 steps, zero inverse depth is included in confidence region, meaning that the feature might be at infinity. After this, more distant but finite locations are gradually eliminated, and eventually the feature’s depth is accurately estimated. In (b), the tree is so distant that the confidence region always includes zero, since little parallax is gathered for that feature.

Figure 3.10 shows a selection of the 737 frames from the sequence, concentrating on the beginning, first loop closure and end of the sequence. Figure 3.11 shows the camera location estimate covariance history, represented by the 95% confidence regions for the 6 camera d.o.f. and expressed in a reference local to the camera.

We observe the following properties of the evolution of the estimation, focussing in particular on the uncertainty in the camera location:

- After processing the first few images, the uncertainty in the depth of features is huge, with highly non-elliptical confidence regions in XYZ space (Fig. 3.10(a)).
- In Figure 3.11 the first peak in the X and Z translation uncertainty corresponds to a camera motion backwards along the optical axis; this motion produces poor parallax for newly initialized features, and we therefore see a reduction in orientation uncertainty and an increase in translation uncertainty. After frame #50 the camera again translates in the X direction, parallax is gathered and the translation uncertainty is reduced.
- From frame #240, the camera starts a  $360^\circ$  circular motion in the XZ plane. The camera explores new scene regions, and the covariance increases steadily as expected (Fig. 3.11).
- In frame #417, the first loop closing feature is re-observed. This is a feature which is distant from the camera, and causes an abrupt reduction in orientation and translation uncertainty (Fig. 3.11), though a medium level of uncertainty remains.

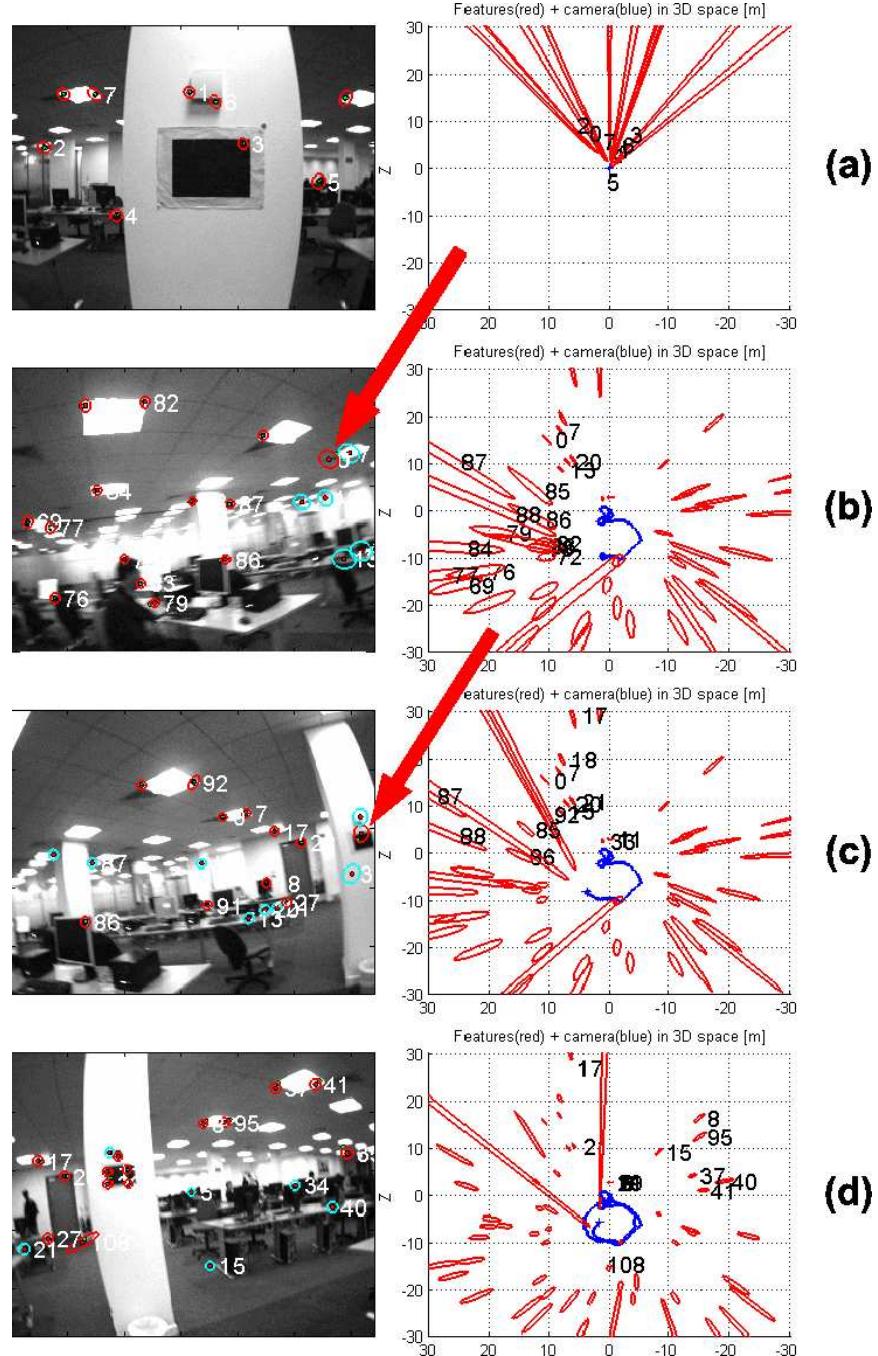


Figure 3.10: A selection of frames from the loop closing experiment of Section 3.8.3. For each frame, we show the current image and reprojected map (left), and a top-down view of the map with 95% confidence regions and camera trajectory (right). Notice that confidence regions for the map features are far from being Gaussian ellipses, especially for newly initialized or distant features. The selected frames are: (a) #11, close to the start of the sequence; (b) #417, where the first loop closing match, corresponding to a distant feature, is detected; the loop closing match is signaled with an arrow; (c) #441 where the first loop closing match corresponding to a close feature is detected; the match is signaled with an arrow; and (d) #737, the last image, in the sequence, after reobserving most of the map features during the second lap around the loop.

### 3.8. Experimental Results

---

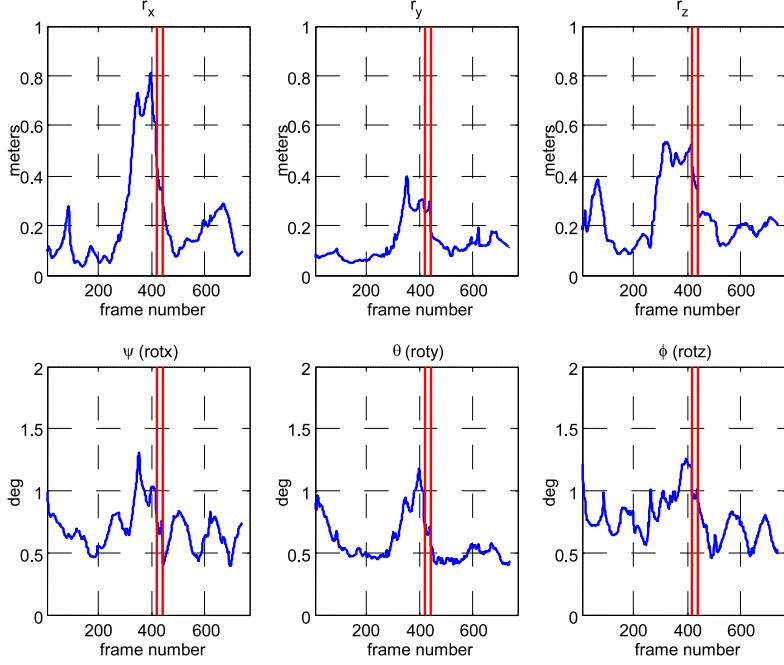


Figure 3.11: Camera location estimate covariance along the sequence. The 95% confidence regions for each of the 6 d.o.f of camera motion are plotted. Note that errors are expressed in a reference local to the camera. The vertical solid lines indicate the loop closing frames #417 and #441.

- In frame #441, a much closer loop closing feature (mapped with high parallax) is matched. Another abrupt covariance reduction takes place (Fig. 3.11) with the extra information this provides.
- After frame #441, as the camera goes on a second lap around the loop, most of the map features are revisited, almost no new features are initialized, and hence the uncertainty in the map is further reduced. Comparing the map at frame #441 (the beginning of the second lap) and at #737, (the end of the second lap), we see a significant reduction in uncertainty. During the second lap, the camera uncertainty is low, and as features are reobserved their uncertainties are noticeably reduced (Fig. 3.10(c) and (d)).

Note that these loop closing results with the inverse depth representation show a marked improvement on the experiments on monocular SLAM with a humanoid robot presented in [Davison *et al.* 2007], where a gyro was needed in order to reduce angular uncertainty enough to close loops with very similar camera motions.

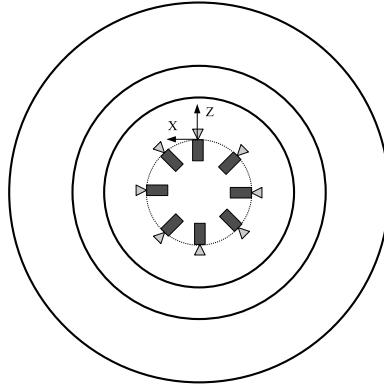


Figure 3.12: Simulation configuration for analysis of parametrization switching in Section 3.8.4, sketching the circular camera trajectory and 3D scene, composed of three concentric spheres of radius 4.3m, 10m and 20m. The camera completes two circular laps in the ( $XZ$ ) plane with radius 3m, and is orientated radially.

### 3.8.4 Simulation Analysis for Inverse Depth to XYZ Switching

In order to analyze the effect of the parametrization switching proposed in Section 3.6 on the consistency of SLAM estimation, simulation experiments with different switching thresholds were run. In the simulations, a camera completed two laps of a circular trajectory of radius 3m in the  $XZ$  plane, looking out radially at a scene composed of points lying on three concentric spheres of radius 4.3m, 10m and 20m. These points at different depths were intended to produce observations with a range of parallax angles (Figure 3.12.)

The camera parameters of the simulation correspond with our real image acquisition system: camera  $320 \times 240$  pixels, frame rate 30 frames/sec, image field of view  $90^\circ$ , measurement uncertainty for a point feature in the image, Gaussian  $N(0, 1\text{pixel}^2)$ . The simulated image sequence contained 1000 frames. Features were selected following the randomized map management algorithm proposed in [Davison 2003] in order to have 15 features visible in the image at all times. All our simulation experiments work using the same scene features, in order to homogenize the comparison.

Four simulation experiments for different thresholds for switching each feature from inverse depth to XYZ parametrization were run, with  $L_d \in \{0\%, 10\%, 40\%, 60\%\}$ . Figure 3.13 shows the camera trajectory estimation history in 6 d.o.f. (translation in  $XYZ$ , and three orientation angles  $\psi(\text{Rot}_x), \theta(\text{Rot}_y), \phi(\text{Rot}_z, \text{cyclotorsion})$ ). The following conclusions can be made:

- Almost the same performance is achieved with no switching (0%) and with 10% switching. So it is clearly advantageous to perform 10% switching because there is no penalization in accuracy and the state

### 3.8. Experimental Results

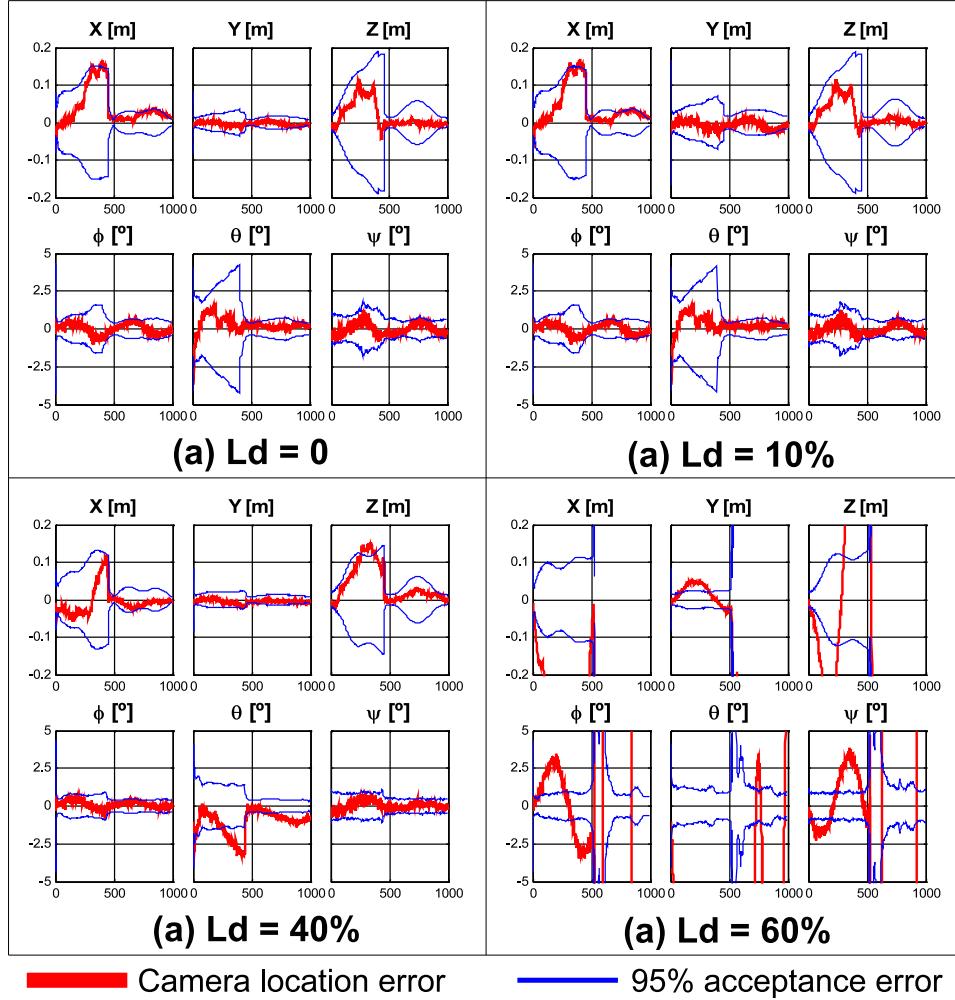


Figure 3.13: Details from the parametrization switching experiment. Camera location estimation error history in 6 d.o.f. (translation in  $X$  $Y$  $Z$ , and three orientation angles  $\psi\theta\phi$ ) for four switching thresholds: With  $L_d = 0\%$ , no switching occurs and the features all remain in the inverse depth parametrization. At,  $L_d = 10\%$  although features from the spheres at 4.3m and 10m are eventually converted, no degradation with respect to the non-switching case is observed. At  $L_d = 40\%$  some features are switched before achieving true Gaussianity, and there is noticeable degradation, especially in  $\theta$  rotation around the  $Y$  axis. At  $L_d = 60\%$  the map becomes totally inconsistent and loop closing fails.

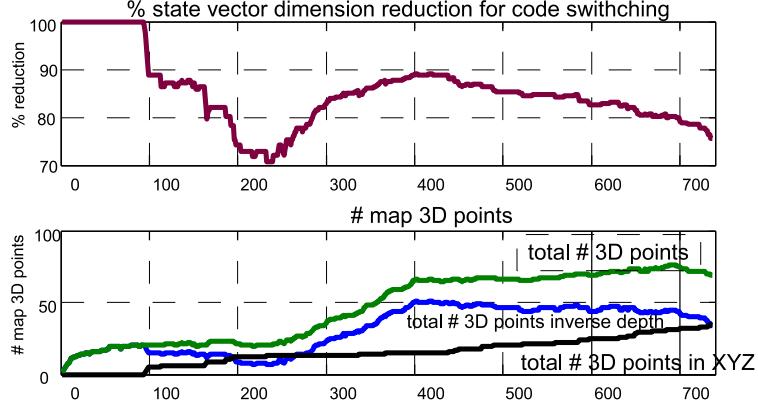


Figure 3.14: Parametrization switching on a real sequence (Section 3.8.5): state vector size history. Top: percentage reduction in state dimension when using switching compared with keeping all points in inverse depth. Bottom: total number of points in the map, showing the number of points in inverse depth and the number of points in XYZ.

vector size of each converted feature is halved.

- Switching too early degrades accuracy, especially in the orientation estimate. Notice how for 40% the orientation estimate is worse and the orientation error covariance is smaller, showing filter inconsistency. For 60%, the estimation is totally inconsistent and loop closing fails.
- Since early switching degrades performance, the inverse depth parametrization is mandatory for initialization of every feature and over the long-term for low-parallax features.

### 3.8.5 Parametrization Switching with Real Images

The loop closing sequence of Section 3.8.3 was processed without any parametrization switching, and with switching at  $L_d = 10\%$ .

Figure 3.14 shows the history of the state size, the number of map features and how their parametrization evolves. At the last estimation step about half of the features had been switched; at this step the state size had reduced from 427 to 322 (34 inverse depth features and 35 XYZ), i.e. 75% of the original vector size. Figure 3.15 shows four frames from the sequence illustrating feature switching. Up to step 100 the camera has low translation and all the features are in inverse depth form. As the camera translates nearby features switch to XYZ. Around step 420, the loop is closed and features are reobserved, producing a significant reduction in uncertainty which allows switching of more reobserved close features. Our method automatically determines which features should be represented in the inverse depth

### 3.8. Experimental Results



Figure 3.15: Parametrization switching seen in image space: points coded in inverse depth ( $\star$ ) and coded in XYZ ( $\triangle$ ). (a) First frame, with all features in inverse depth. (b) Frame #100; nearby features start switching. (c) Frame # 470, loop closing; most features in XYZ. (d) Last image of the sequence.

or XYZ forms, optimizing computational efficiency without sacrificing accuracy.

#### 3.8.6 Processing Time

We give some details of the real-time operation of our monocular SLAM system, running on a 1.8 GHz. Pentium M processor laptop. A typical EKF iteration would imply:

- A state vector dimension of 300.
- 12 features observed in the image, a measurement dimension of 24.
- 30 fps, so 33.3 ms available for processing.

Typical computing time breaks down as follows: Image acquisition, 1 ms.; EKF prediction, 2 ms.; Image matching, 1 ms.; EKF update, 17 ms. That adds up to a total of 21ms. The remaining time is used for graphics functions, using OpenGL on an NVidia card and scheduled at a low priority.

The quoted state vector size 300 corresponds to a map size of 50 if all features are encoded using inverse depth. In indoor scenes, thanks to switching maps of up to 60-70 features can be computed in real time. This size is enough to map many typical scenes robustly.

### 3.9 Discussion

We have presented a parametrization for monocular SLAM which permits operation based uniquely on the standard EKF prediction-update procedure at every step, unifying initialization with the tracking of mapped features. Our inverse depth parametrization for 3D points allows unified modelling and processing for any point in the scene, close or distant, or even at ‘infinity’. In fact, close, distant or just-initialized features are processed within the routine EKF prediction-update loop without making any binary decisions. Thanks to the undelayed initialization and immediate full use of infinite points, estimates of camera orientation are significantly improved, reducing the camera estimation jitter often reported in previous work. The jitter reduction in turn leads to computational benefits in terms of smaller search regions and improved image processing speed

The key factor is that due to our parametrization of the direction and inverse depth of a point relative to the location from which it was first seen, our measurement equation has low linearization errors at low parallax, and hence the estimation uncertainty is accurately modeled with a multi-variate Gaussian. In Section 3.4 we presented a model which quantifies linearization error. This provides a theoretical understanding of the impressive outdoor, real-time performance of the EKF with our parametrization.

The inverse depth representation requires a six-dimensional state vector per feature, compared to three for XYZ coding. This doubles the map state vector size, and hence produces a 4-fold increase in the computational cost of the EKF. Our experiments show that it is essential to retain the inverse depth parametrization for initialization and distant features, but that nearby features can be safely converted to the cheaper XYZ representation meaning that the long-term computational cost need not significantly increase. We have given details on when this conversion should be carried out for each feature, to optimize computational efficiency without sacrificing accuracy.

The experiments presented have validated the method with real imagery, using a hand-held camera as the only sensor both indoors and outdoors. We have experimentally verified the key contributions of our work:

- Real-time performance achieving 30 fps real-time processing for maps up to 60–70 features.
- Real-time loop closing.
- Dealing simultaneously with low and high parallax features.
- Non delayed initialization.
- Low jitter, full 6 DOF monocular SLAM.

In the experiments, we have focused on a map size around 60–100 features, because these map sizes can be dealt with in real time at 30Hz and

### 3.9. Discussion

---

we have focused on the challenging loop closing issue. Useful future work would be a thorough analysis of the the limiting factors in EKF inverse depth monocular SLAM in terms of linearity, data association errors, accuracy, map size and ability to deal with degenerate motion such as pure rotations or a static camera for long time periods.

Finally, our simulations and experiments have shown that inverse depth monocular SLAM operates well without known patterns in the scene to fix scale. This result points towards further work in understanding the role of scale in monocular SLAM (an avenue we have begun to investigate in a dimensionless formulation in [Civera *et al.* 2007b]) and in further bridging the gap between sequential SLAM techniques and structure from motion methods from the computer vision literature.



# 1-Point RANSAC for EKF-Based Structure from Motion

## Contents

---

<b>4.1</b>	<b>Introduction</b>	<b>70</b>
<b>4.2</b>	<b>Related Work</b>	<b>73</b>
4.2.1	Random Sample Consensus (RANSAC)	73
4.2.2	Joint Compatibility Branch and Bound (JCBB)	74
4.2.3	Structure from Motion and Visual Odometry	75
4.2.4	Benchmarking	76
<b>4.3</b>	<b>1-Point RANSAC Extended Kalman Filter Algorithm</b>	<b>77</b>
4.3.1	EKF Prediction and IC Search	77
4.3.2	1-Point Hypotheses	79
4.3.3	Partial Update with Low-Innovation Inliers	79
4.3.4	Partial Update with High-Innovation Inliers	80
<b>4.4</b>	<b>1-Point RANSAC EKF from a Monocular Sequence</b>	<b>81</b>
4.4.1	State Vector Definition	81
4.4.2	Dynamic Model	81
4.4.3	Camera-Centered Estimation	82
<b>4.5</b>	<b>Experimental Results</b>	<b>84</b>
4.5.1	Benchmark Method for 6 DOF Camera Motion	84
4.5.2	1-Point RANSAC	86
4.5.3	JCBB	90
4.5.4	Trajectory Benchmarking against GPS	93
4.5.5	EKF-Based Estimation for Long Sequences	95
4.5.6	Visual Odometry	99
<b>4.6</b>	<b>Discussion</b>	<b>102</b>
<b>4.7</b>	<b>Conclusions</b>	<b>103</b>

---

## 4.1 Introduction

The establishment of reliable correspondences from sensor data is at the core of most estimation algorithms in robotics. The search for correspondences, or data association, is usually based first stage on comparing local descriptors of salient features in the measured data. The ambiguity of such local description leads to possible incorrect correspondences at this stage. Robust methods operate by checking the consistency of the data against the global model assumed to be generating the data, and discarding as spurious any that does not fit into it. Among robust estimation methods, Random Sample Consensus (RANSAC) [Fischler & Bolles 1981] stands out as one of the most successful and widely used, especially in the Computer Vision community.

This chapter introduces a novel integration of RANSAC into the Extended Kalman Filter framework. In order to highlight the requirements and benefits of this method, the RANSAC algorithm is first briefly exposed in this introduction for the simple case of 2D line estimation from a set of points contaminated with spurious data (see Figure 4.1). After that, the same simple example will be tackled using the proposed 1-Point RANSAC algorithm (Figure 4.2). It is important to remark here that we use this simple example only to illustrate in the simplest manner our approach, and will later on fill in the details which make 1-Point RANSAC into a fully practical matching algorithm.

Standard RANSAC starts from a set of data, in our simple example 2D points, and the underlying model that generates the data, a 2D line. In the first step, RANSAC constructs hypotheses for the model parameters and selects the one that gathers most support. Hypotheses are randomly generated from the minimum number of points necessary to compute the model parameters, which is two in our case of line estimation. Support for each hypothesis can be computed in its most simple form by counting the data points inside a threshold (related to the data noise), although more sophisticated methods have been used [Torr & Zisserman 2000].

Hypotheses involving one or more outliers are assumed to receive low support, as is the case in the third hypothesis in Figure 4.1. The number of hypotheses  $n_{hyp}$  necessary to ensure that at least one spurious-free hypothesis has been tested with probability  $p$  can be computed from this formula:

$$n_{hyp} = \frac{\log(1-p)}{\log(1 - (1-\epsilon)^m)}, \quad (4.1)$$

where  $\epsilon$  is the outlier ratio and  $m$  the minimum number of data points necessary to instantiate the model. The usual approach is to adaptively compute this number of hypotheses at each iteration, assuming the inlier ratio is the support set by the total number of data points in this iteration

#### 4.1. Introduction

---

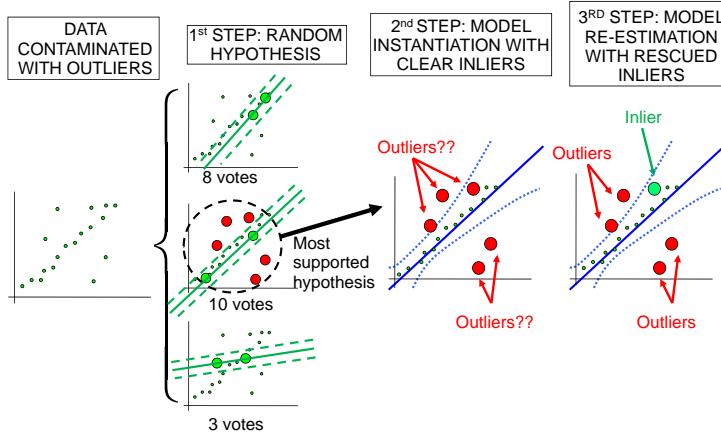


Figure 4.1: RANSAC steps for the simple 2D line estimation example: First, random hypotheses are generated from data samples of size two, the minimum to define a line. The most supported one is selected, and data voting for this hypothesis is considered inlier. Model parameters are estimated from those clear inliers in a second step. Finally, the remaining data points consistent with this latest model are rescued and the model is re-estimated again.

[Hartley & Zisserman 2004].

Data points that voted for the most supported hypothesis are considered clear inliers. In a second stage, clear inliers are used to estimate the model parameters. Individual compatibility is checked for each one of the rest of the points against the estimated model. If any of them is rescued as inlier, as happens in the example in Figure 4.1, the model parameters are re-estimated again in a third step.

Figure 4.2 illustrates the idea behind 1-Point RANSAC in the same 2D line estimation problem. As the first key difference, the starting point is a data set and its underlying model, but also a prior probability distribution over the model parameters. RANSAC random hypotheses are then generated based on this prior information and data points, differently from standard RANSAC hypothesis solely based on data points. The use of prior information can reduce the size of the data set that instantiates the model to the minimum size of one point, and it is here where the computational benefit of our method with respect to RANSAC arises: according to Equation 4.1, reducing the sample size  $m$  greatly reduces the number of RANSAC iterations and hence the computational cost.

The order of magnitude of this reduction can be better understood if we switch from the simple 2D line estimation example to our visual estimation application. According to [Nistér 2004], at least five image points are necessary to estimate the 6 degrees of freedom camera motion between two

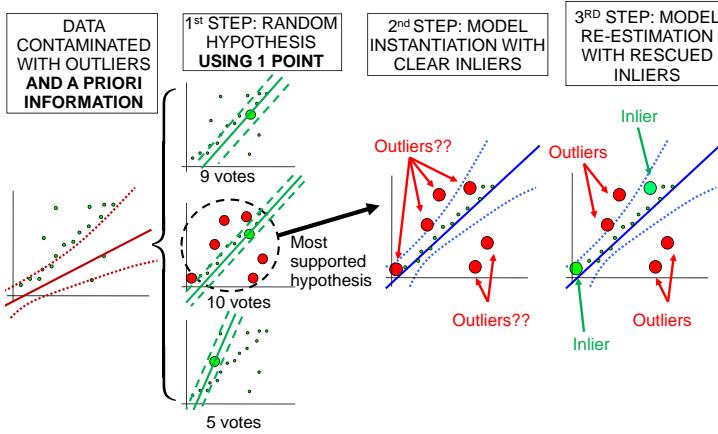


Figure 4.2: 1-Point RANSAC steps for the simple 2D line estimation example: As a key difference from standard RANSAC, the algorithm assumes that an a priori probability distribution over the model parameters is known in advance. This prior knowledge allows us to compute the random hypotheses using only 1 data point, hence reducing the number of hypotheses and the computational cost. The remaining steps do not vary with respect to standard RANSAC in Figure 4.1

frames (so  $m = 5$ ). Using formula 4.1, assuming an inlier ratio of 0.5 and a probability  $p$  of 0.99, the number of random hypotheses would be 146. Using our 1-Point RANSAC scheme, assuming that probabilistic a priori information is available, the sample size  $m$  can be reduced to one point and the number of hypotheses would be reduced to 7.

Having an a priori probability distribution over the camera parameters is unusual in classical pairwise Structure from Motion which assumes widely separated views [Hartley & Zisserman 2004], and methods like standard RANSAC which generate hypotheses from candidate feature matches are mandatory in this case. But in sequential SfM from video (such as [Davison 2003, Klein & Murray 2008, Mouragnon *et al.* 2009]), smooth interframe camera motion can be reasonably assumed and this used to generated a prior distribution (prediction) of the motion. For the specific EKF implementation of sequential SfM used in this thesis, this prior probability is naturally propagated by the filter and is straightforwardly available.

The rest of the chapter is organised as follows: first, related work is described in Section 4.2; the proposed algorithm is then described in its most general form in Section 4.3 and the details for the visual application are given in Section 4.4. Experimental results are shown in Section 4.5, including pure visual estimation and the monocular and wheel odometry combination. Finally, discussion, conclusions and future work are presented

## 4.2. Related Work

---

in sections 4.6, 4.7 and ??.

## 4.2 Related Work

### 4.2.1 Random Sample Consensus (RANSAC)

Although RANSAC is a relatively old method, the literature covering the topic continues up to the present. RANSAC [Fischler & Bolles 1981] was introduced early in visual geometric estimation [Torr & Murray 1993] and has been the preferred outlier rejection tool in the field. Recently, an important stream of research has focused on reducing the model verification cost in standard RANSAC (e.g. [Raguram *et al.* 2008, Chum & Matas 2008, Capel 2005, Nistér 2005]) via the early detection and termination of bad hypotheses. The 1-point RANSAC algorithm proposed here is related to this stream in the sense that it also reduces the hypothesis generation and validation cost. Nevertheless, it does so in a different manner: instead of fast identification of good hypotheses among a large number of them, the number of hypotheses is greatly reduced.

Incorporating probabilistic information into RANSAC has rarely been discussed in the computer vision literature. Only very recently Moreno *et al.* [Moreno-Noguer *et al.* 2008] have explored the case where weak a priori information is available in the form of probabilistic distribution functions.

More related to our method, the combination of RANSAC and Kalman filtering was proposed by Vedaldi *et al.* in [Vedaldi *et al.* 2005]. Our 1-Point RANSAC might be considered a specific form of Vedaldi's quite general approach. They propose an iterative scheme in which several minimal hypotheses are tested; for each such hypothesis all the consistent matches are iteratively harvested. No statement about the cardinality of the hypotheses is made. Here we propose a definite and efficient method, in which the cardinality of the hypotheses generator size is 1, and the inlier harvesting is not iterative but in two stages. Finally we describe in reproducible detail how to deal efficiently with the EKF algorithm in order to reach real-time, splitting the expensive EKF covariance update in two stages.

RANSAC using 1-point hypotheses has also been very recently proposed in [Scaramuzza *et al.* 2009] as the result of constraining the camera motion. While at least 5 points would be needed to compute monocular Structure from Motion for a calibrated camera undergoing general six degrees of freedom motion [Nistér 2004], fewer are needed if the motion is known to be less general: as few as 2 points in [Ortín & Montiel 2001] for planar motion and 1 point in [Scaramuzza *et al.* 2009] for planar and nonholonomic motion. As a clear limitation of both approaches, any motion performed out of the model will result in estimation error. In fact, it is shown in real-image experiments in [Scaramuzza *et al.* 2009] that although the most constrained model is enough for RANSAC hypotheses (reaching then 1-point RANSAC),

a less restrictive model offers better results for motion estimation.

In the case of the new 1-point RANSAC presented here, extra information for the predicted camera motion comes from the probability distribution function that the EKF naturally propagates over time. The method presented is then in principle not restricted to any specific motion, being suitable for 6 degrees of freedom estimation. The only assumption is the existence of tight and highly correlated priors, which is reasonable within the EKF framework since the filter itself only works in such circumstances.

#### 4.2.2 Joint Compatibility Branch and Bound (JCBB)

Joint Compatibility Branch and Bound (JCBB) [Neira & Tardós 2001] has been the preferred technique for spurious match rejection within the EKF framework in the robotics community, being successfully used in visual (e.g. [Clemente *et al.* 2007], [Williams *et al.* 2007]) and non-visual SLAM (e.g. [Fenwick *et al.* 2002]). Unlike RANSAC, which hypothesizes model parameters based on current measurement data, JCBB detects spurious measurements based on a predicted probability distribution over the measurements. It does so by extracting from all the possible matches the maximum set that is jointly compatible with the multivariate Gaussian prediction.

In spite of its wide use, JCBB presents two main limitations that 1-Point RANSAC overcomes. First, JCBB operates over the prediction for the measurements *before* fusing them. Such a probabilistic prediction is coming from the linearization of the dynamic and measurement models and the assumption of Gaussian noise; so it will presumably not correspond to the real state of the system. 1-Point and in general any RANSAC operates over hypotheses *after* the integration of a data subset, which have corrected part of the predicted model error with respect to the real system.

The second limitation of JCBB concerns computational cost: the Branch and Bound search that JCBB uses for extracting the largest jointly compatible set of matches has exponential complexity in the number of matches. This complexity does not present a problem for small numbers of matches, as is the case in the references two paragraphs above, but very large computation times arise when the number of spurious grows, as we will show in the experimental results section. The computational complexity of 1-Point RANSAC is linear in the state and measurement size and exhibits low cost variation with the number of outliers.

Two recent methods are also of interest for this work. First, Active Matching [Chli & Davison 2008] is a clear inspiration for our method. In Active Matching, feature measurements are integrated sequentially, with the choice of measurement at each step driven by expected information gain, and the results of each measurement in turn used to narrow the search for subsequent correspondences. 1-Point RANSAC can be seen as lying in the middle ground between RANSAC and JCBB which obtain point corre-

## 4.2. Related Work

---

spondence candidates and then aim to resolve them, and Active Matching with its fully sequential search for correspondence. The first step of 1-Point RANSAC is very similar to Active Matching, and confirming that integrating the first match highly constrains the possible image locations of other features, but afterwards the methods of the algorithms diverge. A problem with Active Matching in [Chli & Davison 2008] was the unreasonably high computational cost of scaling to large numbers of feature correspondences per frame, and 1-Point RANSAC has much better properties in this regard, though very recently an improvement to Active Matching has also addressed this issue in a different way [Handa *et al.* 2010].

Paz *et al.* [Paz *et al.* 2008b] describe can approach called Randomized Joint Compatibility (RJC) which basically randomizes the jointly compatible set search, avoiding the Branch and Bound search and ensuring an initial small set of jointly compatible inliers at the first step via Branch and Bound search in random sets. Only afterwards, the joint compatibility of each remaining match is checked against the initial set. Although this approach lowers the computational cost of the JCBB, it still faces the accuracy problems derived from the use of the predicted measurement function before data fusion.

### 4.2.3 Structure from Motion and Visual Odometry

Structure from Motion (SfM) is the generic term for 3D estimation from the sole input of a set of images of the imaged 3D scene and the corresponding camera locations. SfM from a sparse set of images has been usually processed by pairwise geometry algorithms [Hartley & Zisserman 2004] and refined by global optimization procedures [Triggs *et al.* 2000]. Estimation from a sequence has been carried out either by local optimization of keyframes [Klein & Murray 2008, Mouragnon *et al.* 2009], or by filtering [Davison *et al.* 2007, Eade & Drummond 2007]. In our work we apply 1-Point RANSAC to filtering based SLAM using the EKF inverse depth parametrization of [Civera *et al.* 2008a].

Visual Odometry, a term coined in [Nistér *et al.* 2004], refers to egomotion estimation mainly from visual input (monocular or stereo), but sometimes also combined with mechanical odometry and/or inertial sensor measurements. The variety of approaches here makes a complete review difficult; some visual odometry algorithms have made use of stereo cameras, either as the only sensor (e.g. [Comport *et al.* 2007]) or in combination with inertial measurements [Konolige *et al.* 2007, Cheng *et al.* 2006]. Among the monocular approaches, [Mouragnon *et al.* 2009] uses a non-panoramic camera as the only sensor. Several others have been proposed using an omnidirectional camera, e.g. [Scaramuzza *et al.* 2009, Tardif *et al.* 2008]. The experiment presented here, combining a non-panoramic camera plus proprioceptive information for estimation of large trajectories, is rarely found in

the literature.

#### 4.2.4 Benchmarking

Carefully designed benchmark datasets and methods have come into standard use in the vision community, e.g. [Scharstein & Szeliski 2002]. Robotics datasets have only recently reached such level of detail, presenting either detailed benchmarking procedures [Kummerle *et al.* 2009] or datasets with reliable ground truth and open resources for comparison [Smith *et al.* 2009, Blanco *et al.* 2009].

The RAWSEEDS dataset [RAWSEEDS 2009], which include monocular and wheel odometry streams for large scale scenarios, will be used for the Visual Odometry experiments of this thesis. While being suitable to benchmark very large real-image experiments, robotic datasets face two main inconveniences: First, the robot motion is planar in all the datasets, thus not allowing to evaluate full six-degrees-of-freedom motion estimation. And second, GPS only provides translational data and angular estimation cannot be benchmarked. Simulation environments, like the one described in [Funke & Pietzsch 2009], can provide the translational and angular ground truth for any kind of camera motion. Nevertheless, those simulation environments usually cannot represent full real world complexity.

The benchmarking method proposed and used in this chapter overcomes all these limitations. It consists of comparing the estimation results against a Bundle Adjustment solution over high resolution images. Full 6 DOF motion can be evaluated with low user effort (only the generation of a Bundle Adjustment solution is required), requirements for hardware are low (a high resolution camera) and any kind of motion or scene can be evaluated as the method operates over the real images themselves.

This approach is not entirely new: the use of a global Bundle Adjustment solution to benchmark sequential algorithms has already been used in [Eade & Drummond 2007, Mouragnon *et al.* 2009]. The contribution here is the validation of the algorithm, effectively showing that the Bundle Adjustment uncertainty is much lower than the sequential methods to benchmark. As another novelty, global Bundle Adjustment is applied over high resolution images, further improving accuracy. While it is true that a Bundle Adjustment solution still may suffer from scale drift, it will be much lower than that of the sequential algorithms. Also, scale drift can be driven close to zero by carefully choosing the images over which to apply Bundle Adjustment to form a well-conditioned network [Triggs *et al.* 2000], so the validity of the method is not compromised.

## 4.3 1-Point RANSAC Extended Kalman Filter Algorithm

Algorithm 3 outlines the proposed combination of 1-Point RANSAC inside the EKF framework in its most general form, and we describe this in detail in this section. The language used here is deliberately general in the belief that the described algorithm may be of application in a large number of estimation problems. The particular scenarios of the experimental results section (real-time sequential visual odometry from a monocular sequence, either with or without additional wheel odometry) are discussed in detail in section 4.4.

### 4.3.1 EKF Prediction and Search for Individually Compatible Matches (lines 5–8)

The algorithm begins with standard EKF prediction: the estimation for the state vector  $\mathbf{x}_{k-1|k-1}$  at step  $k-1$ , modeled as a multidimensional Gaussian  $\mathbf{x}_{k-1|k-1} \sim \mathcal{N}(\hat{\mathbf{x}}_{k-1|k-1}, \mathbf{P}_{k-1|k-1})$ , is propagated to step  $k$  through the known dynamic model  $\mathbf{f}_k$

$$\hat{\mathbf{x}}_{k|k-1} = \mathbf{f}_k(\hat{\mathbf{x}}_{k-1|k-1}, \mathbf{u}_k) \quad (4.2)$$

$$\mathbf{P}_{k|k-1} = \mathbf{F}_k \mathbf{P}_{k-1|k-1} \mathbf{F}_k^\top + \mathbf{G}_k \mathbf{Q}_k \mathbf{G}_k^\top. \quad (4.3)$$

In the above equation  $\mathbf{u}_k$  stands for the control inputs to the system at step  $k$ ,  $\mathbf{F}_k$  is the Jacobian of  $\mathbf{f}_k$  with respect to the state vector  $\mathbf{x}_{k|k-1}$  at step  $k$ ,  $\mathbf{Q}_k$  is the covariance of the zero-mean Gaussian noise assumed for the dynamic model and  $\mathbf{G}_k$  is the Jacobian of this noise with respect to the state vector  $\mathbf{x}_{k|k-1}$  at step  $k$ .

The predicted probability distribution for the state  $\mathbf{x}_{k|k-1}$  can be used to ease the correspondence search process by Active Search [Davison *et al.* 2007]. Propagating this predicted state through the measurement model  $\mathbf{h}_i$  offers a Gaussian prediction for each measurement:

$$\hat{\mathbf{h}}_i = \mathbf{h}_i(\hat{\mathbf{x}}_{k|k-1}) \quad (4.4)$$

$$\mathbf{S}_i = \mathbf{H}_i \mathbf{P}_{k|k-1} \mathbf{H}_i^\top + \mathbf{R}_i, \quad (4.5)$$

where  $\mathbf{H}_i$  is the Jacobian of the measurement  $\mathbf{h}_i$  with respect to the state vector  $\mathbf{x}_{k|k-1}$  and  $\mathbf{R}_i$  is the covariance of the Gaussian noise assumed for each individual measurement. The actual measurement  $\mathbf{z}_i$  should be exhaustively searched for inside the 99% probability region defined by its predicted Gaussian  $\mathcal{N}(\hat{\mathbf{h}}_i, \mathbf{S}_i)$  by comparison of the chosen local feature descriptor.

---

**Algorithm 3** 1-Point RANSAC EKF

---

```

1: INPUT:  $\hat{\mathbf{x}}_{k-1|k-1}, \mathbf{P}_{k-1|k-1}$  {EKF estimate at step  $k-1$ }
2:            $th$  {Threshold for low-innovation points. In this thesis,  $th =$ 
    $2\sigma_{pixels}$ }
3: OUTPUT:  $\hat{\mathbf{x}}_{k|k}, \mathbf{P}_{k|k}$  {EKF estimate at step  $k$ }
4:
   {A. EKF prediction and individually compatible matches}
5:  $[\hat{\mathbf{x}}_{k|k-1}, \mathbf{P}_{k|k-1}] = EKF\_prediction(\hat{\mathbf{x}}_{k-1|k-1}, \mathbf{P}_{k-1|k-1}, \mathbf{u})$ 
6:  $[\hat{\mathbf{h}}_{k|k-1}, \mathbf{S}_{k|k-1}] = measurement\_prediction(\hat{\mathbf{x}}_{k|k-1}, \mathbf{P}_{k|k-1})$ 
7:  $\mathbf{z}^{IC} = search\_IC\_matches(\hat{\mathbf{h}}_{k|k-1}, \mathbf{S}_{k|k-1})$ 
8:
   {B. 1-Point hypotheses generation and evaluation}
9:  $\mathbf{z}^{li\_inliers} = []$ 
10:  $n_{hyp} = 1000$  {Initial value, will be updated in the loop}
11: for  $i = 0$  to  $n_{hyp}$  do
12:    $\mathbf{z}_i = select\_random\_match(\mathbf{z}^{IC})$ 
13:    $\hat{\mathbf{x}}_i = EKF\_state\_update(\mathbf{z}_i, \hat{\mathbf{x}}_{k|k-1})$  {Notice: only state update; NO
      covariance update}
14:    $\hat{\mathbf{h}}_i = predict\_all\_measurements(\hat{\mathbf{x}}_i)$ 
15:    $\mathbf{z}_i^{th} = find\_matches\_below\_a\_threshold(\mathbf{z}^{IC}, \hat{\mathbf{h}}_i, th)$ 
16:   if  $size(\mathbf{z}_i^{th}) > size(\mathbf{z}^{li\_inliers})$  then
17:      $\mathbf{z}^{li\_inliers} = \mathbf{z}_i^{th}$ 
18:      $\epsilon = 1 - \frac{size(\mathbf{z}^{li\_inliers})}{size(\mathbf{z}^{IC})}$ 
19:      $n_{hyp} = \frac{\log(1-p)}{\log(1-(1-\epsilon))}$ 
20:   end if
21: end for
22:
   {C. Partial EKF update using low-innovation inliers}
23:  $[\hat{\mathbf{x}}_{k|k}, \mathbf{P}_{k|k}] = EKF\_update(\mathbf{z}^{li\_inliers}, \hat{\mathbf{x}}_{k|k-1}, \mathbf{P}_{k|k-1})$ 
24:
   {D. Partial EKF update using high-innovation inliers}
25:  $\mathbf{z}^{hi\_inliers} = []$ 
26: for every match  $\mathbf{z}^j$  above a threshold  $th$  do
27:    $[\hat{\mathbf{h}}^j, \mathbf{S}^j] = point\_j\_prediction\_and\_covariance(\hat{\mathbf{x}}_{k|k}, \mathbf{P}_{k|k}, j)$ 
28:    $\nu^j = \mathbf{z}^j - \hat{\mathbf{h}}^j$ 
29:   if  $\nu^j \top \mathbf{S}^{j-1} \nu^j < \chi^2_{2,0.01}$  then
30:      $\mathbf{z}^{hi\_inliers} = add\_match\_j\_to\_inliers(\mathbf{z}^{hi\_inliers}, \mathbf{z}^j)$  {If individually
      compatible, add to inliers}
31:   end if
32: end for
33: if  $size(\mathbf{z}^{hi\_inliers}) > 0$  then
34:    $[\hat{\mathbf{x}}_{k|k}, \mathbf{P}_{k|k}] = EKF\_update(\mathbf{z}^{hi\_inliers}, \hat{\mathbf{x}}_{k|k}, \mathbf{P}_{k|k})$ 
35: end if

```

---

### 4.3. 1-Point RANSAC Extended Kalman Filter Algorithm

---

Active Search allows computational savings and also constraints the matches to be individually compatible with the predicted state  $\mathbf{x}_{k|k-1}$ . Nevertheless, ensuring geometric compatibility for each separated match  $\mathbf{z}_i$  does not guarantee the global consensus of the whole set. So, still the joint compatibility of the data against a global model has to be checked for the set individually compatible matches  $\mathbf{z}^{IC} = (\mathbf{z}_1 \dots \mathbf{z}_i \dots \mathbf{z}_n)^\top$  previous to the EKF update.

#### 4.3.2 1-Point Hypotheses Generation and Evaluation (lines 9–22)

Following the principles of RANSAC, random state hypotheses  $\hat{\mathbf{x}}_i$  are generated and data support is computed by counting measurements inside a threshold. It is assumed that we are considering problems where the predicted measurements are highly correlated, such that every hypothesis computed from one match reduces most of the correlation in the measurement prediction, with inlier uncertainty close to the measurement noise. The threshold is fixed according to a  $\chi^2$  test with significance  $\alpha = 0.05$ .

As the key difference with respect to standard RANSAC, random hypotheses will be generated not only based on the data  $\mathbf{z}^{IC} = (\mathbf{z}_1 \dots \mathbf{z}_i \dots \mathbf{z}_n)^\top$  but also on the predicted state  $\mathbf{x}_{k|k-1} \sim \mathcal{N}(\hat{\mathbf{x}}_{k|k-1}, \mathbf{P}_{k|k-1})$ . Exploiting this prior knowledge allows us to reduce the sample size necessary to instantiate the model parameters from the minimal size to define the degrees of freedom of the model to only one data point. The termination criteria of the RANSAC algorithm, stated in Equation 4.1, grows exponentially with the sample size and means a great reduction in the number of hypotheses.

Another key aspect for the efficiency of the algorithm is that each hypothesis  $\hat{\mathbf{x}}_i$  generation only needs an EKF state update using a single match  $\mathbf{z}_i$ . A covariance update, which is of quadratic complexity in the size of the state, is not needed and the cost per hypothesis will be low. Hypothesis support is calculated by projecting the updated state into the camera, which can also be performed at very low cost compared with other stages in the EKF algorithm.

#### 4.3.3 Partial Update with Low-Innovation Inliers (lines 23–24)

Data points voting for the most supported hypothesis  $\mathbf{z}^{li\_inliers}$  are designated as low-innovation inliers. They are assumed to be generated by the true model, as they are at a small distance from the most supported hypothesis. The rest of the points can be outliers but also inliers, even if they are far from the most supported hypothesis.

A simple example from visual estimation can illustrate this: it is well

known that distant points are useful for estimating camera rotation, while close points are necessary to estimate translation [Civera *et al.* 2008a]. In the RANSAC hypotheses generation step, a distant feature would generate a highly accurate 1-point hypothesis for rotation, while translation would remain inaccurately estimated. Other distant points would in this case have low innovation and would vote for this hypothesis. But as translation is still inaccurately estimated, nearby points would presumably exhibit high innovation even if they are inliers.

So after having determined the most supported hypothesis and the other points that vote for it, some inliers still have to be “rescued” from the high-innovation set. Such inliers will be rescued after a partial state and covariance update using only the reliable set of low-innovation inliers:

$$\hat{\mathbf{x}}_{k|k} = \hat{\mathbf{x}}_{k|k-1} + \mathbf{K}_k \left( \mathbf{z}^{li\_inliers} - \mathbf{h}'(\hat{\mathbf{x}}_{k|k-1}) \right) \quad (4.6)$$

$$\mathbf{P}_{k|k} = (\mathbf{I} - \mathbf{K}_k \mathbf{H}_k) \mathbf{P}_{k|k-1} \quad (4.7)$$

$$\mathbf{K}_k = \mathbf{P}_{k|k-1} \mathbf{H}_k^\top \left( \mathbf{H}_k \mathbf{P}_{k|k-1} \mathbf{H}_k^\top + \mathbf{R}_k \right)^{-1}. \quad (4.8)$$

$\mathbf{H}_k = (\mathbf{H}_1 \dots \mathbf{H}_i \dots \mathbf{H}_{n'})^\top$  stands for the Jacobian of the measurement equation  $\mathbf{h}'(\hat{\mathbf{x}}_{k|k-1})$  that projects the low-innovation inliers into the sensor space.  $\mathbf{R}_k$  is the covariance assigned to the sensor noise.

#### 4.3.4 Partial Update with High-Innovation Inliers (lines 25–35)

After a partial update using low-innovation inliers, most of the correlated error in the EKF prediction is corrected and the covariance is greatly reduced. This high reduction will be exploited for the recovery of high-innovation inliers: as correlations have weakened, consensus for the set will not be necessary to compute and individual compatibility will suffice to discard inliers from outliers.

An individual Gaussian prediction  $\mathbf{h}^j \sim \mathcal{N}(\hat{\mathbf{h}}^j, \mathbf{S}^j)$  will be computed for each high innovation for every match  $\mathbf{z}^j$  by propagating the state after the first partial update  $\mathbf{x}_{k|k}$  through the projection model. The match will be accepted as an inlier if it lies within the 99% probability region of the predicted Gaussian for the measurement.

After testing all the high-innovation measurements a second partial update will be performed with all the points classified as inliers  $\mathbf{z}^{hi\_inliers}$ , following the usual EKF equations.

It is worth remarking here that splitting the EKF update does not have a noticeable effect on the computational cost. If  $n$  is the state size and  $m$  the measurement vector size, and in the usual SLAM case where the state is much bigger than the locally measured set  $n \gg m$ , the main EKF

cost is the covariance update which is  $\mathcal{O}(mn^2)$ . If the update is divided into two steps of measurement vector sizes  $m_1$  and  $m_2$  ( $m = m_1 + m_2$ ), this covariance update cost stays almost the same. Some other minor costs grow, like the Jacobian computation which has to be done twice. But also some others are reduced, like the measurement covariance inversion which is  $\mathcal{O}(m^3)$ . Nevertheless, the effect of the latter two is negligible and for most EKF estimation cases the cost is dominated by the covariance update and remains approximately the same.

## 4.4 1-Point RANSAC Extended Kalman Filter from a Monocular Sequence Input

As previously stated, the proposed 1-point RANSAC and EKF combination is used in this thesis for the particular case of visual estimation from a monocular camera. In this section, the general method detailed in Section 4.3 specializes to this specific application.

### 4.4.1 State Vector Definition

The state vector at step  $k$  is composed of a set of camera parameters  $\mathbf{x}_{C_k}^W$  and map parameters  $\mathbf{y}^W$ . All of these are usually referred to a static reference frame  $W$ , although there are some advantages in referring them to the current camera frame  $C_k$  (Section 4.4.3 describes this latter approach);

$$\hat{\mathbf{x}}_k^W = \begin{pmatrix} \hat{\mathbf{x}}_{C_k}^W \\ \hat{\mathbf{y}}^W \end{pmatrix}; \quad \mathbf{P}_k^W = \begin{pmatrix} \mathbf{P}_{C_k}^W & \mathbf{P}_{C_k y}^W \\ \mathbf{P}_{y C_k}^W & \mathbf{P}_y^W \end{pmatrix}. \quad (4.9)$$

The estimated map  $\mathbf{y}^W$  is composed of  $n$  point features  $\mathbf{y}_i^W$ ;  $\mathbf{y}^W = (\mathbf{y}_1^{W\top} \dots \mathbf{y}_n^{W\top})^\top$ . Point features are parametrized in inverse depth coordinates  $\mathbf{y}_{i, ID}^W = (X_i^W Y_i^W Z_i^W \theta_i^W \phi_i^W \rho_i)^\top$  and converted to Euclidean parametrization  $\mathbf{y}_{i, E}^W = (X_i^W Y_i^W Z_i^W)^\top$  if and when the projection equation becomes linear enough, as described in chapter 3. The inverse depth parametrization stores in its six parameters the 3D camera position when the feature was initialized  $(X_i^W Y_i^W Z_i^W)^\top$ , the azimuth-elevation pair  $(\theta_i^W \phi_i^W)^\top$  encoding the unit ray pointing to the feature and its inverse depth along the ray  $\rho_i$ .

### 4.4.2 Dynamic Model

The dynamic model applied to the camera depends on the information available. For the case of pure visual estimation from a monocular sequence, a constant velocity model is sufficient for smooth hand-held motion. Details for the constant velocity model were already discussed in section 3.2.1. The

camera state is then formed by position  $\mathbf{r}_{C_k}^W$ , orientation  $\mathbf{q}_{C_k}^W$ , and linear and angular velocities  $\mathbf{v}^W$  and  $\omega^{C_k}$ :

$$\mathbf{x}_{C_k}^W = \begin{pmatrix} \mathbf{r}_{C_k}^W \\ \mathbf{q}_{C_k}^W \\ \mathbf{v}^W \\ \omega^{C_k} \end{pmatrix}. \quad (4.10)$$

When other sensorial information apart from the monocular sequence is available, it should be incorporated as input to the dynamic model. In this chapter, the combination of monocular vision plus wheel odometry is analyzed. In this case, the camera state only needs to contain position and orientation  $\mathbf{x}_{C_k}^W = \begin{pmatrix} \mathbf{r}_{C_k}^W \\ \mathbf{q}_{C_k}^W \end{pmatrix}$ . In the experiments shown at the end of this chapter, the classical model for a differential drive robot [Borenstein *et al.* 1996] has been chosen to model its dynamics.

#### 4.4.3 Camera-Centered Estimation

It is well known that the usual EKF SLAM formulation, referred to a world reference frame, is only valid for local estimation in the surroundings of a sensor. Figure 4.3(a) illustrates the problem of this formulation: as the sensor moves away from the world reference, and if a pure exploratory trajectory is performed, the uncertainty of the estimation will always grow. Eventually it will reach a point where large linearization errors will cause inconsistency and filter divergence.


Figure 4.3(b) illustrates an alternative approach that alleviates this problem, that was first presented for EKF SLAM in [Castellanos *et al.* 2004]. It basically consists of referring all geometric parameters to a reference frame attached to the camera. Uncertainty in the locality of the sensor will always be kept low, greatly reducing the linearization errors associated with the measurement model. The camera-centered approach was first used for visual EKF estimation in [Civera *et al.* 2009c]; and has been thoroughly benchmarked in [Williams 2009].

The modifications with respect to world-centered visual SLAM are now given in detail. First, the state vector is composed of the location of the world reference frame  $\mathbf{x}_W^{C_k}$  and the map of estimated features  $\mathbf{y}^{C_k}$ , both expressed in the current camera reference frame:

$$\mathbf{x}_k^{C_k} = \begin{pmatrix} \mathbf{x}_W^{C_k} \\ \mathbf{y}^{C_k} \end{pmatrix}. \quad (4.11)$$

The location of the world reference with respect to the current camera  $\mathbf{x}_W^{C_k} = \begin{pmatrix} \mathbf{r}_W^{C_k} \\ \mathbf{q}_W^{C_k} \end{pmatrix}$  is coded with its position  $\mathbf{r}_W^{C_k}$  and quaternion orientation

#### 4.4. 1-Point RANSAC EKF from a Monocular Sequence

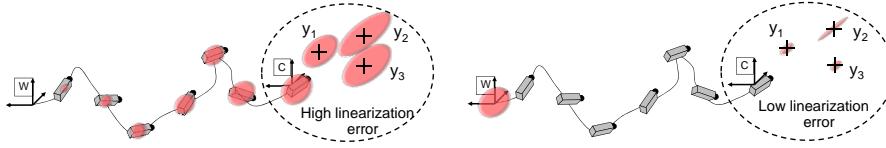

(a) World-referenced EKF estimation. As the camera moves away from the World reference and does not revisit known places the uncertainty grows both in the camera and newly initialized features  $y_i$ . The wide uncertainty regions will produce high linearization errors and filter inconsistency.

(b) Camera-centered EKF estimation. The camera location uncertainty is close to zero, as the reference is always attached to it. Uncertainties for features in its vicinity  $y_i$  will be also kept low, so measurement model linearization errors will be kept small for the whole estimation.

Figure 4.3: Camera-centered and World-referenced EKF estimation.

$\mathbf{q}_W^{C_k}$ . When odometry information is not available and a constant velocity model is assumed, velocities should also be included in the state  $\mathbf{x}_k^{C_k} = \begin{pmatrix} \mathbf{x}_W^{C_k} \\ \mathbf{v}^{C_k} \\ \omega^{C_k} \\ \mathbf{y}^{C_k} \end{pmatrix}$ .

For the prediction step at time  $k$ , the world reference frame and feature map are kept in the reference frame at time  $k-1$  and a new feature  $\mathbf{x}_{C_{k-1}}^{C_k}$  that represents the motion of the sensor between  $k-1$  and  $k$  is added:

$$\mathbf{x}_{k|k-1}^{C_{k-1}} = \begin{pmatrix} \mathbf{x}_W^{C_{k-1}} \\ \mathbf{y}^{C_{k-1}} \\ \mathbf{x}_{C_{k-1}}^{C_k} \end{pmatrix} \quad (4.12)$$

The predicted camera motion is represented in terms of position and orientation, represented via a quaternion:

$$\mathbf{x}_{C_k}^{C_{k-1}} = \begin{pmatrix} \mathbf{r}_{C_k}^{C_{k-1}} \\ \mathbf{q}_{C_k}^{C_{k-1}} \end{pmatrix}. \quad (4.13)$$

The 1-point RANSAC EKF algorithm is applied with minor changes. The dynamic model of the system is applied over the motion relative to the previous frame contained in  $\mathbf{x}_{C_k}^{C_{k-1}}$ , either using the constant velocity model in section 3.2.1 (in which case velocities should be kept then in the state as described above) or wheel odometry inputs. The measurement model described in chapter 3 is modified only at its first step: as the map  $\mathbf{y}^{C_{k-1}}$  is now in the previous camera frame  $C_{k-1}$ , Equations ?? and ?? change

features from the previous to the current camera frame using relative motion in  $\mathbf{x}_{C_k}^{C_{k-1}}$ .

The algorithm proceeds then as explained in Section 4.3. At the end of the algorithm, after the second update, a rigid transformation is applied to change the reference frame from the previous camera to the current one. The world reference location is updated:

$$\mathbf{r}_W^{C_k} = \mathbf{R}_{C_{k-1}}^{C_k} (\mathbf{q}_{C_k}^{C_{k-1}}) (\mathbf{r}_W^{C_{k-1}} - \mathbf{r}_{C_k}^{C_{k-1}}) \quad (4.14)$$

$$\mathbf{q}_W^{C_k} = \mathbf{q}_W^{C_{k-1}} \times \mathbf{q}_{C_{k-1}}^{C_k}, \quad (4.15)$$

and the parameters representing motion from the previous to the current frame  $\mathbf{x}_{C_k}^{C_{k-1}}$  are marginalized out from the state. Inverse depth and Euclidean map features are also affected by this composition step:

$$\mathbf{y}_{i, ID}^{C_k} = \begin{pmatrix} \mathbf{R}_{C_{k-1}}^{C_k} (\mathbf{q}_{C_k}^{C_{k-1}}) \begin{pmatrix} X_i^{C_{k-1}} \\ Y_i^{C_{k-1}} \\ Z_i^{C_{k-1}} \end{pmatrix} - \mathbf{r}_{C_k}^{C_{k-1}} \\ \mathbf{m}^{-1} \left( \mathbf{R}_{C_{k-1}}^{C_k} (\mathbf{q}_{C_k}^{C_{k-1}}) \mathbf{m} \left( \theta_i^{C_{k-1}}, \phi_i^{C_{k-1}} \right) \right) \\ \rho_i \end{pmatrix}; \mathbf{y}_{i, E}^{C_k} = \mathbf{R}_{C_{k-1}}^{C_k} (\mathbf{q}_{C_k}^{C_{k-1}}) (\mathbf{y}_{i, E}^{C_{k-1}} - \mathbf{r}_{C_k}^{C_{k-1}}) \quad (4.16)$$

The covariance is updated using the Jacobians of this composition function  $\mathbf{J}_{C_{k-1} \rightarrow C_k}$

$$\mathbf{P}_k^{C_k} = \mathbf{J}_{C_{k-1} \rightarrow C_k} \mathbf{P}_k^{C_{k-1}} \mathbf{J}_{C_{k-1} \rightarrow C_k}^\top. \quad (4.17)$$

## 4.5 Experimental Results

### 4.5.1 Benchmark Method for 6 DOF Camera Motion Estimation.

The first step of the method takes an image sequence of the highest resolution, in order to achieve the highest accuracy. In this chapter, a  $1224 \times 1026$  pixels sequence was taken at 22 frames per second. A sparse subset of  $n$  camera locations  $\mathbf{x}_{BA}^{C_1}$  are estimated by Levenberg-Marquardt Bundle Adjustment with robust likelihood model [Triggs *et al.* 2000] over the corresponding  $n$  images in the sequence  $\{I_1, \dots, I_n\}$ . Images are manually selected to ensure they form a strong network. The reference frame is attached to the camera  $C_1$ , corresponding to the first frame of the sequence  $I_1$ . For the experiments in sections 4.5.2 and 4.5.3, 62 overlapping camera locations were reconstructed by manually matching 74 points spread over the images. 15 – 20 points are visible in each image.

#### 4.5. Experimental Results

---

$$\mathbf{x}_{BA}^{C_1} = \begin{pmatrix} \mathbf{x}_{1,BA}^{C_1} \\ \vdots \\ \mathbf{x}_{n,BA}^{C_1} \end{pmatrix}, \quad (4.18)$$

$$\mathbf{x}_{i,BA}^{C_1} = \left( X_{i,BA}^{C_1} Y_{i,BA}^{C_1} Z_{i,BA}^{C_1} \phi_{i,BA}^{C_1} \theta_{i,BA}^{C_1} \psi_{i,BA}^{C_1} \right)^\top. \quad (4.19)$$

Each camera location is represented by its position  $\left( X_{i,BA}^{C_1} Y_{i,BA}^{C_1} Z_{i,BA}^{C_1} \right)^\top$  and Euler angles  $\left( \phi_{i,BA}^{C_1} \theta_{i,BA}^{C_1} \psi_{i,BA}^{C_1} \right)^\top$ . The covariance of the solution is computed by back-propagation of reprojection errors  $P_{BA}^{C_1} = (J^\top R^{-1} J)^{-1}$ , where  $J$  is the Jacobian of the projection model and  $R$  is the covariance of the Gaussian noise assumed in the model.

The input sequence is then reduced by dividing its width and height by four. The algorithm to benchmark is applied over the subsampled sequence. The reference frame is also attached to the first camera  $C_1$ , which is taken to be the same first one as in Bundle Adjustment. Images for which a Bundle Adjustment estimation is available are selected and stored  $\mathbf{x}_{i,MS}^{C_1}$ , each along with its individual covariance  $P_{i,MS}^{C_1}$  directly extracted from the EKF at each step.

As the reference has been set to the same first image of the sequence, the Bundle Adjustment and sequential estimation solutions only differ in the scale of the reconstruction. So, in order to compare them, the relative scale  $s$  is estimated first by minimizing the error between the two trajectories. The Bundle Adjustment trajectory is then scaled  $\mathbf{x}_{BA}^{C_1} = f_{scale} \left( \mathbf{x}_{BA}^{C_1} \right)$  and also its covariance  $P_{BA}^{C_1} = J_{scale} P_{BA}^{C_1} J_{scale}^\top$ .

Finally, the error is computed as the relative transformation between the two solutions:

$$e = \oplus \mathbf{x}_{BA}^{C_1} \ominus \mathbf{x}_{MS}^{C_1}; \quad (4.20)$$

and the corresponding covariance of the error is computed by propagating the covariances of the global optimization and sequential estimate:

$$P_e = J_{eBA} P_{BA}^{C_1} J_{eBA}^\top + J_{eMS} P_{MS}^{C_1} J_{eMS}^\top. \quad (4.21)$$

It was checked in the experiments in the chapter that the covariance term from Bundle Adjustment,  $J_{eBA} P_{BA}^{C_1} J_{eBA}^\top$ , was negligible with respect to the summed covariance  $P_e$ . Since this is the case, it is our opinion that the Bundle Adjustment results can be considered as a reliable ground truth to evaluate sequential approaches. In the following figures, only uncertainty regions coming from filtering,  $J_{eMS} P_{MS}^{C_1} J_{eMS}^\top$  are shown.

The same subsampled sequence was used for all the experiments in the following Sections 4.5.2 and 4.5.3. The camera moves freely in six degrees

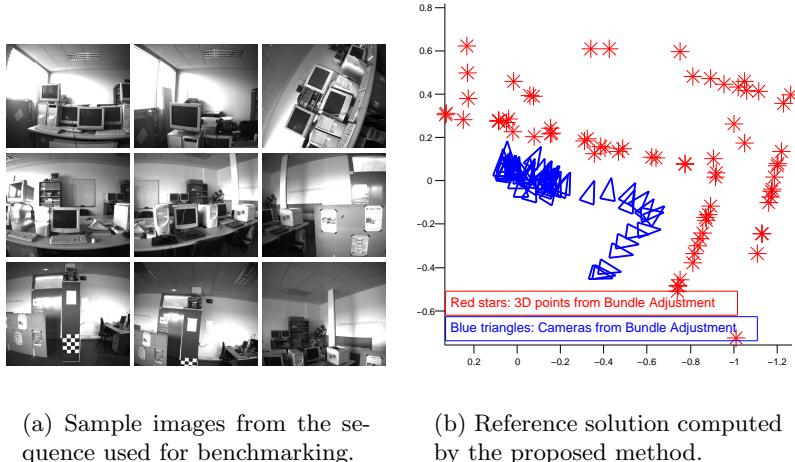


Figure 4.4: Images extracted from the sequence used in the experiments and reference camera positions extracted.

of freedom in a computer lab, with the maximum distances between camera locations around 5 metres. Filter tuning parameters were equal for all the experiments: motion dynamic and measurement model noise were kept the same, the number of measured features in the image was limited to 30 and all the thresholds (e.g. for feature deletion, cross-correlation, inverse depth to Euclidean conversion and initialization) were also kept the same. The reader should be aware that despite all of care taken, the experiments are not exactly the same: One of the reasons is that the outlier rate is different for each method; some methods need to initialize more features in order to keep measuring 30. Nevertheless, in the opinion of the authors, this is the fairest comparison as the algorithms try always to measure always the same number of points and hence gather an equivalent amount of sensor data.

Figure 4.4 shows example images from the sequence used in the following two sections for 1-point RANSAC and JCBB benchmarking. The 62 camera locations from the 2796 images long sequence are also displayed. Results for different experiments using this benchmarking method have been grouped for better visualization and comparison: Figures 4.5 and 4.7 show estimation errors for different tunings of 1-point RANSAC and JCBB; and 4.9 details their computational cost. All the experiments in the chapter were run on an Intel(R) Core(TM) i7 processor at 2.67GHz.

### 4.5.2 1-Point RANSAC

First, the performance of 5-point and 1-point RANSAC is compared, in order to ensure that there is no degradation of performance when the sample size is reduced. Figures 4.5(a) and 4.5(b) show the errors of both algorithms with

#### 4.5. Experimental Results

---

respect to the reference camera motion, along with their 99% uncertainty regions. It can be observed that reducing the sample size from 5 to 1 does not have a significant effect either on the accuracy or the consistency of the estimation. On the contrary, the figure even shows 1-point outperforming 5-point RANSAC. We attribute this to the fact that the theoretical number of hypotheses given by equation 4.1 was not inflated in our experiments, unlike in classical SfM algorithms [Raguram *et al.* 2008]. By increasing the number of iterations, 5-point RANSAC results comes close to 1-point; but we find it remarkable that without this augmentation 1-point RANSAC already shows good behaviour. The standard deviation of image noise was chosen to be 0.5 for the experiments, as subpixel matching is used.

While the accuracy and consistency remains similar, the computational cost is much higher for the usual 5-point RANSAC than the proposed 1-point. The detail of the computational cost of both algorithms can be seen in Figures 4.9(a) and 4.9(b). The cost of RANSAC is low compared with the rest of the EKF computations for the 1-point case, but it is several orders of magnitude higher and is the main cost in the 5-point case. The large cost increase is caused by the increase in the number of random hypotheses in frames with a large number of spurious matches. Figures 4.6(a) and 4.6(b) show the number of hypotheses in both cases, revealing that in 5-point RANSAC this is two orders of magnitude. The five higher green spikes appearing in all the figures are caused by dropped frames in the sequence where there is a jump in camera location. The correspondence search cost is increased at these frames, but notice that the cost of RANSAC is not increased at all.

Hypothesis generation from a single point opens the possibility of exhaustive rather than random hypotheses generation: while an exhaustive generation of all the possible combinations of 5 points in the measurement subset would be impractical, an exhaustive generation of 1-point hypotheses implies only as many hypotheses as measurements. Figure 4.5(c) details the errors for the 1-point exhaustive hypotheses generation case. Compared with 1-point random hypotheses generation in Figure 4.6(b), we observe similar accuracy and consistency. Figure 4.6(c) shows the number of iterations needed for comparison with the random adaptive case (Figure 4.6(b)). The computational cost is increased but, as shown in Figure 4.9(c), it is still dominated by the EKF update cost. Both options are then suitable for real-time implementation, with the cheaper adaptive random 1-point RANSAC algorithm being preferable as performance is not degraded significantly.

From analyzing the computational cost in Figure 4.9(b) it can be concluded that the cost for 1-point RANSAC is always low compared with EKF computation even when the spurious match rate is high (the spurious match rate is shown in Figure 4.8(b)). As will be shown later, the latter becomes an important advantage over JCBB whose cost grows exponentially with the rate of spurious matches. This efficiency opens the possibility of making the

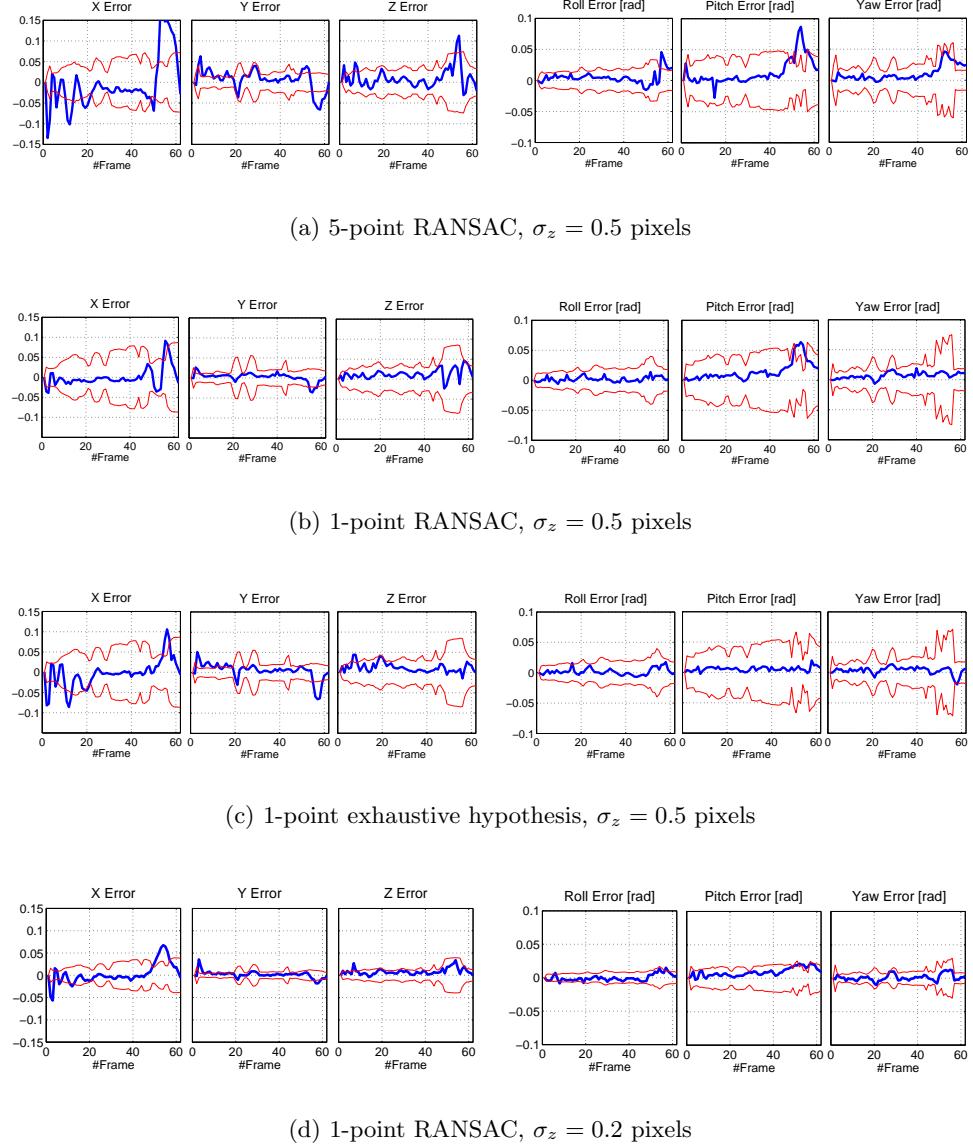


Figure 4.5: Camera location error (in thick blue) and uncertainty (in thin red) for different RANSAC configurations. Similar error and consistency is shown for 5-point and 1-point RANSAC in Figures 4.5(a) and 4.5(b) respectively. Figure 4.5(c) also reports similar results for exhaustive hypothesis testing. Figure 4.5(d) shows smaller errors as a result of making 1-point RANSAC stricter by reducing the standard deviation of measurement noise.

#### 4.5. Experimental Results

---

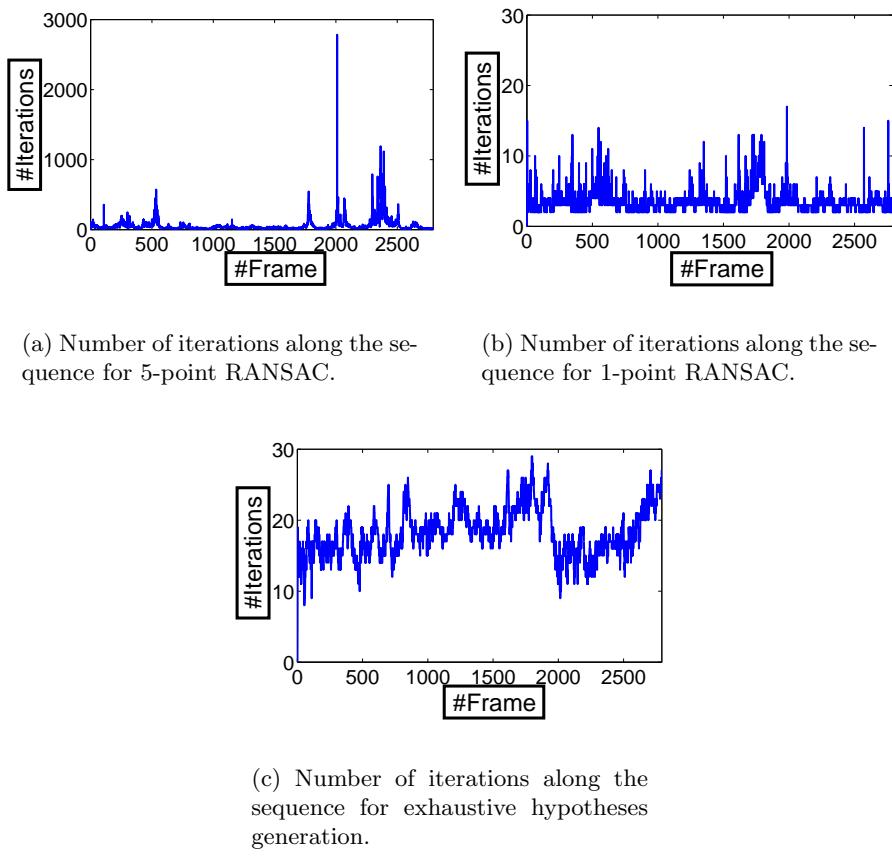


Figure 4.6: Number of iterations for 5-points and 1-point RANSAC. Notice the several orders of magnitude increase for the 5-point case, causing a large cost overhead when compared with 1-point RANSAC (Figures 4.9(a), 4.9(b) and 4.9(c) detail the computational cost for the three cases respectively).

RANSAC algorithm stricter by reducing the measurement noise standard deviation and hence discarding high noise points in the EKF. Such analysis can be done by reducing the standard deviation from 0.5 to 0.2 pixels: high noise points were discarded as outliers, as can be seen in Figures 4.8(b) and 4.8(d). The computational cost increases, as shown in Figure 4.9(e), but still remains small enough to reach real-time performance at 22 Hz. The benefit of discarding high noise points can be observed in Figure 4.5(d): errors and their uncertainty were reduced (but still kept highly consistent) as a result of measuring more accurate points.

### 4.5.3 JCBB

RANSAC and JCBB tuning is a thorny issue when benchmarking both algorithms. As both cases assume Gaussian distributions for the measurement and decide based on probability, we considered it fairest to choose equal significance levels for the probabilistic tests of both algorithms. The significance level was chosen to be 0.05 in the  $\chi^2$  test that JCBB performs to ensure joint compatibility for the matches. Consistently, the probabilistic threshold for RANSAC was set to 95% for voting (line 15 in the algorithm in Section 4.3) and for the rescue of high-innovation matches (line 29 in the algorithm in Section 4.3).

The results of benchmarking JCBB are shown in the following figures. First, Figure 4.7(a) details the errors and uncertainty regions for the EKF using JCBB. It can be observed that the estimation in Figure 4.7(a) show larger errors and inconsistency than the 1-point RANSAC one in Figure 4.7(b), repeated here for visualization purposes. The reason can be observed in Figure 4.8, where the outlier rates for 1-point RANSAC and JCBB are shown: the number of matches considered outliers by 1-point RANSAC is greater than by JCBB. The points accepted as inliers by JCBB are the ones that spoil the estimation.

A stricter version of JCBB has been benchmarked by reducing the standard deviation of uncorrelated measurement noise to 0.2 pixels, as was done with 1-point RANSAC. The spurious match rate for both algorithms, shown in Figure 4.8(c) and 4.8(d), shows that 1-point RANSAC remains more discriminative and hence produces more accurate estimation than JCBB (Figure 4.7(c)). 1-point RANSAC errors for the same tuning are repeated in 4.7(d) for comparison purposes. Also, as previously noted, the computational cost of JCBB grows exponentially when made stricter: Figure 4.9(f) shows peaks over a second in the worst cases.

JCBB can also be made stricter by increasing the significance level  $\alpha$  of the  $\chi^2$  test it performs to check the joint compatibility of the data. Several experiments were run varying this parameter. The lowest estimation errors, shown in Figure 4.7(e), were reached for  $\alpha = 0.5$  instead of the usual  $\alpha = 0.05$ . Estimation errors for this best JCBB tuning are still larger than in

#### 4.5. Experimental Results

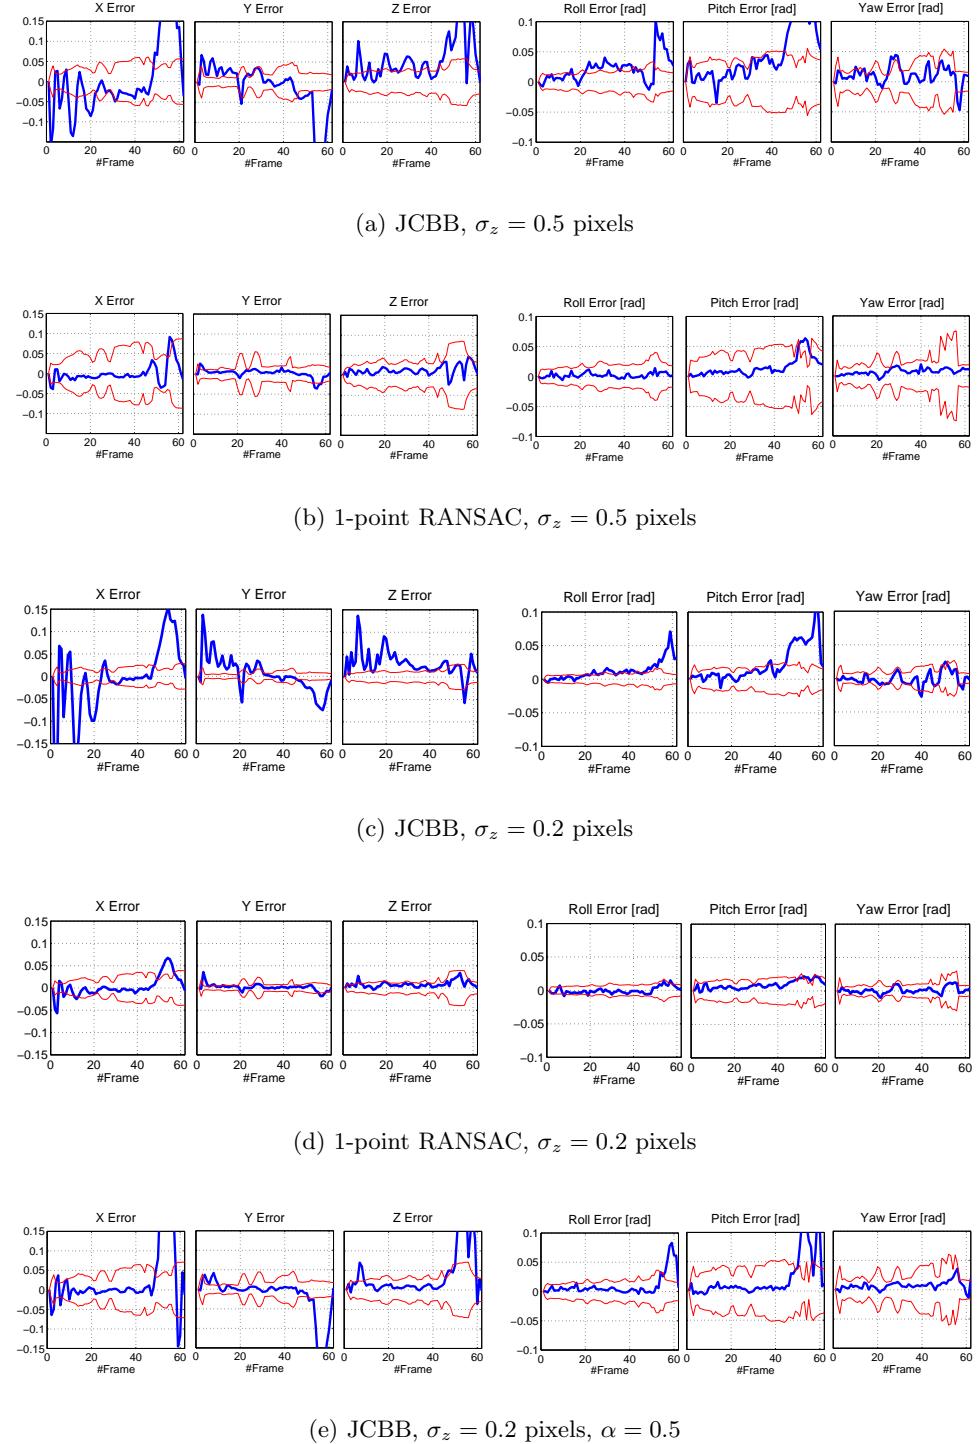


Figure 4.7: Camera location errors when using JCBB is shown in Figures 4.7(a) and 4.7(c), for standard deviations of 0.5 and 0.2 pixels respectively. Figures 4.7(b) and 4.7(d) showing 1-point RANSAC results for the same filter tuning are repeated here for comparison. It can be seen that 1-point RANSAC outperforms JCBB in both cases. Figure 4.7(e) shows the best JCBB tuning found by the authors, which still gives worse results than 1-point RANSAC.

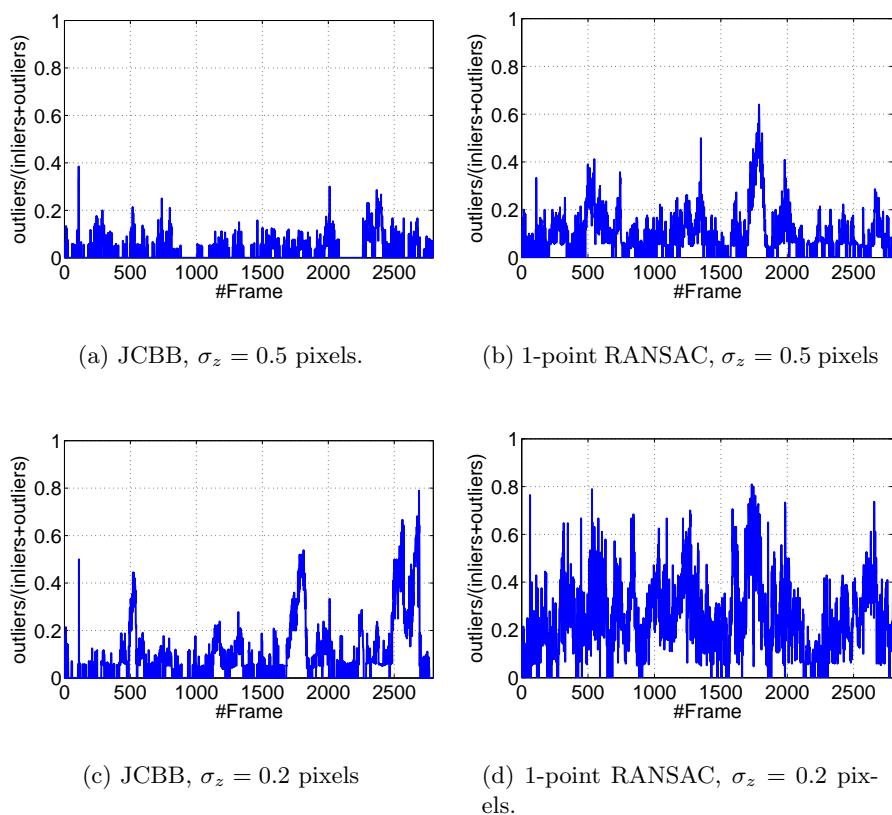


Figure 4.8: Spurious match rate for JCBB and RANSAC when measurement noise standard deviation  $\sigma_z$  is reduced to 0.2 pixels. It can be observed that reducing the measurement noise makes both techniques stricter, but 1-point RANSAC remains more discriminative.

## 4.5. Experimental Results

---

any of the 1-point RANSAC experiments.

### 4.5.4 Trajectory Benchmarking against GPS.

The following sections benchmark the presented filtering scheme for the estimation of long camera trajectories. The benchmarking method of the previous section becomes difficult to apply here, so camera translation only is benchmarked against GPS data. This section describes the benchmarking procedure.

Similarly to the previous section, our EKF estimation takes the first camera frame  $C_1$  as the frame of reference. A similarity transformation (rotation  $\mathbf{R}_{C_1}^W$ , translation  $\mathbf{t}_{C_1}^W$  and scale  $s$ ) has to be applied which aligns every point of the trajectory  $\mathbf{r}_{C_k}^{C_1} = [x_{C_k}^{C_1} \ y_{C_k}^{C_1} \ z_{C_k}^{C_1}]^\top$  with the GPS data  $\mathbf{r}_{GPS_k}^W$ , whose frame of reference we will denote by  $W$ :

$$\begin{bmatrix} \mathbf{r}_{C_k}^W \\ 1 \end{bmatrix} = \begin{bmatrix} x_{C_k}^W \\ y_{C_k}^W \\ z_{C_k}^W \\ 1 \end{bmatrix} = \begin{bmatrix} s\mathbf{R}_{C_1}^W & \mathbf{t}_{C_1}^W \\ \mathbf{0} & 1 \end{bmatrix} \begin{bmatrix} x_{C_k}^{C_1} \\ y_{C_k}^{C_1} \\ z_{C_k}^{C_1} \\ 1 \end{bmatrix}. \quad (4.22)$$

The value of  $\mathbf{t}_{C_1}^W$  is taken from the GPS data in the first camera frame. Trajectory estimation from pure monocular vision will not be able to recover the scale  $s$ , which will remain unknown. For the combination of a monocular camera and wheel odometry input, the overall scale of the estimation is observed by odometry readings and then  $s = 1$  in Equation 4.22. The rotation between GPS and the first camera position  $\mathbf{R}_{C_1}^W$  will be unknown in every case, as it is non-observable from GPS readings.

The unknown parameters of the alignment ( $s$  and  $\mathbf{R}_{C_1}^W$  for pure monocular, and only  $\mathbf{R}_{C_1}^W$  for monocular plus wheel odometry) are obtained via a non-linear optimization that minimizes the error between the aligned trajectory  $\mathbf{r}_{C_k}^W$  and the GPS trajectory  $\mathbf{r}_{GPS_k}^W$ .

For the sake of simplicity, the assumption that the position of the camera sensor and the GPS antenna coincide on the robot has been made in the above reasoning, which is reasonable as the position of the sensors differ by only a few centimetres and robot paths cover hundreds of metres.

Finally, the error of each camera position in the reconstructed path is computed as the Euclidean distance between each point of the estimated camera path and GPS path, both in the  $W$  reference:

$$e_k = \sqrt{\left(\mathbf{r}_{C_k}^W - \mathbf{r}_{GPS_k}^W\right)^\top \left(\mathbf{r}_{C_k}^W - \mathbf{r}_{GPS_k}^W\right)}. \quad (4.23)$$

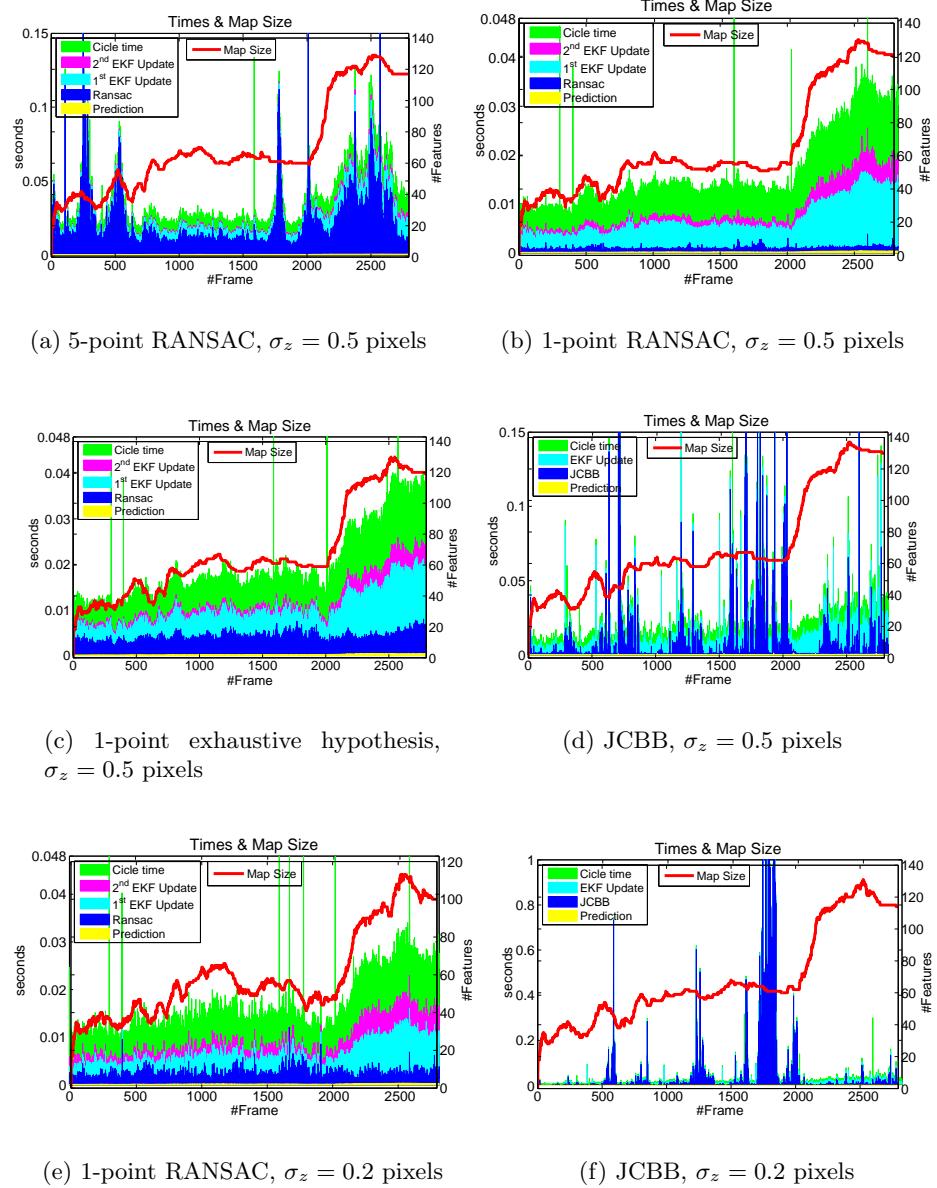


Figure 4.9: Detail of times and map sizes for different RANSAC and JCBB configurations in double y-axis figures: times are shown as areas and measured in seconds on the left y-axis; the map size is displayed as a red line and is measured on the right y-axis. 1-point RANSAC exhibits much lower computational cost than 5-point RANSAC and JCBB. 1-point RANSAC also shows only a small increase when made exhaustive or stricter, making it suitable for real-time implementation at 22 Hz for the map size detailed in the figures.

## 4.5. Experimental Results

---

### 4.5.5 Pure Monocular EKF-Based Estimation for Long Sequences

Three different sequences from the *RAWSEEDS* dataset have been used to test the validity of the 1-point RANSAC EKF for long-term camera motion estimation. All sequences were recorded by a  $320 \times 240$  Unibrain camera with a wide-angle lens capturing at 30 fps.

In the first sequence, consisting of 6000 images, the robot translates for about 146 metres. The second sequence has 5400 images and the robot describes a similar trajectory length, about 153 metres. Finally, a very long and challenging sequence is evaluated that consists of 24180 frames (13.5 minutes of video) in which the robot describes a trajectory of 650 metres. In this latter sequence, although the accumulated drift makes the error noticeable when plotted with the GPS trajectory, the relative error with respect to the trajectory keeps the same low value as the other two shorter sequences (1% of the trajectory length).

Figure 4.10 shows an image from the 650 metres experiment, along with the tracked features. It can be observed that around a hundred features per frame had to be measured in order to reduce scale drift error. This high number will increase the computational cost of the EKF beyond real-time bounds for the pure monocular case. In the particular experiments presented, the algorithm runs at about 1 Hz. Nevertheless, it will be shown in next subsection how introducing extra information about the scale will reduce the number of measurements, enabling real-time performance for the combination of visual tracking plus wheel odometry.

Figure 4.11 shows the estimated (in black) and the GPS (in red) trajectories over a top view extracted from Google Maps for each one of the sequences. The accuracy of the estimated trajectories is clear from visual inspection. Table 4.1 details the maximum and mean errors obtained in these experiments and also for the experiment in the next section combining monocular vision and wheel odometry inputs. Figure 4.12 shows histograms of the errors for the three sequences.

Subfigures 4.12(c) and 4.12(d) in this latter figure show histograms of the errors for the 650 metres experiment in two different versions of the 1-point RANSAC algorithm: the first one of them using the algorithm 3 and the second one replacing the random hypotheses generation with exhaustive hypotheses generation as evaluated in Figure 4.5(c). The conclusion from section 4.5.2 is confirmed here: exhaustive hypothesis generation only very slightly improves the estimation errors; so adaptive random 1-point RANSAC should be preferred.

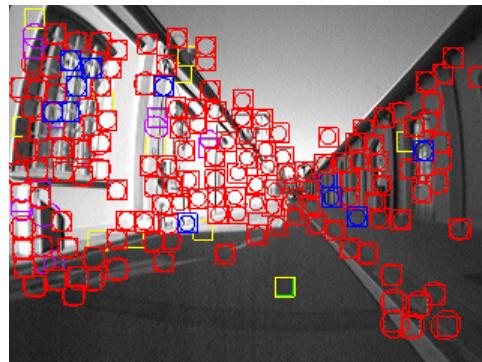


Figure 4.10: Image from the 650 metres sequence, showing the high number of tracked features.

Table 4.1: EKF-based visual estimation error for long camera trajectories.

Trajectory length [m]	Sensor used	Mean error [m]	Maximum error [m]	% mean error over the trajectory
146	monocular	1.3	4.2	0.9%
153	monocular	1.9	3.3	1.1%
650	monocular	6.4	11.1	1.0%
1310	monocular and wheel odometry	9.8	23.6	0.7%

#### 4.5. Experimental Results

---

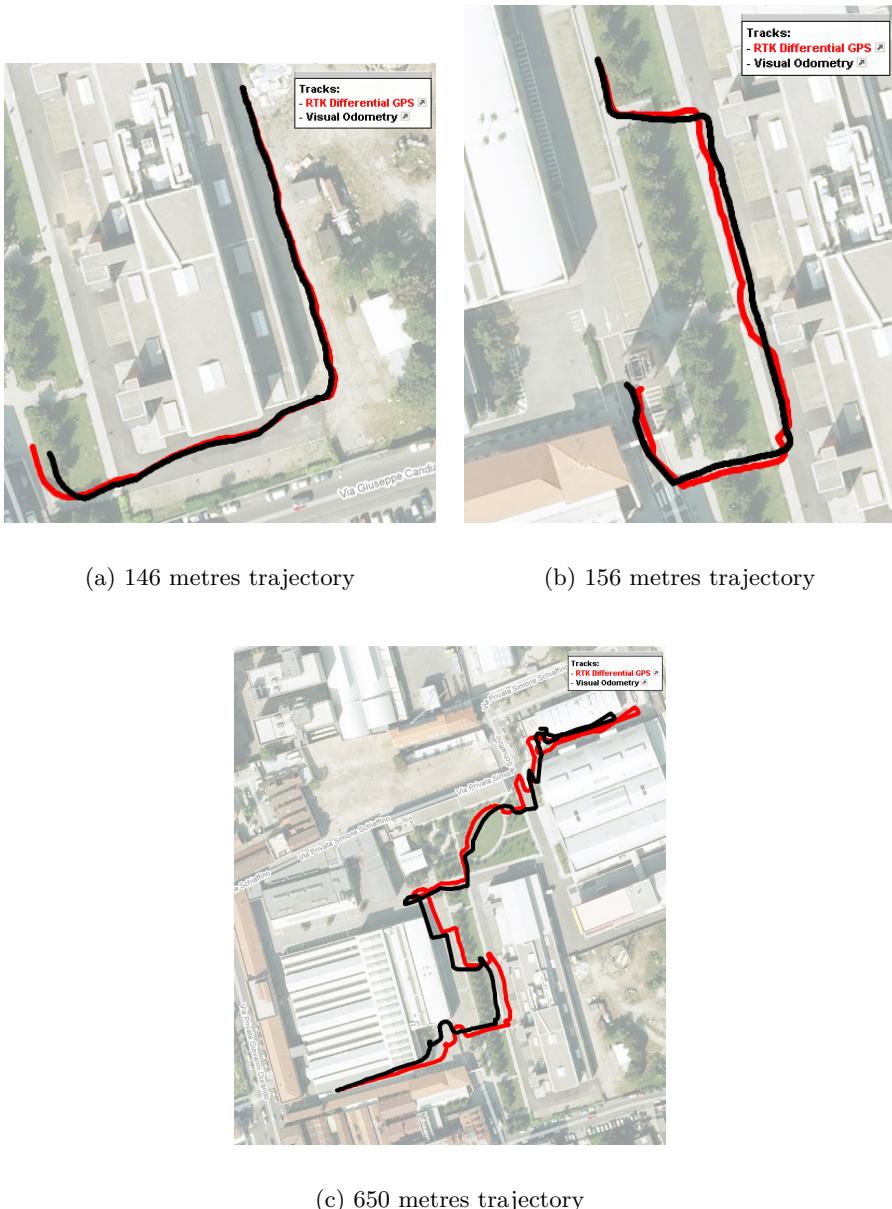


Figure 4.11: Estimated trajectories from pure monocular data and GPS data

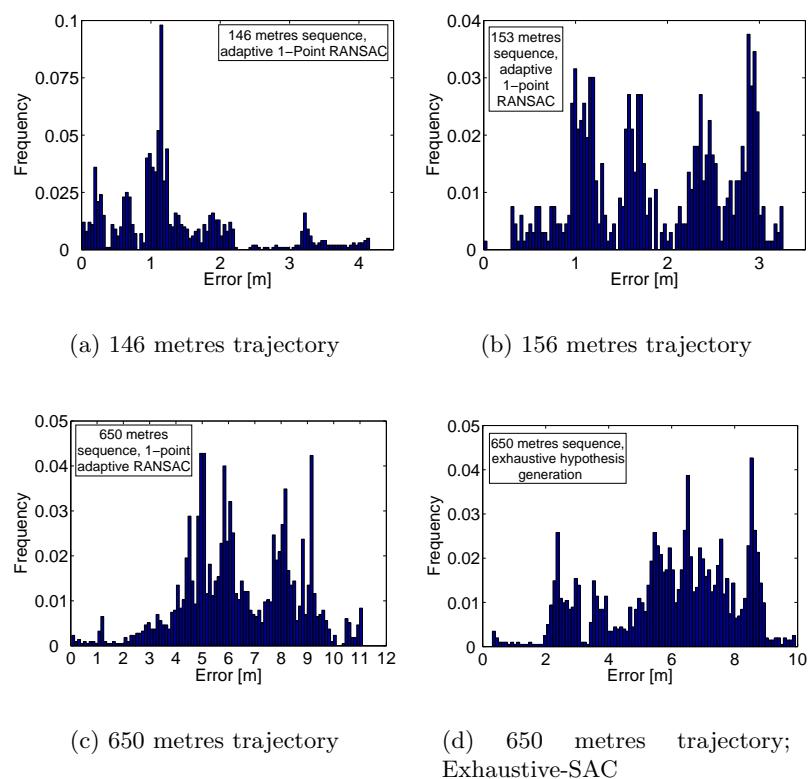


Figure 4.12: Histograms of the errors for the three experiments using only monocular information

#### 4.5. Experimental Results

---

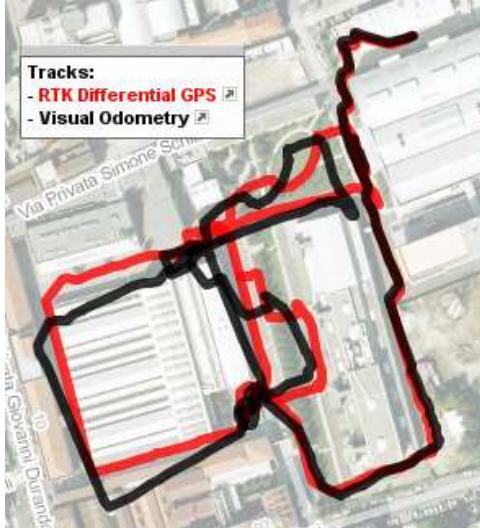


Figure 4.13: Visual odometry results compared against RTK GPS over a Google Maps plot.

##### 4.5.6 Visual Odometry from a Monocular Sequence plus Wheel Odometry

Figure 4.13 shows the trajectory obtained by the visual odometry algorithm over a GoogleMaps plot and compared against GPS data. The length of the estimated trajectory is about 1310 metres and was covered by the RAWSEEDS mobile robot in 30 minutes, capturing 54000 frames. The maximum and mean error were 23.6 and 9.8 metres respectively. Adding wheel odometry information allowed us to reduce the number of tracked features to 25, enabling real-time operation at 30 frames per second.

The processing time per frame for this sequence using 1-point RANSAC can be observed in Figure 4.14 in the form of a histogram. It can be noticed that the total computational cost per step is under 33 milliseconds in 98% of the frames, suggesting that the algorithm is suitable for real-time implementation. It can be observed in the right-hand figure that for the same number of image measurements JCBB's computational cost far exceeds real-time constraints in a large number of frames. JCBB's exponential complexity arises in this experiment in frames where a significant proportion of outliers are present, expanding the tail of the histograms of the figure. For this particular experiment, JCBB's histogram expands to 2.4 seconds while 1-Point RANSAC's maximum time only reaches 0.44 seconds.

Figure 4.14 also shows two histograms representing the computational cost of both algorithms when the number of features in the image is increased to 50. It can be observed that the cost of 1-Point RANSAC grows, but still the processing cost is always on the order of tenths of a second. JCBB's cost

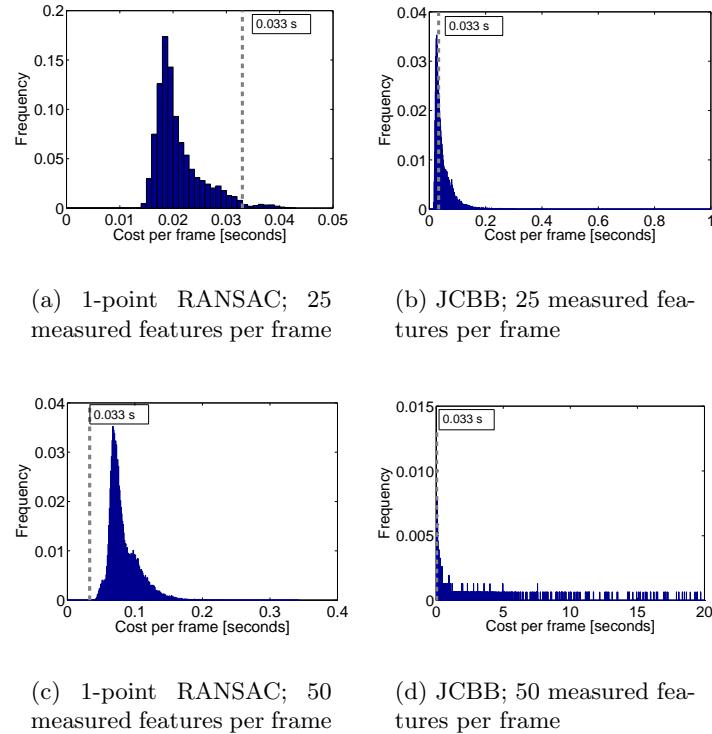


Figure 4.14: Histograms showing the computational cost for RANSAC and JCBB for the cases of 25 and 50 image points per frame. Experiment 4.14(d) had to be early terminated at frame 1533, as JCBB computational cost rises in some frames up to 1544 seconds

reaches maximum values of several hours, and processing times of several seconds per frame are not unusual

Figure 4.15(b) shows raw odometry as a red thin line and GPS with a blue thick line for comparison. It can be observed that early drift appears and the plotted trajectory is rather far from the GPS locations. Figure 4.15(a) shows pure monocular estimation in thin red and GPS measurements in thick green. Observing this plot carefully, it can be observed that a monocular camera is able to very accurately estimate orientation, but the unobservability of the scale produces drift in this parameter for the number of tracked features (25) considered in this experiment.

Finally, Figure 4.15(c) details the estimated trajectory that can be achieved from the combination of the two sensors. Accurate estimation is achieved for a trajectory of 1.3 kilometres, which can be compared with state of the art in monocular visual odometry, e. g. [Scaramuzza *et al.* 2009].

#### 4.5. Experimental Results

---

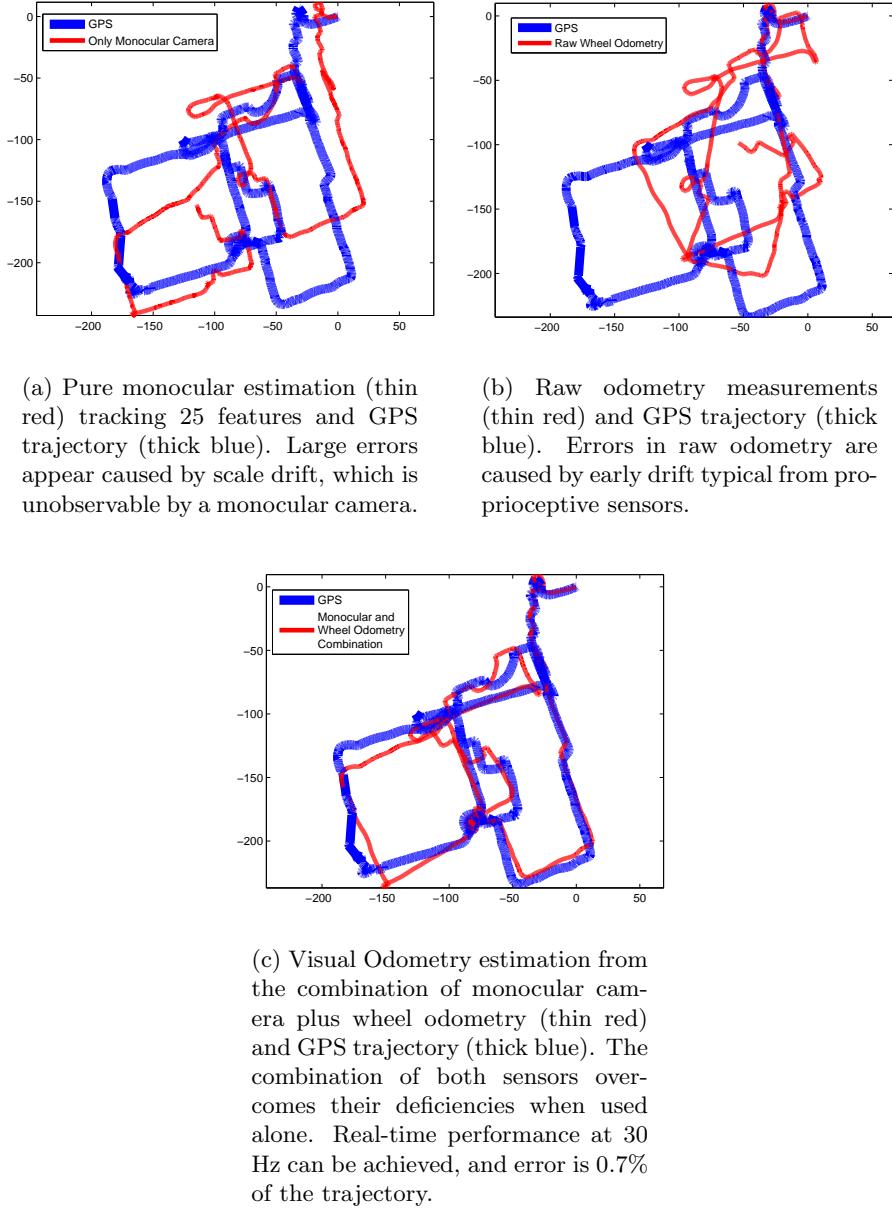


Figure 4.15: Pure monocular estimation showing scale drift in Figure 4.15(a), raw odometry input showing drift in Figure 4.15(b) and visual odometry results combining the two in Figure 4.15(c); all are compared against GPS trajectory (thick blue line).

## 4.6 Discussion

While the relevance of algorithms like JCBB or the recent Active Matching (AM) reside on their generality, the main advantage in the presented approach is its efficiency. 1-point RANSAC is directed to the particular case of a rigid scene. The rich variety of correlation patterns that a covariance matrix can encode is manageable by general methods like JCBB or AM. Our 1-point RANSAC exploits the very simple pattern where all the correlations are mainly explained by sensor motion, and hence small size data subsets are enough to constraint the rest of the measurements. For more complex models, like non-rigid scenes or multi-object tracking, 1-point RANSAC may not offer such a satisfactory result.

Nevertheless, it is also true that estimation from a moving sensor's data stream in an almost rigid scene covers a great percentage of SLAM problems; and a specific method more efficient than general methods can be of importance. In this sense, 1-point RANSAC outperforms existing approaches by presenting lower cost and scaling well with the state vector and measurement size, and also with the outlier rate. The computational overhead it introduces is always smaller than 10% of standard EKF's computational cost, such that it can be readily used in any existing algorithm. Visual EKF SfM, already proven to run in real-time, still keep real-time performance and provides the benefit in accuracy of spurious match rejection when 1-point RANSAC is used.

Besides its efficiency, 1-point RANSAC also has some advantages in dealing with non-linearities as a result of checking rigidity after data fusion where some of the inaccuracies introduced by non-linearities have been compensated. This advantage is shared with Active Matching. On the contrary JCBB checks rigidity before data fusion, which is a serious drawback of the algorithm.

Since 1-point RANSAC is able to deal with large outlier rates at low computational overhead, we find it interesting to force the EKF into a low measurement error operation mode. For a small cost increase, the EKF is fed only very accurate measurements (selected by “a survival of the fittest” process, where the fittest features are those producing the lowest error measurements) and hence the accuracy of the estimation is improved as seen in Figure 4.5(d). This particular operation mode can only be achieved due to the efficiency of the presented algorithm, being impractical if spurious match rejection is expensive.

It is also worth remarking that although this thesis is focused on the particular case of EKF visual estimation, the new 1-point RANSAC method presented here is independent of the type of sensor used. The only requirement is the availability of highly correlated prior information, which is typical of EKF SLAM for any kind of sensor used — and also in the multisensor case. Also, as highly correlated priors are not exclusive to

#### 4.7. Conclusions

---

EKF SLAM, the applicability of 1-point RANSAC could be even broader. As an example, we think that camera pose tracking in keyframe schemes [Klein & Murray 2008, Mouragnon *et al.* 2009] would benefit from our 1-point RANSAC cost reduction if a dynamic model were added to predict camera motion between frames.

## 4.7 Conclusions

A novel RANSAC algorithm is presented in this chapter which, for the first time and differently from standard purely data-driven RANSAC, incorporates *a priori* probabilistic information into the hypothesis generation stage. As a consequence of using this prior information, the sample size for the hypothesis generation loop can be reduced to the minimum size of 1 point data. 1-point RANSAC has two main strengths worth summing up here. First, as in standard RANSAC, model constraints are checked *after* hypothesis data has been fused with the *a priori* model, an advantage over JCBB. Second, using 1-point plus prior knowledge hypotheses greatly reduces the number of hypotheses to construct and hence the computational cost compared with usual RANSAC based solely on data. Its linear cost in the state size also outperforms JCBB's exponential complexity in the number of outliers. In a practical sense, its linear complexity means an overhead of less than 10% of the standard EKF cost, making it suitable for real-time implementation in local visual SLAM or SfM.

The chapter also presents a method for benchmarking six degrees of freedom camera motion estimation results. The method presents three clear advantages: First, it is intended for real image sequences and includes effects difficult to reproduce by simulation (like non-Gaussian image noise, shaking handy motion, image blur or complex scenes). Second, it is easily reproducible as the only hardware required is a high resolution camera. And third, the effort required by the user is low. The uncertainty of the estimated solution also comes as an output of the method and the appropriateness of Bundle Adjustment estimation as reference can be validated. The method has been used to prove the claimed superiority of the 1-point RANSAC method described in the chapter.

The general EKF plus 1-point RANSAC algorithm has been also experimentally tested for the case of large camera trajectories in outdoor scenarios. Sensor-centered filtering instead of the traditional world-centered method has been used in order to reduce the uncertainty in the area local to the current camera and reduce linearization errors. For the pure monocular case, errors around 1% of the trajectory have been obtained for trajectories up to 650 metres from a publicly available dataset. The number of tracked features in the image has to be increased to 100 – 200 in order to avoid scale drift. This high number makes this case currently moves us away from

real-time performance, and the method runs at 1 frame per second.

The combination of monocular vision and wheel odometry has also been benchmarked for the visual odometry application. The extra odometric information makes scale observable; the number of tracked features can be reduced and real-time performance can be achieved for this case. A 1300 metre long trajectory has been estimated in the chapter, with the mean error against GPS coming out at 0.7% of the trajectory.

# Degenerate Camera Motion and Filter-based Model Selection

## Contents

---

5.1	Introduction	105
5.2	Bayesian Model Selection for Sequences	107
5.3	Interacting Multiple Model	109
5.4	Interacting Multiple Model Monocular SLAM Algorithm	110
5.5	Experimental Results	111
5.5.1	Consistent start up even with rotation	112
5.5.2	Low risk of spurious matches due to small search regions	112
5.5.3	Camera motion model identification	115
5.5.4	Computational cost considerations	116
5.6	Discussion	116

---

## 5.1 Introduction

Image sequence processing relies on camera motion models to robustly identify point matches. Off-line methods rely on geometrical models relating two or three images to compute matches. In [Torr *et al.* 1999] it is shown how different models should be used at different parts of a general sequence to avoid degenerate geometries. This geometrical model selection has been extended to segment different motion models between image pairs or triplets [Schindler & Suter 2006, Kanatani 2004, Torr 2002].

In contrast to these two or three-view geometrical models, the probabilistic motion models used in SLAM are well suited to modelling long sequences of close images instead of discrete sets of images. However a single

probabilistic model can similarly only deal with sequences which follow the prescribed model or processing will fail. In this work we extend the monocular SLAM method to deal with more than one probabilistic motion model, expanding the range of sequences compatible with the priors represented by a set of tuning parameters. We use a sequential Bayesian approach to model selection.

Thanks to Bayesian probability propagation, monocular SLAM with a general translating camera can deal with low parallax motions — such as rotations — provided that the camera re-observes map features whose locations are well-estimated as a result of parallax observed previously in the sequence, and so model switching is not a must in some cases where it would be in the off-line approaches. However, when monocular SLAM is initialised on-the-fly without a known scene pattern, model selection is an issue. If the camera initially undergoes a low parallax motion, no reliable estimation is possible. Any measurement noise may be considered parallax by the filter producing inconsistent depth estimates. We tackle this problem with model selection.

Multiple model methods are well known in maneuvering target tracking. An excellent and recent survey of this can be found in [Li & Jilkov 2005]. In our paper, we adapt to the SLAM problem the most widespread of those methods, Interacting Multiple Models (IMM), initially proposed by Blom in [Blom & Bar-Shalom 1988]. The IMM estimator is a suboptimal hybrid filter — that is, it estimates the continuous values of a process, and the discrete probabilities of a set of models — whose main features are: 1) It assumes that the system can jump between the members of a set of models, which is the case of our monocular SLAM estimation, and 2) It offers the best compromise between complexity and performance.

Thanks to the use of multiple models, the range of images that can be processed with a single system tuning is enlarged. We work with a bank of 7 models: one model of a stationary camera, three models of pure rotation motion (constant angular velocity) with different angular acceleration covariances, and three general translation + rotation models (constant velocity, constant angular velocity) with different angular and linear acceleration covariances. Via the Bayesian model selection of IMM, the system prefers simpler (less general) models where they fit the data. As a result, the search regions for the predicted image features are smaller than with a single model EKF. These reduced search regions increase mismatch rejection and reduce the processing cost of image search. Additionally, the computed probabilities per model allow the segmentation of a sequence into different models.

## 5.2 Bayesian Model Selection for Sequences

In standard single-model monocular SLAM algorithms, Bayes' rule combines at every step past estimation information with current image data. Given the background information  $I$  and the image data at current step  $D$ , the posterior probability density function for the set of parameters  $\theta$  defining our model  $M$  is updated via Bayes' formula:

$$p(\theta|DMI) = p(\theta|MI) \frac{p(D|\theta MI)}{p(D|MI)} . \quad (5.1)$$

In this chapter we consider cases where a single model  $M$  is not sufficient to cover all of the sequences we would like to track. Taking full advantage of the fully probabilistic estimation that our SLAM approach is performing, we formulate our multiple model problem in a Bayesian framework.

Consider, as Jaynes does in Chapter 20 of his book [Jaynes 2003], a discrete set of models  $\mathcal{M} = \{M^1, \dots, M^r\}$  — rather than a single one — which might feasibly describe the assumptions of a sequential SfM process. We start by assigning initial scalar probabilities  $P(M^1|I), \dots, P(M^r|I)$  which represent prior belief about the different models based on background information  $I$ , and which are normalised to add up to one. If no prior information exists, these probabilities may well be assigned initially equal.

At each new image, where we acquire image measurements data  $D$ , we update the probability of each model according to Bayes' rule:

$$P(M^j|DI) = P(M^j|I) \frac{P(D|M^j I)}{P(D|I)} \quad (5.2)$$

In this expression, the first term is the probability of the model being correct given only the prior information. In the fraction, the numerator is the likelihood of obtaining the data given that the model is correct. The denominator is the normalizing constant, computation of which can be avoided when the posterior probabilities of a mutually-exclusive set of models are all computed, or alternatively cancels out when the ratio of posterior probabilities of different models is calculated.

So, what is the likelihood  $P(D|M^j I)$  of the data given a model in a monocular SLAM system? It is simply the joint likelihood of all of the feature measurements in an image:

$$P(D|MI) = \frac{1}{\sqrt{2\pi |\mathbf{S}|}} \exp\left(-\frac{1}{2} \boldsymbol{\nu}^\top \mathbf{S}^{-1} \boldsymbol{\nu}\right) , \quad (5.3)$$

where

$$\boldsymbol{\nu} = \mathbf{z} - \mathbf{h}(\hat{\mathbf{x}}_{k|k-1}) , \quad (5.4)$$

$$\mathbf{S} = \mathbf{H} \left( \mathbf{F} \mathbf{P}_{k|k-1} \mathbf{F}^\top + \mathbf{G} \mathbf{Q} \mathbf{G}^\top \right) \mathbf{H}^\top + \mathbf{R} . \quad (5.5)$$

$\mathbf{F} = \frac{\partial \mathbf{f}}{\partial \mathbf{x}}$ ,  $\mathbf{B} = \frac{\partial \mathbf{f}}{\partial \mathbf{w}}$ ,  $\mathbf{H} = \frac{\partial \mathbf{h}}{\partial \mathbf{x}}$  and  $\mathbf{G} = \frac{\partial \mathbf{h}}{\partial \mathbf{u}}$  are the Jacobians for the EKF.

We should note, as Jaynes explains with great clarity, that in this correctly formulated Bayesian approach to model selection there is no need for ad-hoc terms like Minimum Description Length which penalise ‘complex’ models and favour simple ones. The ‘Occam principle’ of selecting the simplest model which is able to capture the detail of the data and avoiding overfitting is taken care of automatically by correctly normalising our comparison of different models. The big difference between our approach and the common two-view model selection methods (e.g. [Kanatani 2004, Torr 2002, Schindler & Suter 2006]) which require penalty terms is that our concept of a model is probabilistic at its core, not just geometric (like homography, affine, . . .). For our use in sequential probabilistic tracking, a model must actually define a probability distribution during a transition. This is what makes it possible to calculate proper likelihoods for the models themselves, independent of parameters.

The formulation above allows us to obtain posterior probabilities for our models in one frame, but we are interested in propagating these probabilities through a sequence. This is achieved by defining a vector of model probabilities — a ‘state vector’ for models or set of mixing weights:

$$\boldsymbol{\mu}_{\mathbf{k}|\mathbf{k}} = \left( \mu_{\mathbf{k}|\mathbf{k}}^1 \dots \mu_{\mathbf{k}|\mathbf{k}}^r \right)^\top. \quad (5.6)$$

We fill  $\boldsymbol{\mu}_{\mathbf{k}|\mathbf{k}}$  with the prior model probabilities  $P(M^1|I), \dots, P(M^r|I)$  before processing the first image, and after processing use the values of  $\boldsymbol{\mu}_{\mathbf{k}|\mathbf{k}}$  as the priors for each model in Equation 5.2 and then replace these values with the posterior values calculated.

A final step is needed in between processing images, which is to apply a mixing operator to account for possible transitions between models. With a homogeneous Markov assumption that the probability of transition from one model to any other is constant at any inter-frame interval, this is achieved by:

$$\boldsymbol{\mu}_{\mathbf{k}|\mathbf{k}-1} = \boldsymbol{\pi} \boldsymbol{\mu}_{\mathbf{k}-1|\mathbf{k}-1}, \quad (5.7)$$

where  $\boldsymbol{\pi}$  is a square matrix of transition probabilities where each row must be normalised. In the typical case that the dominant tendency is sustained periods of motion with one model, this matrix will have large terms on the diagonal. If the models are ordered with some sense of proximity, the matrix will tend to have large values close to the diagonal and small ones far away.

The sequential process of calculating model probabilities therefore evolves as a loop of mixing and update steps and at motion transitions in the sequence evidence will accrue over several frames.

### 5.3. Interacting Multiple Model

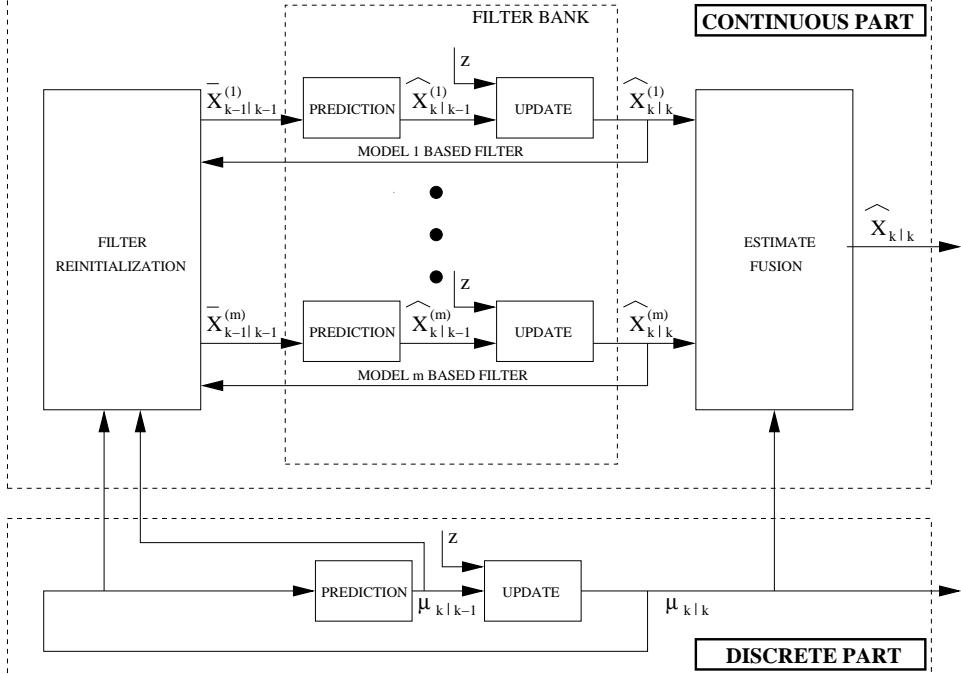


Figure 5.1: Interacting Multiple Model algorithm scheme

### 5.3 Interacting Multiple Model

IMM is presented in the tracking literature as a hybrid estimation scheme, well suited to estimating the continuous state of a system that can switch between several behaviour modes. This hybrid system is then composed of a continuous part (the state) and a discrete part (the behaviour modes). The continuous part of such a system is defined by its state and measurement equations:

$$\dot{\mathbf{x}}(t) = \mathbf{f}(\mathbf{x}(t), M(t), \mathbf{w}(t), t) \quad (5.8)$$

$$\mathbf{z}(t) = \mathbf{h}(\mathbf{x}(t), M(t), \mathbf{v}(t), t) \quad (5.9)$$

where the dynamics of the process and the measurements depend not only on the state  $\mathbf{x}(t)$  and the process and measurement noise  $\mathbf{w}(t)$  and  $\mathbf{v}(t)$  at time  $t$ , but also on the model  $M(t)$  that governs the system at time  $t$ . The probability of each of those models being effective at time  $t$  is coded in the discrete probability vector  $\mu_{k-1|k-1}$ , as explained in section 5.2.

Figure 5.1 shows graphically the structure of the IMM estimator. The whole algorithm is detailed in Figure 5.2. The central part of the algorithm consists of a bank of  $r$  filters running in parallel, each one under a different model. An overall estimation for the state can be obtained as a sum of the a posteriori estimation of every filter weighted with the discrete a posteriori model probabilities.

**1. Filter reinitialization (for  $i = 1, 2, \dots, r$ ):**

Predicted model probability:

$$\mu_{k|k-1}^i = P\{M_k^i | z^{k-1}\} = \sum_j \pi_{ji} \mu_{k-1}^j$$

Mixing weight:

$$\mu_{k-1}^{j|i} = P\{M_{k-1}^j | M_k^i, z^{k-1}\} = \pi_{ji} \mu_{k-1}^j / \mu_{k|k-1}^i$$

Mixing estimate:

$$\bar{\mathbf{x}}_{k-1|k-1}^i = E[\mathbf{x}_{k-1} | m_k^i, z^{k-1}] = \sum_j \mathbf{x}_{k-1|k-1}^j \mu_{k-1}^{j|i}$$

Mixing covariance:

$$\begin{aligned} \bar{P}_{k-1|k-1}^i &= \sum_j (P_{k-1|k-1}^j + \\ &+ (\bar{\mathbf{x}}_{k-1|k-1}^i - \hat{\mathbf{x}}_{k-1|k-1}^j)(\bar{\mathbf{x}}_{k-1|k-1}^i - \hat{\mathbf{x}}_{k-1|k-1}^j)^\top) \mu_{k-1}^{j|i} \end{aligned}$$

**2. EKF bank filtering (for  $i = 1, 2, \dots, r$ ):**

Prediction:  $\hat{\mathbf{x}}_{k|k-1}^i, P_{k|k-1}^i, \mathbf{h}(\mathbf{x}_{k|k-1}^i), S_k^i$

Measurement:  $z_k$

Update:  $\hat{\mathbf{x}}_{k|k}^i, P_{k|k}^i$

**3. Model probability update (for  $i = 1, 2, \dots, r$ ):**

Model likelihood:  $L_k^i = \mathcal{N}(\nu_k^i; 0, S_k^i)$

$$\text{Model probability: } \mu_k^i = \frac{\mu_{k|k-1}^i L_k^i}{\sum_j \mu_{k|k-1}^j L_k^j}$$

**4. Estimate fusion**

Overall state:

$$\hat{\mathbf{x}}_{k|k} = \sum_i \hat{\mathbf{x}}_{k|k}^i \mu_k^i$$

Overall covariance:

$$P_{k|k} = \sum_i \left( P_{k|k}^i + (\hat{\mathbf{x}}_{k|k} - \hat{\mathbf{x}}_{k|k}^i)(\hat{\mathbf{x}}_{k|k} - \hat{\mathbf{x}}_{k|k}^i)^\top \right) \mu_k^i$$

Figure 5.2: Interacting Multiple Model algorithm

A key aspect of the IMM algorithm is the reinitialisation of the filter before the parallel computation of the filter bank at every step. This mixing of the estimations allows individual poor estimates caused by model mismatch to recombine with estimates from better models, so that the whole filter bank benefits from the better estimates.

## 5.4 Interacting Multiple Model Monocular SLAM Algorithm

Given the tracking-oriented IMM algorithm, some aspects have to be taken into account before applying it to our particular monocular SLAM problem.

1. **Active search and JCBB:** In the multiple model tracking literature, little attention is given to the matching (data association) process, which is crucial in SLAM algorithms. If matching is mentioned, as in [Kirubarajan *et al.* 1998], it is said that the most general model,

## 5.5. Experimental Results

---

that is, the model with the largest covariance, is used to compute the measurement covariance for gating correspondences —the implication is ‘always to expect the worst’.

In monocular SLAM, most of the time this weakest search region is unnecessary large, increasing both the computational cost and the risk of obtaining a false match. A more realistic search region can be defined by the combination of the individual filters weighted by their discrete probabilities. The only assumption that has to be made is that motion changes are smooth, a reasonable assumption when dealing with image sequences. The form of the image search regions is therefore determined by the following equations:

$$\hat{\mathbf{x}}_{k|k-1} = \sum_i \hat{\mathbf{x}}_{k|k-1}^i \mu_{k|k-1}^i \quad (5.10)$$

$$P_{k|k-1} = \sum_i (P_{k|k-1}^i + (\hat{\mathbf{x}}_{k|k-1} - \hat{\mathbf{x}}_{k|k-1}^i)^\top \mu_{k|k-1}^i) \quad (5.11)$$

$$(\hat{\mathbf{x}}_{k|k-1} - \hat{\mathbf{x}}_{k|k-1}^i)^\top \mu_{k|k-1}^i \quad (5.12)$$

$$\mathbf{h}_{k|k-1} = \mathbf{h}(x_{k|k-1}) \quad (5.13)$$

$$S_k = H_k P_{k|k-1} H_k^\top + R_k \quad (5.14)$$

Spurious rejection is not mentioned in the multiple model literature either. In the current implementation, and as the number of matched features is kept low enough, JCBB is used to effectively reject spurious data.

2. **Map management:** As detailed in [Davison *et al.* 2007], map management strategies for deleting bad features and adding new ones are convenient in monocular SLAM. We are also using inverse depth to cartesian conversion [Civera *et al.* 2007a] in order to reduce the computational cost of the algorithm.

## 5.5 Experimental Results

A 1374 frame sequence was recorded with a  $320 \times 240$  wide-angle camera at 30fps. The camera makes a motion consisting of the following sequence of essential movements: stationary  $\rightarrow$  pure rotation  $\rightarrow$  general motion (translation and rotation)  $\rightarrow$  pure rotation  $\rightarrow$  stationary. The sequence has been processed using the dimensionless inverse depth formulation of [Civera *et al.* 2007b] and two different types of motion modelling. Firstly, IMM EKF formulation with a bank of seven models: stationary camera, rotating camera (three angular acceleration levels with standard deviation 0.1, 0.5 and 1 pixels), and general motion (with 3 acceleration levels for both linear and angular components with standard deviations of 0.1, 0.5 and 1

pixels). Secondly, as a base reference, a single model for general motion with acceleration noise standard deviation of 1 pixel, both angular and linear. Both formulations are fed the same starting image feature detections. On analysing the results the advantages of the IMM over single model monocular SLAM become clear. Results of the comparative experiments can be better observed in the accompanying video.

### 5.5.1 Consistent start up even with rotation

As was said in the introduction, single model EKF SLAM leads to inconsistent mapping if the camera initially undergoes low parallax motion. In the analysed sequence, we have an extreme case of this as the camera is either stationary or rotating for more than 600 frames. Figure 5.3 compares the estimation results with a single model EKF and our IMM algorithm at step 600, when the camera has performed non-translational motion. Features are plotted as arrows if (as should be the case) no finite depth has been estimated after the no parallax motion. It can be observed that, for the single model case, all features have collapsed to narrow, *false*, depth estimates while in the IMM case all of the features have no depth estimation.

### 5.5.2 Low risk of spurious matches due to small search regions

It can be noticed in Figure 5.4 that although high process noise models are necessary in order to retain tracking features during high accelerations, these models are scarcely used for any length of time. In hand-held camera sequences, constant velocity motions are much more common than accelerated ones. This is reflected by the model probabilities, as we see that the highest probabilities are given to the lower acceleration noise models on most frames.

When using a single model estimation, we are forced to choose the most general model in order to maintain tracking under high acceleration. As process noise directly influences search region size, we are forced to maintain large search regions, unnecessary most of the time. As a consequence, the risk of obtaining false matches grows. As IMM selects at any time the most probable motion model, preferring simpler models, it adjust the search region to the real motion at any time, resulting in considerably reduced ellipses and lowering the risk of mismatches.

In Figure 5.5 the large factor of reduction in the size of search ellipses can be observed. Subfigure (a) shows a detail of a feature search region at frame 100, at the top using IMM and at the bottom using a single model. Search regions in subfigure (b) correspond to the same feature at frame 656, when camera starts translating and high acceleration is detected. Notice that the IMM ellipse slightly enlarges in adapting to this motion change,

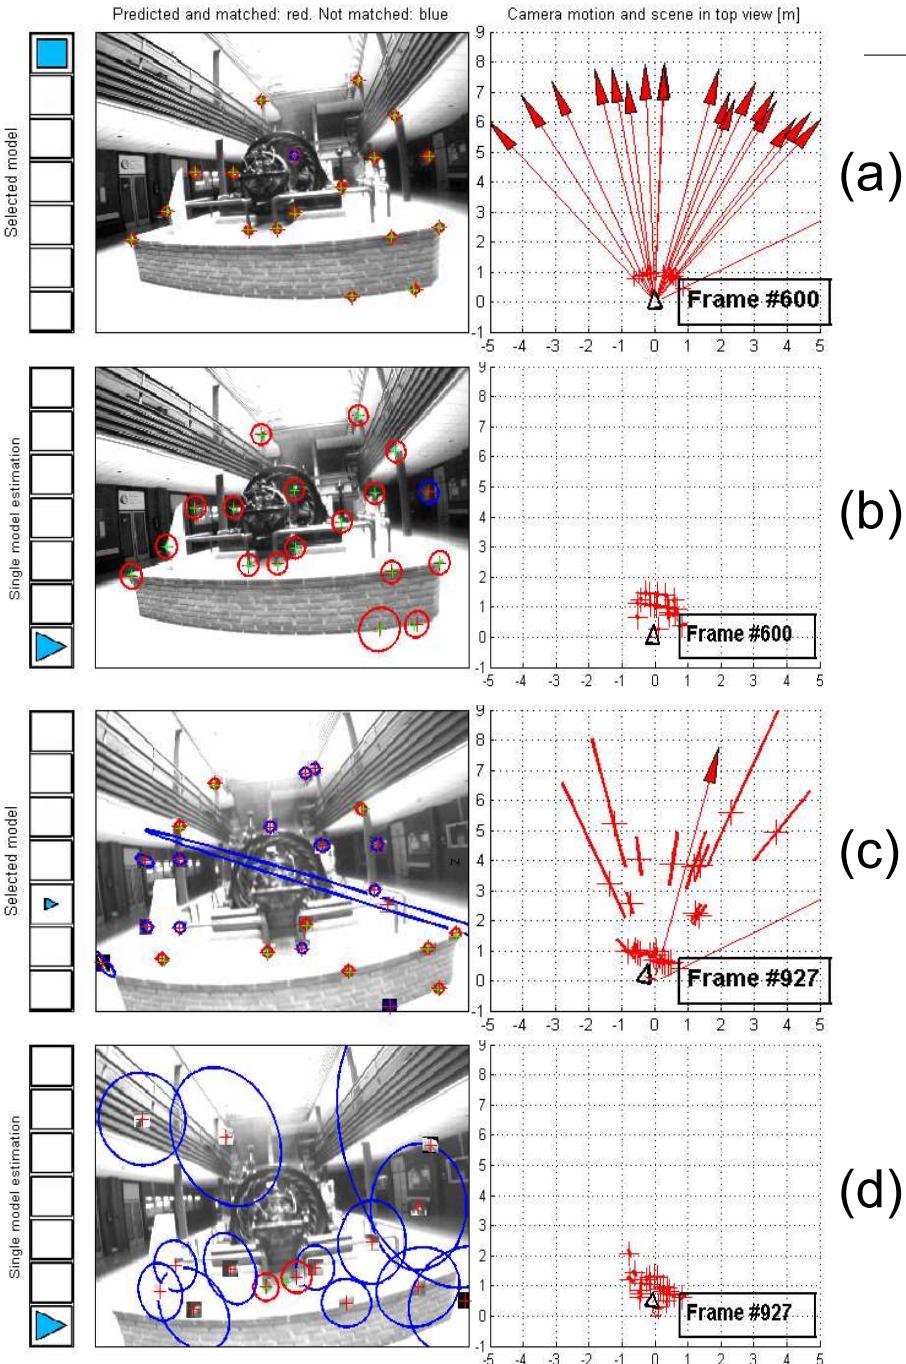


Figure 5.3: (a, left) frame 600 and (a, right) 3D top view of the IMM estimation at this frame. The camera has been either stationary or rotating until this frame. It can be seen in Fig. 5.4 that rotation and still camera models have high probability throughout this early part of the sequence. IMM, correctly, has not estimated any feature depth –features whose depths have not been estimated (their depth uncertainties, stored in inverse depth formulation, encompass infinity) are plotted as arrows–. (b), frame and top-viewed estimation with single-model monocular SLAM. The over-general model has led to narrow, false depth estimates. When the camera translates this inconsistent map leads to false<sup>113</sup> matches that cause the estimation to fail, as seen in (d) at frame 927 of the sequence. On the other hand, (c) shows the correct map estimation performed by the IMM algorithm.

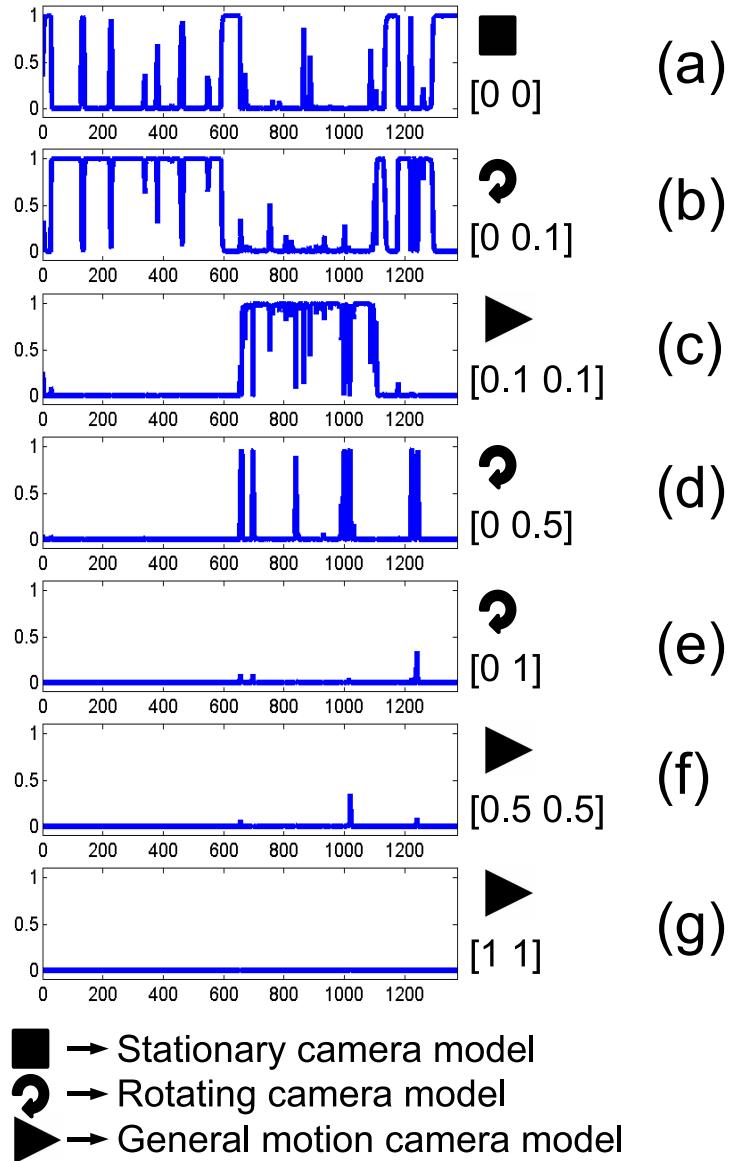


Figure 5.4: Posterior model probabilities along the sequence. Each model is represented by its acceleration noise standard deviation  $[\sigma_a, \sigma_\alpha]$  expressed in pixels, following the notation in [Civera *et al.* 2007b]. Notice that the probability for the most general model ( $\sigma_a = 1\text{pxl}, \sigma_\alpha = 1\text{pxl}$ ) is always under 0.01. The stationary camera model (a) and low acceleration noise models (b) and (c) are assigned the highest probabilities in most of the frames. In spite of being rarely selected, the high acceleration noise models are important to keep the features track at the frames where motion change occurs (small spikes are visible at these points).

## 5.5. Experimental Results

but continues to be smaller than the single-model one. Finally, (c) exhibits the consequences of having unnecessary big search regions: false correspondences happen. Due to mismatches like this one, the estimation in this experiment fails catastrophically.

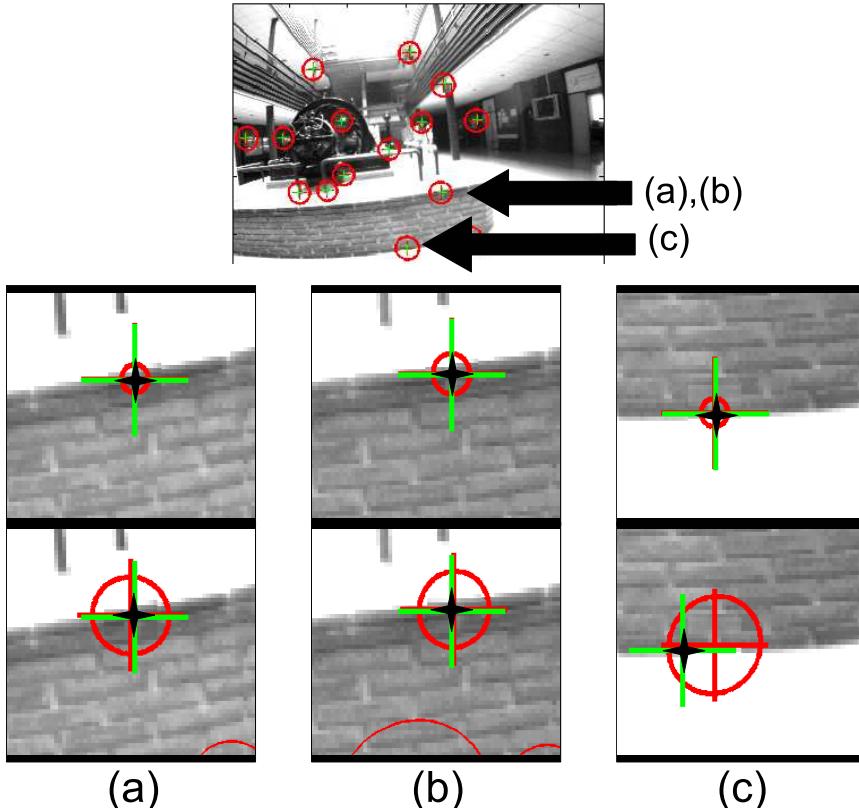


Figure 5.5: (a), IMM (top) and single-model (bottom) feature search ellipse when the camera is rotating. (b), the same feature IMM and single-model search regions when the camera begins to translate. (c), mismatch in the single-model case caused by an unnecessary large ellipse that does not occur in the IMM estimation. Several mismatches like this one in the highly repetitive texture of the brick wall eventually lead to full tracking failure.

### 5.5.3 Camera motion model identification

The IMM not only achieves better performance in processing the sequence, but also provides a tool to segment the sequence according to the dominant motion model. It is worth noting that this segmentation is based on sequence criteria as opposed to a classical pairwise motion model selection in geometrical vision.

In Figure 5.4 and in the accompanying video, it can be seen that when

there is a predominant model (stationary, rotating or general motion), the corresponding probability  $\mu^i$  reaches a value close to 1, while the other model probabilities goes down close to zero — the IMM acts as a discrete selector here rather than a mixer. Only when there is a change between motion models are there periods with no clear dominant model and this is where the IMM proves its worth.

It has to be noted that models with lower acceleration noise are preferred unless the camera really undergoes a high acceleration motion. In fact the model with the highest acceleration has negligible probability indicating that it is not necessary for processing the current sequence. Although this unused model does require a computational overhead, its presence does not affect the accuracy of the solution nor jeopardize the matching by the size of the search regions for the predicted features — since its weight is always close to zero it is simply weighted out of all the calculations.

#### 5.5.4 Computational cost considerations

Although the main advantage of the algorithm is its good tracking performance, clearly outperforming standard single model SLAM on complex sequences, it is also remarkable that the computational cost does not grow excessively. The cost of the IMM algorithm is essentially proportional to the number of models since all filtering operations must be duplicated for each model. This is offset somewhat, as shown in section 5.5.2, by the fact that the search region ellipses are reduced in size in the IMM formulation and this makes the image processing work of feature matching cheaper.

### 5.6 Discussion

We have shown experimentally the advantages of the IMM filter when applied to EKF-based Structure from Motion. We are able to track sequences containing periods with no movement, and pure rotation and general motion at various dynamic levels, the system adapting automatically. In particular, while single model monocular SLAM is weak when bootstrapped with low parallax motions (still or rotating camera), the IMM formulation copes admirably by recognising the motion type.

The IMM formulation requires a computational overhead, but has extra benefits in producing smaller acceptance regions for the predicted measurements, improving outlier rejection, and being able to act as an automatic segmentation and labelling tool by identifying motion boundaries.

# Filter-Based Estimation from Uncalibrated Sequences

## Contents

---

<b>6.1</b>	<b>Introduction</b>	<b>117</b>
<b>6.2</b>	<b>Related Work</b>	<b>118</b>
<b>6.3</b>	<b>Sum of Gaussians (SOG) Filter</b>	<b>120</b>
<b>6.4</b>	<b>Self-Calibration Using SOG Filtering</b>	<b>122</b>
6.4.1	State vector definition	122
6.4.2	Robust Data Association	122
6.4.3	Pruning of Gaussians with Low Weight	123
<b>6.5</b>	<b>Experimental Results</b>	<b>124</b>
6.5.1	Indoor Sequence	125
6.5.2	Loop-Closing Sequence	126
<b>6.6</b>	<b>Discussion</b>	<b>130</b>

---

## 6.1 Introduction

Camera self-calibration (or auto-calibration) is the process of estimating the internal parameters of a camera from a set of arbitrary uncalibrated images of a general scene. Self-calibration has several advantages over calibration with a special target. First, it avoids the onerous task of taking pictures of the calibration object; a task that may be difficult or even impossible if the camera is attached to a robot. Second, internal parameters of a camera may change either unintentionally (e.g. due to vibrations, thermal or mechanical shocks) or even intentionally in the case of a zooming camera. 3D estimation in this latter case could only be performed via self-calibration.

Finally, inaccurate calibration (coming either from a poor calibration process or from changed calibration parameters) produces the undesirable effect of introducing bias in the estimation.

Although computer vision researchers have demonstrated the feasibility of self-calibration and despite all the advantages mentioned before, all of the recent sequential approaches to visual localisation and mapping – Visual Odometry and Visual SLAM – rely on a pre-calibrated camera. In this chapter, it is proposed a sequential SLAM-based algorithm that is able to sequentially estimate the structure of a scene, the trajectory of a camera and also its full calibration — including two coefficients of radial distortion. The only assumption made about the fixed camera calibration is that the skew is zero and the pixel aspect ratio is 1, a reasonable assumption in today’s digital cameras.

Apart from all the advantages mentioned, self-calibration can also be considered essential for the development of practical systems. Vision systems in vacuum cleaners, autonomous vehicles or mobile phones cannot rely on end users to perform an accurate camera calibration for the system to work. Instead, it would be desirable that the visual estimation worked as soon as you install the software in your mobile phone or the engine of your car is started. A particular example derived from research of this thesis would be [Grasa *et al.* 2009b, Grasa *et al.* 2009a], where real-time EKF SfM is used to enhance visual perception in laparoscopic surgery. Calibrating the endoscope before every operation by medical staff would be impractical, being necessary that the system works –and selfcalibrates– producing minimum interference and nuisances with the medical team.

The rest of the chapter is organised as follows: Section 6.2 surveys prior work related to the approach presented here. Section 6.3 introduces the Sum of Gaussians (SOG) filter. In Section 6.4 we detail our self-calibration algorithm using SOG. Section 6.5 presents real-image experiments that validate our approach. The conclusions of the paper and future lines of work can be found in Section 6.6.

## 6.2 Related Work

Traditionally, photogrammetric bundle adjustment has included camera calibration parameters — projective camera parameters and also distortion parameters — in order to refine a tight initial calibration guess and hence improve reconstruction accuracy.

Self-calibration allows the computation from scratch of projective calibration parameters: focal length, principal point, and skew; the computed calibration is readily usable or might be used as an initial guess for bundle adjustment refinement, and the refinement might include estimation of distortion parameters. The standard off-line self-calibration process is

## 6.2. Related Work

---

summarized as follows: first, matches along an uncalibrated sequence with possibly varying parameters are determined. Note that here, no assumptions about camera calibration — except that non-projective distortions are negligible — are applied. Then a projective reconstruction is computed; a potentially warped version of the ideal Euclidean reconstruction. If no more information about the camera taking the images is available then projective reconstruction is the best result that can be computed. However if some knowledge about calibration parameters is available — that they are constant, that there is zero skew, a known principal point or known aspect ratio — then this can be exploited to compute the rest of the unknown calibration parameters. Maybank and Faugeras demonstrated auto-calibration for the first time in 1992 [Maybank & Faugeras 1992, Faugeras *et al.* 1992]. Since then different methods for upgrading projective reconstruction to metric using partial knowledge about the camera calibration have been developed. A summary of all these results is found in [Hartley & Zisserman 2004].

In spite of the vast amount of work related to autocalibration, approaches to these problems under a sequential Bayesian estimation framework are surprisingly few, and none of them performs a complete calibration. In [Azarbayejani & Pentland. 1995] the authors propose for the first time the use of an EKF for sequential Bayesian estimation of unknown focal length. This is relevant seminal work but the 3D point parametrization is basic and this makes it difficult to deal with occlusion and feature addition and deletion. The approach of [Qian & Chellappa 2004a] estimates a varying focal length assuming that the rest of the calibration parameters are known, and using a particle filter to deal with non-linearities.

In the context of visual SLAM, self-calibration of the internal parameters of a camera has not been previously discussed. [Solà *et al.* 2008] may be the closest related work, where a self-calibration algorithm for extrinsic camera parameters in large baseline stereo SLAM is proposed —relative locations of cameras in a stereo rig are easily decalibrated as baseline is increased. External self-calibration has also been tackled for multisensor systems, like [Scaramuzza *et al.* 2007] for a 3D laser and a camera. In this work, no artificial landmarks are needed but correspondences have to be manually identified. [Bryson *et al.* 2009] describes a multisensor system composed of GPS, IMU and monocular camera that autocalibrates IMU biases, IMU-camera relative angles and refines an initial guess of the intrinsic camera calibration. A general framework for self-calibration of non-visual sensor internal parameters —biases, gains, etc.— has also been addressed, e.g. in [Foxlin 2002].

Regarding the estimation techniques used in this work, the nonlinearity of the self-calibration problem has forced us to abandon the Extended Kalman Filter and adopt an approach more suitable for nonlinear systems: the Sum of Gaussians (SOG) filter [Alspach & Sorenson 1972]. This type of filter has already been used in SLAM [Piniés *et al.* 2006,

Durrant-Whyte *et al.* 2003]. The paper [Kwok *et al.* 2005] is of particular interest, as the combination of the Sum of Gaussians filter plus Sequential Probability Ratio Test they use to deal with the point initialization problem in monocular SLAM is the same it is used in this chapter for self-calibration purposes.

### 6.3 Sum of Gaussians (SOG) Filter

Within the SOG approach [Alspach & Sorenson 1972], the probability density function of the estimated parameters  $p(\mathbf{x})$  is approximated by a weighted sum of multivariate Gaussians:

$$p(\mathbf{x}) = \sum_{i=1}^{n_g} \alpha^{(i)} \mathcal{N}\left(\hat{\mathbf{x}}^{(i)}, \mathbf{P}^{(i)}\right), \quad (6.1)$$

where  $n_g$  stands for the number of Gaussians,  $\hat{\mathbf{x}}^{(i)}$  and  $\mathbf{P}^{(i)}$  are the mean and covariance matrix for each Gaussian and  $\alpha^{(i)}$  represents the weighting factors, which should obey  $\sum_{i=1}^{n_g} \alpha^{(i)} = 1$  and  $\alpha^{(i)} \geq 0$ .

This Sum of Gaussians probability density function evolves as follows: at every step, when new measurements arrive, each one of the Gaussians is updated with the standard prediction-update Extended Kalman Filter equations. The central part of the SOG algorithm is, then, a bank of EKF filters running in parallel. This bank of EKF filters is illustrated in Figure 6.1.

Weighting factors  $\alpha^{(i)}$  are also updated at every step  $k$  using this formula:

$$\alpha_k^{(i)} = \frac{\alpha_{k-1}^{(i)} \mathcal{N}\left(\nu_k^{(i)}, \mathbf{S}_k^{(i)}\right)}{\sum_{j=1}^{n_g} \alpha_{k-1}^{(j)} \mathcal{N}\left(\nu_k^{(j)}, \mathbf{S}_k^{(j)}\right)}; \quad (6.2)$$

where  $\nu_k^{(i)}$  and  $\mathbf{S}_k^{(i)}$  are the EKF innovation vector and its covariance matrix respectively. The innovation vector for each EKF is computed as the difference between the actual measurements  $\mathbf{z}_k$  and the predicted measurements  $\mathbf{h}_k^{(i)}$ . The predicted measurements  $\mathbf{h}_k^{(i)}$  result from applying the measurement model equations to the state vector  $\hat{\mathbf{x}}_k^{(i)}$

$$\nu_k^{(i)} = \mathbf{z}_k - \mathbf{h}_k^{(i)}, \quad \mathbf{h}_k^{(i)} = \mathbf{h}\left(\hat{\mathbf{x}}_k^{(i)}\right). \quad (6.3)$$

The innovation covariance is obtained propagating each EKF covariance  $\mathbf{P}_k^{(i)}$  through the measurement equations and adding the covariance of the zero-mean image noise  $\mathbf{R}_k^{(i)}$

$$\mathbf{S}_k^{(i)} = \mathbf{H}_k^{(i)} \mathbf{P}_k^{(i)} \mathbf{H}_k^{(i)\top} + \mathbf{R}_k^{(i)}, \quad \mathbf{H}_k^{(i)} = \frac{\partial \mathbf{h}}{\partial \mathbf{x}}\Big|_{\hat{\mathbf{x}}_k^{(i)}}. \quad (6.4)$$

### 6.3. Sum of Gaussians (SOG) Filter

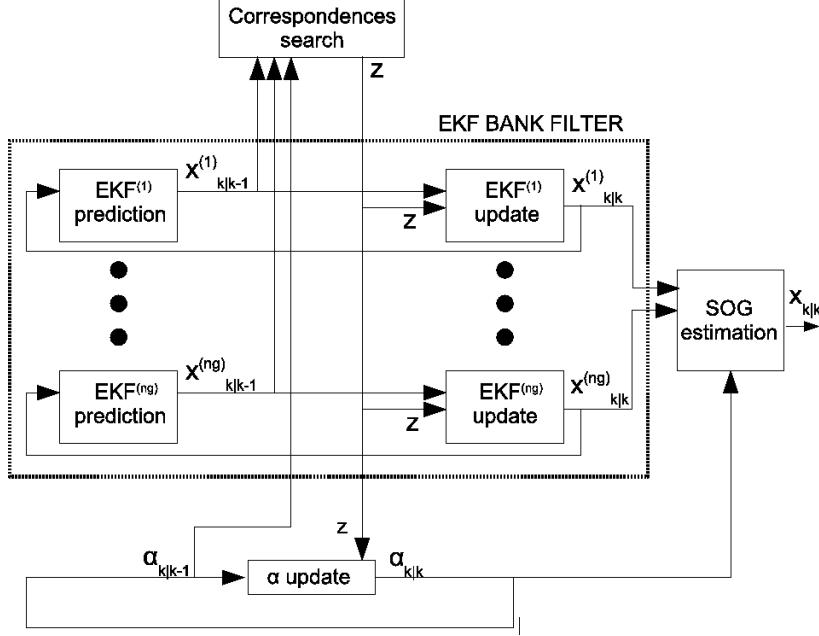


Figure 6.1: Scheme of the Sum of Gaussians (SOG) filter

Finally, an overall mean and covariance for the whole filter can be computed as follows:

$$\begin{aligned}\hat{\mathbf{x}}_k &= \sum_{i=1}^{n_g} \alpha_k^{(i)} \hat{\mathbf{x}}_k^{(i)} \\ \mathbf{P}_k &= \sum_{i=1}^{n_g} \alpha_k^{(i)} \left( \mathbf{P}_k^{(i)} + (\hat{\mathbf{x}}_k^{(i)} - \hat{\mathbf{x}}_k) (\hat{\mathbf{x}}_k^{(i)} - \hat{\mathbf{x}}_k)^\top \right).\end{aligned}\quad (6.5)$$

These values are used for visualization purposes in our experiments. Nevertheless, notice (graphically in Figure 6.1) that this is the only purpose of the overall mean and covariance as they are not involved either in the filter bank or in the evolution of the weighting factors.

From this brief introduction, the two fundamental advantages of the SOG filter over the EKF can be intuitively introduced. First, notice that any probability density function can be reasonably approximated by a weighted Sum of Gaussians if we make the number of Gaussians  $n_g$  high enough. So, the usual EKF assumption of Gaussian PDF does not need to hold for the SOG filter. Second, and more importantly for this work, as we increase the number of Gaussians the uncertainty  $\mathbf{P}^{(i)}$  for each Gaussian becomes smaller, favoring linearity.

## 6.4 Self-Calibration Using SOG Filtering

### 6.4.1 State vector definition

In order to estimate 3D scene structure and camera location and calibration the SOG state vector  $\mathbf{x}$ , –and hence every EKF state vector  $\mathbf{x}^{(i)}$  that composes the filter bank– will contain a set of camera parameters  $\mathbf{x}_{cam}$  and a set of parameters  $\mathbf{x}_{map}$  representing each estimated point  $\mathbf{y}_j$ .

$$\mathbf{x} = \left( \mathbf{x}_{cam}^\top, \mathbf{x}_{map}^\top \right)^\top, \quad \mathbf{x}_{map} = \left( \mathbf{y}_1^\top, \dots, \mathbf{y}_n^\top \right)^\top \quad (6.6)$$

Mapped points  $\mathbf{y}_j$  are first coded in inverse depth (ID) coordinates and converted into Cartesian (XYZ) coordinates if and when their measurement equation becomes linear, as detailed in chapter 3.

$$\mathbf{y}_j^{ID} = (X_c, Y_c, Z_c, \theta, \phi, \rho)^\top, \quad \mathbf{y}_j^{XYZ} = (X, Y, Z)^\top \quad (6.7)$$

The camera part of the state vector  $\mathbf{x}_{cam}$ , as the key difference from previous work, now includes the internal calibration parameters to estimate: the focal length  $f$ , the principal point coordinates  $C_x$  and  $C_y$  and the parameters modelling radial distortion  $\kappa_1$  and  $\kappa_2$ .

$$\begin{aligned} \mathbf{x}_{cam} &= \left( \mathbf{x}_{cal}^\top, \mathbf{x}_v^\top \right)^\top; \quad \mathbf{x}_{cal} = (f, C_x, C_y, \kappa_1, \kappa_2)^\top, \\ \mathbf{x}_v &= \left( \mathbf{r}^{WC^\top}, \mathbf{q}^{WC^\top}, \mathbf{v}^W, \omega^C \right)^\top. \end{aligned} \quad (6.8)$$

Camera motion is modeled with a constant velocity model [Davison 2003] that we shall not reproduce here for space reasons. Camera motion parameters in  $\mathbf{x}_v$  are then camera position  $\mathbf{r}^{WC}$  and orientation  $\mathbf{q}^{WC}$  and respective linear and angular velocities  $\mathbf{v}^W$  and  $\omega^C$ .

Regarding the camera projection model, it is used here the same pin-hole model followed by a two coefficient radial distortion. Section 3.3 fully describes the model, that shall not be reproduced here. Nevertheless, it is important to remark that calibration parameters in this model that were assumed to be known up to this chapter are now taken from the state vector.

### 6.4.2 Robust Data Association

Active search and JCBB are used to improve the efficiency and robustness of the correspondence search as it was explained in Section 3.7. Based on the experimental result that the multimodal distribution that a Sum of Gaussians represents quickly converges to a highly piked one in our estimation case; the predicted probability distribution will be assumed to be Gaussian. This approximation will be practically equal to the real distribution in most of the sequence, differing only in its first frames where the weights for each

#### 6.4. Self-Calibration Using SOG Filtering

---

Gaussian are still homogeneous. Nevertheless, even in this first frames the assumption is good enough to define small search regions containing the matches.

Having this assumption, search regions are computed as follows: first, an estimation of the predicted measurements in the image and its covariance is computed from equations 6.3 and 6.4 for each EKF, being the measurement model  $\hat{\mathbf{h}}_k^{(i)}$  the camera model described in section 3.7.

And second, an aggregation of all the multivariate Gaussians that represent the predicted measurements for every EKF is computed.  $\hat{\mathbf{h}}_k$  and  $\mathbf{S}_k$  are used to define the  $3\sigma$  ellipses in the image where the matches are searched and are the input to JCBB's algorithm to check the rigidity constraint.

$$\begin{aligned}\hat{\mathbf{h}}_k &= \sum_{i=1}^{n_g} \alpha_k^{(i)} \hat{\mathbf{h}}_k^{(i)} \\ \mathbf{S}_k &= \sum_{i=1}^{n_g} \alpha_k^{(i)} \left( \mathbf{S}_k^{(i)} + (\hat{\mathbf{h}}_k^{(i)} - \hat{\mathbf{h}}_k) (\hat{\mathbf{h}}_k^{(i)} - \hat{\mathbf{h}}_k)^\top \right)\end{aligned}\quad (6.9)$$

##### 6.4.3 Pruning of Gaussians with Low Weight

As it can be assumed that the final estimation result will be unimodal, Gaussians that repeatedly obtain low weighting factors can be pruned reducing the computational cost. To do this, it is adopted the proposal in [Kwok *et al.* 2005], which makes use of the Sequential Probability Ratio Test (SPRT) [Wald 1945]. Experiments have shown that SPRT achieves a high reduction rate while maintaining similar performance.

For each Gaussian  $i$  in the SOG filter, the null hypothesis  $H_0$  is that such Gaussian correctly represents the true state and the alternative hypothesis  $H_1$  that the Gaussian does not represent the true state. At every step  $k$ , the null hypothesis is accepted if

$$\prod_{t=1}^k \frac{\mathcal{L}_t^{(i)}(H_0)}{\mathcal{L}_t^{(i)}(H_1)} > A , \quad (6.10)$$

and the alternative hypothesis is accepted (meaning that Gaussian  $i$  can be pruned) if

$$\prod_{t=1}^k \frac{\mathcal{L}_t^{(i)}(H_0)}{\mathcal{L}_t^{(i)}(H_1)} < B , \quad (6.11)$$

where  $\mathcal{L}_t^{(i)}(H_0)$  and  $\mathcal{L}_t^{(i)}(H_1)$  are the likelihoods of the data under hy-

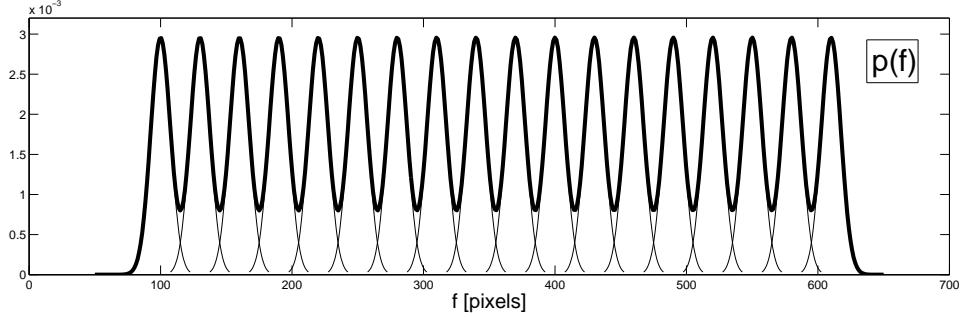


Figure 6.2: Probability density function considered for the focal length.

pothesis  $H_0$  and  $H_1$  at frame  $t$ . These likelihoods are computed as follows:

$$\mathcal{L}_t^{(i)}(H_0) = \mathcal{N}\left(\nu_t^{(i)}, \mathbf{S}_t^{(i)}\right) \quad (6.12)$$

$$\mathcal{L}_t^{(i)}(H_1) = \sum_{j=1; j \neq i}^{n_g} \alpha^{(j)'} \mathcal{N}\left(\nu_t^{(j)}, \mathbf{S}_t^{(j)}\right) \quad (6.13)$$

$$\alpha^{(j)'} = \frac{\alpha^{(j)}}{\sum_{k=1; k \neq i}^{n_g} \alpha^{(k)}}. \quad (6.14)$$

Thresholds  $A$  and  $B$  are approximated by the so-called *Wald Boundaries* [Wald 1945]  $A = \frac{1-\alpha_b}{\alpha_a}$  and  $B = \frac{\alpha_b}{1-\alpha_a}$ , where  $\alpha_a$  and  $\alpha_b$  are the probabilities of type I and type II errors.

## 6.5 Experimental Results

Two experiments have been carried to test the performance of the algorithm. The design of the SOG filter, which is the same for both experiments, it is explained here previous to the experimental results.

An interval for the focal length  $f$  from around 100 pixels to around 600 pixels is considered to be the usual range for cameras used in robotics. It has been experimentally found that the projection measurement equation from section 3.3 is fairly linear in intervals of 30 pixels. So, in order to estimate the focal length, the full range of possible focal length values is divided into 18 Gaussians with standard deviations of 7.5 pixels and separation between means of 30 pixels. Figure 6.2 shows the resulting probability distribution function.

A similar procedure applies for  $\kappa_1$  and  $\kappa_2$ . It is considered that usual values for these parameters go from 0 (no radial distortion) to  $0.08\text{mm}^{-2}$  and  $0.018\text{mm}^{-4}$  respectively. The projection model is approximately linear if these two variation ranges are divided into 2 intervals for  $\kappa_1$  and 3 for  $\kappa_2$ .

## 6.5. Experimental Results

---

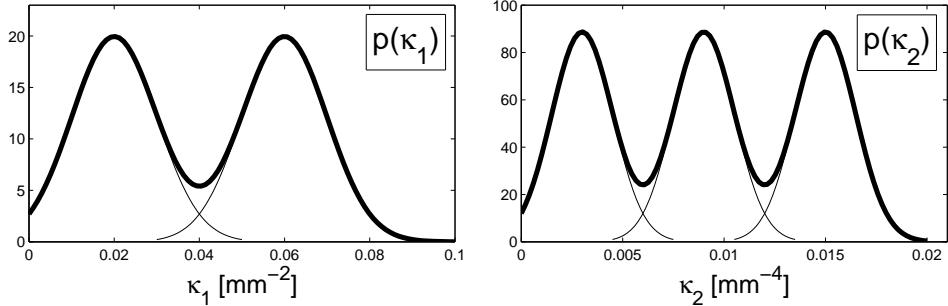


Figure 6.3: Probability density function for distortion parameters  $\kappa_1$  and  $\kappa_2$ .

The resulting probability density functions for radial distortion parameters can be seen in Figure 6.3.

The final SOG filter will be composed of all possible combinations of the above divisions, that is  $18 \times 2 \times 3 = 108$  filters. It is worth mentioning here that the naive approach of considering all combinations of parameters is used here only to demonstrate the performance of the algorithm in the most general case. In a practical setting, it is known that a camera with large focal length will have negligible radial distortion and that small focal lengths corresponds to high radial distortion lenses. The number of the filters could be then cut down.

Finally, regarding the optical centre coordinates  $C_x$  and  $C_y$ ; as the measurement equation is linear for those parameters, they are coded with one single Gaussian. The optical centre is assumed to be a maximum of 10 pixels from the centre of the image. For a  $320 \times 240$  image, this results in a bidimensional Gaussian whose mean is  $[160, 120]$  and whose standard deviations are 3.3 pixels in each coordinate.

### 6.5.1 Indoor Sequence

The first sequence used to test the self-calibration algorithm is an indoor sequence taken with a hand-held  $320 \times 240$  IEEE1394 camera in a computer room. The purpose of this experiment is to test the accuracy of the proposed algorithm, comparing its results with an offline calibration.

Figure 6.4 shows three frames of the sequence, one at the beginning, the second in the middle and the last frame of the sequence, and with the 3D estimation at each instant. The evolution of the calibration parameters estimation over the sequence can be observed in Figure 6.5. The same figure also shows the number of Gaussians in the SOG filter at each step. Notice the steep decrease in the first steps of the estimation, and how after image 120 of the sequence the SOG filter is composed of only one filter, becoming an EKF. Table 6.1 details the initial and final values of the estimation with a 99%

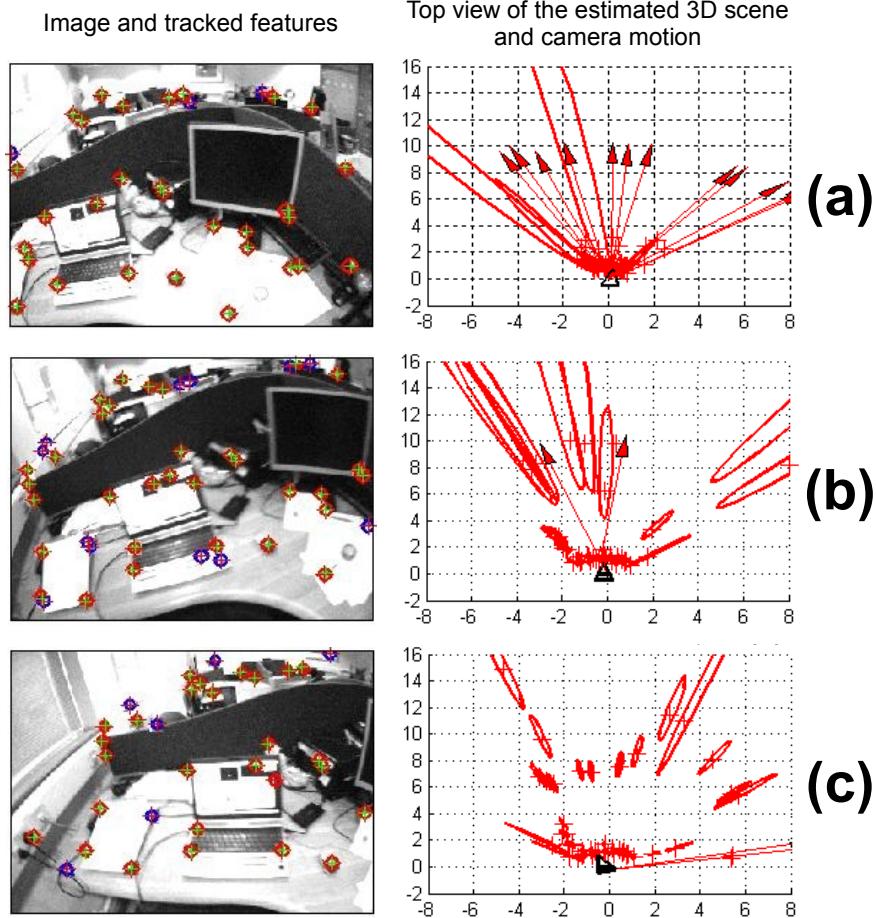


Figure 6.4: Images and top-down view 3D estimation for frames #20 (a), #80 (b) #260 (c), which is the last frame of the sequence.

confidence interval and the offline calibration values for a better visualization of the accuracy of our self-calibration results. Notice that although initial values cover a wide range of variation for the parameters, the SOG ends up with a tight and consistent estimation for all of them.

### 6.5.2 Loop-Closing Sequence

Loop-Closing is a standard benchmark in SLAM to test the validity of an estimation algorithm: when a sensor revisits known areas, the estimation error should be small enough for the algorithm to recognize previous mapped landmarks.

A challenging indoor loop-closing sequence available as multimedia material in [Civera *et al.* 2008a] –previously used to test inverse depth EKF monocular SLAM with a calibrated camera– has been used in this exper-

## 6.5. Experimental Results

---

Table 6.1: Calibration results for indoor sequence

	Initial SOG Interval	Final SOG Estimation	Offline Calibration
$f[\text{pixels}]$	[100, 610]	$193.0 \pm 1.9$	194.1
$C_x[\text{pixels}]$	[150, 170]	$161.6 \pm 2.3$	160.2
$C_y[\text{pixels}]$	[110, 130]	$127.0 \pm 2.4$	128.9
$\kappa_1[\text{mm}^{-2}]$	[0, 0.08]	$0.0639 \pm 0.0032$	0.0633
$\kappa_2[\text{mm}^{-4}]$	[0, 0.018]	$0.0139 \pm 0.0009$	0.0139

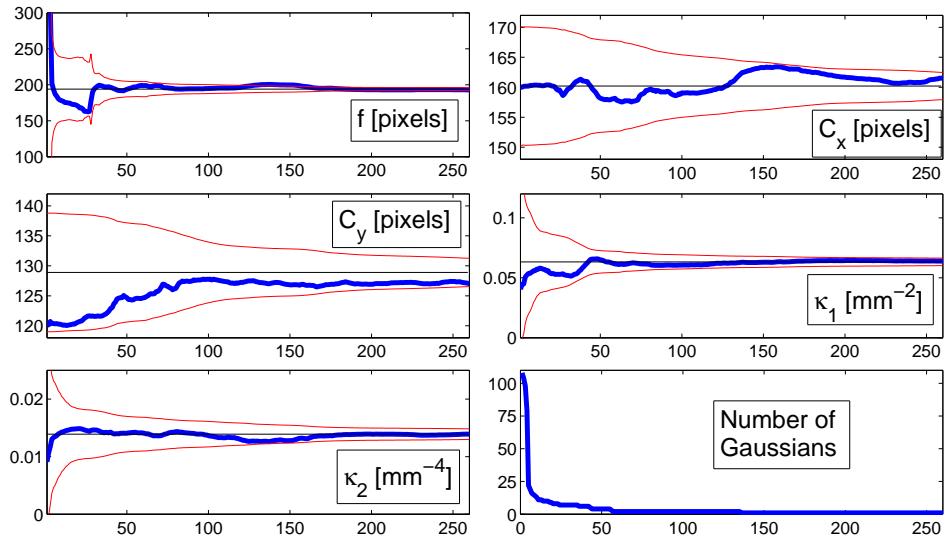


Figure 6.5: Estimated calibration parameters over the computer room sequence. Thick blue line is the estimated value, the horizontal black line is the offline calibration value and the red thin lines represent the 99% uncertainty region.

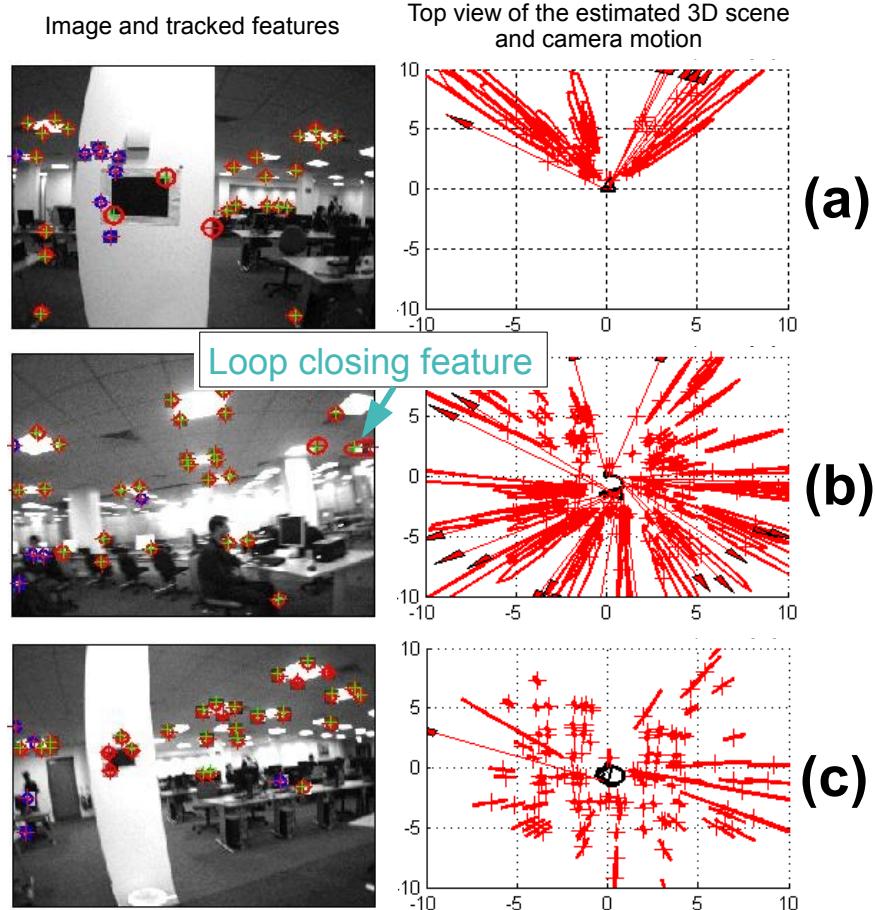


Figure 6.6: (a) Image and 3D estimation at frame 60. (b) Image and 3D estimation at frame 330 of the sequence, when first loop-closure feature (signaled in the image) is detected. (c) Image and 3D estimation at frame 670, the last one of the sequence.

iment. The estimated calibration values are accurate enough to close the loop. Figure 6.6 shows three representative frames of the sequence and their estimated scene, including the loop closing frame.

As we show in Table 6.2 and in Figure 6.7, the estimated calibration is close to the offline calibration, but in a slightly over-confident manner. This experiment when compared with the previous one presents more difficult linearization issues because uncertainty increases when the camera explores new areas, and increases in uncertainty imply more non-linear effects. Besides, the fixed model for the calibration parameters implies a monotonic uncertainty reduction that becomes unrealistic after processing several hundred of images.

## 6.5. Experimental Results

---

Table 6.2: Calibration results for the loop closing sequence.

	Initial SOG Interval	Final SOG Estimation	Offline Calibration
$f[\text{pixels}]$	[100, 610]	$195.0 \pm 0.4$	196.9
$C_x[\text{pixels}]$	[150, 170]	$159.6 \pm 1.0$	153.5
$C_y[\text{pixels}]$	[110, 130]	$133.9 \pm 1.0$	130.8
$\kappa_1[\text{mm}^{-2}]$	[0, 0.08]	$0.0652 \pm 0.0019$	0.0693
$\kappa_2[\text{mm}^{-4}]$	[0, 0.018]	$0.0132 \pm 0.0005$	0.0109

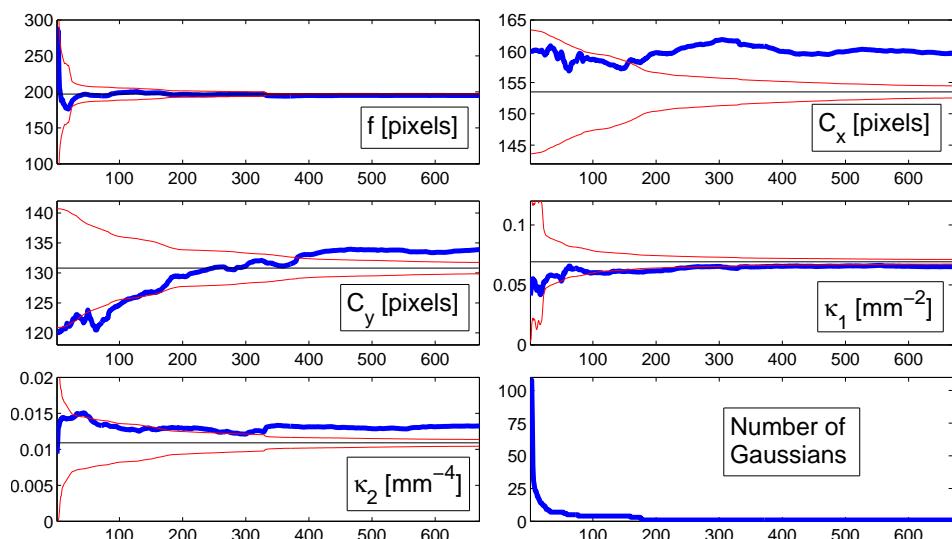


Figure 6.7: Estimated calibration parameters over the loop closing sequence. Thick blue line is the estimated value, the horizontal black line is the offline calibration value and the red thin lines represent the 99% uncertainty region.

## 6.6 Discussion

It has been presented in this chapter for the first time an algorithm that fully auto-calibrates a camera within a filtering framework, the only input being a sequence of images from a moving uncalibrated camera. Due to non-linearities introduced by the estimation of calibration parameters, a Sum of Gaussian filter is used to divide the whole non-linear range of variation into small almost-linear pieces. The SOG approach uses several filters in the first steps of the estimation to cover all of these almost-linear hypothesis. A pruning algorithm has been added that cuts Gaussians whose weighting factors are low and reduces the SOG filter to a simple EKF in a few steps so complexity is reduced after an initial computation overhead. As the multiple Gaussians have to be kept only at initial stages when the map size is small, we expect the computational complexity to be low enough to achieve real time performance.

Experimental results with real-images show that an accurate and consistent camera calibration is achieved for a waggling motion in an indoor sequence. A loop closure has been successfully performed, achieving calibration values close to offline calibration, what is a remarkable achievement, though the estimation is somewhat inconsistent due to non-linearities and to the unrealistic monotonic uncertainty reduction that EKF produces when dealing with static parameters.

Regarding future lines of work, an interesting one would be to analyze how this self-calibration algorithm behaves with respect to degenerate camera motion. Also, being already demonstrated that sequential camera self-calibration is feasible for a camera with fixed unknown parameters, next natural step is to deal with varying calibration parameters.

# Conclusions and Future Directions

## Contents

---

7.1 Conclusions . . . . .	131
7.2 Future Directions . . . . .	133

---

### 7.1 Conclusions

As well as visual estimation based on Multiple View Geometry –summarized in [Hartley & Zisserman 2004]– is nowadays rigorously formulated for the most general case where any information is known in advance, this was not the case for filtering-based methods few years ago. The state of the art in filtering-based SfM previous to this thesis, that can be summarized in [Davison 2003], did not include a projective point parametrization able to deal with high and low parallax points, neither it considered uncalibrated nor degenerate sequences.

As a summary and main conclusion of the work presented, this thesis' contributions are oriented to provide filtering-based visual estimation algorithms with models and methods that are appropriate to the projective nature of the camera as a sensor. As a result, the range of image sequences that a Bayesian filter is able to deal with has been widen and insight has been given concerning some of the main geometric issues involved in visual estimation –projective models, model selection algorithms, outlier detection or uncalibrated settings. As an added value, most of the contributions presented in this thesis have been proven to run in real-time at 30 frames per second in a standard laptop. This fact situates our research into the recent stream aiming to real-time sequential SfM; that has a great potential for applications in the robotics or augmented graphics domains among others.

In more detail, the main contributions of this thesis can be outlined as follows:

- The first of the novel contributions; mosaicing from calibrated image sequences taking with a rotating camera –chapter 2 of the thesis– presents two particular features that make the EKF a suitable choice as estimation tool. First, the projection equation of a zero parallax feature presents high linearity in angular coordinates. And second, the largest possible mosaic is constrained to  $360^\circ$  solid angle. With these particular conditions, EKF-based mosaicing outperforms existing algorithms providing real-time and consistent estimates. Current approaches based on global Bundle Adjustment can offer consistent estimates but not in real-time; while those based on pairwise SfM or local Bundle Adjustment can reach real-time but at the price of accumulating drift.
- Inverse depth parametrization presented in chapter 3 is able to represent points at all depths, even those presenting low or zero parallax in an unified manner. This point feature coding provides a solution to a thread of research aiming to undelayed point initialization. Theoretical and experimental proof is given in this chapter supporting the high degree of linearity of this parametrization, making it perfectly suited for EKF estimation. Linearity indexes are also constructed that informs about the linearity of both inverse depth and Euclidean XYZ parameterizations and govern the switching between the two of them. It is concluded that inverse depth always presents a high degree of linearity while Euclidean coding only is linear enough for high parallax points. For computational reasons, the three parameters Euclidean coding is preferred to the six parameters inverse depth one if parallax is enough.
- Inverse depth Extended Kalman Filter estimation has been thoroughly benchmarked in chapter 4, showing experimentally that filtering algorithms proposed in this thesis can obtain similar accuracy than the usual combination of pairwise SfM plus local Bundle Adjustment that is used in keyframe-based Visual Odometry. Two contributions of this chapter played an important role to obtain this result: First, a sensor-centered EKF estimation has been used in order to reduce the linearization errors. And second, an efficient 1-point RANSAC spurious rejection algorithm have been developed that is able to overcome JCB’s exponential complexity in the number of matches and manage hundreds of them.
- The need of model selection to cope with degenerate configurations is well known in traditional pairwise SfM. Unnecessary degrees of freedom in overparametrized systems are estimated based on the noise leading to inconsistent estimations; being the solution to change the model of the system. When a general sequence is presented, pair-

## 7.2. Future Directions

---

wise SfM considers various possible models and select one of them based on reprojection error –to discard simplistic ones– and heuristic penalty terms –to discard overparametrized ones. In this thesis, it is introduced a model selection criteria based on the probability of occurrence of each model taken from the tracking community. Such criteria based on probabilities discards simplistic and overparametrized models at the same time, making unnecessary the use of heuristic penalty terms.

- Camera self-calibration, that has been demonstrated possible by pairwise SfM methods, is a must for filtering-based SfM algorithms to become a part of real systems. It is of course essential in variable focal length –that is, zooming– cameras, that are of use for example in augmented reality applications. But even in the case of fixed focal length, it is desirable for two reasons: First, calibration may vary along time being needed self-calibration abilities in a robot that is expected to autonomously operate during years. And second, cameras deployed in real systems like cars or mobile phones and that require an accurate calibration to perform an accurate environment reconstruction cannot rely on end users to perform a costly calibration by hand.

In chapter 6 it is developed a self-calibration algorithm in the context of Bayesian filtering. The estimated calibration is shown to be accurate enough to close a loop in a room-sized scenario. As main contributions over previous self-calibration algorithm, the approach presented is the first one that obtain a complete calibration –focal length, optical centre and radial distortion parameters– using filtering.

## 7.2 Future Directions

The problem of visual estimation in small scale environments, either from the Computer Vision or the Robotics SLAM point of view– seems to have reached a consistent state of maturity and highly accurate local metric maps have already been obtained for trajectories up to hundreds of metres. A set of tools and techniques –Multiple View Geometry, Bundle Adjustment or Bayesian Filtering among others– are currently available and well known to researchers in the area to such an extent that it is claimed sometimes that it already is a solved problem.

Although I consider true that some aspects of the visual estimation are nowadays well studied, I totally disagree with the idea that the whole problem is solved. It was said in [Hartley & Zisserman 2004] that some areas of multiple view geometry are still a black art. And it is still certain today that any algorithm exists that can perform reliable visual estimation under all circumstances, having to rely in manual intervention in one or another

sense. There is then some space left for improvement, above all regarding robustness of the algorithms, until an algorithm can really cope with any image sequence input.

Also, and although a mature area of research can be a bit disappointing from the pure research angle, it offers on the contrary exciting opportunities for technological transfer. Nowadays, visual estimation can be carried out using the computational power of a standard laptop and cameras are increasingly commonplace, opening the path for the more diverse applications to populate our environment in the near future.

Perhaps one of the most interesting –and less traveled– paths in small scale SfM is the search for an appropriate representation for the reconstructed scene. Up to now, SfM estimation can obtain an accurate estimation of the location of the camera; but the scene reconstruction is limited in most cases to a sparse set of point features. These point features are of low value in certain contexts, for example in robotic navigation. Dense scene reconstruction at low computational complexity remains an open issue and, in my opinion, far from being solved. Even more exciting and less explored is the task of taking the estimated scene to a higher semantic level, distinguishing among different objects and assigning semantic labels to the 3D estimation.

Regarding to what comes after solving the small scale mapping problem; it is really difficult to advance anything in great detail but some interesting lines begins to appear. It seems clear that the very large scale and long term mapping problem –sometimes called lifetime mapping– will become one of the main topics in the near future. From recent research, it seems that the tendency will be to construct a set of local accurate maps which are mutually related. Two aspects are then of crucial importance: first one, to accurately represent small local maps –where work developed in this thesis could be of importance– and second, robust and very fast recognition algorithms –one example could be the recent [Posner *et al.* 2009].

## Appendix



---

Appendix **A**

---

# Implementation Details

## Contents

---

<b>1</b>	<b>Extended Kalman Filter</b>	<b>137</b>
<b>2</b>	<b>Calibrated EKF-Based SfM</b>	<b>139</b>
21	Dynamic Model and Derivatives	139
22	Measurement Model and Derivatives	140
23	Inverse Depth Point Feature Initialization and Derivatives	145
24	Quaternion Normalization	148
<b>3</b>	<b>Uncalibrated EKF-Based SfM</b>	<b>148</b>
31	Dynamic Model and Derivatives	148
32	Measurement Model and Derivatives	149
33	Inverse Depth Point Feature Initialization and Derivatives	151

---

## 1 Extended Kalman Filter

The Kalman Filter –and its version for non-linear systems, the Extended Kalman Filter– are probably the best studied implementation of Bayesian filtering and the first filtering solution to be successfully applied to the online SLAM estimation problem [Smith *et al.* 1987].

A Bayesian filter is an algorithm that recursively estimates a probability distribution function over the unknown parameters of a state vector  $x$  from measurements gathered by a sensor and the dynamical model of such state. Bayesian filters evolve following two steps. In the first one, the probability distribution function  $p(x_{k-1})$  from step  $k-1$  is updated to step  $k$  based on the probabilistic dynamic model of the system  $p(x_{k|k-1}|x_{k-1|k-1}, u_k)$  in the so-called *prediction* step

$$p(x_{k|k-1}) = \int p(x_{k|k-1}|x_{k-1|k-1}, u_k) p(x_{k-1}) dx_{k-1}. \quad (11)$$

After measurements  $z_k$  are collected, they are fused with the probability distribution function from the prediction step using Bayes' rule in the *update* step

$$p(x_{k|k}) = \eta p(z_k|x_{k|k-1}) p(x_{k|k-1}), \quad (12)$$

where  $p(z_k|x_{k|k-1})$  stands for the probabilistic measurement model of the system, that has been known in advance; and  $\eta$  is the normalization constant that converts  $p(x_{k|k})$  into a probability distribution function.

Obviously, the algorithm requires the initial probability distribution over  $x$ ,  $p(x_0)$  as a boundary condition.

The Kalman Filter, initially proposed in [Kalman 1960], makes three assumptions: linear dynamic and measurement model with Gaussianly distributed noise; and Gaussian initial probability distribution at time  $k = 0$ . Under these three assumptions, it is proved that the a posteriori distribution over the estimated parameters is going to be Gaussian and then represented by its mean and covariance  $\mathbf{x} \sim \mathcal{N}(\hat{\mathbf{x}}, \mathbf{P})$ .

Being most of the systems in real applications showing some degree of linearity, the Extended Kalman Filter relaxes the linearity assumption by linearizing the dynamic and measurement model in the mean value at every step of the estimation. It is worth noticing that Extended Kalman Filter does not give us the real a posteriori probability distribution function, but only a Gaussian approximation. The approximation will be better the more linear the system is along the uncertainty interval defined by the covariance matrix.

The prediction step in Bayesian filtering involves mean  $\hat{\mathbf{x}}$  and covariance  $\mathbf{P}$  update in the Extended Kalman filtering,

$$\hat{\mathbf{x}}_{k|k-1} = \mathbf{f}(\hat{\mathbf{x}}_{k|k-1}, \mathbf{u}_k), \quad (13)$$

$$\mathbf{P}_{k|k-1} = \mathbf{F}_k \mathbf{P}_{k|k-1} \mathbf{F}_k^\top + \mathbf{G}_k \mathbf{Q}_k \mathbf{G}_k^\top; \quad (14)$$

where  $\mathbf{f}(\hat{\mathbf{x}}_{k|k-1}, \mathbf{u}_k)$  is the nonlinear equation modeling the dynamic evolution of the system,  $\mathbf{u}_k$  the input given to the system,  $\mathbf{F}_k$  the derivatives of the dynamic model by the state vector,  $\mathbf{Q}_k$  the noise covariance and  $\mathbf{G}_k$  the derivatives of such noise by the state vector parameters.

The update step via Bayes' rule modifies mean and covariance using the following formulation

$$\hat{\mathbf{x}}_{k|k} = \hat{\mathbf{x}}_{k|k-1} + \mathbf{K}_k (\mathbf{z}_k - \mathbf{h}(\hat{\mathbf{x}}_{k|k-1})) \quad (15)$$

$$\mathbf{P}_{k|k} = (\mathbf{I} - \mathbf{K}\mathbf{H}_k) \mathbf{P}_{k|k-1} \quad (16)$$

$$\mathbf{K}_k = \mathbf{P}_{k|k-1} \mathbf{H}_k^\top \left( \mathbf{H}_k \mathbf{P}_{k|k-1} \mathbf{H}_k^\top + \mathbf{R}_k \right)^{-1}; \quad (17)$$

where  $\mathbf{z}_k$  are measurements gathered at step  $k$ ,  $\mathbf{h}(\hat{\mathbf{x}}_{k|k-1})$  the function that defines the sensor measurement model,  $\mathbf{H}_k$  the derivatives of the measurement function by the state vector and  $\mathbf{R}_k$  the covariance of the measurement noise. Matrix  $\mathbf{K}_k$  is called the filter gain.

For an Extended Kalman Filter implementation, it is then required to know: first, which parameters are included in the state vector and its probabilistic dynamic model. Second, which sensor we are using, what are our measurements and the probabilistic measurement model. Based on that, derivatives of both models can be computed. The next sections details models and derivatives computation for the particular Extended Kalman Filter implementation in this thesis.

## 2 Calibrated EKF-Based SfM

### 21 Dynamic Model and Derivatives

Camera motion is assumed to be smooth; being modeled as a constant velocity model with an zero-mean Gaussian acceleration noise  $\mathbf{n} = (\mathbf{a}^W \ \alpha^C)^\top$ . Camera state vector is composed of the position of the camera, the quaternion representing orientation with respect to a world reference frame and linear and angular velocities.

$$\mathbf{x}_{cam} = \begin{pmatrix} \mathbf{r}^{WC} \\ \mathbf{q}^{WC} \\ \mathbf{v}^W \\ \omega^C \end{pmatrix} \quad (21)$$

Camera states evolve in the EKF prediction stage following this constant velocity model with impulses of linear  $\mathbf{V}^W = \mathbf{a}^W \Delta t$  and angular velocities  $\Omega^C = \alpha^C \Delta t$  produced by acceleration noise

$$\mathbf{f}_v = \begin{pmatrix} \mathbf{r}_{k+1}^{WC} \\ \mathbf{q}_{k+1}^{WC} \\ \mathbf{v}_k^W \\ \omega_{k+1}^C \end{pmatrix} = \begin{pmatrix} \mathbf{r}_k^{WC} + (\mathbf{v}_k^W + \mathbf{V}_k^W) \Delta t \\ \mathbf{q}_k^{WC} \times \mathbf{q}((\omega_k^C + \Omega^C) \Delta t) \\ \mathbf{v}_k^W + \mathbf{V}_k^W \\ \omega_k^C + \Omega^C \end{pmatrix}. \quad (22)$$

The derivatives of this dynamic model function by the state  $F = \frac{\partial \mathbf{f}_v}{\partial \mathbf{x}_v}$  and by the Gaussian noise  $G = \frac{\partial \mathbf{f}_v}{\partial \mathbf{n}}$ , required for covariance update, are computed as follows:

$$\frac{\partial \mathbf{f}_v}{\partial \mathbf{x}_v} = \begin{pmatrix} \mathbf{I} & \mathbf{0} & \Delta t \mathbf{I} & \mathbf{0} \\ \mathbf{0} & \frac{\partial \mathbf{q}_{k+1}^{WC}}{\partial \mathbf{q}_k^{WC}} & \mathbf{0} & \frac{\partial \mathbf{q}_{k+1}^{WC}}{\partial \omega_{k+1}^C} \\ \mathbf{0} & \mathbf{0} & \mathbf{I} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{I} \end{pmatrix} \quad (23)$$

$$\frac{\partial \mathbf{f}_v}{\partial \mathbf{n}} = \begin{pmatrix} \Delta t \mathbf{I} & \mathbf{0} \\ \mathbf{0} & \frac{\partial \mathbf{q}_{k+1}^{WC}}{\partial \Omega^C} \\ \mathbf{I} & \mathbf{0} \\ \mathbf{0} & \mathbf{I} \end{pmatrix} \quad (24)$$

Being renamed the above quaternions as  $\mathbf{q}^3 = \mathbf{q}_{k+1}^{WC}$ ,  $\mathbf{q}^2 = \mathbf{q}_k^{WC}$  and  $\mathbf{q}^1 = \mathbf{q}((\omega_k^C + \Omega^C) \Delta t)$  for simplicity; partial derivative  $\frac{\partial \mathbf{q}_{k+1}^{WC}}{\partial \mathbf{q}_k^{WC}}$  is computed as

$$\frac{\partial \mathbf{q}_{k+1}^{WC}}{\partial \mathbf{q}_k^{WC}} = \begin{pmatrix} q_0^1 & -q_1^1 & -q_2^1 & -q_3^1 \\ q_1^1 & q_0^1 & q_3^1 & -q_2^1 \\ q_2^1 & -q_3^1 & q_0^1 & q_1^1 \\ q_3^1 & q_2^1 & -q_1^1 & q_0^1 \end{pmatrix}. \quad (25)$$

And partial derivative  $\frac{\partial \mathbf{q}_{k+1}^{WC}}{\partial \omega_{k+1}^C}$  is decomposed via the chain rule

$$\frac{\partial \mathbf{q}_{k+1}^{WC}}{\partial \omega_{k+1}^C} = \frac{\partial \mathbf{q}_{k+1}^{WC}}{\partial \mathbf{q}((\omega_k^C + \Omega^C) \Delta t)} \frac{\partial \mathbf{q}((\omega_k^C + \Omega^C) \Delta t)}{\partial \omega_{k+1}^C}; \quad (26)$$

where

$$\frac{\partial \mathbf{q}_{k+1}^{WC}}{\partial \mathbf{q}((\omega_k^C + \Omega^C) \Delta t)} = \begin{pmatrix} q_0^2 & -q_1^2 & -q_2^2 & -q_3^2 \\ q_1^2 & q_0^2 & -q_3^2 & q_2^2 \\ q_2^2 & q_3^2 & q_0^2 & -q_1^2 \\ q_3^2 & -q_2^2 & q_1^2 & q_0^2 \end{pmatrix} \quad (27)$$

## 22 Measurement Model and Derivatives

The measurement model can be divided in three steps. In the first of them, features referred to the world reference frame are converted into Euclidean ones referred to the camera reference frame. In the case of an inverse depth feature,

$$\mathbf{h}^C = \mathbf{h}_\rho^C = \mathbf{R}^{CW} \left( \rho_i \left( \begin{pmatrix} x_i \\ y_i \\ z_i \end{pmatrix} - \mathbf{r}^{WC} \right) + \mathbf{m}(\theta_i, \phi_i) \right); \quad (28)$$

## 2. Calibrated EKF-Based SfM

---

and for a feature coded in Euclidean form

$$\mathbf{h}^C = \mathbf{h}_{XYZ}^C = \mathbf{R}^{CW} \begin{pmatrix} X_i \\ Y_i \\ Z_i \end{pmatrix} - \mathbf{r}^{WC} . \quad (29)$$

A pinhole camera model is applied then over the point in the camera reference frame,

$$\mathbf{h}_u = \begin{pmatrix} u_u \\ v_u \end{pmatrix} = \begin{pmatrix} u_0 - \frac{f}{d_x} \frac{h_x^C}{h_z^C} \\ v_0 - \frac{f}{d_y} \frac{h_y^C}{h_z^C} \end{pmatrix} . \quad (210)$$

Finally, a distortion model has to be applied to deal with real camera lenses. In this work we have used the standard two parameter distortion model from photogrammetry [Mikhail *et al.* 2001], which is described next.

To recover the ideal projective undistorted coordinates  $\mathbf{h}_u = (u_u, v_u)^\top$ , from the actually distorted ones gathered by the camera,  $\mathbf{h}_d = (u_d, v_d)^\top$ , the classical two parameters radial distortion model [Mikhail *et al.* 2001] is applied:

$$\begin{pmatrix} u_u \\ v_u \end{pmatrix} = \mathbf{h}_u \begin{pmatrix} u_d \\ v_d \end{pmatrix} = \begin{pmatrix} u_0 + (u_d - u_0) (1 + \kappa_1 r_d^2 + \kappa_2 r_d^4) \\ v_0 + (v_d - v_0) (1 + \kappa_1 r_d^2 + \kappa_2 r_d^4) \end{pmatrix}$$

$$r_d = \sqrt{(d_x (u_d - u_0))^2 + (d_y (v_d - v_0))^2} \quad (211)$$

Where,  $u_0, v_0$  are the image center and,  $\kappa_1, \kappa_2$  are the radial distortion coefficients.

To compute the distorted coordinates from the undistorted:

$$\begin{pmatrix} u_d \\ v_d \end{pmatrix} = \mathbf{h}_d \begin{pmatrix} u_u \\ v_u \end{pmatrix} = \begin{pmatrix} u_0 + \frac{(u_u - u_0)}{(1 + \kappa_1 r_d^2 + \kappa_2 r_d^4)} \\ v_0 + \frac{(v_u - v_0)}{(1 + \kappa_1 r_d^2 + \kappa_2 r_d^4)} \end{pmatrix} \quad (212)$$

$$r_u = r_d (1 + \kappa_1 r_d^2 + \kappa_2 r_d^4) \quad (213)$$

$$r_u = \sqrt{(d_x (u_u - u_0))^2 + (d_y (v_u - v_0))^2} \quad (214)$$

$r_u$  is readily computed from (214), but  $r_d$  has to be numerically solved from (213), e.g using Newton-Raphson, hence (212) can be used to compute the distorted point.

The Jacobian of this measurement equation by the state vector is extracted from the model defined above. The full Jacobian  $\mathbf{H}$  is divided into rows, each one corresponding to a measurement

$$\mathbf{H} = \begin{pmatrix} \frac{\partial \mathbf{h}_1}{\partial \mathbf{x}} \\ \vdots \\ \frac{\partial \mathbf{h}_m}{\partial \mathbf{x}} \end{pmatrix} . \quad (215)$$

Derivatives of each measurement can be separated into derivatives by the camera states  $\frac{\partial \mathbf{h}_i}{\partial \mathbf{x}_{cam}}$  and derivatives by the map features  $\frac{\partial \mathbf{h}_i}{\partial \mathbf{x}_{map}}$

$$\frac{\partial \mathbf{h}_i}{\partial \mathbf{x}} = \left( \frac{\partial \mathbf{h}_i}{\partial \mathbf{x}_{cam}} \frac{\partial \mathbf{h}_i}{\partial \mathbf{x}_{map}} \right). \quad (216)$$

Camera state vector is composed by its location, orientation and linear and angular velocities (equation 21); so derivatives have to be calculated by each one of this components

$$\frac{\partial \mathbf{h}_i}{\partial \mathbf{x}_{cam}} = \left( \frac{\partial \mathbf{h}_i}{\partial \mathbf{r}^{WC}} \frac{\partial \mathbf{h}_i}{\partial \mathbf{q}^{WC}} \frac{\partial \mathbf{h}_i}{\partial \mathbf{v}} \overset{0}{\cancel{\frac{\partial \mathbf{h}_i}{\partial \omega}}} \right) \quad (217)$$

As camera velocities are not involved in the projection model considered, derivatives involving velocities cancel out to zero. The partial derivative by camera position is computed via the chain rule

$$\frac{\partial \mathbf{h}_i}{\partial \mathbf{r}^{WC}} = \frac{\partial \mathbf{h}_d}{\partial \mathbf{h}_u} \frac{\partial \mathbf{h}_u}{\partial \mathbf{h}^C} \frac{\partial \mathbf{h}^C}{\partial \mathbf{r}^{WC}} \quad (218)$$

The undistortion jacobian,  $\frac{\partial \mathbf{h}_u}{\partial (u_d, v_d)}$  has the analytical expression:

$$\left( \begin{array}{c|c} \frac{(1 + \kappa_1 r_d^2 + \kappa_2 r_d^4) + 2((u_d - u_0) d_x)^2 \times}{(\kappa_i + 2\kappa_2 r_d^2)} & \left| \begin{array}{l} 2d_y^2 (u_d - u_0) (v_d - v_0) \times \\ (\kappa_1 + 2\kappa_2 r_d^2) \end{array} \right. \\ \hline \frac{2d_x^2 (v_d - v_0) (u_d - u_0) \times}{(\kappa_1 + 2\kappa_2 r_d^2)} & \left| \begin{array}{l} (1 + \kappa_1 r_d^2 + \kappa_2 r_d^4) + \\ 2((v_d - v_0) d_y)^2 \times \\ (\kappa_i + 2\kappa_2 r_d^2) \end{array} \right. \end{array} \right) \quad (219)$$

The jacobian for the distortion is computed by inverting expression (219):

$$\frac{\partial \mathbf{h}_d}{\partial (u_{u_0}, v_{u_0})} \Big|_{(u_u, v_u)} = \left( \frac{\partial \mathbf{h}_u}{\partial (u_d, v_d)} \Big|_{\mathbf{h}_d(u_{u_0}, v_{u_0})} \right)^{-1} \quad (220)$$

The derivatives for the pinhole camera model are

$$\frac{\partial \mathbf{h}_u}{\partial \mathbf{h}^C} = \begin{pmatrix} \frac{f}{d_x h_z^C} & 0 & \frac{-h_x^C f}{d_x h_z^C} \\ 0 & \frac{f}{d_y h_z^C} & \frac{-h_y^C f}{d_y h_z^C} \end{pmatrix} \quad (221)$$

And finally, the jacobian of  $\mathbf{h}^C$  with respect to  $\mathbf{r}^{WC}$

$$\frac{\partial \mathbf{h}^C}{\partial \mathbf{r}^{WC}} = -\mathbf{R}^{CW} \rho_i \quad (222)$$

$$\frac{\partial \mathbf{h}_i}{\partial \mathbf{q}^{WC}} = \frac{\partial \mathbf{h}_d}{\partial \mathbf{h}_u} \frac{\partial \mathbf{h}_u}{\partial \mathbf{h}^C} \frac{\partial \mathbf{h}^C}{\partial \mathbf{q}^{WC}} \quad (223)$$

Partial derivatives  $\frac{\partial \mathbf{h}_d}{\partial \mathbf{h}_u}$  and  $\frac{\partial \mathbf{h}_u}{\partial \mathbf{h}^C}$  have already been detailed in formulas 220 and 221 respectively. The only calculation left is  $\frac{\partial \mathbf{h}^C}{\partial \mathbf{q}^{WC}}$ . Such computation can be done dividing first the jacobian,

$$\frac{\partial \mathbf{h}^C}{\partial \mathbf{q}^{WC}} = \frac{\partial \mathbf{h}^C}{\partial \mathbf{q}^{CW}} \frac{\partial \mathbf{q}^{CW}}{\partial \mathbf{q}^{WC}} ; \quad (224)$$

where

$$\frac{\partial \mathbf{q}^{CW}}{\partial \mathbf{q}^{WC}} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 \\ 0 & 0 & -1 & 0 \\ 0 & 0 & 0 & -1 \end{pmatrix} . \quad (225)$$

Partial derivatives  $\frac{\partial \mathbf{h}^C}{\partial \mathbf{q}^{CW}}$  can be computed dividing them as the derivative with respect to each one of the components of the quaternion,

$$\frac{\partial \mathbf{h}^C}{\partial \mathbf{q}^{CW}} = \left( \frac{\partial \mathbf{h}^C}{\partial q_0^{WC}} \quad \frac{\partial \mathbf{h}^C}{\partial q_1^{WC}} \quad \frac{\partial \mathbf{h}^C}{\partial q_2^{WC}} \quad \frac{\partial \mathbf{h}^C}{\partial q_3^{WC}} \right) ; \quad (226)$$

where the derivative with respect to the quaternion components only affects to the rotation matrix

$$\frac{\partial \mathbf{h}^C}{\partial q_0^{WC}} = \left( \rho_i \left( \begin{pmatrix} x_i \\ y_i \\ z_i \end{pmatrix} - \mathbf{r}^{WC} \right) + \mathbf{m}(\theta_i, \phi_i) \right) \frac{\partial \mathbf{R}^{CW}}{\partial q_0} \quad (227)$$

$$\frac{\partial \mathbf{h}^C}{\partial q_1^{WC}} = \left( \rho_i \left( \begin{pmatrix} x_i \\ y_i \\ z_i \end{pmatrix} - \mathbf{r}^{WC} \right) + \mathbf{m}(\theta_i, \phi_i) \right) \frac{\partial \mathbf{R}^{CW}}{\partial q_1} \quad (228)$$

$$\frac{\partial \mathbf{h}^C}{\partial q_2^{WC}} = \left( \rho_i \left( \begin{pmatrix} x_i \\ y_i \\ z_i \end{pmatrix} - \mathbf{r}^{WC} \right) + \mathbf{m}(\theta_i, \phi_i) \right) \frac{\partial \mathbf{R}^{CW}}{\partial q_2} \quad (229)$$

$$\frac{\partial \mathbf{h}^C}{\partial q_3^{WC}} = \left( \rho_i \left( \begin{pmatrix} x_i \\ y_i \\ z_i \end{pmatrix} - \mathbf{r}^{WC} \right) + \mathbf{m}(\theta_i, \phi_i) \right) \frac{\partial \mathbf{R}^{CW}}{\partial q_3} . \quad (230)$$

From the conversion formula from quaternion to rotation matrix orientation representation,

$$\mathbf{R}^{CW} = \begin{pmatrix} q_0^2 + q_1^2 - q_2^2 - q_3^2 & 2(q_1 q_2 - q_0 q_3) & 2(q_3 q_1 + q_0 q_2) \\ 2(q_1 q_2 + q_0 q_3) & q_0^2 - q_1^2 + q_2^2 - q_3^2 & 2(q_2 q_3 - q_0 q_1) \\ 2(q_3 q_1 - q_0 q_2) & 2(q_2 q_3 + q_0 q_1) & q_0^2 - q_1^2 - q_2^2 + q_3^2 \end{pmatrix} \quad (231)$$

derivatives of rotation matrix  $\mathbf{R}^{CW}$  with respect to each component of the quaternion are easily computed

$$\frac{\partial \mathbf{R}^{CW}}{\partial q_0^{WC}} = \begin{pmatrix} 2q_0^{WC} & -2q_3^{WC} & 2q_2^{WC} \\ 2q_3^{WC} & 2q_0^{WC} & -2q_1^{WC} \\ -2q_2^{WC} & 2q_1^{WC} & 2q_0^{WC} \end{pmatrix} \quad (232)$$

$$\frac{\partial \mathbf{R}^{CW}}{\partial q_1^{WC}} = \begin{pmatrix} 2q_1^{WC} & 2q_2^{WC} & 2q_3^{WC} \\ 2q_2^{WC} & -2q_1^{WC} & 2q_0^{WC} \\ 2q_3^{WC} & 2q_0^{WC} & -2q_1^{WC} \end{pmatrix} \quad (233)$$

$$\frac{\partial \mathbf{R}^{CW}}{\partial q_2^{WC}} = \begin{pmatrix} -2q_2^{WC} & 2q_1^{WC} & 2q_0^{WC} \\ 2q_1^{WC} & 2q_2^{WC} & 2q_3^{WC} \\ -2q_0^{WC} & 2q_3^{WC} & -2q_2^{WC} \end{pmatrix} \quad (234)$$

$$\frac{\partial \mathbf{R}^{CW}}{\partial q_3^{WC}} = \begin{pmatrix} -2q_3^{WC} & -2q_0^{WC} & 2q_1^{WC} \\ 2q_0^{WC} & -2q_3^{WC} & -2q_2^{WC} \\ 2q_1^{WC} & 2q_2^{WC} & 2q_3^{WC} \end{pmatrix} \quad (235)$$

In the derivative of each measurement with respect to the map appearing in equation 216; only the feature related with the measurement affects the projection equation, so

$$\frac{\partial \mathbf{h}_i}{\partial x_{map}} = \left( 0 \dots 0 \frac{\partial \mathbf{h}_i}{\partial \mathbf{y}_i} 0 \dots 0 \right) \quad (236)$$

Partial derivative with respect to the feature parameters can be computed via the chain rule

$$\frac{\partial \mathbf{h}_i}{\partial \mathbf{y}_i} = \frac{\partial \mathbf{h}_d}{\partial \mathbf{h}_u} \frac{\partial \mathbf{h}_u}{\partial \mathbf{h}^C} \frac{\partial \mathbf{h}^C}{\partial \mathbf{y}_i}; \quad (237)$$

where  $\frac{\partial \mathbf{h}_d}{\partial \mathbf{h}_u}$  and  $\frac{\partial \mathbf{h}_u}{\partial \mathbf{h}^C}$  are detailed in 220 and 221. Last partial derivative in the above expression is:

$$\frac{\partial \mathbf{h}^C}{\partial \mathbf{y}_i} = \left( \rho \mathbf{R}^{CW} \quad \mathbf{R}^{CW} \frac{\partial \mathbf{m}}{\partial \theta} \quad \mathbf{R}^{CW} \frac{\partial \mathbf{m}}{\partial \phi} \quad \mathbf{R}^{CW} \left( \begin{pmatrix} x_i \\ y_i \\ z_i \end{pmatrix} - \mathbf{r}^{WC} \right) \right). \quad (238)$$

Here  $\mathbf{m} = (\cos\phi \sin\theta \quad -\sin\phi \quad \cos\phi \cos\theta)^\top$  is the unit vector defined by the azimuth-elevation pair  $(\theta, \phi)$ , derivatives  $\frac{\partial \mathbf{m}}{\partial \theta}$  and  $\frac{\partial \mathbf{m}}{\partial \phi}$  come straightforwardly as

$$\frac{\partial \mathbf{m}}{\partial \theta} = (\cos\phi \cos\theta \ 0 \ -\cos\phi \sin\theta)^\top \quad (239)$$

$$\frac{\partial \mathbf{m}}{\partial \phi} = (-\sin\phi \sin\theta \ -\cos\phi \ -\sin\phi \cos\theta)^\top . \quad (240)$$

### 23 Inverse Depth Point Feature Initialization and Derivatives

The initialization function defines a new point feature in the estimation scheme; depending on the extracted salient image point we want to initialize  $h$ , the state vector at this moment  $x$  and the initial inverse depth value  $\rho_0$ :

$$\mathbf{y}^{NEW} = \mathbf{y}(\mathbf{x}, \mathbf{h}, \rho_0) \quad (241)$$

The initialization function follows the same three steps as measurement equation but in reverse order. Firstly, the detected point in the image has to be undistorted

$$\begin{pmatrix} u_u \\ v_u \end{pmatrix} = \mathbf{h}_u \begin{pmatrix} u_d \\ v_d \end{pmatrix} = \begin{pmatrix} u_0 + (u_d - u_0) (1 + \kappa_1 r_d^2 + \kappa_2 r_d^4) \\ v_0 + (v_d - v_0) (1 + \kappa_1 r_d^2 + \kappa_2 r_d^4) \end{pmatrix}$$

$$r_d = \sqrt{(d_x(u_d - u_0))^2 + (d_y(v_d - v_0))^2} \quad (242)$$

The 3D ray –in the camera reference frame– where the point feature lies can be extracted from the line joining the optical centre and the undistorted image coordinates

$$\mathbf{h}^C = \begin{pmatrix} \frac{(u_u - U_0)d_x}{f} \\ \frac{(v_u - V_0)d_y}{f} \\ 1 \end{pmatrix} . \quad (243)$$

Using the current camera orientation estimation from the state vector, this ray can be transformed to the world reference frame and the azimuth and elevation angles extracted;

$$\mathbf{h}^W = \mathbf{R}^{WC}(\mathbf{q}^{WC}) \mathbf{h}^C , \quad (244)$$

$$\theta = \arctan(h_x^W, h_z^W) , \quad (245)$$

$$\phi = \arctan\left(-h_y^W, \sqrt{h_x^W{}^2 + h_z^W{}^2}\right) . \quad (246)$$

The position of the optical centre is directly extracted from the current camera position,

$$\begin{pmatrix} x_i \\ y_i \\ z_i \end{pmatrix} = \mathbf{r}^{WC} . \quad (247)$$

The initial value for the inverse depth  $\rho_0$  is chosen to cover in its 95% acceptance region a range of possible depths covering from a minimum close distance  $d_{min}$  to infinity. A typical value in our experiments is  $\rho_0 = 1$  and  $\sigma_{\rho_0} = 1$ ; covering a range from  $d_{min} = 0.33$  to infinite (and beyond).

The newly initialized feature is finally  $\mathbf{y}^{NEW} = (x_i \ y_i \ z_i \ \theta \ \phi \ \rho_0)^\top$  and is added to the state vector

$$\mathbf{x}^{NEW} = \begin{pmatrix} \mathbf{x}^{OLD} \\ \mathbf{y}^{NEW} \end{pmatrix} \quad (248)$$

State covariance is updated after initialization using

$$\mathbf{P}^{NEW} = \mathbf{J} \begin{pmatrix} \mathbf{P}^{OLD} & 0 & 0 \\ 0 & \mathbf{R} & 0 \\ 0 & 0 & \sigma_{\rho_0} \end{pmatrix} \mathbf{J}^\top ; \quad (249)$$

being  $\mathbf{R}$  the image noise covariance associated with the detection of the feature.

The matrix  $\mathbf{J}$  is the Jacobian of the initialization function

$$\mathbf{J} = \begin{pmatrix} \mathbf{I} & 0 \\ \frac{\partial \mathbf{y}}{\partial \mathbf{x}_{cam}} & \begin{matrix} \vdots \\ 0 \end{matrix} \end{pmatrix} . \quad (250)$$

As it happened with point feature projection equations, point unprojection does not depend on the camera velocities, so the Jacobian with respect to the camera only has terms in camera position and orientation

$$\frac{\partial \mathbf{y}}{\partial \mathbf{x}_{cam}} = \begin{pmatrix} \frac{\partial \mathbf{y}}{\partial \mathbf{r}^{WC}} \frac{\partial \mathbf{y}}{\partial \mathbf{q}^{WC}} \frac{\partial \mathbf{y}}{\partial \mathbf{v}} \frac{\partial \mathbf{y}}{\partial \omega} \end{pmatrix}^0 . \quad (251)$$

The Jacobian with respect to camera position is

$$\frac{\partial \mathbf{y}}{\partial \mathbf{r}^{WC}} = (\mathbf{I} \ \mathbf{0}) . \quad (252)$$

Derivatives with respect to camera orientation are computed as

$$\frac{\partial \mathbf{y}}{\partial \mathbf{q}^{WC}} = \left( \mathbf{0} \ \frac{\partial \theta}{\partial \mathbf{q}^{WC}} \ \frac{\partial \phi}{\partial \mathbf{q}^{WC}} \ 0 \right) ; \quad (253)$$

where

$$\frac{\partial \theta}{\partial \mathbf{q}^{WC}} = \frac{\partial \theta}{\partial \mathbf{h}^W} \frac{\partial \mathbf{h}^W}{\partial \mathbf{q}^{WC}} \quad (254)$$

$$\frac{\partial \phi}{\partial \mathbf{q}^{WC}} = \frac{\partial \phi}{\partial \mathbf{h}^W} \frac{\partial \mathbf{h}^W}{\partial \mathbf{q}^{WC}} ; \quad (255)$$

$$\frac{\partial \theta}{\partial \mathbf{h}^W} = \left( \frac{\mathbf{h}_z^W}{\mathbf{h}_x^W + \mathbf{h}_z^W} \ 0 - \frac{\mathbf{h}_x^W}{\mathbf{h}_x^W + \mathbf{h}_z^W} \right) \quad (256)$$

$$\frac{\partial \phi}{\partial \mathbf{h}^W} = \begin{pmatrix} \frac{\mathbf{h}_x^W \mathbf{h}_y^W}{(\mathbf{h}_x^W + \mathbf{h}_y^W + \mathbf{h}_z^W) \sqrt{\mathbf{h}_x^W + \mathbf{h}_z^W}} \\ -\frac{\sqrt{\mathbf{h}_x^W + \mathbf{h}_z^W}}{\mathbf{h}_x^W + \mathbf{h}_y^W + \mathbf{h}_z^W} \\ \frac{\mathbf{h}_z^W \mathbf{h}_y^W}{(\mathbf{h}_x^W + \mathbf{h}_y^W + \mathbf{h}_z^W) \sqrt{\mathbf{h}_x^W + \mathbf{h}_z^W}} \end{pmatrix}^\top \quad (257)$$

$$\frac{\partial \mathbf{h}^W}{\partial \mathbf{q}^{WC}} = \left( \frac{\partial \mathbf{h}^W}{\partial \mathbf{q}_0^{WC}} \frac{\partial \mathbf{h}^W}{\partial \mathbf{q}_1^{WC}} \frac{\partial \mathbf{h}^W}{\partial \mathbf{q}_2^{WC}} \frac{\partial \mathbf{h}^W}{\partial \mathbf{q}_3^{WC}} \right) \quad (258)$$

$$\frac{\partial \mathbf{h}^W}{\partial \mathbf{q}_i^{WC}} = \mathbf{h}^C \frac{\partial \mathbf{R}^{WC}}{\partial \mathbf{q}_i^{WC}} . \quad (259)$$

Derivatives for the rotation matrix  $\mathbf{R}^{WC}$  with respect to each quaternion component  $\mathbf{q}_i^{WC}$  have been detailed in equations 232.

Finally, derivatives with respect to the detected salient image point result as follows:

$$\frac{\partial \mathbf{y}'}{\partial \mathbf{h}} = \begin{pmatrix} \frac{\partial \mathbf{y}'}{\partial \mathbf{h}} & 0 \\ 0 & 1 \end{pmatrix} , \quad (260)$$

where  $\mathbf{y}' = (x_i \ y_i \ z_i \ \theta_i \ \phi_i)$  stands for all feature parameters except the inverse depth one  $\rho_0$ . The derivative  $\frac{\partial \mathbf{y}'}{\partial \mathbf{h}}$  is computed as

$$\frac{\partial \mathbf{y}'}{\partial \mathbf{h}} = \frac{\partial \mathbf{y}'}{\partial \mathbf{h}^W} \ \frac{\partial \mathbf{h}^W}{\partial \mathbf{h}^C} \ \frac{\partial \mathbf{h}^C}{\partial \mathbf{h}_u} \ \frac{\partial \mathbf{h}_u}{\partial \mathbf{h}_d} ; \quad (261)$$

where

$$\frac{\partial \mathbf{y}'}{\partial \mathbf{h}^W} = \left( \mathbf{0} \frac{\partial \theta}{\partial \mathbf{h}^W} \frac{\partial \phi}{\partial \mathbf{h}^W} \right) \quad (262)$$

with  $\frac{\partial \theta}{\partial \mathbf{h}^W}$  and  $\frac{\partial \phi}{\partial \mathbf{h}^W}$  being already computed in equations 256 and 257; and

$$\frac{\partial \mathbf{h}^W}{\partial \mathbf{h}^C} = \mathbf{R}^{WC} ; \quad (263)$$

$$\frac{\partial \mathbf{h}^C}{\partial \mathbf{h}_u} = \begin{pmatrix} \frac{d_x}{f} & 0 & 0 \\ 0 & \frac{d_x}{f} & 0 \end{pmatrix} . \quad (264)$$

(265)

The Jacobian of the undistortion is detailed in equation 219.

## 24 Quaternion Normalization

Quaternion normalization must be performed after each update step of the Extended Kalman Filter in order to ensure that its norm equals one, i.e.  $q_0^2 + q_1^2 + q_2^2 + q_3^2 = 1$ . The state vector is then modified as follows

$$\mathbf{x}^{norm} = \begin{pmatrix} \mathbf{r}^{WC} \\ \mathbf{q}^{WC} \\ \frac{1}{|\mathbf{q}^{WC}|} \\ \mathbf{v}^W \\ \omega^C \\ \mathbf{x}_{map} \end{pmatrix} , \quad (266)$$

and the covariance should be updated with the Jacobian of the transformation

$$\mathbf{P}^{norm} = \mathbf{J}_{norm} \mathbf{P} \mathbf{J}_{norm}^\top , \quad (267)$$

$$\mathbf{J}_{norm} = \begin{pmatrix} \mathbf{I} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \frac{\partial \mathbf{q}^{norm}}{\partial \mathbf{q}} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{I} \end{pmatrix} , \quad (268)$$

$$\frac{\partial \mathbf{q}^{norm}}{\partial \mathbf{q}} = (q_0^2 + q_1^2 + q_2^2 + q_3^2)^{-\frac{3}{2}} \times \quad (269)$$

$$\times \begin{pmatrix} q_1^2 + q_2^2 + q_3^2 & -q_0 q_1 & -q_0 q_2 & -q_0 q_3 \\ -q_1 q_0 & q_0^2 + q_2^2 + q_3^2 & -q_1 q_2 & -q_1 q_3 \\ -q_2 q_0 & -q_2 q_1 & q_0^2 + q_1^2 + q_3^2 & -q_2 q_3 \\ -q_3 q_0 & -q_3 q_1 & -q_3 q_2 & q_0^2 + q_1^2 + q_2^2 \end{pmatrix} \quad (270)$$

## 3 Uncalibrated EKF-Based SfM

### 31 Dynamic Model and Derivatives

The camera state vector is augmented in the uncalibrated case with the projective parameters –focal length  $f$  and principal point coordinates  $U_0$

### 3. Uncalibrated EKF-Based SfM

---

and  $V_0$  – and parameters modeling lens distortion –in our case,  $\kappa_1$  and  $\kappa_2$  modeling radial distortion

$$\mathbf{x}_{cam} = \begin{pmatrix} f \\ U_0 \\ V_0 \\ \kappa_1 \\ \kappa_2 \\ \mathbf{r}^{WC} \\ \mathbf{q}^{WC} \\ \mathbf{v}^W \\ \omega^C \end{pmatrix} \quad (31)$$

The motion model assumed for the camera is the same as detailed in section 21. Calibration parameters are assumed to remain constant in this thesis –no zooming cameras are considered. The whole dynamic model and derivatives for the uncalibrated case are then easily derived from the ones in section 21

$$\mathbf{f}_v = \begin{pmatrix} f_{k+1} \\ U0_{k+1} \\ V0_{k+1} \\ \kappa1_{k+1} \\ \kappa2_{k+1} \\ \mathbf{r}^{WC}_{k+1} \\ \mathbf{q}^{WC}_{k+1} \\ \mathbf{v}^W_{k+1} \\ \omega^C_{k+1} \end{pmatrix} = \begin{pmatrix} f_k \\ U0_k \\ V0_k \\ \kappa1_k \\ \kappa2_k \\ \mathbf{r}^{WC}_k + (\mathbf{v}^W_k + \mathbf{V}^W_k) \Delta t \\ \mathbf{q}^{WC}_k \times \mathbf{q}((\omega^C_k + \Omega^C) \Delta t) \\ \mathbf{v}^W_k + \mathbf{V}^W_k \\ \omega^C_k + \Omega^C \end{pmatrix}. \quad (32)$$

$$\frac{\partial \mathbf{f}_v}{\partial \mathbf{x}_v} = \begin{pmatrix} \mathbf{I} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{I} & \mathbf{0} & \Delta t \mathbf{I} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \frac{\partial \mathbf{q}^{WC}_{k+1}}{\partial \mathbf{q}^{WC}_k} & \mathbf{0} & \frac{\partial \mathbf{q}^{WC}_{k+1}}{\partial \omega^C_{k+1}} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{I} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{I} \end{pmatrix} \quad (33)$$

$$\frac{\partial \mathbf{f}_v}{\partial \mathbf{n}} = \begin{pmatrix} \mathbf{0} & \mathbf{0} \\ \Delta t \mathbf{I} & \mathbf{0} \\ \mathbf{0} & \frac{\partial \mathbf{q}^{WC}_{k+1}}{\partial \Omega^C} \\ \mathbf{I} & \mathbf{0} \\ \mathbf{0} & \mathbf{I} \end{pmatrix} \quad (34)$$

## 32 Measurement Model and Derivatives

The pinhole camera model plus a two parameter radial distortion model for the lens is still used in the uncalibrated case, so equations 28 to 214 in

section 22 keep describing the measurement model. The key difference is that, in this case, calibration parameters are not constant anymore but they are also being estimated and belong to the main estimation vector. The Jacobians then change with respect to the calibrated scheme.

From the measurement derivatives from equations 216 and 217

$$H = \begin{pmatrix} \frac{\partial \mathbf{h}_1}{\partial \mathbf{x}} \\ \vdots \\ \frac{\partial \mathbf{h}_m}{\partial \mathbf{x}} \end{pmatrix} \quad (35)$$

$$\frac{\partial \mathbf{h}_i}{\partial \mathbf{x}} = \left( \frac{\partial \mathbf{h}_i}{\partial \mathbf{x}_{cam}} \frac{\partial \mathbf{h}_i}{\partial \mathbf{x}_{map}} \right), \quad (36)$$

the derivative by the camera state  $\frac{\partial \mathbf{h}_i}{\partial \mathbf{x}_{cam}}$  is the one that changes, having to include now the derivative by the calibration parameters

$$\frac{\partial \mathbf{h}_i}{\partial x_{cam}} = \left( \frac{\partial \mathbf{h}_i}{\partial f} \frac{\partial \mathbf{h}_i}{\partial U_0} \frac{\partial \mathbf{h}_i}{\partial V_0} \frac{\partial \mathbf{h}_i}{\partial \kappa_1} \frac{\partial \mathbf{h}_i}{\partial \kappa_2} \frac{\partial \mathbf{h}_i}{\partial \mathbf{r}^{WC}} \frac{\partial \mathbf{h}_i}{\partial \mathbf{q}^{WC}} \frac{\partial \mathbf{h}_i}{\partial \mathbf{v}} \frac{\partial \mathbf{h}_i}{\partial \omega} \right). \quad (37)$$

Derivatives with respect to the projective parameters  $\frac{\partial \mathbf{h}_i}{\partial f}$ ,  $\frac{\partial \mathbf{h}_i}{\partial U_0}$  and  $\frac{\partial \mathbf{h}_i}{\partial V_0}$  can be straightforwardly extracted from equations 210 and 242

$$\frac{\partial \mathbf{h}_i}{\partial f} = \frac{\partial \mathbf{h}_d}{\partial \mathbf{h}_u} \frac{\partial \mathbf{h}_u}{\partial f} \quad (38)$$

$$\frac{\partial \mathbf{h}_u}{\partial f} = \begin{pmatrix} \frac{h_x^C}{h_z^C} \\ \frac{h_y^C}{h_z^C} \end{pmatrix} \quad (39)$$

$$\frac{\partial \mathbf{h}_i}{\partial U_0} = \begin{pmatrix} 1 \\ 0 \end{pmatrix} \quad (310)$$

$$\frac{\partial \mathbf{h}_i}{\partial V_0} = \begin{pmatrix} 0 \\ 1 \end{pmatrix}. \quad (311)$$

Derivatives by the radial distortion parameters can be computed spending a bit more of time from equations 242 to 214. The final result is

$$\frac{\partial \mathbf{h}_i}{\partial \kappa_1} = \begin{pmatrix} -r_d^2(u_d-U_0) \\ \frac{(1+\kappa_1 r_d^2 + \kappa_2 r_d^4) + (u_d-U_0)d_x^2(2\kappa_1+4\kappa_2 r_d^2) + (v_d-V_0)d_y^2(2\kappa_1+4\kappa_2 r_d^2)}{(1+\kappa_1 r_d^2 + \kappa_2 r_d^4) + (u_d-U_0)d_x^2(2\kappa_1+4\kappa_2 r_d^2) + (v_d-V_0)d_y^2(2\kappa_1+4\kappa_2 r_d^2)} \\ -r_d^2(v_d-V_0) \end{pmatrix} \quad (312)$$

$$\frac{\partial \mathbf{h}_i}{\partial \kappa_2} = \begin{pmatrix} -r_d^4(u_d-U_0) \\ \frac{(1+\kappa_1 r_d^2 + \kappa_2 r_d^4) + (u_d-U_0)d_x^2(2\kappa_1+4\kappa_2 r_d^2) + (v_d-V_0)d_y^2(2\kappa_1+4\kappa_2 r_d^2)}{(1+\kappa_1 r_d^2 + \kappa_2 r_d^4) + (u_d-U_0)d_x^2(2\kappa_1+4\kappa_2 r_d^2) + (v_d-V_0)d_y^2(2\kappa_1+4\kappa_2 r_d^2)} \\ -r_d^4(v_d-V_0) \end{pmatrix} \quad (313)$$

### 33 Inverse Depth Point Feature Initialization and Derivatives

As it happened in the previous section, point initialization function is exactly the same as in the calibrated case detailed in equations 241 from 247. It is not the same for the derivatives, that account for the fact that calibration is included now in the state vector. From the initialization Jacobian in equation 250

$$\mathbf{J} = \begin{pmatrix} & & 0 \\ & \mathbf{I} & \vdots \\ \frac{\partial \mathbf{y}}{\partial \mathbf{x}_{cam}} & 0 \dots 0 & \frac{\partial \mathbf{y}}{\partial \mathbf{h}} \end{pmatrix}, \quad (314)$$

the derivatives by the camera  $\frac{\partial \mathbf{y}}{\partial \mathbf{x}_{cam}}$  are now different –including calibration terms–

$$\frac{\partial \mathbf{y}}{\partial \mathbf{x}_{cam}} = \left( \frac{\partial \mathbf{y}}{\partial f} \frac{\partial \mathbf{y}}{\partial U_0} \frac{\partial \mathbf{y}}{\partial V_0} \frac{\partial \mathbf{y}}{\partial \kappa_1} \frac{\partial \mathbf{y}}{\partial \kappa_2} \frac{\partial \mathbf{y}}{\partial \mathbf{r}^{WC}} \frac{\partial \mathbf{y}}{\partial \mathbf{q}^{WC}} \frac{\partial \mathbf{y}}{\partial v} \frac{\partial \mathbf{y}}{\partial \omega} \right)^T. \quad (315)$$

From the six parameters defining an inverse depth feature, only the azimuth-elevation angles defining the ray are the ones depending on the calibration in the initialization step. Derivatives by the calibration result then

$$\frac{\partial \mathbf{y}}{\partial f} = \left( 0 \ 0 \ 0 \ \frac{\partial \theta}{\partial f} \ \frac{\partial \phi}{\partial f} \ 0 \right)^T \quad (316)$$

$$\frac{\partial \mathbf{y}}{\partial U_0} = \left( 0 \ 0 \ 0 \ \frac{\partial \theta}{\partial U_0} \ \frac{\partial \phi}{\partial U_0} \ 0 \right)^T \quad (317)$$

$$\frac{\partial \mathbf{y}}{\partial V_0} = \left( 0 \ 0 \ 0 \ \frac{\partial \theta}{\partial V_0} \ \frac{\partial \phi}{\partial V_0} \ 0 \right)^T \quad (318)$$

$$\frac{\partial \mathbf{y}}{\partial \kappa_1} = \left( 0 \ 0 \ 0 \ \frac{\partial \theta}{\partial \kappa_1} \ \frac{\partial \phi}{\partial \kappa_1} \ 0 \right)^T \quad (319)$$

$$\frac{\partial \mathbf{y}}{\partial \kappa_2} = \left( 0 \ 0 \ 0 \ \frac{\partial \theta}{\partial \kappa_2} \ \frac{\partial \phi}{\partial \kappa_2} \ 0 \right)^T. \quad (320)$$

The above derivatives of azimuth-elevation angle pair by calibration can be computed via the chain rule. The derivatives by the focal length are as follows,

$$\frac{\partial \theta}{\partial f} = \frac{\partial \theta}{\partial \mathbf{h}^W} \frac{\partial \mathbf{h}^W}{\partial \mathbf{h}^C} \frac{\partial \mathbf{h}^C}{\partial f} \quad (321)$$

$$\frac{\partial \theta}{\partial \mathbf{h}^W} = \begin{pmatrix} h_z^W & 0 & -h_x^W \\ \frac{h_z^W}{h_x^W + h_z^W} & \frac{-h_x^W}{h_x^W + h_z^W} \end{pmatrix} \quad (322)$$

$$\frac{\partial \mathbf{h}^W}{\partial \mathbf{h}^C} = \mathbf{R}^{WC} \quad (323)$$

$$\frac{\partial \mathbf{h}^C}{\partial f} = \begin{pmatrix} -(u_u - U_0) d_x & -(v_u - V_0) d_y & 0 \\ \frac{-(u_u - U_0) d_x}{f^2} & \frac{-(v_u - V_0) d_y}{f^2} & 0 \end{pmatrix} \quad (324)$$

$$\frac{\partial \phi}{\partial f} = \frac{\partial \phi}{\partial \mathbf{h}^W} \frac{\partial \mathbf{h}^W}{\partial \mathbf{h}^C} \frac{\partial \mathbf{h}^C}{\partial f} \quad (325)$$

$$\frac{\partial \phi}{\partial \mathbf{h}^W} = \begin{pmatrix} h_x^W h_y^W \\ \frac{(h_x^W + h_y^W + h_z^W) \sqrt{h_x^W + h_z^W}}{(h_x^W + h_y^W + h_z^W)^2} \\ \frac{-\sqrt{h_x^W + h_z^W} h_x^W h_y^W}{(h_x^W + h_y^W + h_z^W)^2} \\ \frac{h_y^W h_z^W}{(h_x^W + h_y^W + h_z^W)^2} \\ \frac{(h_x^W + h_y^W + h_z^W) \sqrt{h_x^W + h_z^W}}{(h_x^W + h_y^W + h_z^W)^2} \end{pmatrix}^\top . \quad (326)$$

Derivatives by the radial distortion parameters are easily extracted

$$\frac{\partial \theta}{\partial \kappa_1} = \frac{\partial \theta}{\partial \mathbf{h}^W} \frac{\partial \mathbf{h}^W}{\partial \mathbf{h}^C} \frac{\partial \mathbf{h}^C}{\partial \kappa_1} \quad (327)$$

$$\frac{\partial \mathbf{h}^C}{\partial \kappa_1} = ((u_d - U_0) r_d^2 \ (u_d - U_0) r_d^2 \ 0)^\top \quad (328)$$

$$\frac{\partial \phi}{\partial \kappa_1} = \frac{\partial \phi}{\partial \mathbf{h}^W} \frac{\partial \mathbf{h}^W}{\partial \mathbf{h}^C} \frac{\partial \mathbf{h}^C}{\partial \kappa_1} \quad (329)$$

$$\frac{\partial \theta}{\partial \kappa_2} = \frac{\partial \theta}{\partial \mathbf{h}^W} \frac{\partial \mathbf{h}^W}{\partial \mathbf{h}^C} \frac{\partial \mathbf{h}^C}{\partial \kappa_2} \quad (330)$$

$$\frac{\partial \mathbf{h}^C}{\partial \kappa_2} = ((u_d - U_0) r_d^4 \ (u_d - U_0) r_d^4 \ 0)^\top \quad (331)$$

$$\frac{\partial \phi}{\partial \kappa_2} = \frac{\partial \phi}{\partial \mathbf{h}^W} \frac{\partial \mathbf{h}^W}{\partial \mathbf{h}^C} \frac{\partial \mathbf{h}^C}{\partial \kappa_2} . \quad (332)$$

And finally, derivatives by the principal point

$$\mathbf{h}_u^* = \begin{pmatrix} u_u^* \\ v_u^* \end{pmatrix} = \begin{pmatrix} u_u - U_0 \\ v_u - V_0 \end{pmatrix} \quad (333)$$

$$\frac{\partial \theta}{\partial U_0} = \frac{\partial \theta}{\partial \mathbf{h}^W} \frac{\partial \mathbf{h}^W}{\partial \mathbf{h}^C} \frac{\partial \mathbf{h}^C}{\partial \mathbf{h}_u^*} \frac{\partial \mathbf{h}_u^*}{\partial U_0} \quad (334)$$

$$\frac{\partial \mathbf{h}^C}{\partial \mathbf{h}_u^*} = \begin{pmatrix} \frac{d_x}{f} & 0 \\ 0 & \frac{d_y}{f} \\ 0 & 0 \end{pmatrix} \quad (335)$$

$$\frac{\partial \mathbf{h}_u^*}{\partial U_0} = \begin{pmatrix} \frac{\partial u_u^*}{\partial U_0} \\ \frac{\partial v_u^*}{\partial U_0} \end{pmatrix} \quad (336)$$

$$\frac{\partial u_u^*}{\partial U_0} = - \left( 1 + \kappa_1 r_d^2 + \kappa_2 r_d^4 + (u_d - U_0)^2 d_x^2 (2\kappa_1 + 4\kappa_2 r_d^2) \right) \quad (337)$$

$$\frac{\partial v_u^*}{\partial U_0} = - \left( (v_d - V_0) (u_d - U_0) d_x^2 (2\kappa_1 + 4\kappa_2 r_d^2) \right) \quad (338)$$

$$\frac{\partial \phi}{\partial U_0} = \frac{\partial \phi}{\partial \mathbf{h}^W} \frac{\partial \mathbf{h}^W}{\partial \mathbf{h}^C} \frac{\partial \mathbf{h}^C}{\partial \mathbf{h}_u^*} \frac{\partial \mathbf{h}_u^*}{\partial U_0} \quad (339)$$

$$\frac{\partial \theta}{\partial V_0} = \frac{\partial \theta}{\partial \mathbf{h}^W} \frac{\partial \mathbf{h}^W}{\partial \mathbf{h}^C} \frac{\partial \mathbf{h}^C}{\partial \mathbf{h}_u^*} \frac{\partial \mathbf{h}_u^*}{\partial V_0} \quad (340)$$

$$\frac{\partial \mathbf{h}_u^*}{\partial V_0} = \begin{pmatrix} \frac{\partial u_u^*}{\partial V_0} \\ \frac{\partial v_u^*}{\partial V_0} \end{pmatrix} \quad (341)$$

$$\frac{\partial u_u^*}{\partial V_0} = - \left( (u_d - U_0) (v_d - V_0) d_y^2 (2\kappa_1 + 4\kappa_2 r_d^2) \right) \quad (342)$$

$$\frac{\partial v_u^*}{\partial V_0} = - \left( 1 + \kappa_1 r_d^2 + \kappa_2 r_d^4 + (v_d - V_0)^2 d_y^2 (2\kappa_1 + 4\kappa_2 r_d^2) \right) \quad (343)$$



# Filter Tuning Understanding via Dimensional Analysis

## Contents

---

<b>1</b>	<b>Introduction</b>	<b>155</b>
<b>2</b>	<b>Monocular SLAM Estimation Process</b>	<b>156</b>
<b>3</b>	<b>Buckingham’s II Theorem Applied to Monocular SLAM</b>	<b>157</b>
<b>4</b>	<b>Dimensionless Monocular SLAM Model</b>	<b>158</b>
<b>5</b>	<b>Image interpretation of dimensionless parameters and image filter tuning</b>	<b>159</b>
<b>6</b>	<b>Real Image Results</b>	<b>160</b>
61	Dependence of scene scale on a priori parameters . . .	160
62	Image tuning in a pure rotation sequence . . . . .	161
63	The same image tuning for different sequences . . . .	162
<b>7</b>	<b>Conclusions</b>	<b>163</b>

---

## 1 Introduction

It is a well known fact in SfM that a moving calibrated camera observing a scene can recover scene geometry and camera motion only up to a scale factor — scene scale is an non-observable magnitude if only bearing measurements are made. Unlike SfM, probabilistic SLAM methods previous to this thesis [Davison 2003] —and even in one of the first papers derived from this thesis [Montiel *et al.* 2006]— have used extra information in the form of a known initialisation object to fix scene scale.

In this appendix it is given insight on how this non-visual information is in fact not essential for solving the tracking problem and that no known target object needs to be added to the scene. While this means that overall scene scale cannot intrinsically be recovered, real-time tracking can still proceed — and if extra information does become available later, scale can be put back into the scene map.

In particular, a novel understanding of the EKF-based SfM problem in terms of dimensionless parameters is derived using Buckingham's  $\Pi$  theorem [Buckingham 1914].  $\Pi$  theorem relies on the necessity for dimensional correctness in any formula and hence any estimation process. Our EKF SfM algorithm therefore recovers dimensionless, up-to-scale geometry, and also provides benefits by allowing previous tuning parameters to be rolled up into a canonical set which give an important new understanding of the uncertainties in the system now in pixel units. These parameters in the image provide a natural way of understanding image sequences, irrespectively of the frame rate and actual scene and camera motion size.

Further, it is also shown that alongside the main dimensionless part of the SLAM state vector an extra parameter representing metric scale could be added. During tracking, vision-only measurements would not reduce the uncertainty in the scale parameter but only in the dimensionless scene geometry. However, any measurement containing metric information such as odometry, a feature at a known depth or the distance between two features can be added when available and will correctly affect both the scale and the dimensionless scene geometry.

## 2 Monocular SLAM Estimation Process

As previously exposed, state vector in the EKF SfM estimation proposed in this thesis is composed of a group of parameters referring to the camera motion,  $\mathbf{x}_v$ , and  $n$  others representing every feature in the map,  $\mathbf{y}_i$ ,

$$\mathbf{x} = (\mathbf{x}_v, \mathbf{y}_1, \mathbf{y}_2, \dots, \mathbf{y}_n)^\top . \quad (21)$$

The camera state vector includes camera position, quaternion orientation, and linear and angular velocities:

$$\mathbf{x}_v = (\mathbf{r}^{WC}, \mathbf{q}^{WC}, \mathbf{v}^W, \boldsymbol{\omega}^W) . \quad (22)$$

Points are coded in inverse depth parameterization proposed in chapter 3 [Montiel *et al.* 2006, Civera *et al.* 2008a]

$$\mathbf{y}_i = (\mathbf{r}_i, \theta_i, \phi_i, \rho_i) = (x_i, y_i, z_i, \theta_i, \phi_i, \rho_i) \quad (23)$$

It is proposed here, for a better understanding of the filter estimation processing, to split the state vector into a metric parameter  $d$  — unobservable with only-vision measurements — and a dimensionless state covering

### 3. Buckingham's II Theorem Applied to Monocular SLAM

---

scene and camera parameters. Doing this, the state vector is partitioned according to observability with a monocular camera. Camera measurements will reduce scene geometry uncertainty, but not the uncertainty in the metric parameter  $d$ .

$$\mathbf{x} = (d, \Pi_r^{WC}, \mathbf{q}^{WC}, \Pi_v^W, \Pi_\omega^C, \Pi_{y_1}, \dots)^\top . \quad (24)$$

The mapping from the state vector to metric scene geometry is a non-linear computation involving the dimensionless geometry and the parameter  $d$ :

$$\mathbf{r}^{WC} = d\Pi_r^{WC} \quad (25)$$

$$\mathbf{v}^W = d\Pi_v^W \Delta t \quad (26)$$

$$\omega^W = d\Pi_\omega^W \Delta t \quad (27)$$

$$\mathbf{y}_i = \begin{pmatrix} d\Pi_{xi} \\ d\Pi_{yi} \\ d\Pi_{zi} \\ \theta_i \\ \phi_i \\ \Pi_{\rho i}/d \end{pmatrix} . \quad (28)$$

## 3 Buckingham's II Theorem Applied to Monocular SLAM

Buckingham's II Theorem [Buckingham 1914] is a key theorem in Dimensional Analysis. It states that physical laws are independent of units. Given a dimensionally correct equation involving  $n$  quantities of different kinds  $f(X_1, X_2, X_3, \dots, X_n) = 0$ ; the existing relationship between the variables can be expressed also as

$F(\Pi_1, \Pi_2, \Pi_3, \dots, \Pi_{n-k}) = 0$  where  $\Pi_i$  is a reduced set of  $n - k$  independent dimensionless groups of variables, and  $k$  the number of independent dimensions appearing in the problem.

The monocular estimation process can be expressed as the following function:

$$(\mathbf{r}^{WC}, \mathbf{q}^{WC}, \mathbf{v}^W, \omega^W, \mathbf{y}_1, \dots, \mathbf{y}_n)^\top = \mathbf{f}(\sigma_a, \sigma_\alpha, \sigma_z, \mathbf{z}, \Delta t, \rho_0, \sigma_{\rho_0}, \sigma_{v0}, \sigma_{\omega 0}) , \quad (31)$$

where vector  $\mathbf{z}$  stacks all the image measurements along the image sequence. Table 31 summarizes all the variables involved in monocular SLAM estimation and their units.

Based on the equation above, dimensionless groups must be chosen. The parameters  $\rho_0$  and  $\Delta t$  are the parameters of the two dimensions involved (length and time) chosen to form the dimensionless groups. (Table 32).

$\mathbf{r}$	$\mathbf{q}$	$\mathbf{v}, \sigma_{v0}$	$\omega, \sigma_{\omega0}$		$\mathbf{z}, \sigma_{\mathbf{z}}$		$a^W, \sigma_a$	$\alpha^C, \sigma_\alpha$	$x_i, y_i, z_i$	$\theta_i, \phi_i$	$\rho_i, \sigma_{\rho_0}$
$l$	1	$lt^{-1}$	$t^{-1}$	$l^{-1}$	$lt^{-1}$	$t^{-1}$	$l^{-1}$	1	1	$lt^{-2}$	$t^{-2}$

Table 31: Dimensionless parameters and the corresponding variables involved

$\Pi_{\mathbf{r}}$	$\Pi_{\mathbf{q}}$	$\Pi_{\mathbf{v}}$	$\Pi_{\omega}$	$\Pi_{\rho_i}$	$\Pi_{\sigma_{v0}}$	$\Pi_{\sigma_{\omega0}}$	$\Pi_{\sigma_{\rho_0}}$	$\Pi_{\mathbf{z}}$	$\Pi_{\sigma_z}$	$\Pi_{\sigma_a}$	$\Pi_{\sigma_\alpha}$
$\mathbf{r}\rho_0$	$\mathbf{q}$	$\mathbf{v}\rho_0\Delta t$	$\omega\Delta t$	$\frac{\rho_i}{\rho_0}$	$\sigma_{v0}\rho_0\Delta t$	$\sigma_{\omega0}\Delta t$	$\frac{\sigma_{\rho_0}}{\rho_0}$	$z$	$\sigma z$	$\sigma_a\rho_0\Delta t^2$	$\sigma_\alpha\rho_0\Delta t^2$

Table 32: Dimensionless numbers and the corresponding involved variables

## 4 Dimensionless Monocular SLAM Model

The state vector is composed of dimensionless parameters defining camera location, rotation and velocities, and the map features:

$$\mathbf{x}_v = (\Pi_{\mathbf{r}}, \mathbf{q}, \Pi_{\mathbf{v}}, \Pi_{\omega})^\top \quad \Pi_{\mathbf{y}_i} = (\Pi_{\mathbf{r}_i}, \theta_i, \phi_i, \Pi_{\rho_i})^\top \quad (41)$$

The dimensionless state update equation is:

$$\mathbf{f}_v = \begin{pmatrix} \Pi_{\mathbf{r}_{k+1}}^{WC} \\ \mathbf{q}_{k+1}^{WC} \\ \Pi_{\mathbf{v}_{k+1}}^{WC} \\ \Pi_{\omega_{k+1}}^{WC} \end{pmatrix} = \begin{pmatrix} \Pi_{\mathbf{r}_k}^{WC} + \Pi_{\mathbf{v}_k}^{WC} + \Pi_{\mathbf{a}_k}^{WC} \\ \mathbf{q}_k^{WC} \times \mathbf{q}(\Pi_{\omega_k}^{WC} + \Pi_{\alpha_k}^{WC}) \\ \Pi_{\mathbf{v}_k}^{WC} + \Pi_{\mathbf{a}_k}^{WC} \\ \Pi_{\omega_k}^{WC} + \Pi_{\alpha_k}^{WC} \end{pmatrix} \quad (42)$$

Next the monocular camera measurement equation is detailed. First, features coded in inverse depth must be converted to 3D points in the world reference:

$$\Pi_h^W = \Pi_{\mathbf{r}_i} + \Pi_{\rho_i} \mathbf{m}(\theta_i, \phi_i), \quad (43)$$

where  $\mathbf{m}(\theta_i, \phi_i)$  is the unit vector defined by the pair of azimuth-elevation angles.

These world-referenced 3D points are converted to the camera frame:

$$\Pi_h^C = \mathbf{R}^{CW}(\Pi_h^W - \Pi_{\mathbf{r}}), \quad (44)$$

and then are projected into the camera using the pinhole model:

$$v = \frac{\Pi_h^C|_x}{\Pi_h^C|_z} \quad \nu = \frac{\Pi_h^C|_y}{\Pi_h^C|_z} \quad (45)$$

Finally, camera calibration including radial distortion is applied to obtain pixel coordinates from angular coordinates.

It can be observed that measurements do not involve the actual size of the scene, coded in the metric parameter  $d$ . Visual measurements from a monocular camera would not reduce the initial uncertainty given in the size

## 5. Image interpretation of dimensionless parameters and image filter tuning

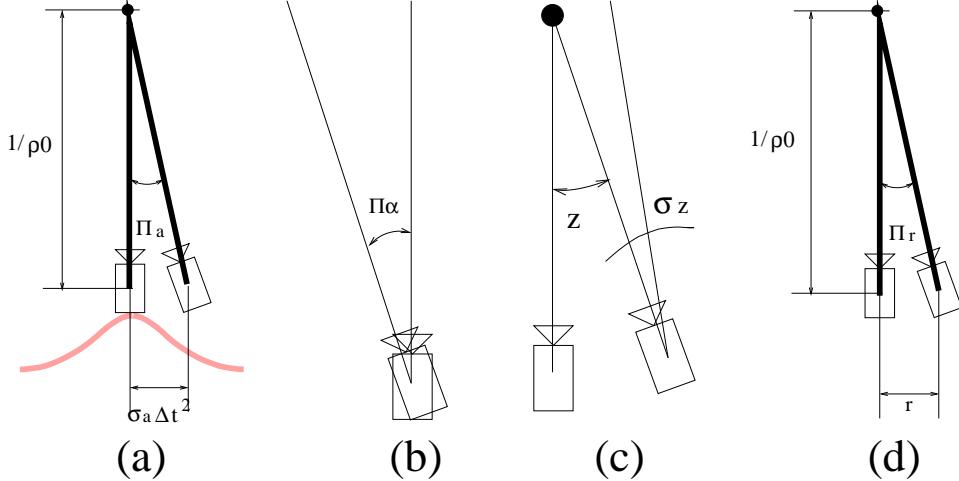


Figure 51: Dimensionless monocular SLAM parameters.

of the scene. If the metric size had to be estimated, other measurements should be made. As an example, if a distance between two points is known, an equation can be formulated in which parameter  $d$  is involved –and then, it could be estimated.

$$\mathcal{D}(\mathbf{P}_1, \mathbf{P}_2) = d \sqrt{(\Pi_{y_2}|_x - \Pi_{y_1}|_x)^2 + (\Pi_{y_2}|_y - \Pi_{y_1}|_y)^2 + (\Pi_{y_2}|_z - \Pi_{y_1}|_z)^2} \quad (46)$$

## 5 Image interpretation of dimensionless parameters and image filter tuning

Figure 51 details the geometrical interpretation of the main dimensionless parameters that are involved in the estimation. As a conclusion from the analysis performed in previous sections 3 and 4, it will be detailed in this section how such dimensionless parameters are represented by image values, providing an understanding of filter tuning parameters in terms of pixels in the image instead of 3D values that cannot directly be observed from images.

Figure 51(a) shows the dimensionless parameter  $\Pi_{\sigma a}$ . The product  $\sigma_a \Delta t^2$  represents the effect of the acceleration noise on the camera location. This value divided by  $1/\rho_0$  gives the angle represented in the figure. This angle can be seen as the parallax allowed to a feature at depth  $1/\rho_0$  due to camera acceleration.

The camera angular acceleration covariance in Figure 51(b) can clearly be interpreted as an angle between frames and can be measured –as calibration is known– in image pixels. Image measurements and image noise,

in Figure 51(c) are directly measured in the image, so they are already equivalent to dimensionless angles.

The translation estimate,  $\Pi_r$  (in fig 51(d)), can also be seen as the angle defined by the translation between frames and the initial inverse depth.

As a result of the analysis given in this section, and with minimum changes in the structure of the EKF estimation scheme, all estimated parameters and filter tuning can be seen as dimensionless angles and consequently transformed to pixels in a calibrated camera. We believe that this approach simplifies the filter tuning: 3D acceleration values, that cannot be directly extracted from the visualization of the sequence to be processed are no longer required. Instead of that, quantities measured in pixels in the image are the only numbers necessary for the tuning –easier to extract from the sequence.

## 6 Real Image Results

Real image experiments have been performed in order to show some of the main results coming from the dimensionless point of view. The first one illustrates how the scale of the scene in usual monocular SLAM depends on the prior knowledge added to scene, even if this knowledge is very weak –in the case where no known target is added, scale depends on prior inverse depth values and acceleration noise. Second experiment tries to show the use of image tuning and the reduction in the number of tuning parameters that comes as consequence from the proposed scheme. In the third experiment, the same image tuning is used in two different sequences which have different metric qualities but lead to the same image motion. All of the sequences have been recorded with a IEEE 1394 320×240 monochrome camera at 30 fps. A wide angle lens is used.

### 61 Dependence of scene scale on a priori parameters

The same sequence was processed with the dimensional EKF SLAM algorithm varying the  $\rho_0$  parameter. Figure 61 shows the estimation for  $\rho_0 = 0.5m^{-1}$  and  $\rho_0 = 0.1m^{-1}$ . Notice that the estimated depth of the scene (the distance between the camera and the points in the bookcase) tends to be at the depth prior (2m and 10m). The two estimated scenes have the same form, the difference is just the scale of the axis. If  $\Pi_r^{WC} = \rho_0 \mathbf{r}^{WC}$  and  $\Pi_{y_i}$  were estimated using the dimensionless monocular SLAM proposed, these two experiments would be normalized into one, in which normalized depth tends to be at *dimensionless '1'*,

## 6. Real Image Results

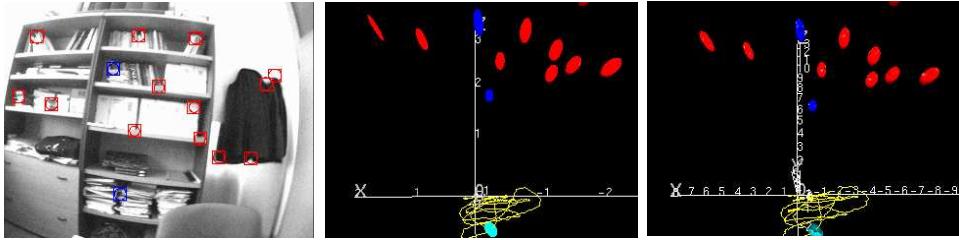


Figure 61: Left: sample. Centre: EKF SLAM estimation result  $\rho_0 = 0.5m^{-1}$ . Right: EKF SLAM estimation result  $\rho_0 = 0.1m^{-1}$ . Feature uncertainty in red and blue, the camera uncertainty in cyan and the camera trajectory in yellow.

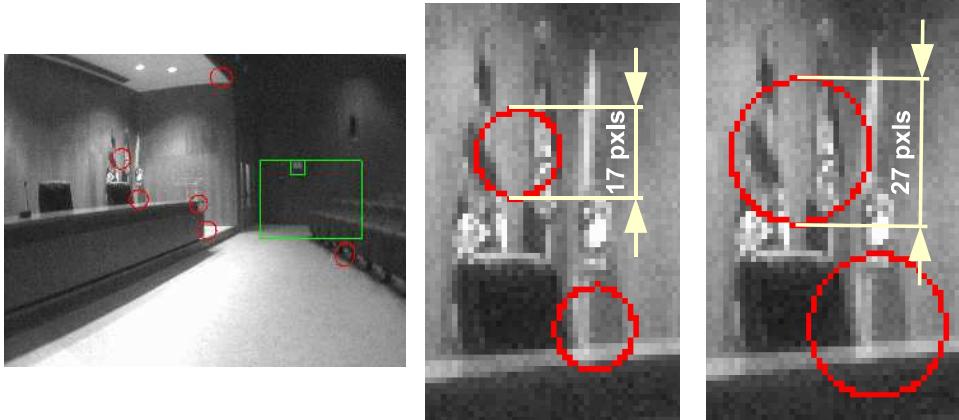


Figure 62: Pure rotation image search regions. Left: sample image. Centre:  $\Pi_\alpha = 2pxls$ . Right:  $\Pi_\alpha = 4pxls$ .

## 62 Image tuning in a pure rotation sequence

This sequence is a pure camera rotation in a hallway. Dimensional monocular SLAM should have been tuned with real camera accelerations and depth priors. As these values are not observable, they need to be assumed. Dimensionless monocular SLAM is tuned directly with image values.

Two experiments with the same  $\Pi_{\sigma a} = 0$ ,  $\Pi_{\sigma z} = 1pxls$  values but different tuning in  $\Pi_{\sigma \alpha}$ : a)  $\Pi_{\sigma \alpha} = 2pxls$ , and b)  $\Pi_{\sigma \alpha} = 4pxls$  has been performed (Fig.62.) Because of the image tuning, their effect can be directly seen in the 95% image search regions size for the map features.

It is important to notice that, in the previous paragraph, neither 3D scene assumptions nor time between frames  $\Delta t$  are needed in the filter. The tuned values are the allowed image motion between frames due to camera linear and angular acceleration and image noise.

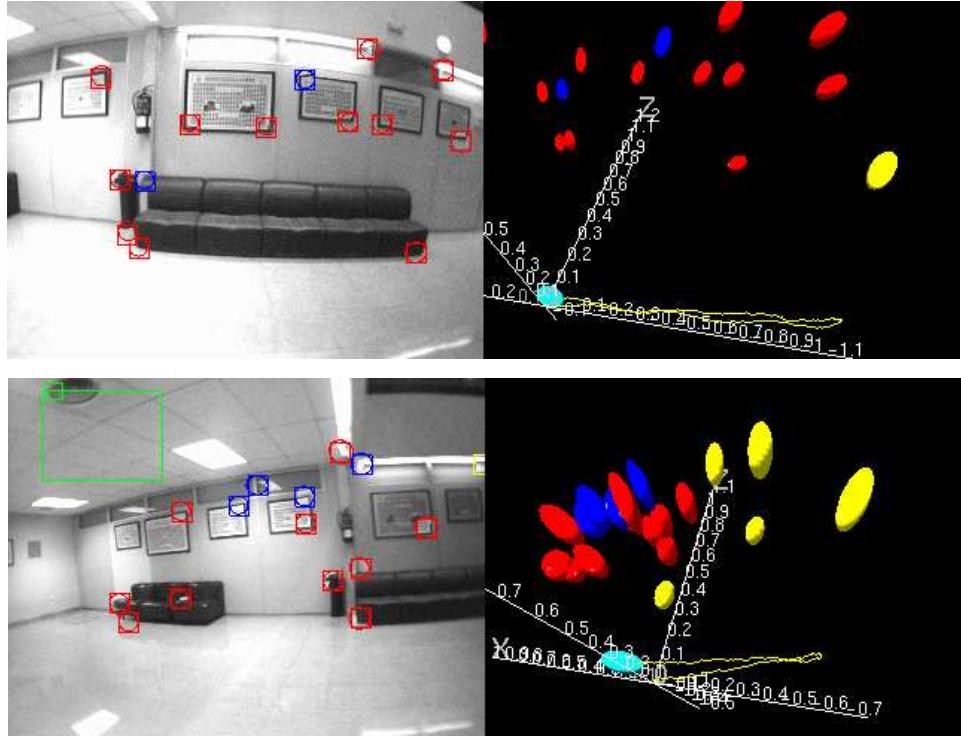


Figure 63: Two equivalent sequences. First and last images and 3D estimated geometry

### 63 The same image tuning for different sequences

Two translational sequences have been recorded walking along a corridor and looking at the wall. In the first one, the distance from the wall was 2.5 metres. In the second, the distance from the wall was twice (5 metres), the distance walked along the corridor the same, and the walking velocity was double (therefore, the number of frames of the second sequence is half the first one). Although they are two different experiments, the image motion in both sequences is the same, and dimensionless monocular SLAM has to be tuned with same values. In this experiment, these values were:  $\sigma_z = 1pxl$ ,  $\sigma_a = 2pxl$  and  $\sigma_\alpha = 2pxl$ . Notice again the simplicity of image tuning compared with 3D tuning, in which you have to imagine the depth prior and the 3D accelerations, unobservable with a single camera. Figure 63 shows the results of both estimations.

The dimensionless estimated translation can be interpreted as the translation in units of the initial depth prior. As the wall is twice as far in the second sequence, the second sequence's estimated translation is half. It can also be noticed that, as the normalized translation is smaller in the second experiment, the normalized 3D point positions are estimated with less

## 7. Conclusions

---

accuracy and have larger uncertainty regions.

## 7 Conclusions

As a result of an analysis of the SfM problem under II Buckingham's theorem, a dimensionless parametrization for the EKF state vector has been proposed that clarifies the role of the filter tuning parameters and estimated quantities in terms of image units. As a consequence, filter tuning can be done using the allowed accelerations to the filter projected in the images –that is, in pixels– instead of using the allowed acceleration itself in metric units –which is more difficult to estimate having the sequence as the only input to the algorithm. Also, as a result of the reduction in the number of parameters of the problem that Buckingham's theorem offer, the tuning parameters are reduced.

Up-to-scale results from real-time, EKF based monocular SLAM without an initialisation target are presented. As no known points are included in the estimation, the real size of the scene is not going to be recovered. A scaled estimation is going to be obtained, being the overall scene scale being determined from a priori knowledge inserted to the filter –even if it is so weak as inverse depth priors and linear acceleration noise are.



# Bibliography

- [2d3 2009] 2d3. URL <http://www.2d3.com/>, May 2009.
- [Aidala & Hammel 1983] Vincent J. Aidala and Sherry E. Hammel. *Utilization of Modified Polar Coordinates for Bearing-Only Tracking*. IEEE Trans. Autom. Control, vol. 28, no. 3, pages 283–294, March 1983.
- [Alspach & Sorenson 1972] D. Alspach and H. Sorenson. *Nonlinear Bayesian estimation using Gaussian sum approximations*. IEEE Transactions on Automatic Control, vol. 17, no. 4, pages 439–448, 1972.
- [Autostitch 2009] Autostitch. URL <http://www.autostitch.net/>, May 2009.
- [Azarbayejani & Pentland. 1995] A. Azarbayejani and A. P. Pentland. *Recursive Estimation of Motion, Structure, and Focal Length*. IEEE Transactions on Pattern Analysis and Machine Intelligence, vol. 17, no. 6, pages 562–575, June 1995.
- [Bailey *et al.* 2006] T. Bailey, J. Nieto, J. Guivant, M. Stevens and E. Nebot. *Consistency of the EKF-SLAM algorithm*. In IEEE/RSJ International Conference on Intelligent Robots and Systems, pages 3562–3568, 2006.
- [Bailey 2003] T. Bailey. *Constrained Initialisation for Bearing-Only SLAM*. In Proc. IEEE Int. Conf. Robotics and Automation, Taiwan, 2003.
- [Bar-Shalom & Fortmann 1988] Y. Bar-Shalom and T. E. Fortmann. Tracking and data association, volume 179 of *Mathematics in Science and Engineering*. Academic Press, INC., San Diego, 1988.
- [Bay *et al.* 2008] Herbert Bay, Andreas Ess, Tinne Tuytelaars and Luc Van Gool. *SURF: Speeded Up Robust Features*. Computer Vision and Image Understanding, vol. 110, no. 3, pages 346–359, 2008.

---

## BIBLIOGRAPHY

- [Blanco *et al.* 2009] José-Luis Blanco, Francisco-Angel Moreno and Javier González. *A Collection of Outdoor Robotic Datasets with centimeter-accuracy Ground Truth*. Autonomous Robots, vol. 27, no. 4, pages 327–351, November 2009.
- [Blom & Bar-Shalom 1988] H.A.P. Blom and Y. Bar-Shalom. *The interacting multiple model algorithm for systems with Markovian switching coefficients*. IEEE Transactions on Automatic Control, vol. 33, no. 8, pages 780–783, August 1988.
- [Borenstein *et al.* 1996] J. Borenstein, HR Everett and L. Feng. *Where am I? Sensors and methods for mobile robot positioning*. University of Michigan, vol. 119, page 120, 1996.
- [Brown 2003] D.G. Brown M.and Lowe. *Recognising panoramas*. In International Conference on Computer Vision, pages 1218–1225, Nice, 2003.
- [Bryson & Sukkarieh 2005] Mitch Bryson and Salah Sukkarieh. *Bearing-Only SLAM for an Airborne Vehicle*. In Australian Conference on Robotics and Automation (ACRA '05), Sidney, 2005.
- [Bryson *et al.* 2009] M. Bryson, M. Johnson-Roberson and S. Sukkarieh. *Airborne Smoothing and Mapping using Vision and Inertial Sensors*. In IEEE International Conference on Robotics and Automation, 2009, 2009.
- [Buckingham 1914] E. Buckingham. *On Physically Similar Systems; Illustrations of the Use of Dimensional Equations*. Phys. Rev., vol. 4, no. 4, pages 345–376, Oct 1914.
- [Canavos 1984] George C. Canavos. Applied probability and statistical methods. Little, Brown and Company, Boston. USA, 1984.
- [Canny 1986] J. Canny. *A computational approach to edge detection*. IEEE Transactions on Pattern Analysis and Machine Intelligence, vol. 8, no. 6, pages 679–698, 1986.
- [Capel & Zisserman 1998] D. Capel and A. Zisserman. *Automated Mosaicing with Super-resolution Zoom*. In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, pages 885–891, 1998.
- [Capel 2005] D. Capel. *An effective bail-out test for RANSAC consensus scoring*. In Proceedings of the British Machine Vision Conference, pages 629–638, 2005.
- [Castellanos & Tardós 1999] J.A Castellanos and J.D. Tardós. Mobile robot localization and map building: A multisensor fusion approach. Kluwer Academic Publishers, Boston. USA, 1999.

## BIBLIOGRAPHY

---

- [Castellanos *et al.* 1994] J.A. Castellanos, J.M.M. Montiel, J. Neira and J.D. Tardós. *Sensor Influence in the Performance of Simultaneous Mobile Robot Localization and Map Building*. In Lecture Notes in Control and Information Sciences. Vol 250, pages 287 – 296. 1994.
- [Castellanos *et al.* 1999] JA Castellanos, JMM Montiel, J. Neira and JD Tardos. *The SPmap: a probabilistic framework for simultaneous localization and map building*. IEEE Transactions on Robotics and Automation, vol. 15, no. 5, pages 948–952, 1999.
- [Castellanos *et al.* 2004] JA Castellanos, J. Neira and JD Tardos. *Limits to the consistency of EKF-based SLAM*. In 5th IFAC Symposium on Intelligent Autonomous Vehicles, 2004.
- [Castellanos *et al.* 2007] JA Castellanos, R. Martinez-Cantin, JD Tardos and J. Neira. *Robocentric map joining: Improving the consistency of EKF-SLAM*. Robotics and Autonomous Systems, vol. 55, no. 1, pages 21–29, 2007.
- [Chekhlov *et al.* 2007] D. Chekhlov, M. Pupilli, W. W. Mayol and A. Calway. *Robust Real-Time Visual SLAM Using Scale Prediction and Exemplar Based Feature Description*. In Proceedings of the IEEE Computer Vision and Pattern Recognition, 2007.
- [Cheng *et al.* 2006] Y. Cheng, MW Maimone and L. Matthies. *Visual odometry on the Mars exploration rovers-a tool to ensure accurate driving and science imaging*. IEEE Robotics and Automation Magazine, vol. 13, no. 2, pages 54–62, 2006.
- [Chiuso *et al.* 2000] A. Chiuso, P. Favaro, H. Jin and S. Soatto. “*MFM*”: *3-D Motion From 2-D Motion Causally Integrated Over Time*. In European Conference on Computer Vision, pages 735–750, 2000.
- [Chli & Davison 2008] M. Chli and A.J. Davison. *Active Matching*. In Proceedings of the 10th European Conference on Computer Vision: Part I, pages 72–85. Springer, 2008.
- [Chowdhury & Chellappa 2003] A.K.R. Chowdhury and R. Chellappa. *Stochastic Approximation and Rate-Distortion Analysis for Robust Structure and Motion Estimation*. International Journal of Computer Vision, vol. 55, no. 1, pages 27–53, 2003.
- [Chum & Matas 2008] O. Chum and J. Matas. *Optimal randomized RANSAC*. IEEE Transactions on Pattern Analysis and Machine Intelligence, vol. 30, no. 8, pages 1472–1482, 2008.

---

## BIBLIOGRAPHY

- [Civera *et al.* 2007a] J. Civera, A. J. Davison and J. M. M. Montiel. *Inverse Depth to Depth Conversion for Monocular SLAM*. In IEEE International Conference on Robotics and Automation, 2007, pages 2778–2783, April 2007.
- [Civera *et al.* 2007b] J. Civera, A.J. Davison and JMM Montiel. *Dimensionless monocular SLAM*. Lecture Notes in Computer Science, Proceedings of the 3rd Iberian conference on Pattern Recognition and Image Analysis, Part II, vol. 4478, pages 412–419, 2007.
- [Civera *et al.* 2008a] J. Civera, A. J. Davison and J. M. M. Montiel. *Inverse Depth Parametrization for Monocular SLAM*. IEEE Transactions on Robotics, vol. 24, no. 5, pages 932–945, October 2008.
- [Civera *et al.* 2008b] J. Civera, A.J. Davison and JMM Montiel. *Interacting multiple model monocular SLAM*. In IEEE International Conference on Robotics and Automation, 2008, pages 3704–3709, 2008.
- [Civera *et al.* 2009a] J. Civera, Diana R. Bueno, A.J. Davison and JMM Montiel. *Camera Self-Calibration for Sequential Bayesian Structure From Motion*. In IEEE International Conference on Robotics and Automation, 2009. ICRA 2009, 2009.
- [Civera *et al.* 2009b] J. Civera, A.J. Davison, J.A. Magallon and JMM Montiel. *Drift-Free Real-Time Sequential Mosaicing*. International Journal of Computer Vision, vol. 81, no. 2, pages 128–137, February 2009.
- [Civera *et al.* 2009c] J. Civera, Oscar G. Grasa, A. J. Davison and J. M. M. Montiel. *1-Point RANSAC for EKF-Based Structure from Motion*. In IEEE/RSJ International Conference on Intelligent Robots and Systems, 2009.
- [Clemente *et al.* 2007] L. A. Clemente, A. J. Davison, I. D. Reid, J. Neira and J. D. Tardos. *Mapping Large Loops with a Single Hand-Held Camera*. In Proceedings of Robotics: Science and Systems, 2007.
- [Comport *et al.* 2007] A.I. Comport, E. Malis and P. Rives. *Accurate Quadrifocal Tracking for Robust 3D Visual Odometry*. Robotics and Automation, 2007 IEEE International Conference on, pages 40–45, April 2007.
- [Davison & Murray 1998] Andrew J. Davison and David W. Murray. *Mobile Robot Localization using Active Vision*. In 5th European Conference on Computer Vision, pages 809–825, Freiburg, Germany, 1998.
- [Davison *et al.* 2007] A. J. Davison, N. D. Molton, I. D. Reid and O. Stasse. *MonoSLAM: Real-Time Single Camera SLAM*. IEEE Transactions

## BIBLIOGRAPHY

---

- on Pattern Analysis and Machine Intelligence, vol. June, pages 1052–1067, 2007.
- [Davison 2003] A. J. Davison. *Real-time simultaneous localisation and mapping with a single camera*. In Ninth IEEE International Conference on Computer Vision, 2003. Proceedings, pages 1403–1410, 2003.
- [de Agapito *et al.* 2001] L. de Agapito, E. Hayman and I. A. Reid. *Self-Calibration of Rotating and Zooming Cameras*. International Journal of Computer Vision, vol. 45, no. 2, pages 107–127, Nov 2001.
- [Dellaert & Kaess 2006] F. Dellaert and M. Kaess. *Square Root SAM: Simultaneous localization and mapping via square root information smoothing*. The International Journal of Robotics Research, vol. 25, no. 12, page 1181, 2006.
- [Dissanayake *et al.* 2001] M. Dissanayake, P. Newman, S. Clark, HF Durrant-Whyte and M. Csorba. *A solution to the simultaneous localization and map building (SLAM) problem*. IEEE Transactions on Robotics and Automation, vol. 17, no. 3, pages 229–241, 2001.
- [Durrant-Whyte *et al.* 2003] H. Durrant-Whyte, S. Majumder, S. Thrun, M de Battista and Steve Scheding. *A Bayesian Algorithm for Simultaneous Localisation and Map Building*. Robotics Research: The Tenth International Symposium, 2003.
- [Eade & Drummond 2006a] E. Eade and T. Drummond. *Edge landmarks in monocular slam*. In Proceedings of the 17th British Machine Vision Conference, Edinburgh (UK), 2006.
- [Eade & Drummond 2006b] E. Eade and T. Drummond. *Scalable Monocular SLAM*. In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, New York, pages 469–476, 2006.
- [Eade & Drummond 2007] E. Eade and T. Drummond. *Monocular slam as a graph of coalesced observations*. In IEEE 11th International Conference on Computer Vision, 2007. ICCV 2007, pages 1–8, 2007.
- [Estrada *et al.* 2005] C. Estrada, J. Neira and JD Tardos. *Hierarchical SLAM: Real-time accurate mapping of large environments*. IEEE Transactions on Robotics, vol. 21, no. 4, pages 588–596, 2005.
- [Eustice *et al.* 2005a] R. M. Eustice, H. Singh, J. J. Leonard, M. Walter and R. Ballard. *Visually Navigating the RMS Titanic with SLAM Information Filters*. In Proceedings of Robotics: Science and Systems, 2005.

---

## BIBLIOGRAPHY

- [Eustice *et al.* 2005b] RM Eustice, H. Singh and JJ Leonard. *Exactly sparse delayed-state filters*. In Proceedings of the 2005 IEEE International Conference on Robotics and Automation, 2005., pages 2417–2424, 2005.
- [Faugeras *et al.* 1992] O.D. Faugeras, Q.T. Luong and S.J. Maybank. *Camera self-calibration: theory and experiments*. European Conference on Computer Vision, vol. 588, pages 321–334, 1992.
- [Feder *et al.* 1999] H.J.S. Feder, J.J. Leonard and C.M. Smith. *Adaptive Mobile Robot Navigation and Mapping*. Int. Journal of Robotics Research, vol. 18, no. 7, pages 650–668, 1999.
- [Fenwick *et al.* 2002] J.W. Fenwick, P.M. Newman and J.J. Leonard. *Cooperative concurrent mapping and localization*. In Proceedings of the 2002 IEEE International Conference on Robotics and Automation, volume 2, pages 1810–1817, 2002.
- [Fischler & Bolles 1981] M. A. Fischler and R. C. Bolles. *Random Sample Consensus, a Paradigm for Model Fitting with Applications to Image Analysis and Automated Cartography*. Communications of the ACM, vol. 24, no. 6, pages 381 – 395, 1981.
- [Foxlin 2002] E. Foxlin. *Generalized architecture for simultaneous localization, auto-calibration and map-building*. In Proceedings of the IEEE/RSJ Conference on Intelligent Robots and Systems, pages 2–4, 2002.
- [Funke & Pietzsch 2009] J. Funke and T. Pietzsch. *A Framework For Evaluating Visual SLAM*. In Proceedings of the British Machine Vision Conference, 2009.
- [Gee *et al.* 2007] A.P. Gee, D. Chekhlov, W. Mayol and A. Calway. *Discovering planes and collapsing the state space in visual SLAM*. In British Machine Vision Conference (BMVC), University of Warwick, UK, 2007.
- [Gee *et al.* 2008] A.P. Gee, D. Chekhlov, A. Calway and W. Mayol-Cuevas. *Discovering Higher Level Structure in Visual SLAM*. IEEE Transactions on Robotics, vol. 24, no. 5, pages 980–990, 2008.
- [Grasa *et al.* 2009a] Oscar G. Grasa, Javier Civera, Antonio Guemes, Víctor Muñoz and J. M. M. Montiel. *EKF Monocular SLAM 3D Modeling, Measuring and Augmented Reality from Endoscope Image Sequences*. In 5th Workshop on Augmented Environments for Medical Imaging including Augmented Reality in Computer-Aided Surgery, held in conjunction with MICCAI2009, 2009.

## BIBLIOGRAPHY

---

- [Grasa *et al.* 2009b] Oscar G. Grasa, Javier Civera, Antonio Guemes, Víctor Muñoz and J. M. M. Montiel. *Real-time 3D Modeling from Endoscope Image Sequences*. In Proceedings of the 2009 IEEE International Conference on Robotics and Automation; Workshop on Advanced Sensing and Sensor Integration in Medical Robotics, 2009.
- [Handa *et al.* 2010] A. Handa, M. Chli, H. Strasdat and A. J. Davison. *Scalable Active Matching*. In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 2010.
- [Haralick *et al.* 1994] B.M. Haralick, C.N. Lee, K. Ottenberg and M. Nölle. *Review and analysis of solutions of the three point perspective pose estimation problem*. International Journal of Computer Vision, vol. 13, no. 3, pages 331–356, 1994.
- [Harris & Stephens 1988] C. G. Harris and M. Stephens. *A Combined Corner and Edge Detector*. In Proceedings of the 4th Alvey Vision Conference, pages 147–151, 1988.
- [Hartley & Zisserman 2004] R. I. Hartley and A. Zisserman. Multiple view geometry in computer vision. Cambridge University Press, ISBN: 0521540518, 2004.
- [Heeger & Jepson 1992] D. Heeger and A. Jepson. *Subspace methods for recovering rigid motion I: Algorithm and implementation*. International Journal of Computer Vision, pages 95–117, 1992.
- [Holmes *et al.* 2008] S. Holmes, G. Klein and D. Murray. *An O (N2) Square Root Unscented Kalman Filter for Visual Simultaneous Localization and Mapping*. IEEE Transactions on Pattern Analysis and Machine Intelligence, vol. 22, 2008.
- [Jaynes 2003] E. T. Jaynes. Probability theory: The logic of science. Cambridge University Press, 2003.
- [Jin *et al.* 2003] H. Jin, P. Favaro and S. Soatto. *A semi-direct approach to structure from motion*. The Visual Computer, vol. 19, no. 6, pages 377–394, 2003.
- [Julier & Uhlmann 1997] S.J. Julier and J.K. Uhlmann. *A new extension of the Kalman filter to nonlinear systems*. In Int. Symp. Aerospace/Defense Sensing, Simul. and Controls, volume 3, 1997.
- [Julier & Uhlmann 2001] S.J. Julier and J.K. Uhlmann. *A counter example to the theory of simultaneous localization and map building*. In IEEE International Conference on Robotics and Automation, volume 4, pages 4238–4243. IEEE; 1999, 2001.

---

## BIBLIOGRAPHY

- [Jung & Lacroix 2003] I.K. Jung and S. Lacroix. *High resolution terrain mapping using low altitude aerial stereo imagery*. In Proceedings of the Ninth International Conference on Computer Vision, page 946, 2003.
- [Kalman 1960] R.E. Kalman. *A new approach to linear filtering and prediction problems*. Journal of basic Engineering, vol. 82, no. 1, pages 35–45, 1960.
- [Kanatani 2004] K. Kanatani. *Uncertainty modeling and model selection for geometric inference*. IEEE Transactions on Pattern Analysis and Machine Intelligence, vol. 26, no. 10, pages 1307–1319, 2004.
- [Kim & Hong 2006] D.W. Kim and K.S. Hong. *Real-time mosaic using sequential graph*. Journal of Electronic Imaging, vol. 15, no. 2, pages 47–63, Apr-Jun 2006.
- [Kim & Sukkarieh 2003] J. H. Kim and S. Sukkarieh. *Airborne Simultaneous Localisation and Map Building*. In Proceedings of the IEEE International Conference on Robotics and Automation, pages 406–411, 2003.
- [Kirubarajan *et al.* 1998] T. Kirubarajan, Y. Bar-Shalom, W.D. Blair and G. A. Watson. *IMMPDAF for Radar Management and Tracking Benchmark with ECM*. IEEE Transactions on Aerospace and Electronic Systems, vol. 34, no. 4, pages 1115–1134, October 1998.
- [Klein & Murray 2007] G. Klein and D. Murray. *Parallel Tracking and Mapping for Small AR Workspaces*. In Proc. Sixth IEEE and ACM International Symposium on Mixed and Augmented Reality, 2007.
- [Klein & Murray 2008] G. Klein and D. Murray. *Improving the Agility of Keyframe-Based SLAM*. In Proceedings of the 10th European Conference on Computer Vision: Part II, pages 802–815. Springer, 2008.
- [Konolige & Agrawal 2008] K. Konolige and M. Agrawal. *FrameSLAM: From bundle adjustment to realtime visual mapping*. IEEE Transactions on Robotics, vol. 24, no. 5, pages 1066–1077, 2008.
- [Konolige *et al.* 2007] K. Konolige, M. Agrawal and J. Solà. *Large-Scale Visual Odometry for Rough Terrain*. In International Symposium on Research in Robotics, 2007.
- [Kummerle *et al.* 2009] R. Kummerle, B. Steder, C. Dornhege, M. Ruhnke, G. Grisetti, C. Stachniss and A. Kleiner. *On measuring the accuracy of SLAM algorithms*. Autonomous Robots, vol. 27, no. 4, pages 387–407, 2009.

## BIBLIOGRAPHY

---

- [Kwok & Dissanayake 2004] N.M. Kwok and G. Dissanayake. *An Efficient Multiple Hypothesis Filter for Bearing-Only SLAM*. In IEEE/RSJ International Conference on Intelligent Robots and Systems, pages 736–741, 2004.
- [Kwok *et al.* 2005] NM Kwok, G. Dissanayake and QP Ha. *Bearing-only SLAM Using a SPRT Based Gaussian Sum Filter*. Robotics and Automation, 2005. Proceedings of the 2005 IEEE International Conference on, pages 1109–1114, 2005.
- [Li & Jilkov 2005] X. Rong Li and Vesselin P. Jilkov. *Survey of Maneuvering Target Tracking. Part V: Multiple-Model Methods*. IEEE Transactions on Aerospace and Electronic Systems, vol. 41, no. 4, pages 1255–1320, October 2005.
- [Lowe 2004] D. G. Lowe. *Distinctive image features from scale-invariant keypoints*. International Journal of Computer Vision, vol. 60, no. 2, pages 91–110, 2004.
- [Lu & Milios 1997] F. Lu and E. Milios. *Globally consistent range scan alignment for environment mapping*. Autonomous Robots, vol. 4, no. 4, pages 333–349, 1997.
- [Marks *et al.* 1995] R.L. Marks, S.M. Rock and M.J. Lee. *Real-time Video Mosaicking of the Ocean Floor*. IEEE Journal of Oceanic Engineering, vol. 20, no. 3, pages 229–241, Jul 1995.
- [Matthies *et al.* 1989] Larry Matthies, Takeo Kanade and Richard Szeliski. *Kalman Filter-based Algorithms for Estimating Depth from Image Sequences*. International Journal of Computer Vision, vol. 3, no. 3, pages 209–238, 1989.
- [Maybank & Faugeras 1992] S.J. Maybank and O. Faugeras. *A Theory of Self-Calibration of a Moving Camera*. International Journal of Computer Vision, vol. 8, no. 2, pages 123–151, 1992.
- [Mikhail *et al.* 2001] E.M. Mikhail, J.S. Bethel and McGlone J.C. Introduction to modern photogrammetry. John Wiley & Sons, 2001.
- [Mikolajczyk *et al.* 2005] K. Mikolajczyk, T. Tuytelaars, C. Schmid, A. Zisserman, J. Matas, F. Schaffalitzky, T. Kadir and L.V. Gool. *A comparison of affine region detectors*. International Journal of Computer Vision, vol. 65, no. 1, pages 43–72, 2005.
- [Molton *et al.* 2004] N. D. Molton, A. J. Davison and I. D. Reid. *Locally Planar Patch Features for Real-Time Structure from Motion*. In Proceedings of the 15th British Machine Vision Conference, Kingston, 2004.

---

## BIBLIOGRAPHY

- [Montemerlo *et al.*] M. Montemerlo, S. Thrun, D. Koller and B. Wegbreit.  
In Proceedings of the AAAI National Conference on Artificial Intelligence, Edmonton, Canada.
- [Montiel & Davison 2006] J. M. M. Montiel and A. J. Davison. *A Visual Compass based on SLAM*. In Proceedings of the International Conference on Robotics and Automation, Orlando, 2006.
- [Montiel *et al.* 2006] J. M. M. Montiel, J. Civera and A. J. Davison. *Unified Inverse Depth Parametrization for Monocular SLAM*. In Proceedings of Robotics: Science and Systems, Philadelphia, USA, August 2006.
- [Moreno-Noguer *et al.* 2008] F. Moreno-Noguer, V. Lepetit and P. Fua.  
*Pose Priors for Simultaneously Solving Alignment and Correspondence*. In Proceedings of the 10th European Conference on Computer Vision: Part II, pages 405–418. Springer-Verlag Berlin, Heidelberg, 2008.
- [Morimoto & Chellappa ] Carlos Morimoto and Rama Chellappa. *Fast 3D Stabilization and Mosaic Construction*.
- [Mouragnon *et al.* 2006] E. Mouragnon, M. Lhuillier, M. Dhome, F. Dekeyser and P. Sayd. *Real-Time Localization and 3D Reconstruction*. In Proceedings of the IEEE Computer Vision and Pattern Recognition, volume 1, 2006.
- [Mouragnon *et al.* 2009] E. Mouragnon, M. Lhuillier, M. Dhome, F. Dekeyser and P. Sayd. *Generic and real-time structure from motion using local bundle adjustment*. Image and Vision Computing, vol. 27, no. 8, pages 1178–1193, 2009.
- [Neira & Tardós 2001] J. Neira and J. D. Tardós. *Data Association in Stochastic Mapping using the Joint Compatibility Test*. IEEE Transactions on Robotics and Automation, vol. 17, no. 6, pages 890–897, 2001.
- [Nistér 2005] D. Nistér. *Preemptive RANSAC for live structure and motion estimation*. Machine Vision and Applications, vol. 16, no. 5, pages 321–329, 2005.
- [Nistér *et al.* 2004] D. Nistér, O. Naroditsky and J. Bergen. *Visual Odometry*. In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 2004.
- [Nistér *et al.* 2006] D. Nistér, O. Naroditsky and J. Bergen. *Visual odometry for ground vehicle applications*. Journal of Field Robotics, vol. 23, no. 1, pages 3–20, 2006.

## BIBLIOGRAPHY

---

- [Nistér 2004] D. Nistér. *An efficient solution to the five-point relative pose problem*. IEEE Transactions on Pattern Analysis and Machine Intelligence, vol. 26, no. 6, pages 756–770, 2004.
- [Okutomi & Kanade 1993] M. Okutomi and T. Kanade. *A Multiple-Baseline Stereo*. IEEE Trans. Pattern Anal. Mach. Intell., vol. 15, no. 4, pages 353–363, 1993.
- [Ortín & Montiel 2001] D. Ortín and J. M. M. Montiel. *Indoor robot motion based on monocular images*. Robotica, vol. 19, no. 03, pages 331–342, 2001.
- [Ortín *et al.* 2003] D. Ortín, J. M. M. Montiel and A. Zisserman. *Automated Multisensor Polyhedral Model Acquisition*. In Proc. Intl. Conf. on Robotics and Automation, 2003.
- [Paz *et al.* 2008a] L.M. Paz, P. Piniés, J.D. Tardós and J. Neira. *Large-Scale 6-DOF SLAM With Stereo-in-Hand*. IEEE Transactions on Robotics, vol. 24, no. 5, pages 946–957, 2008.
- [Paz *et al.* 2008b] L.M. Paz, J.D. Tardos and J. Neira. *Divide and Conquer: EKF SLAM in  $O(n)$* . IEEE Transactions on Robotics, vol. 24, no. 5, pages 1107–1120, 2008.
- [PhotoTourism 2009] PhotoTourism. URL <http://phototour.cs.washington.edu/>, May 2009.
- [Piniés & Tardós 2008] P. Piniés and J.D. Tardós. *Large Scale SLAM Building Conditionally Independent Local Maps: Application to Monocular Vision*. IEEE Transactions on Robotics, vol. 24, no. 5, 2008.
- [Piniés *et al.* 2006] P. Piniés, J.D. Tardós and J. Neira. *Localization of avalanche victims using robocentric SLAM*. Proc. IEEE/RSJ International Conference on Intelligent Robots and Systems, pages 3074–3079, 2006.
- [Posner *et al.* 2009] Ingmar Posner, Mark Cummins and Paul Newman. *Fast Probabilistic Labeling of City Maps*. In Robotics Science and Systems IV, 2009.
- [Qian & Chellappa 2004a] G. Qian and R. Chellappa. *Bayesian self-calibration of a moving camera*. Computer Vision and Image Understanding, vol. 95, no. 3, pages 287–316, 2004.
- [Qian & Chellappa 2004b] G. Qian and R. Chellappa. *Structure from motion using sequential monte carlo methods*. International Journal of Computer Vision, vol. 59, no. 1, pages 5–31, 2004.

---

## BIBLIOGRAPHY

- [Raguram *et al.* 2008] R. Raguram, J.M. Frahm and M. Pollefeys. *A Comparative Analysis of RANSAC Techniques Leading to Adaptive Real-Time Random Sample Consensus*. In Proceedings of the European Conference on Computer Vision, 2008.
- [RAWSEEDS 2009] RAWSEEDS. RAWSEEDS *public datasets web page*. URL <http://www.rawseeds.org/>, June 2009.
- [Renka 1997] Robert J. Renka. *Algorithm 772: STRIPACK: Delaunay Triangulation and Voronoi Diagram on the Surface of a Sphere*. ACM Transactions on Mathematical Software, vol. 23, no. 3, pages 416–434, 1997.
- [Sawhney *et al.*] H.S. Sawhney, S. Hsu and R. Kumar. *Robust Video Mosaicing through Topology Inference and Local to Global Alignment*.
- [Scaramuzza *et al.* 2007] D. Scaramuzza, A. Harati and R. Siegwart. *Extrinsic self calibration of a camera and a 3d laser range finder from natural scenes*. In IEEE Int. Conf. on Intelligent Robots and Systems (IROS), San Diego, CA, USA, 2007.
- [Scaramuzza *et al.* 2009] D. Scaramuzza, F. Fraundorfer and R. Siegwart. *Real-Time Monocular Visual Odometry for On-Road Vehicles with 1-Point RANSAC*. In IEEE International Conference on Robotics and Automation, 2009.
- [Scharstein & Szeliski 2002] D. Scharstein and R. Szeliski. *A taxonomy and evaluation of dense two-frame stereo correspondence algorithms*. International Journal of Computer Vision, vol. 47, no. 1, pages 7–42, 2002.
- [Schindler & Suter 2006] K. Schindler and D. Suter. *Two-view multibody structure-and-motion with outliers through model selection*. IEEE Transactions on Pattern Analysis and Machine Intelligence, vol. 28, no. 6, pages 983–995, 2006.
- [Smith & Cheeseman 1986] R. C. Smith and P. Cheeseman. *On the Representation and Estimation of Spatial Uncertainty*. Int. J. Robotics Research, vol. 5, no. 4, pages 56–68, 1986.
- [Smith *et al.* 1987] R. Smith, M. Self and P. Cheeseman. *A stochastic map for uncertain spatial relationships*. In 4th International Symposium on Robotics Research, 1987.
- [Smith *et al.* 2009] Mike Smith, Ian Baldwin, Winston Churchill, Rohan Paul and Paul Newman. *The New College Vision and Laser Data Set*. The International Journal of Robotics Research, vol. 28, no. 5, pages 595 – 599, May 2009.

## BIBLIOGRAPHY

---

- [Solà *et al.* 2005] J. Solà, A. Monin, M. Devy and T. Lemaire. *Undelayed Initialization in Bearing Only SLAM*. In 2005 IEEE/RSJ International Conference on Intelligent Robots and Systems, 2005.
- [Solà *et al.* 2008] J. Solà, A. Monin, M. Devy and T. Vidal-Calleja. *Fusing Monocular Information in Multicamera SLAM*. IEEE Transactions on Robotics, vol. 24, no. 5, pages 958–968, 2008.
- [Solà 2007] J Solà. *Towards Visual Localization, Mapping and Moving Objects Tracking by a Mobile Robot: a Geometric and Probabilistic Approach*. PhD thesis, LAAS-CNRS, 2007.
- [Steedly *et al.* 2005] D. Steedly, C.. Pal and Szeliski R. . *Efficiently Stitching Large Panoramas from Video*. In International Conference on Computer Vision, 2005.
- [Szeliski & Shum 1997] R. Szeliski and H.Y. Shum. *Creating full view panoramic image mosaics and environment maps*. In Proceedings of the 24th annual conference on Computer graphics and interactive techniques, pages 251–258. ACM Press/Addison-Wesley Publishing Co. New York, NY, USA, 1997.
- [Tardif *et al.* 2008] J.P. Tardif, Y. Pavlidis and K. Daniilidis. *Monocular visual odometry in urban environments using an omnidirectional camera*. In Proceedings of the IEEE/RSJ International Conference on Intelligent Robots and Systems, pages 2531–2538, 2008.
- [Thrun *et al.* 2004] S. Thrun, Y. Liu, D. Koller, A.Y. Ng, Z. Ghahramani and H. Durrant-Whyte. *Simultaneous localization and mapping with sparse extended information filters*. The International Journal of Robotics Research, vol. 23, no. 7-8, page 693, 2004.
- [Torr & Murray 1993] P.H.S. Torr and D.W. Murray. *Outlier detection and motion segmentation*. Sensor Fusion VI, vol. 2059, pages 432–443, 1993.
- [Torr & Zisserman 2000] PHS Torr and A. Zisserman. *MLESAC: A new robust estimator with application to estimating image geometry*. Computer Vision and Image Understanding, vol. 78, no. 1, pages 138–156, 2000.
- [Torr *et al.* 1999] P.H.S. Torr, A. Fitzgibbon and A. Zisserman. *The Problem of Degeneracy in Structure and Motion Recovery from Uncalibrated Image Sequences*. International Journal of Computer Vision, vol. 32, no. 1, pages 27–45, 1999.

---

## BIBLIOGRAPHY

- [Torr 2002] P. H. S. Torr. *Bayesian Model Estimation and Selection for Epipolar Geometry and Generic Manifold Fitting*. International Journal of Computer Vision, vol. 50, no. 1, pages 35–61, 2002.
- [Trawny & Roumeliotis 2006] N. Trawny and Stergios I. Roumeliotis. *A unified framework for nearby and distant landmarks in bearing-only SLAM*. In Proceedings of the IEEE International Conference on Robotics and Automation, pages 1923–1929, 2006.
- [Triggs *et al.* 2000] Bill Triggs, Philip McLauchlan, Richard Hartley and Andrew Fitzgibbon. *Bundle Adjustment – A Modern Synthesis*. In Vision Algorithms: Theory and Practice, LNCS, pages 298–375. Springer Verlag, 2000.
- [Vedaldi *et al.* 2005] A. Vedaldi, H. Jin, P. Favaro and S. Soatto. *KALMANSAC: Robust filtering by consensus*. In Tenth IEEE International Conference on Computer Vision, 2005. ICCV 2005, volume 1, 2005.
- [Wald 1945] A. Wald. *Sequential Tests of Statistical Hypothesis*. The Annals of Mathematical Statistics, vol. 16, no. 2, pages 117–186, 1945.
- [Williams *et al.* 2007] B. Williams, G. Klein and I. Reid. *Real-time SLAM relocation*. In IEEE 11th International Conference on Computer Vision, page 1:8, 2007.
- [Williams *et al.* 2008] B. Williams, M. Cummins, J. Neira, P. Newman, I. Reid and J. Tardos. *An image-to-map loop closing method for monocular SLAM*. In IEEE/RSJ International Conference on Intelligent Robots and Systems, 2008. IROS 2008, pages 2053–2059, 2008.
- [Williams 2009] B. Williams. *Simultaneous Localisation and Mapping Using a Single Camera*. PhD thesis, University of Oxford, 2009.
- [Zhu *et al.* 2006] Z. Zhu, G. Xu, E. M. Riseman and A. R. Hanson. *Fast Construction of Dynamic and Multi-Resolution 360° Panoramas from Video Sequences*. Image and Vision Computing, vol. 24, no. 1, pages 13–26, Jan 2006.