




## Calculating Torque

**CONCEPT: Torque** (“moment” in engineering) is the rotational counterpart of force. It is a measure of the ability of a force to cause or change the rotation of an object.

The torque  $\vec{\tau}$  about a point P, called the pivot or fulcrum, is given by the cross product between the position vector  $\vec{r}$  and the force vector  $\vec{F}$ .

$$\vec{\tau} = \vec{r} \times \vec{F}$$

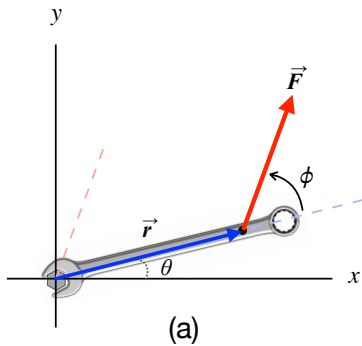

**MAGNITUDE:** The magnitude of the torque about a pivot point is given by:

$$\tau = r F \sin \phi$$

where:

- $r$  is the magnitude of the position vector  $\vec{r}$ , it is the distance from the pivot to the point of application of the force (see Fig. a);
- $F$  is the magnitude of the force; and
- $\phi$  is the angle between the tails of  $\vec{r}$  and  $\vec{F}$  (see Fig. b).

**DIRECTION:** The torque vector is perpendicular to the plane defined by vectors  $\vec{r}$  and  $\vec{F}$ . In the example above, the torque points along the +z-axis, out of the page.

Use the right-hand rule to determine direction (see Fig. c). By convention, the direction of the torque is considered:


- ⊕ **positive** (+z-axis) if it causes a counterclockwise (ccw) rotation; and
- ⊖ **negative** (-z-axis) if it causes a clockwise (cw) rotation.


### VISUALIZING TORQUE:

Torque requires a perpendicular component between the vectors  $\vec{r}$  and  $\vec{F}$ .

There are two ways of defining it:

1. due to the component of the force perpendicular to  $\vec{r}$
2. due to the component of  $\vec{r}$  perpendicular to the force.

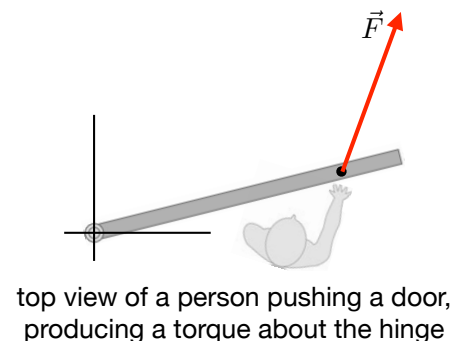


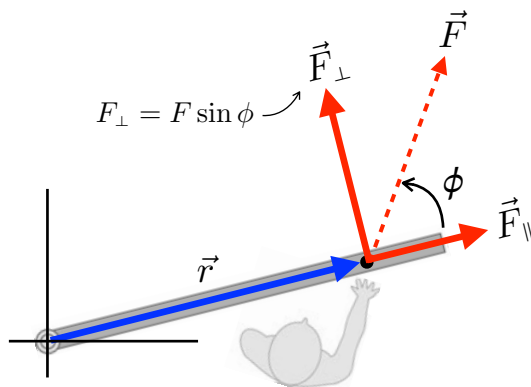Method 1

- identify the vector  $\vec{r}$ , from the pivot to the point of application of the force;
- identify  $\vec{F}_\perp$ , the component of the force perpendicular to  $\vec{r}$  (while  $\vec{F}_\parallel$  is the component parallel to  $\vec{r}$ ).

torque due to distance  $r$  multiplied by the perpendicular component of the force:

$$\tau = r (F_\perp)$$

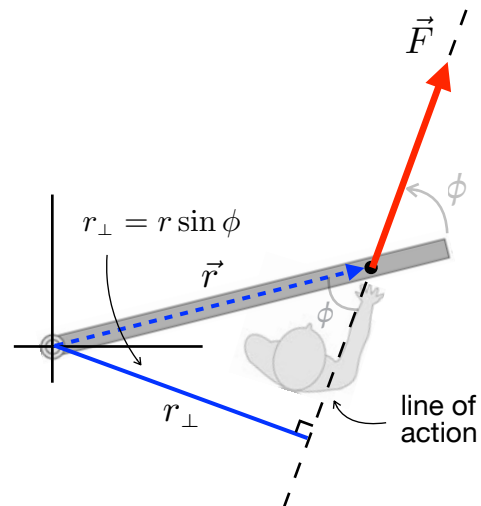Method 2


- identify the line of action, the imaginary line along which the force acts;
- identify the moment or lever arm  $r_\perp$ , which is the minimum distance from the pivot to the line of action.

torque due to moment arm  $r_\perp$  multiplied by the force:


$$\tau = (r_\perp) F$$

Note:


- Both methods of visualizing torque are equivalent and provide the same result.
- Select a method based on whether you know  $r$  or  $r_\perp$ .
- Recall that when the line of action of a force crosses the pivot, the torque exerted by that force zero.

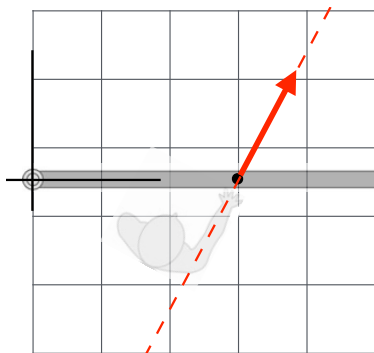

$r$  is known,  $r = 3$  units

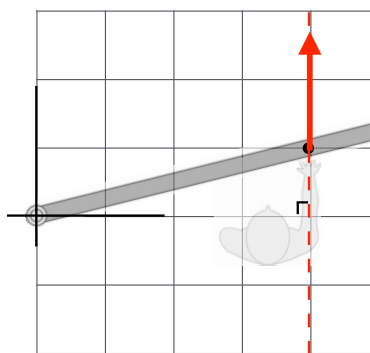

$r_\perp$  is known,  $r_\perp = 4$  units

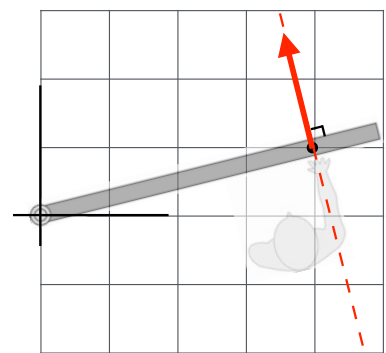

$r = r_\perp$