A NEW COMMAND CENTRE FOR A RADIO ICON

RELEASE 0.6.12

G0ARE MK5F

Rediscover your Mark V Field.

EXPLICITLY WRITTEN FOR THE YAESU FT-1000MP MkV FIELD

Control with confidence

Direct CAT control, clear live meters and precise tuning from one console.

Shape what you hear

Adaptive learning NR, tailored audio filters and instant raw / processed listening.

Explore more of HF

SWL, signal scanning, CW, weather fax, DX tools and a station logbook.



AUDIO 03 SWL 05 WEATHER FAX 07 SKINS 10 CONNECT 12

Your radio. At your fingertips.

A dedicated Field console brings everyday tuning, VFO operation and essential radio controls together.



Modern Command layout with the Aurora Command skin. Live receive-audio spectrum and waterfall show what you are hearing.

Tune the digit you point to

Hover a frequency digit and turn the wheel. Choose MHz, kHz or the finest supported 10 Hz CAT step; double-click for direct entry.

Work the way you operate

Main / sub VFOs, A-to-B copy, split, dual receive, locks, RX / TX clarifiers and band-stack shortcuts.

Keep the whole console in view

A responsive layout fits the available window. F11 gives a full-screen view; advanced sections detach into resizable windows.

12

CAT-selectable modes

160 m - 10 m

Band-stack shortcuts

10 Hz

Finest absolute CAT tuning

Hear more of what matters.

Learn the received noise profile, shape the passband and compare the sound immediately.



Audio controls and the eight-band receive EQ, shown in two enlarged excerpts from the Enterprise audio window.

Learn your noise

The LEARN control captures a noise profile for adaptive spectral reduction. Adjust the reduction to suit the signal and your listening preference.

Build your listening sound

Set low / high cutoffs, shape eight EQ bands, and choose Flat or Voice presets. Select Balanced, High or Maximum processing quality.

Hear the difference now


RAW AF and PROCESSED AF on the main screen switch monitoring and the matching display. Select your speaker or headphone output and listening gain.

LEARN → ADAPTIVE NR → PASSBAND + EQ → MONITOR

Limiter at the end of the audio chain

Every reading. A clearer view.

Flexible RX / TX instruments and native Field DSP controls keep the important indications close at hand.

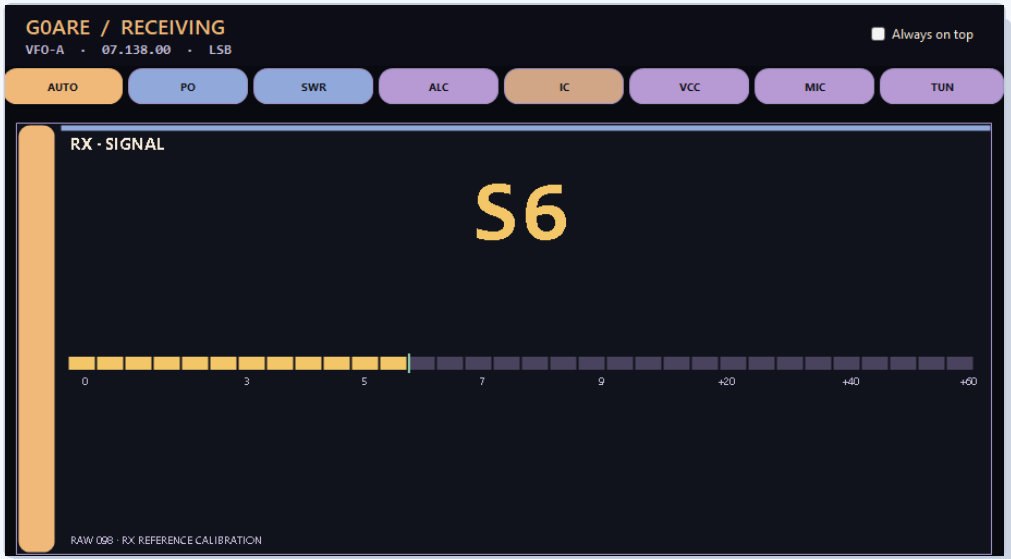

Large meter in AUTO / RX: signal strength. It can remain always on top.



Large meter in AUTO / TX: RF power. Manual selectors add other views.



Select the indication you need

PO, SWR, ALC, IC, VCC, MIC and TUN. Choose meter response and peak hold; AUTO follows RX / TX.

Set your station references


The calibration screen captures nominal 13.8 V for VCC. Save current references for IC in amps and RX references for signal indications.

Radio DSP / IF: second- and third-IF filters, EDSP NR choices and the audio notch. **0.6.12:** RX readout and needle share a scale; S0 clears immediately and missing / stale feedback is identified.

CAT-derived meter indications are not laboratory measurements. VCC / IC units require saved station calibration; RF power, SWR and ALC remain indicative.

Follow your curiosity across HF.

A searchable station catalogue makes broadcasts, utility services and favourite listening easier to find.

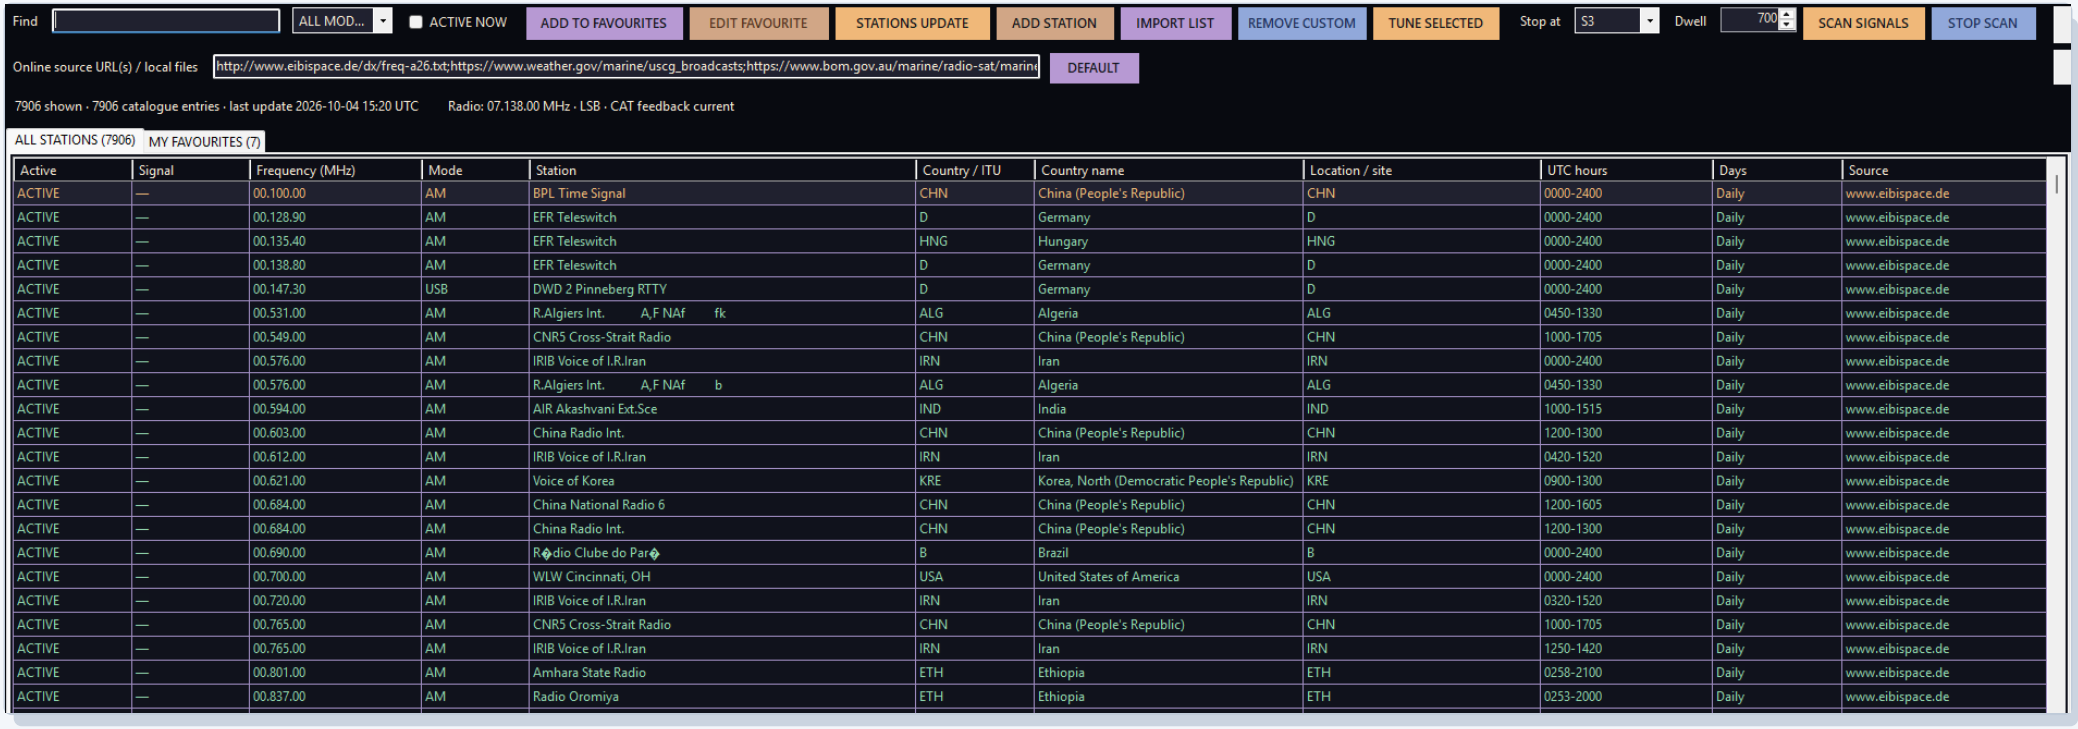

Active	Signal	Frequency (MHz)	Mode	Station	Country / ITU	Country name	Location / site	UTC hours	Days	Source
ACTIVE	—	00.100.00	AM	BPL Time Signal	CHN	China (People's Republic)	CHN	0000-2400	Daily	www.eibispace.de
ACTIVE	—	00.128.90	AM	EFR Teleswitch	D	Germany	D	0000-2400	Daily	www.eibispace.de
ACTIVE	—	00.135.40	AM	EFR Teleswitch	HNG	Hungary	HNG	0000-2400	Daily	www.eibispace.de
ACTIVE	—	00.138.80	AM	EFR Teleswitch	D	Germany	D	0000-2400	Daily	www.eibispace.de
ACTIVE	—	00.147.30	USB	DWD 2 Pinneberg RTTY	D	Germany	D	0000-2400	Daily	www.eibispace.de
ACTIVE	—	00.531.00	AM	R.Algiers Int. A,F NAf fk	ALG	Algeria	ALG	0450-1330	Daily	www.eibispace.de
ACTIVE	—	00.549.00	AM	CNR5 Cross-Strait Radio	CHN	China (People's Republic)	CHN	1000-1705	Daily	www.eibispace.de
ACTIVE	—	00.576.00	AM	IRIB Voice of I.R.Iran	IRN	Iran	IRN	0000-2400	Daily	www.eibispace.de
ACTIVE	—	00.576.00	AM	R.Algiers Int. A,F NAf b	ALG	Algeria	ALG	0450-1330	Daily	www.eibispace.de
ACTIVE	—	00.594.00	AM	AIR Akashvani Ext.Sce	IND	India	IND	1000-1515	Daily	www.eibispace.de
ACTIVE	—	00.603.00	AM	China Radio Int.	CHN	China (People's Republic)	CHN	1200-1300	Daily	www.eibispace.de
ACTIVE	—	00.612.00	AM	IRIB Voice of I.R.Iran	IRN	Iran	IRN	0420-1520	Daily	www.eibispace.de
ACTIVE	—	00.621.00	AM	Voice of Korea	KRE	Korea, North (Democratic People's Republic)	KRE	0900-1300	Daily	www.eibispace.de
ACTIVE	—	00.684.00	AM	China National Radio 6	CHN	China (People's Republic)	CHN	1200-1605	Daily	www.eibispace.de
ACTIVE	—	00.684.00	AM	China Radio Int.	CHN	China (People's Republic)	CHN	1200-1300	Daily	www.eibispace.de
ACTIVE	—	00.690.00	AM	R◆dio Clube do Par◆	B	Brazil	B	0000-2400	Daily	www.eibispace.de
ACTIVE	—	00.700.00	AM	WLW Cincinnati, OH	USA	United States of America	USA	0000-2400	Daily	www.eibispace.de
ACTIVE	—	00.720.00	AM	IRIB Voice of I.R.Iran	IRN	Iran	IRN	0320-1520	Daily	www.eibispace.de
ACTIVE	—	00.765.00	AM	CNR5 Cross-Strait Radio	CHN	China (People's Republic)	CHN	1000-1705	Daily	www.eibispace.de
ACTIVE	—	00.765.00	AM	IRIB Voice of I.R.Iran	IRN	Iran	IRN	1250-1420	Daily	www.eibispace.de
ACTIVE	—	00.801.00	AM	Amhara State Radio	ETH	Ethiopia	ETH	0258-2100	Daily	www.eibispace.de
ACTIVE	—	00.837.00	AM	Radio Oromiya	ETH	Ethiopia	ETH	0253-2000	Daily	www.eibispace.de

SWL catalogue showing station, country, frequency, mode and UTC schedule information. Catalogue contents vary with source updates.

Find what is on

Search by station, filter modes and use Active Now to check UTC schedule activity.

Build your favourites


Save and edit favourite stations, add custom entries and import CSV / TSV lists.

Tune and scan

Scan stations or favourites in your chosen order, with threshold and dwell controls. Continue after a stop, or tune a selected entry.

Find a signal. Stay with it.

Let the radio's S-meter guide the search, then use a dedicated visual and audio toolkit for CW.

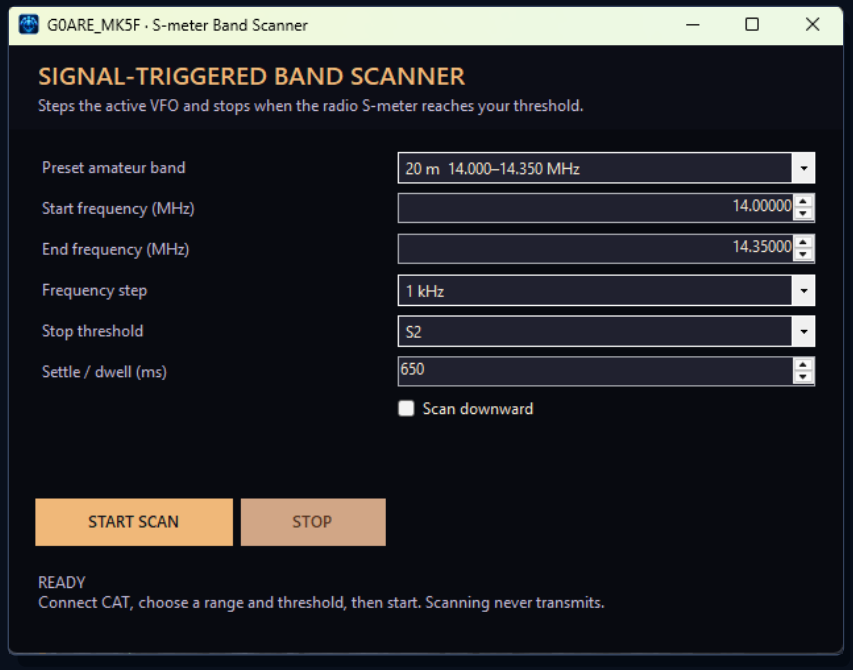

Signal-triggered band scanner. Set a range, direction, step, dwell and stop threshold.

Search your range

Use an amateur-band preset or enter your own limits. Scan up or down and stop at a chosen received signal level. Scanning never keys the transmitter.



CW controls, audio spectrum, narrow waterfall and validated-keying trace.

Read, replay and practise

Automatic or manual tone selection, click-to-mark tuning and a live decoder. Add an optional 8-second replay buffer, delayed reveal, local practice tones and scoring.


CW REFERENCE CHART

Decode results depend on signal and sending quality.

Weather charts, from the airwaves.

A built-in real-time HF WEFAX decoder turns received radiofax audio into images you can keep.

TUNE / DECODE / SAVE

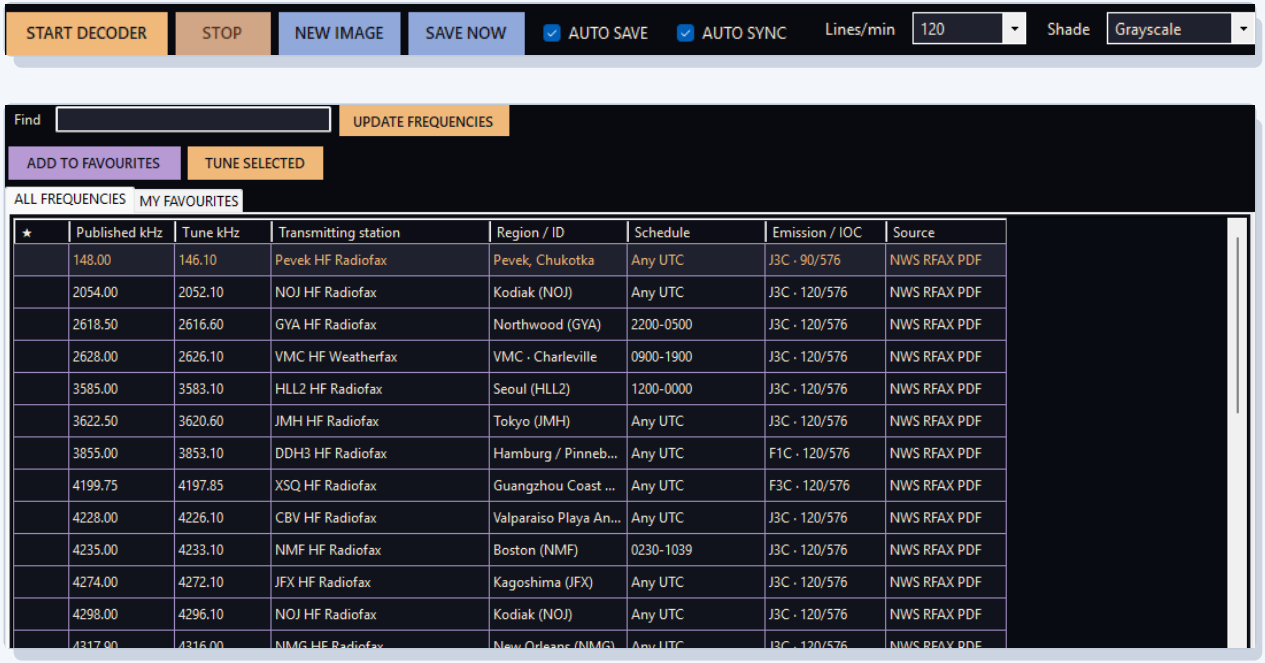

★	Published kHz	Tune kHz	Transmitting station	Region / ID	Schedule	Emission / IOC	Source
	148.00	146.10	Pevek HF Radiofax	Pevek, Chukotka	Any UTC	J3C · 90/576	NWS RFAX PDF
	2054.00	2052.10	NOJ HF Radiofax	Kodiak (NOJ)	Any UTC	J3C · 120/576	NWS RFAX PDF
	2618.50	2616.60	GYA HF Radiofax	Northwood (GYA)	2200-0500	J3C · 120/576	NWS RFAX PDF
	2628.00	2626.10	VMC HF Weatherfax	VMC · Charleville	0900-1900	J3C · 120/576	NWS RFAX PDF
	3585.00	3583.10	HLL2 HF Radiofax	Seoul (HLL2)	1200-0000	J3C · 120/576	NWS RFAX PDF
	3622.50	3620.60	JMH HF Radiofax	Tokyo (JMH)	Any UTC	J3C · 120/576	NWS RFAX PDF
	3855.00	3853.10	DDH3 HF Radiofax	Hamburg / Pinneb...	Any UTC	F1C · 120/576	NWS RFAX PDF
	4199.75	4197.85	XSQ HF Radiofax	Guangzhou Coast ...	Any UTC	F3C · 120/576	NWS RFAX PDF
	4228.00	4226.10	CBV HF Radiofax	Valparaiso Playa An...	Any UTC	J3C · 120/576	NWS RFAX PDF
	4235.00	4233.10	NMF HF Radiofax	Boston (NMF)	0230-1039	J3C · 120/576	NWS RFAX PDF
	4274.00	4272.10	JFX HF Radiofax	Kagoshima (JFX)	Any UTC	J3C · 120/576	NWS RFAX PDF
	4298.00	4296.10	NOJ HF Radiofax	Kodiak (NOJ)	Any UTC	J3C · 120/576	NWS RFAX PDF
	4317.90	4316.00	NMG HF Radiofax	New Orleans (NMG)	Any UTC	J3C · 120/576	NWS RFAX PDF

Weather-fax decoder controls and station catalogue, enlarged from the supplied capture.

From frequency to forecast chart

Search stations, save favourites and tune the radio from the catalogue. Published carrier frequencies and USB receiver tune points are shown separately.

Keep the decoder in control

Automatic phasing / synchronisation search, selectable lines per minute and six viewing shades, including grayscale, inverted and night-friendly colours.

Capture the result


Save an image now or enable Auto Save for completed PNG images. UTC sidecars record station, frequency and decoder settings.

Official-source station information

NOAA / NWS and Australian BOM sources, plus a bundled worldwide schedule snapshot. The last usable catalogue remains available if a source is unreachable.

See where the band can take you.

Live spots, a clickable band map and a world map bring the next station into view.

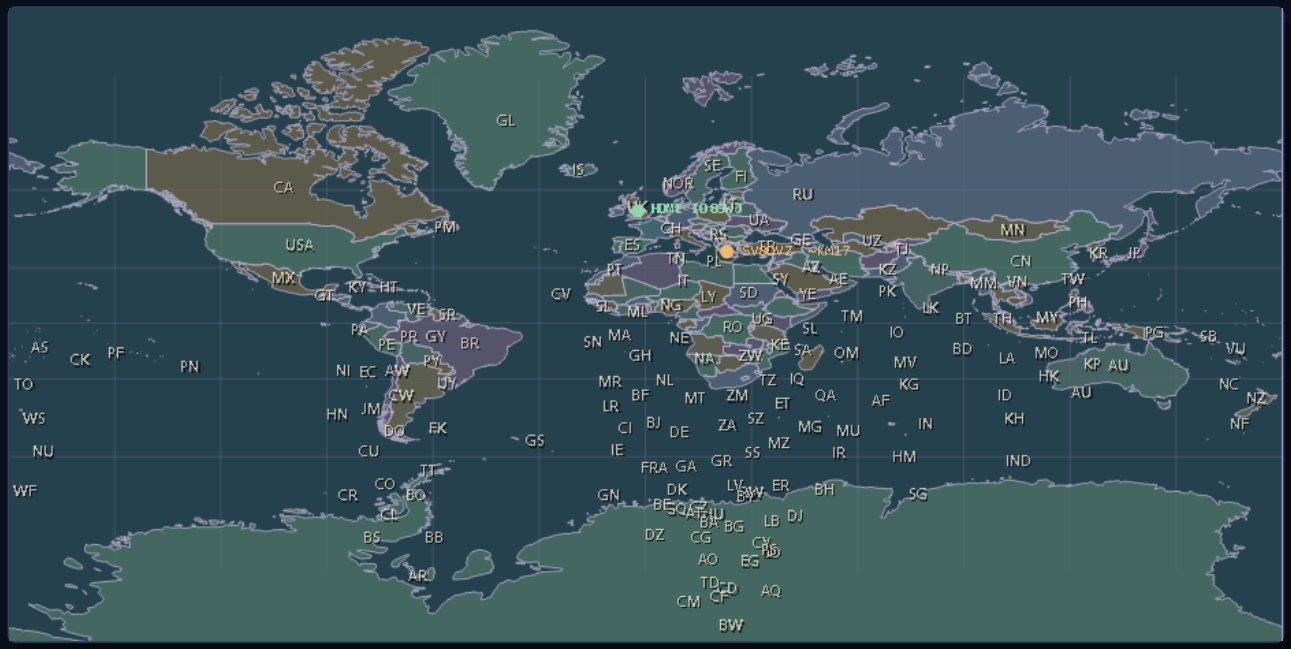

DX World Map excerpt. Pan, zoom, search and tune from a plotted marker; a home grid anchors your station.

UTC	kHz	DX	Spotter	Comment
12:53	21290.0	AB3AH	R6AR	tnx QSO 1253Z
12:53	14095.6	GM0PXV	UR2680YL	WSPR sign -21 1253Z
12:52	28074.0	NP3XF	G0KTN	IO81TI<>FK68KL FT8 1252Z
12:52	10113.0	LY2PX	GM0GMN	1252Z

Live cluster spot list: UTC, frequency, DX callsign, spotter and comment.

INTERNET FOR LIVE CLUSTER SPOTS / CAT FOR RADIO TUNING

Connect to the conversation

Choose a supplied cluster endpoint or enter a host, port and callsign. View incoming spots alongside the raw cluster terminal.

Move straight to the spot

A per-band map places stations by frequency. Zoom around the mouse pointer and use a spot to tune the active VFO.

Put DX in perspective

A searchable world map follows the spots. Callsign-only locations may be estimated; supplied locators give more specific positions.

Keep the contact. Carry the history.

Log the QSO with the current CAT frequency and mode, then find previous contacts as you type a callsign.



UTC	Call	Frequency	Band	Mode	Sent	Rcvd	Name	Notes
2026-09-01 21:02:58	CU2BN	21.280.00	15m	SSB	59	59	VINCE	Contest: DX
2026-09-01 20:32:37	LY4A	07.175.00	40m	SSB	59	59	ROLY	SIAULIAI | Grid: KO15TR | Contest: DX
2026-09-01 20:25:13	ON6ID	07.191.00	40m	SSB	59	59	HUGO	MAARKEDAL | Contest: DX
2026-08-30 20:03:56	MI0TGO	07.142.00	40m	SSB	59	59	BRIAN	BELFAST | Contest: DX
2026-08-30 19:27:45	F8CHM	07.157.00	40m	SSB	59	59	JEAN	TOURS | Contest: DX
2026-08-27 19:56:39	2M1ADM	07.158.00	40m	SSB	59	59	ADAM	Contest: DX
2026-08-26 16:10:05	GB0BL	07.150.80	40m	SSB	59	59	STUART	HEATROW | Contest: DX
2026-08-26 15:55:56	SV8DJW	21.265.00	15m	SSB	59	59	NIKO	SANTORINI | Contest: DX
2026-06-30 21:56:13	G4ITR	07.139.00	40m	SSB	59	59	KEITH	Contest: DX
2026-06-11 21:14:10	M9TRM	07.166.00	40m	SSB	59	59	STEPHEN	SLOUGH | Contest: DX
2026-06-11 21:03:54	M5AFD	07.166.00	40m	SSB	59	59	DAVE	SHREWSBURY | Contest: DX
2026-06-05 07:03:52	W5IB	18.140.00	17m	SSB	59	59	JAY	TEXAS | Contest: DX
2026-06-03 22:13:16	GW4NOO	07.157.00	40m	SSB	59	59	MICHAEL	TENBY | Contest: DX
2026-05-21 20:46:32	LX1UN	07.172.50	40m	SSB	59	59	ALAIN	Contest: DX
2026-05-19 20:20:22	YU1XA	07.154.00	40m	SSB	59	59	Blago	Contest: DX
2026-05-17 08:03:22	HB9HLM	14.203.00	20m	SSB	59	59	ANDRE	Contest: DX
2026-05-06 21:11:05	RP81L	14.288.00	20m	SSB	59	59		SPECIAL EVENT STATION | Contest: ...
2026-05-04 19:28:49	M0DCX	07.155.00	40m	SSB	59	59	DARREN	Contest: DX

Integrated logbook with reports, operator name, notes and UTC contact history. Existing records can be imported from ADIF.

Record and recall

Capture reports, name and notes. Live previous-QSO lookup and alias groups keep related station histories together.

Bring your log with you

Import N1MM Logger+ / ADIF with a preview and duplicate checks. Export ADIF or spreadsheet-safe CSV.

Keep station data protected

Data backups, an isolated restore test and a pre-restore safety copy support recovery. Station data lives outside the install folder.

A new look. The same complete station.

Choose a starship bridge, modern instrument desk or classic broadcast console. Mix skins and layouts, or apply a complete preset in one click.




Enterprise Bridge

Pastel bridge controls and a bold section rail



Aurora Command

Cyan instruments against a dark command deck

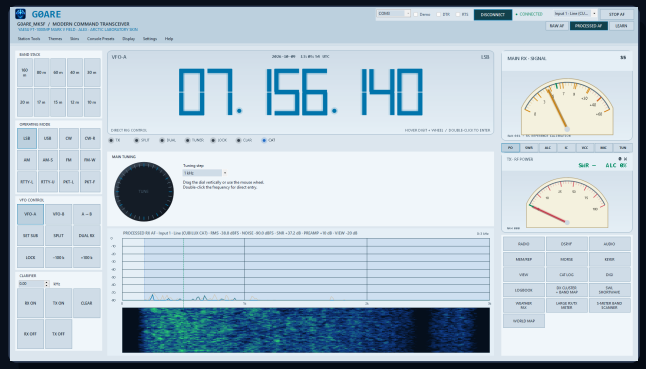


Arctic Laboratory

Cool, light panels and crisp blue instruments




Broadcast 1978

Wood, aluminium, red LEDs and analogue charm

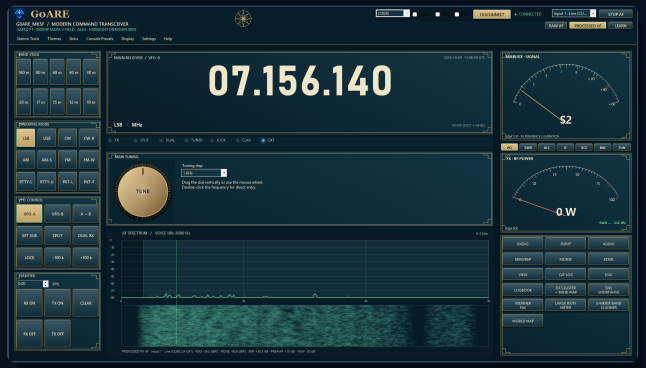

Midnight Meridian

Navy, brass and a nautical instrument character

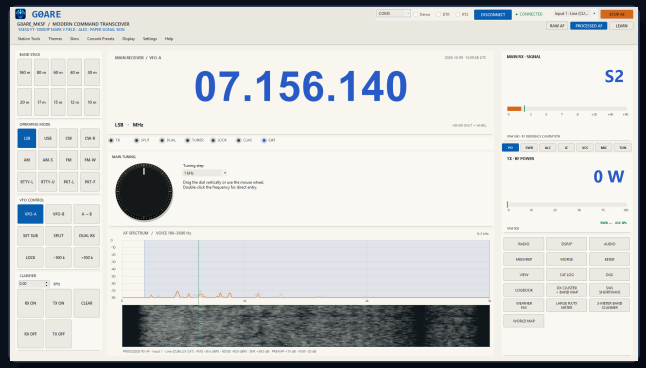

Paper Signal

Ivory, cobalt and an uncluttered reading surface

12 layouts / 13 skins / 7 complete console presets

Also: Bauhaus Signal, Deep Space Tactical, Orbital Glass

All the tools. One station.

Nine live advanced sections complement the logbook, DX cluster, SWL, weather fax, meters, scanner and world map.

RADIO

Hold-to-talk PTT (Space or button), STOP TX, tuner control, VFOs, split, dual receive and clarifiers.

DSP / IF

Second- and third-IF filters, EDSP noise-reduction choices and audio-notch controls.

AUDIO

Noise learning, adaptive NR, signal passband, eight-band EQ and output monitoring.

MEM / REP

Memory recall, copy and scan-skip controls; repeater selection and 33 CTCSS tones.

MORSE

CW decoding, tone tracking, waterfall, reference help, replay and local practice.

KEYER

Access the Field's contest keyer memories and contest-number functions.

VIEW

Audio FFT detail, gain / preamp, waterfall range, meter response, peak hold and raw meter diagnostics.

CAT LOG

Inspect the raw CAT conversation when checking the connection or diagnosing a problem.

DIGI

Release the CAT port for an external digital-mode program, then reconnect when finished.

```
14:01:49.946  RX  6C 6C 6C 6C F7
14:01:49.946  TX  80 00 00 00 F7
14:01:49.970  RX  00 00 00 00 F7
14:01:50.093  TX  00 00 00 02 10
14:01:50.144  RX  0B 00 AE B5 E0 00 00 00 11 00 11 11 11 91 11 00
```


Raw CAT trace excerpt.

Ready for daily use: first-run setup, station-health checks, HoverHelp, keyboard shortcuts, a no-radio demo, saved appearance / windows and opt-in update checks. Background AF stop and device cleanup help keep the console responsive. External digital-mode software uses its own audio interface in a separate CAT session.

Connect today. Explore what comes next.

Release 0.6.12 is explicitly written for the Yaesu FT-1000MP MkV Field. Support for other radios is planned.

TWO CONNECTIONS. ONE CONSOLE.

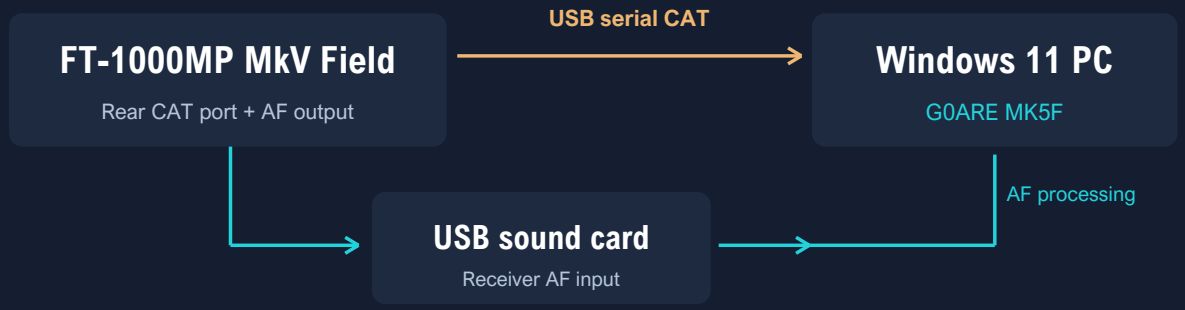

PC / USB output to speakers or headphones for monitoring

What you need

A Windows 11 PC with .NET Framework 4.8; a straight-through USB-to-RS-232 CAT cable / adapter for the radio's DB-9 CAT port; a USB audio sound card with a suitable recording input; an AF lead and speakers or headphones.

CAT uses 4800 baud, 8N2. Choose audio processing quality to suit the PC. Internet is used for cluster spots and catalogue / update downloads. The supplied installer installs per user without administrator rights.

WHAT'S NEXT?

The G0ARE story continues.

G0ARE Remote

In planning: a future project exploring remote station operation.

G0ARE Audio Clarity

In planning: a future project focused on audio clarity and the listening experience.

Other radios are to follow. The present release is dedicated to the Mark V Field. Future projects are in planning; detailed scope and release dates are still to be announced.