

## Preliminary build guide for V7.1: updated 21 May 2026

This build guide is itself under construction; we're hoping to finalise it in early June

Please check the Web page for updates:

go to <http://www.g1mra.com> and select Resources then Designs



If in doubt, get in touch!

Adrian and David

# David Viewing's Greenly 0-4-0 G1MRA starter engine

## Background to the project

In the February 1910 issue of his magazine *Model Railways and Locomotives* Henry Greenly introduced a construction series for a simple 0-4-0 locomotive. He wrote '*The basis of the design is the G.N.R saddle tanks, but although the character is perhaps preserved, there is, of course, no GNR engine in existence exactly the same as this model*'. Henry is presumably referring to the GNR class J13-J17 0-6-0 saddle tank engines designed by Stirling.

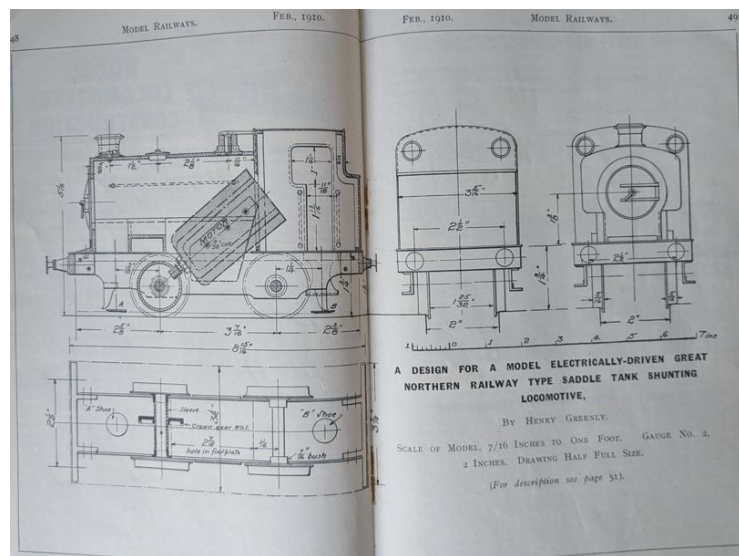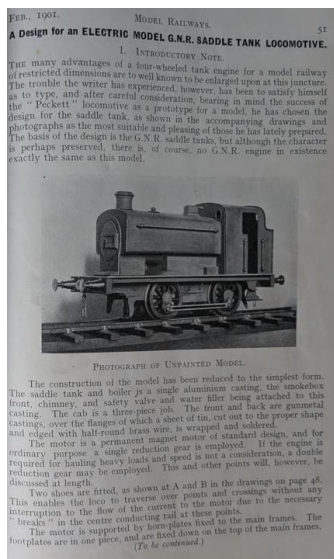

Greenly's article finishes with the fatal words *To be continued* but as far as we know, there were no further instalments. The model as originally described is Gauge 2 (two inches between the rails) not Gauge 1. It seems that some models were sold commercially of which at least one survives, featuring an aluminium one-piece casting for the saddle tank. David Viewing owns the surviving example, and designed a radio control 3D printed chassis to go beneath it. He then developed bodywork in three sizes to go with it.



Here we see the whole family. From left to right: (i) the original Henry Greenly Gauge 2 body atop a modern chassis; (ii) in white, a Gauge 3 resin print; (iii) David's Gauge 2 prototype printed in black nylon with a coloured vinyl wrap; and (iv) on the right David's prototype Gauge 1 engine, printed in black nylon and sprayed with car-paint rattle cans.

The Gauge One Model Railway Association (G1MRA) has a long tradition of promoting ‘starter’ locomotives as an introduction to live steam, and recognised that a low-cost electric loco would also be an attractive way into large scale modelling. David found that Henry’s simple design could be economically reproduced using commercial 3D printing technologies, and also researched low-cost radio control and even ultrasonic ‘smoke’ generators.

The prototypes were well-received by the G1MRA committee who then financially underwrote the production of ten pilot kits, with costs recovered from those builders who bought kits. At the 2025 AGM in Darlington, G1MRA awarded the 2025 President’s Cup to David Viewing for this initiative, who then demonstrated the prototypes running at speed with a full load on the Midland Group’s Carding Road track.

Feedback from the ten pilot builders led to an improved V7.1 design in which the electronics were mounted in a separate backhead assembly to avoid water spillage from the smoke generator. At the same time, David added some detailing to the cab, and a flickering LED to simulate an open firebox.

This production version was formally launched with an article in the March 2026 edition of G1MRA’s *Newsletter and Journal*. An initial run of twenty kits sold out immediately, with many collected at the Spring 2026 G1MRA meeting at Statfold Barn. Towards the end of the day, the Anglia Roads outer electric track was taken over by a procession of four trains, each hauled by a Greenly starter engine.

The lead train comprised eleven RCH wagons, a van and a brake van: this was easily handled by the engine.



Also on track was Elizabeth Scott’s Cadbury loco hauling heavily weighted Northern Finescale vans, Steve Andrews’ NCB loco and brake van, and Roger Hopkin’s Archie.



The design, and the production process are well proven; the rest of this document comprises the build guide. Kits and built-up versions may be ordered from the G1MRA website at <https://www.g1mra.com/>

Adrian Johnstone, April 2026



# Build guide for the **V7.1** Gauge 1 Greenly starter engine

## 1: Check that you have a complete set of parts

Here are the main elements of the kit as supplied.



Check that you have all of the following items.

### **Electronics**


1. Two protected LIPO pouch cells.

**Treat LIPO batteries with great care! Do not puncture the pouches or short circuit the connections!**




- Two LIPO battery connectors and wires.

Do not connect batteries to leads before they are soldered up as the loose leads may touch and short circuit the battery. Keep them separate for now.

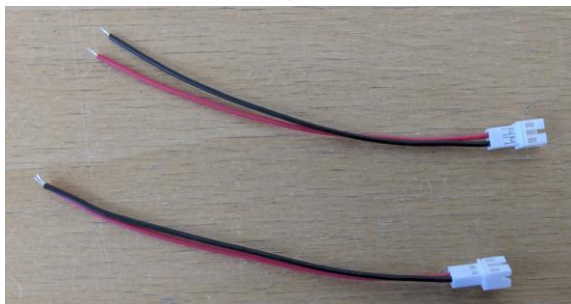


- Battery charger board fitted with a USB-C connector.

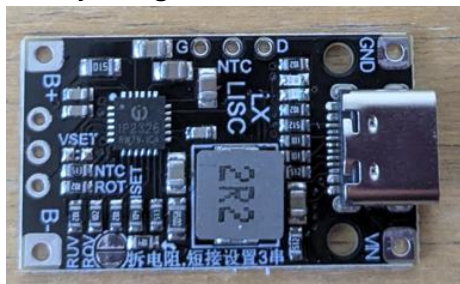

- A single pole, double throw (SPDT) switch that connects the batteries to *either* the charger board or the electronic speed controller.



- Electronic speed controller. The three-way connector plugs into the radio control receiver. The (socket) two-way connector at the same end as the three-way connector goes via the switch to the batteries; the other (plug) two-way connector goes to the motor.

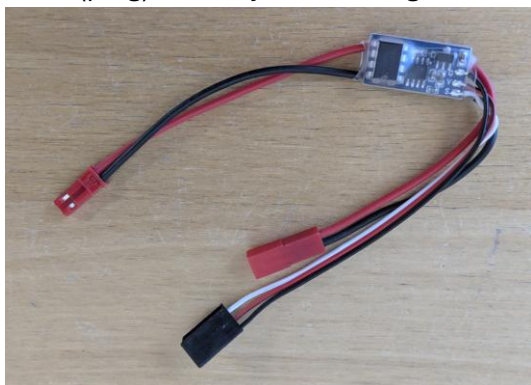

- Motor RS-385PH-2270 or RS385PV-2270.



- Radio control receiver with attached short aerial lead, and a telemetry lead which will allow battery levels to be sent back to the hand-held transmitter. Keep these in the box for now.







8. Hand-held radio control transmitter, boxed with manual, charging lead and wrist cord.




9. Flickering firebox LED with Futaba connector

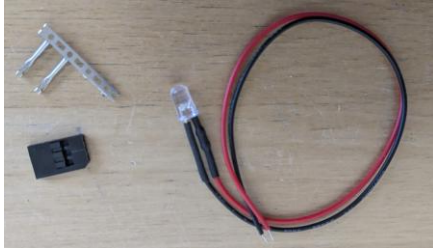

10. Hall effect sensor to control 'smoke' puffs




11. Ultrasonic 'smoke' nebuliser disc

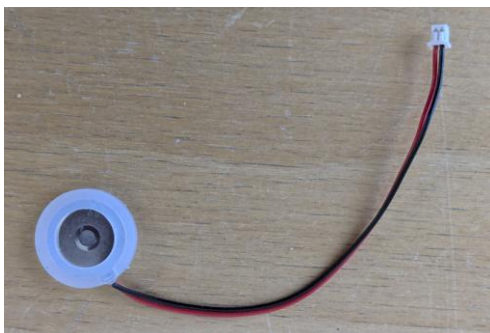

12. Nebuliser wick



13. Ultrasonic control board – note this USB-C connector is not used

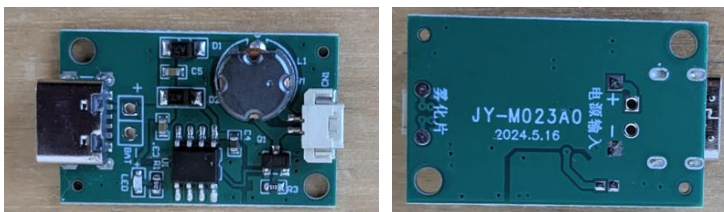

14. Ultrasonic interrupter switch




15. JST two-wire connector leads



### ***Gearbox***

16. Printed nylon sprue with gearbox components

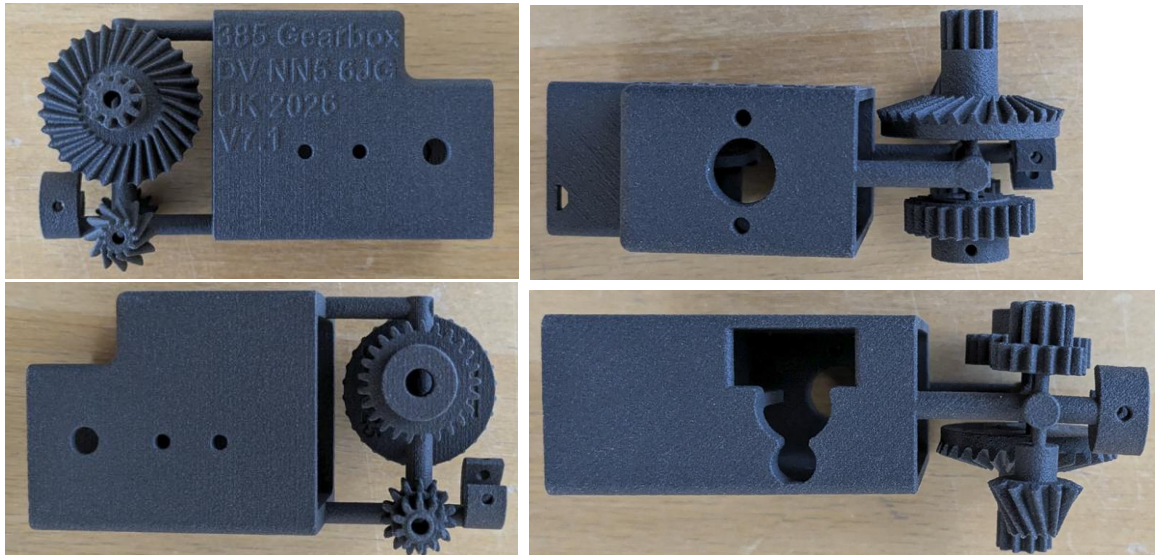


17. Two 5mm diameter axles, two 3mm diameter axles and one RZ-3 crown wheel bearing




### ***Body and chassis***

18. Printed body in white resin

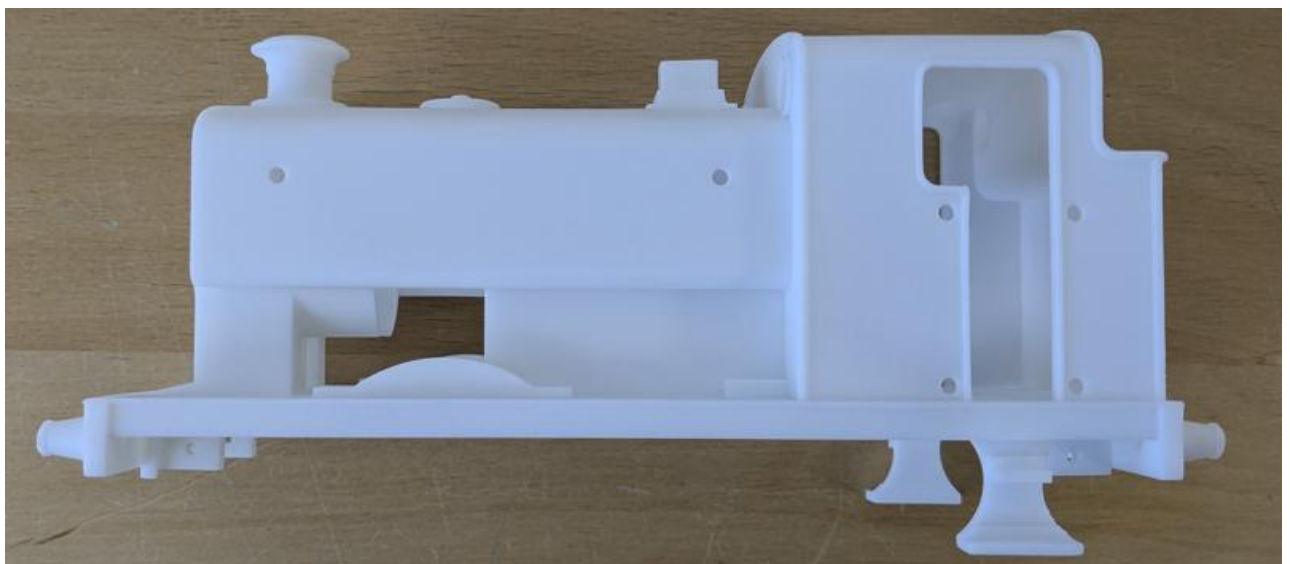




19. Printed backhead and electronics carrier in white resin

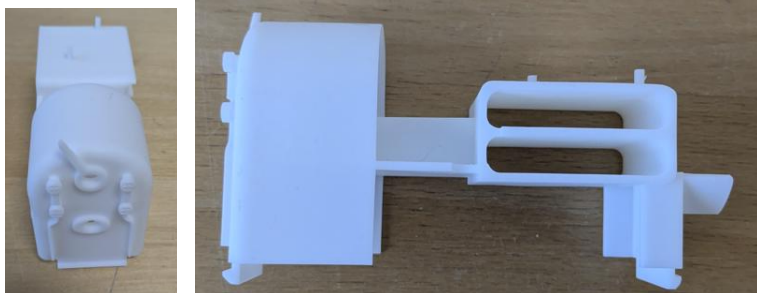


20. Printed black nylon chassis

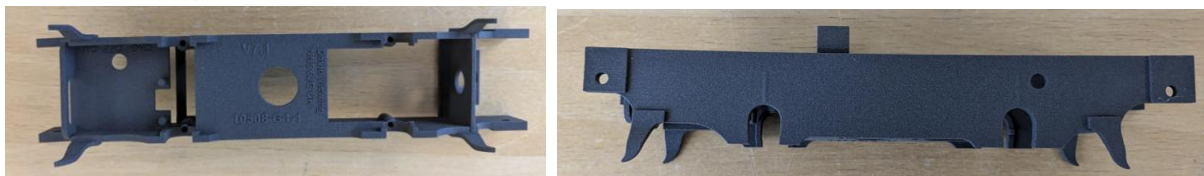

21. Printed black nylon smoke generator and firebox door



22. Printed nylon sprue with wheels and coupling rods

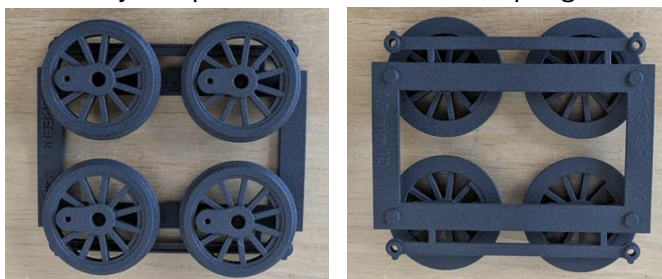


23. Printed nylon sprue with axle boxes and handrail knobs



24. Printed nylon sprue with further handrail knobs



25. Printed nylon sprue with buffers and coupling hooks

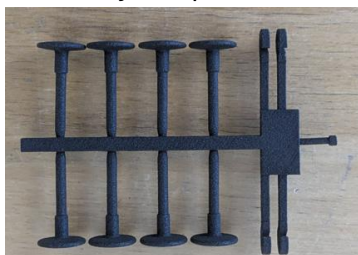

26. Four 2.5mm inside diameter buffer springs





27. One length (or four 10mm long cut pieces) of 2mm outside diameter spring for suspension



28. Two pieces of clock chain for three-link couplings



29. Four M2.5 8mm round head hex socket crankpins (coupling rod screws) with hex key



30. Four M2.5 buffer retaining nuts



31. Two M2.6 motor mounting screws



32. Four M3 slot head body fixing screws



33. Two 2mm diameter by 3mm Neodymium magnets



34. (Optional – not supplied) M2.5 by 6mm charging board fixing screw



35. Optional – not supplied) Two 2.5mm diameter by 4mm grub screws for final drive gear



36. (Optional – not supplied) Steel or brass 1-2mm rod for hand rails



37. (Optional – not supplied) 180g of self-adhesive tyre balance weights for ballast



## 2: Collect tools

You will need some basic tools.

1. A cutting mat to protect your work surface



2. Safety glasses, particularly when cutting parts from sprues as they can fly off at speed



3. A 3mm slotted head screwdriver and a size 00 Philips driver



4. A robust craft knife, preferably with a retractable blade



5. A small electric drill or rotary tool



I prefer the trigger operated style of electric drill as it gives me more control when I am opening out holes in plastic.

6. Sharp 2mm, 3mm and 5mm drill bits



7. Substantial side cutters for removing parts from sprues. I use a Xuron 2175 track cutter



8. Some emery paper or a small file to take the edge off of the pre-cut axles



9. A digital caliper may be useful to ensure that the right size screws are being used



## If you are soldering the electronic connections, you will also need

10. Small side cutters



11. Small needle nose pliers



12. I find a pair of spring loaded tweezers useful for handling small components




13. A wire stripper is very helpful when removing insulation from thin wires



This yellow style of iron is common, but I recommend using a temperature controlled soldering station like the one on the right.



15. Mistakes happen, so a solder sucker for undoing joints is helpful



16. For connecting to open terminals on the switch, motor and LED, heat shrink sleeving provides insulation and mechanical support.



17. After soldering, a hair dryer or heat gun is needed to shrink the sleeving.






### 3: Assemble and test the electronics

#### Outline of operation

This is a block diagram showing the electronic components and their interconnections.

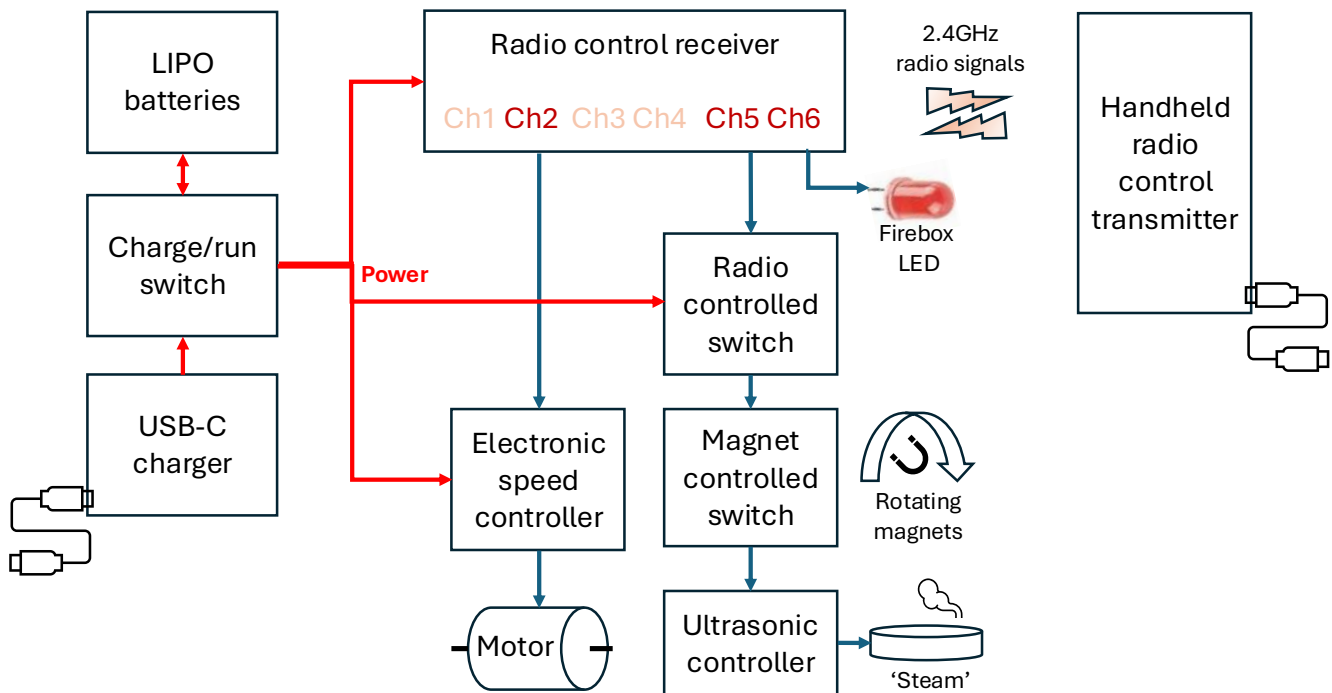

#### Power

Power is supplied by two protected LIPO batteries wired in series to produce a nominal 7.5-8V power rail (in red, above). A charging board allows a USB-C power supply to be connected to the batteries, and a switch selects between charging and run modes. When not in use, the switch is left in the 'charge' position to avoid battery drain.

#### Radio control

The radio control system is based around the commercial HOT-RC DS600 radio control system which provides a cost-effective hand-held transmitter and receiver. The transmitter may be used with multiple receivers, but only one may be switched on at a time. Importantly, the controller provides 'cruise control' - pressing the button underneath causes the system to maintain that speed without needing joystick inputs: just what we need for continuous running. The transmitter has its own USB-C charging port; a full charge should give around 15 hours of operation.

The system provides six independent channels, three of which are in use in this loco. The joystick on the handheld controller sends a proportional signal to channel 1 for left/right motion and channel 2 for up/down motion. We only want to control motor speed, and use channel 2 so that up and down movement of the stick controls the engine's speed.

Channels 3-6 are on/off only, controlled by the four buttons arranged in a diamond on the controller. Channel 5 (the leftmost button) switches the smoke generator on and off, and channel 6 (the rightmost button) switches the firebox LED on and off.

The system also has a single 'telemetry' back channel, which is used to monitor the power voltage at the receiver, which is shown in the lower left part of the handheld's display. This acts as a locomotive battery level indicator. If it approaches 7.4V, then it is time to put the loco on charge.

### Motor control

The motor speed and direction are controlled by an Electronic Speed Controller (ESC), which is a standard piece of radio control equipment that plugs into the receiver and converts proportional inputs at the transmitter into pulses of electricity that drive the motor. The ESC has a three-wire connector called a Futaba connector that plugs directly into channel 2 of the receiver. It has a two-wire connection to the battery power, and a two-wire connection to the motor.

### 'Smoke' generator

The 'smoke' is really just a fine mist of water droplets, created by shaking a metal disk up and down at 108kHz. A water tank under the disk and a wick are used to create a supply of water to the mist generator. Left to itself, the ultrasonic controller board will excite the disk continuously, but we use two switches in series to modulate the power supply to the ultrasonic board, and thus the output of 'steam'. The first switch is a standard radio control electronic 'relay' which is controlled by the channel 5 button to switch the whole ultrasonic system off. The second switch is a Hall effect switch which will only conduct if a magnet is nearby. The locomotive gearbox contains a wheel with two embedded magnets that rotate with the main drive axle, giving two pulses per revolution which then switch on the smoke generator for two quarters of each revolution, creating puffs of 'smoke'.

### Firebox LED


Red/orange light emitting diodes (LEDs) are available which have a built-in flicker. Simply by connecting one to channel 6 of the receiver we can have a switchable firebox glow effect in the cab.

## Initial battery check

LiPo batteries are remarkable devices but must be treated with respect. They must not be over-charged or over-discharged. Fortunately, the supplied batteries come with a small built-in circuit board which protects against the cell against over- and under-voltage conditions. They come already partially charged so if your batteries are not showing any charge at all then they are duds and should be replaced.

**Do not at this stage connect the flying leads for the batteries as an accidental short circuit will damage the cells, and perhaps you too.**

It is very important that the batteries are not physically damaged or swollen. Puncturing a cell can cause it to catch fire. The best way to check that the pouch cells are in good physical condition is to slot them into the backhead electronics carrier. The batteries should be an easy loose fit. If they are bloated and have to be forced in, then they should be replaced.

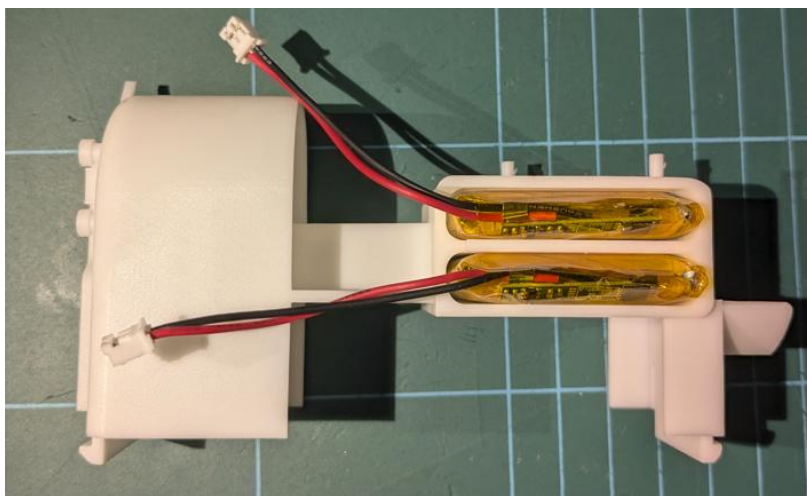

## Plugging components together

The kit as supplied usually comes with the electronics fully wired allowing the elements to be simply plugged together using the wiring diagram below. **If you are soldering up the wiring loom yourself, then please go through section 4 before proceeding with this section.**

## Wiring diagram

*Under construction by – further information needed*

## Initial motor control test

The batteries, switch, RC transmitter, RC receiver, speed controller and motor can be tested on the bench before any assembly begins. You do not need the charging board at this stage.

Switch on the receiver with the toggle switch – a light should appear on the receiver. If this is the first time that you have switched it on, you may need to 'bind' the receiver to the transmitter.

### ***Binding the receiver to the transmitter***

Switch off both the receiver and the transmitter. Now depress the Bind button on the receiver and switch on. The light will flash to indicate that it is listening for a new transmitter. Now press the emergency stop button at the top of the transmitter, and switch the transmitter on with the small red button under the joystick.

Once communication has been established, the receiver light will stop flashing. You only need to do this once: the receiver will remember which transmitter it 'belongs' to. If you have more than one engine, you can bind them both to the same transmitter, but you will only be able to use one at a time.

### ***Testing the motor and setting the zero point***

Switch on the transmitter and receiver. You should now be able to run the motor forwards and backwards using the joystick. If the motor hums or turns when the stick is at its central 'off' position, use the trim buttons on the transmitter to set a zero point.

### ***Charging and telemetry***

Once you have the motor turning under the control of the transmitter, add in the charging board and solder the telemetry lead to the 'run' side of the switch. Test the charging board by connecting a USB-C charger. The charger board will show a red LED when charging the battery which turns blue when the battery is fully charged. A full charge takes 4-5 hours, which will then run the engine for several hours depending on load.

Check the voltage display on the transmitter to ensure that the telemetry connection is working. When fully charged it will show around 8V, reducing to about 7V when the battery is nearly flat.




## 4: Soldering the electronics

We assume that you have the necessary skills to solder electronic components; if not then please purchase the ready-soldered version of the kit.

***Rest of this section is under construction***

### General advice

We recommend using heat shrink tubing for connections to the switch, the motor and the LED so as to provide some mechanical support for the wires and insulation against the elements – Gauge 1 tracks are rather hostile environments. You will also need wide heat shrink sleeving to re-encapsulate the RC switch after soldering.



**Warning:** connectors are keyed, but can have the red and black leads connected either way round, which is unhelpful. To avoid nasty surprises, always connect red to red and black to black; if the connector leads do not match up, then ease the pins out of the shell and rearrange like this.

## 5: De-sprue and clean up

### ***Prepare axles***

The axles need a 1mm bevel on the ends so that sharp corners do not tear the plastic parts as they are pressed on. The bevel also helps provide some 'lead' when inserting.

This can be done by spinning the axle in a drill with the end against a piece of emery paper, or by careful work with a file.

### ***Cut springs***

If not supplied already formed, cut four 10mm lengths of the 2mm outside diameter spring for the axle boxes, and four 15mm lengths of the 2.5mm inside diameter spring for the buffers.

### ***Cut and clean up gear box components***

Before removing from the sprue, we need to ream the holes in the crown gear and the idler gear so that they may rotate freely on their fixed axles. The nylon material has a tendency to smear and tear, so rather than using a proper reamer we recommend drilling out the holes with a *sharp* 3mm bit. It is best to do this whilst the gears are still on the sprue to make them easier to handle, but it can be done with care after cutting.

Now remove all items from the sprue.

Trim the stubs of sprue from the gears since these might touch the frame and create noise, or bind against the frame.



The idler gear as printed is a little oversized. Trim the smaller gear end with a craft knife until the gear slides freely between the narrow walls of the gearbox.

### ***Cut and clean up axle boxes***


Before removing from the sprue, clean up the holes using a sharp 5mm drill. Then cut from the sprue and clean up the stubs.

### ***Clear charging socket cutout***

## 6: Gearbox assembly

Here is an exploded diagram of the gearbox.

*Under construction in Powerpoint using STLs*

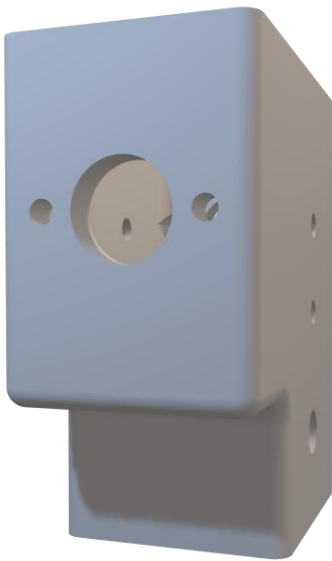

The elements of the gearbox should be assembled in this sequence:

1. Motor
2. Motor bevel pinion
3. Idler gear
4. Crown wheel
5. Final drive gear
6. Timing wheel with magnets
7. Driver axle boxes
8. Driver wheels

The idler gear and the crown wheel rotate freely on their fixed axles. The motor bevel pinion, final drive gear, timing wheel and driver wheels are rigidly fixed to their axles which rotate

### **Motor**

Begin by attaching the motor to the gearbox frame using the M2.6 screws.

### **Motor bevel pinion**

The motor pinion is an interference fit, and some force may be needed to get the pinion onto shaft.

**Warning:** There is a danger that the motor internals might be damaged if you force the pinion on whilst holding the motor body. Instead, stand the motor up on a solid surface so that the end of the shaft is supported, and push the pinion on with force being transmitted through the shaft to the surface and not through the body of the motor. It is a good idea to reconnect the motor to the electronics after fitting the pinion to make sure everything is still working correctly before proceeding.

### **Idler gear**

Ensure that you have trimmed the smaller gear end with a craft knife until the gear slides freely between the narrow walls of the gearbox.

The idler should spin freely (but without wobbling) on a 3mm axle. Open the bore out with a drill as necessary.

Slide the idler gear into the box, making sure that the smaller gear is against the external wall of the gearbox and the bore is aligned with the sidewall holes, and then push the axle through. Support the inner frame with a small block of wood to prevent bowing as the shaft is inserted.

### **Crown wheel**



Snap the ball race bearing into the base of the crown wheel and align the wheel with the axle holes in the gearbox housing. The crown wheel should engage with the motor pinion and the idler gear.

Insert the axle from the side of the gearbox away from the bearing. I found it helpful to put the box on the cutting mat on its side (crown wheel down) and gently tap the axle down the last few mm to seat it in the wall of the gearbox.

Check the alignment of the motor pinion by manually turning the crown wheel and then running the motor under power. Ideally the pinion should mesh tightly with the crown wheel but not so tightly as to cause binding: there should be a little backlash. Adjust the alignment by slight movements of the motor pinion up and down the motor shaft – a pair of long nosed pliers or a flat blade screwdriver will help.




### *Final drive gear*

The final drive gear is an interference fit onto the 5mm main axle. As before, I put the gearbox crown-wheel down onto the cutting mat and drove the axle through the final drive gear and gearbox wheel with gentle taps from a small hammer.

**Warning:** The drive gear must be a tight fit on the axle since this carries drive between the motor and the wheels.

There are holes for M2.5 grub screws if your gear is loose; drill out the holes to 2mm and carefully drive the screw in – it will self-tap.

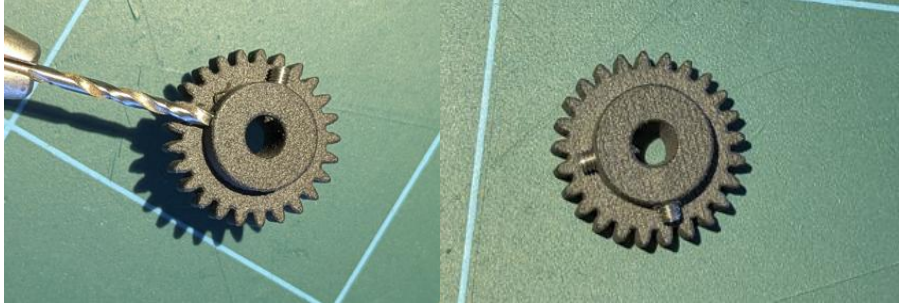


Alternatively, put a drop of super glue down the hole and rotate the axle through the gear to spread the superglue round the inside of the glue. **Only do this after the wheels have been fitted** (see Step 7) since once glued you will not be able to adjust the position of the gear on the axle.

### *Running in*

Run the gearbox on the bench for a while to get everything bedded in, and then check alignments. Do not be tempted to add any sort of lubricants as the nylon gears do not need them – all you will do is create a sticky dust-collecting mess.

**Warning:** The crown wheel axle and the idler axle (the 3mm ones) should be gripped by the walls of the gearbox and should not turn. If the axles do rotate, then they will in time work their way out and the gears will come out of alignment, and probably be damaged. After running in, if you see that they are moving, then let a couple of drops of superglue seep into the axle/wall interface and leave to set

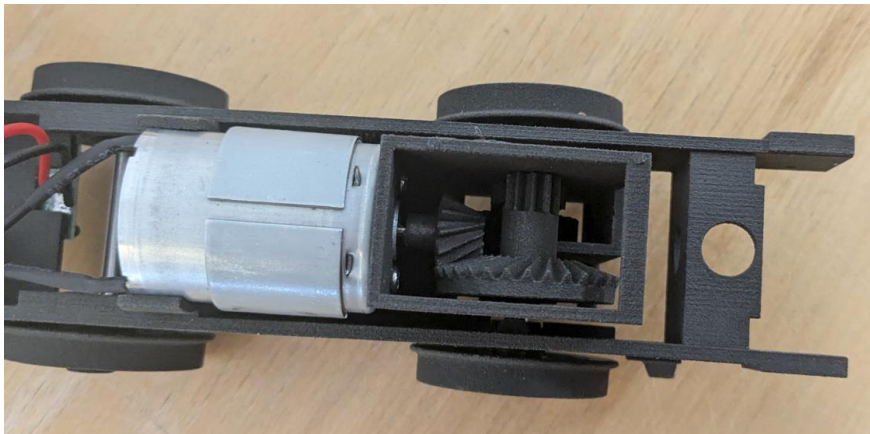

## 7: Chassis assembly

The chassis clips together in an ingenious way: the motor goes into the round bracket on top, and the sprung axle boxes clip into the frames. Everything can be unclipped, so you can safely try a dry run before final assembly.

### ***Adding wheels and axle boxes to the main axle***

Add an axle box to one side of the main axle. The flange on the axle box should be on the outside – it provides a rubbing surface for the wheel.

Now press on a wheel. This requires considerable force, and the wheel needs to be set accurately at a right angle to the axle – it is easy to press the wheel on at a slight angle so you end up with a wobbly wheel. (Guess how I know.) The best way to do this is with a vice: do not attempt to do it by hand. Check the alignments carefully with a set-square, and drive the axle in slowly by tightening the vice jaws, checking as you go.




Now repeat for the other side of the main axle, and then make up the undriven axle in the same way.

### ***Fitting the motor and gearbox assembly***

Easing the motor through the frames requires some care as there are several lumps and bumps on the inside of the frame that can block the motor's passage. Insert the top of the motor from below, and slide it around to find the widest part of the frames, then ease the frames apart slightly to allow the motor waistband through.

### ***Fitting springs and axle boxes***

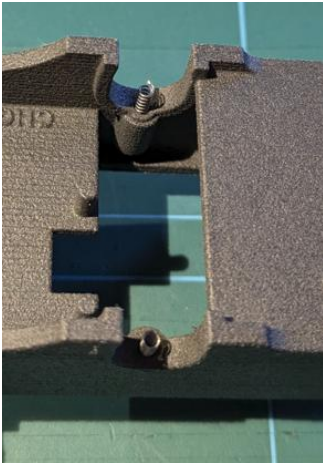

Invert the frame and drop springs into the spring pockets for the axles. Rest the driven axle and its axle boxes on the top edge of the frame and then rotate both axle boxes until the indent for the top of the spring is facing down. Now push the assembly down – it should mate with the frame with a satisfying click, with the springs providing suspension. If all did not go well, unclip the axle boxes from the frame and try again.

Repeat this with the undriven axle, and seat the motor properly in its clip.

Place the chassis right side up, and check that the springing is effective.

## 8: Bodywork, buffers and ballast

The white resin body will take rattle-can paint directly, but a first coat of car body primer coat is advisable. Some livery suggestions are shown in the next section.

The engine is mostly plastic, and thus very light. There is plenty of power to pull heavy loads, but the engine needs mass to achieve the necessary adhesion and avoid wheel spin. Adding about 180g of ballast is recommended, most easily achieved by adding self-adhesive tyre balancing weights. Alternatively, a piece of lead flashing may be folded into the tank interior.

Handrail knobs maybe superglued into the holes in the body (which may need opening out). They are designed to take 2mm wires which may look a little chunky. Some builders have used 1mm or 1.2mm rodding which is closer to a scale size with a little dab of glue to keep them in place.

Nylon buffers and coupling hooks are supplied. The buffers can be glued permanently in place, or you can add the supplied springs with the buffer nuts tightened directly onto the buffer shanks. You will need to open out the buffer shanks with a 4.1mm drill to allow free movement.



## 9A: serving suggestions – preproduction run



*David Viewing's rattle-can painted and vinyl wrapped prototypes in action at the 2025 G1MRA AGM*



*Steve Andrews' weathered NCB loco with added external cylinders, safety valves, bunker and spectacle bars*



*William Ayerst's completed engine and Roger Hopkin's Archie*



*Elizabeth Scott's Cadbury engine running on Mike and Christine Blands' track with Northern Finescale vans*



## 9B: serving suggestions – larger than Gauge 1



*David Viewing's Gauge 3 prototype running on the Warton Road layout at the 2026 National Garden Rail Show*



*The surviving GNR J13 preserved in the National Collection*


Picture credit: Science Museum Group Collection © The Board of Trustees of the Science Museum under terms of license [CC BY-NC-SA 4.0 Licence](https://creativecommons.org/licenses/by-nc-sa/4.0/) for non-commercial use



## ***Notes from David to be incorporated***

### The smoke control switch

The 'RC' switch is a small circuit board that plugs into one of the receiver channels. Normally we suggest Ch5 on the receiver, which corresponds with the leftmost round button on the transmitter. This will toggle the smoke generator 'on' or 'off'.

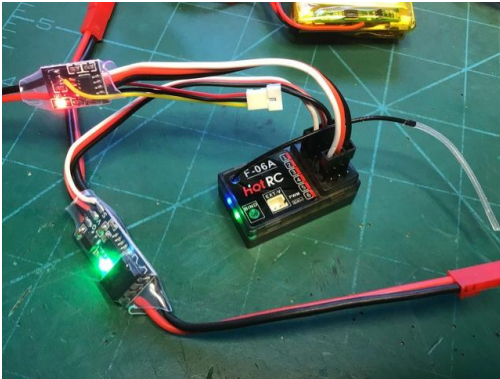

As shown, the RC switch will supply +5v to the smoke generator as the transmitter button is toggled on-off.

### 'Puffing'

It is possible to modulate the smoke output from a sensor installed in the gearbox. If you want to install this option , read on. If not, skip to the next section.

Magnetic sensor (A3144) detects the passage of magnets rotating past on a special 'magnet wheel' installed in the bottom of the gearbox. Positions for 4 magnets at 90 degrees are provided for the 2 -cylinder engine but in practice at model railway speeds the the smoke generator quickly gets 'swamped' by the rate of 'chuffs'. A better compromise is to install just two magnets in opposing positions, which gives a detectable 'chuff' up to a reasonable forward speed.

### Magnet Polarity


The magnet polarity is important because the sensor works in one way only. The chamfered side of the sensor should face the magnet's South Pole. You can find this by trial and error, unless you happen to have a compass! Both magnets must have the same polarity facing outward.

Once you have established the correct polarity, push the magnets into two opposing holes in the magnet wheel until about 1mm projects. I find the best way to do this is to pick up the magnet with a wide flat screwdriver blade or similar. The magnet wheel clips onto the driven axle and can be removed at any time for alteration if required.

### Sensor Installation

Once the three wires from the female JST connector (The one with receptacles for the pins) have been attached and insulated, The sensor can be inserted in the bottom flange of the gearbox shell. The trapezoidal cutout will need little easing with a sharp knife and provided this is not overdone the insulation will hold the sensor in place. Insert the sensor chamfered face down, facing the rotating magnets and as close as practicable without them hitting.




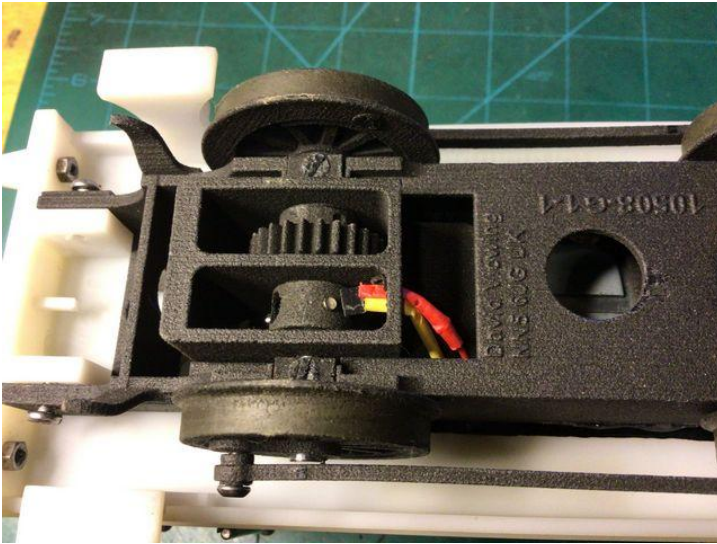


Modifying the electronic switch.

The sensor generates 'puffs' by shutting off the output of the RC switch as the magnet wheel rotates. It does this by shutting off the output transistor in a 'cluge' which has been shown to work reliably.

First , carefully peels back the Heatshrink covering from the switch pcb taking care not to damage any of the components. Prepare the JST-PH 1.25mm connector so the yellow wire is approx 30cm long, naking the red and black wires slightly shorter. Bare the insulation for 1-2mm and pre-tin the ends. Attach the black and red wires by soldering the on top of the existing wires on the board.

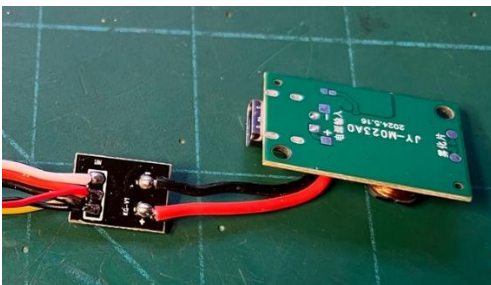

Now, pre-tin the transistor pin as indicated and attach the yellow wire taking care not to short to anything else.

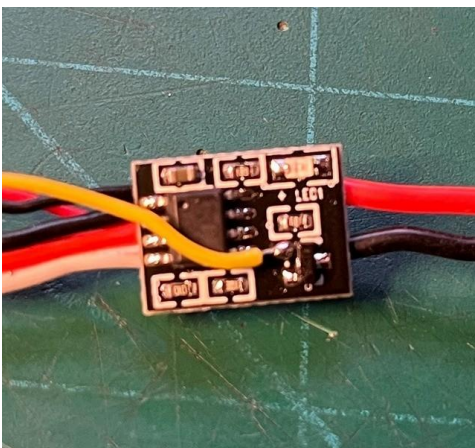

Re insulate the board with transparent heatshrink 22mm wide (not supplied).

Connecting the Ultrasonic oscillator

To save space, we connect the RC switch directly to the smoke unit oscillator. This means cutting off the JST connector leaving about 20cm of wire projecting. The connector can be re-used as part of the on/off switch assembly.



Pre-tin the ends of the remaining wire stubs after removing about 2mm of insulation. Also pre-tin the two pads on the oscillator board, immediately behind the connector, noting they are marked + and -.. Solder the RC switch output leads to these pads, observing red goes to +, etc.

