

LA-4500



250 mm/s
4" PRINTER



LABELLING
IN MULTIPLE
POSITIONS



8,000 PLUS
IN MEMORY



**TOUCH
SCREEN**
OPTIONAL



ETHERNET



Outstanding functions

- Labelling of fix/variable weight/price.
- Generic traceability in label.
- Adapted to comply with EU Regulation 1169/2011 referring to food information.
- Barcodes: EAN-8, EAN-13, EAN-128, CODE 128, ITF-14, QR code, GS1 Datamatrix and GS1 Databar (up to 4 barcodes per label).
- Air applicator: maximum productivity.

Labelling system

- Print type:
 - Direct Thermal (DT) or Thermal Transfer (TT).
- Printhead:
 - Long-lasting 4" (historical control).
- Resolution:
 - 8 dots/mm.
- High speed printing:
 - Up to 250 mm/s.
- Label applicator type:
 - Pneumatic piston, in top labeller also possibility of 90° rotating applicator and "Air-jet®" air blowing (AA).
- Position of the label applicator:
 - Top (front or rear, consult us).

Labels

- Maximum backing paper width:
 - 110 mm.
- Inside diameter of the label roll cardboard core:
 - Ø76 mm (the cardboard joint must be the same width as the backpaper).
- Label dimensions: from L40 x W40 mm, up to L120 x W102 mm.

Construction

- Structure:
 - AISI 304L stainless steel and anodized aluminium.
- Console:
 - Material: AISI 304L stainless steel.
 - "Qwerty" keypad and graphic backlit LCD display.
 - 15" TFT touch screen, optional
 - Adjusting the height of the top labeller from the console.

Communication to PC

- Ethernet TCP/IP.
- RS-232.

PC software

- DIS: for equipment configuration, production data management and back up (LBS).
- DLD: for graphic design of labels.
- Integration tools (see section on software).

Power supply & compressed air

- Electrical: 230 V / 50 Hz; 115 V / 60 Hz.
- Air: max. 150 l/min (at 6-8 bar).

Possible integration with other equipment

- Dibal LP-3000 manual weigh-price labeller.

Note: the equipment is fitted with a product detection system which the client must integrate in his transport system.

MODELS

LA-4540 TD WITHOUT CONVEYOR


- Direct thermal printing, 4" printhead and pneumatic piston applicator.
- Performance*: 100 labels/minute (with W60 x L60 mm labels).

LA-4540 TD WITH CONVEYOR (800 X 280)

- Thermal transfer or direct thermal printing, 4" printhead and pneumatic piston applicator.
- Performance*: 100 labels/minute (with W60 x L60 mm labels).

* Maximum performance will depend on the size, weight and morphology of the product, as well as on the regularity of the infeed of the products, the dimensions and characteristics on the labels.

DIMENSIONS

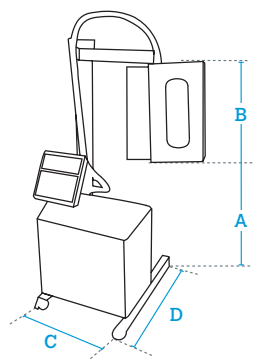

DATA IN mm


A	965 - 1,185
B	720
C	810
D	990

Weight with packaging: 80.0 -120.0 kg.

Options

Option	Characteristics	Ref.
L800 x W400 mm conveyor	Replaces the 800 x 280 mm conveyor. Only available for LA-4540 TD with conveyor (800 x 280) model.	Contact us
15" touch screen console		Contact us
Side labeller	To replace top labeller.	Contact us
Thermal transfer printing		Contact us
4" air applicator		Contact us
90° rotating applicator		Contact us
Horizontal barrier detector		Contact us
IP65 protection kit (equivalent)		Contact us
DIS software	Equipment configuration, received data management and backup (LBS). (See software section).	7340ENW3
DIS+DLD software	Equipment configuration, received data management, backup (LBS) and graphic label design. (See software section).	7340ENW3 + 7340YNW3
DLD software	Label graphic design. (See software section).	7340YNW3
Standard packaging		Contact us
Cage packaging	Necessary depending on the destination.	Contact us

Accessories (only for model with conveyor)

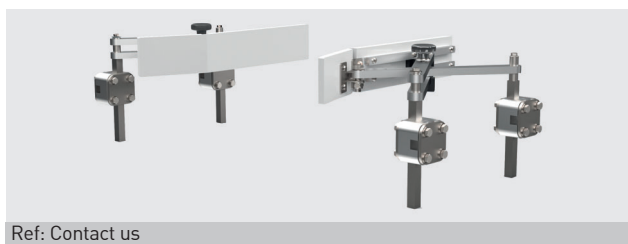

Ref: Contact us

Cestilene guides



Ref: Contact us

Stainless steel guides



Ref: Contact us

W280 mm exit ramp

Non-motorized PVC rollers for W280 mm conveyors.



Ref: Contact us

W400 mm exit ramp

Non-motorized PVC rollers for W400 mm conveyors.