


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	N/A	Inconel 625 Flange Body/pipe (TOP)	1
2	N/A	Inconel 625 Flange Body/pipe (BOTTOM)	1
3	99904A229	Medium Strength A-286 Steel Serrated Flange Locknut	24
4	91271A849	A-286 12-Point Screw, 3/4"-13 UNC	24
5	O-RING SEAL	16.025 OD Metal O-RING	1

NOTES
UNLESS OTHERWISE SPECIFIED:
1. ALL DIMS. IN INCHES
2. ASSEMBLE BOLTS TO 2383.7 LB-IN TORQUE USING LUBRICATED THREADS (K = 0.18).
3. ALL FLANGE COMPONENTS TO BE INCONEL 625.
4. ALL FASTENERS TO BE A-286 STAINLESS STEEL
5. FLANGE SEAL HAS AN OUTER DIAMETER OF 16.025IN AND AN INNER DIAMETER OF 15.475IN.
6. DESIGN BASED ON MEOP = 400 PSI AND OPERATING TEMPERATURE OF 600 DEG. F
7. DETAIL VIEW F SHOWS SEAL FULLY CONTAINED WITHIN BOLT CONES OF COMPRESSION

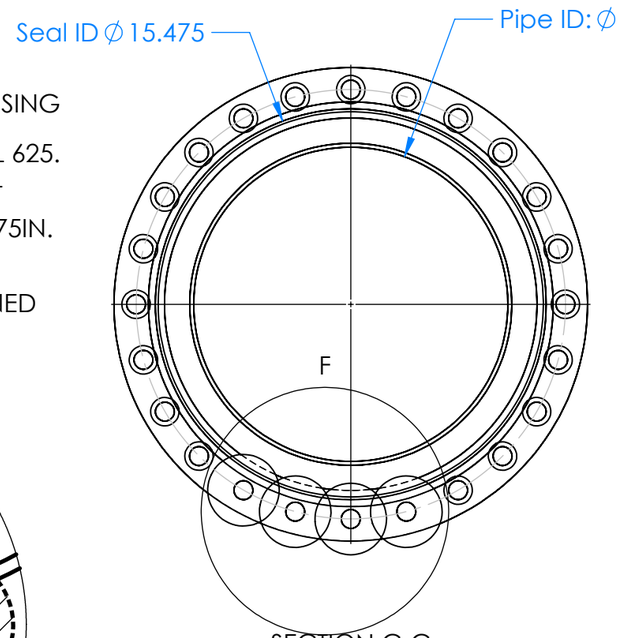


SECTION C-C
SCALE 1 : 6

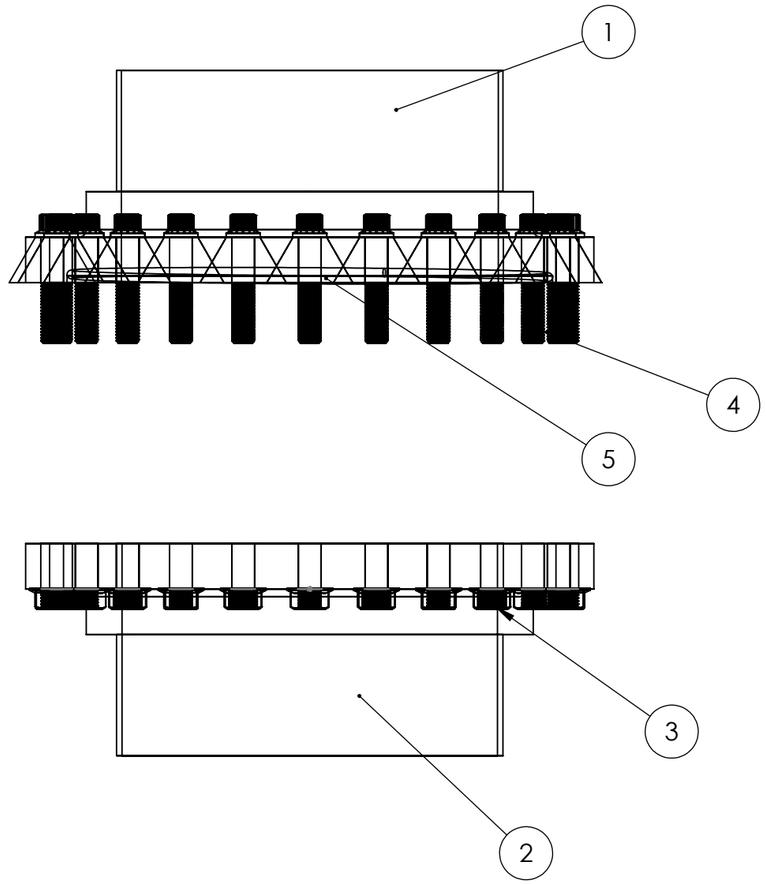


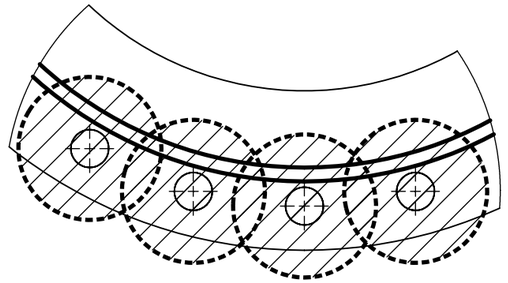

DETAIL F
SCALE 1 : 3

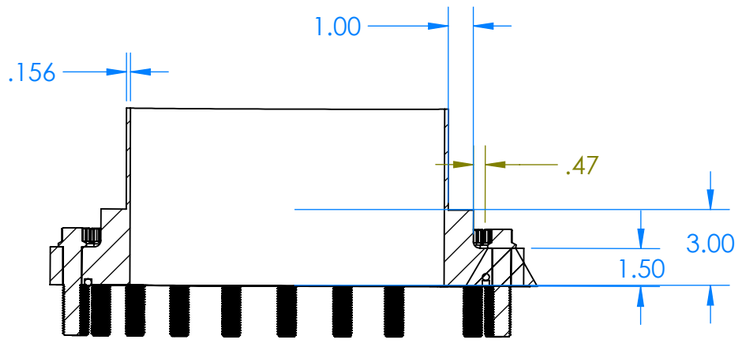

SECTION A-A

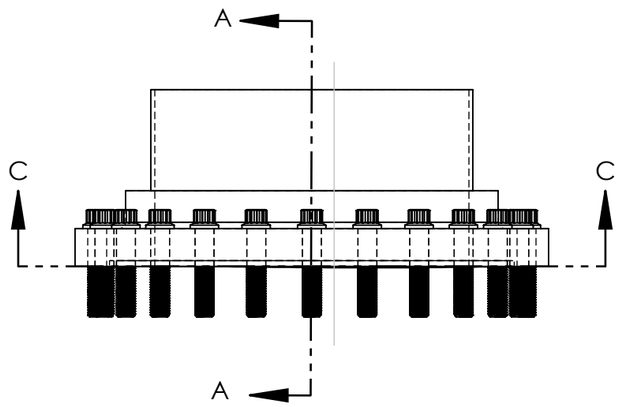

Cal Poly Mechanical Engineering ME 329 - SPRING 2025	Lab Section:12 LAB #4	Title: FLANGE DESIGN Date: 5/28/2025	Drwn. By: RYAN TREVENA AND GABRIEL CHOI Scale: 1:6

SOLIDWORKS Educational Product. For Instructional Use Only.