

© 2004 Blackwell Publishing Ltd

Ethernet PHY

File: Etherne

CM4 connect


File: cm4_con



Title:

KiCad E.D.A. kicad 7.0.2



Id: 1/5

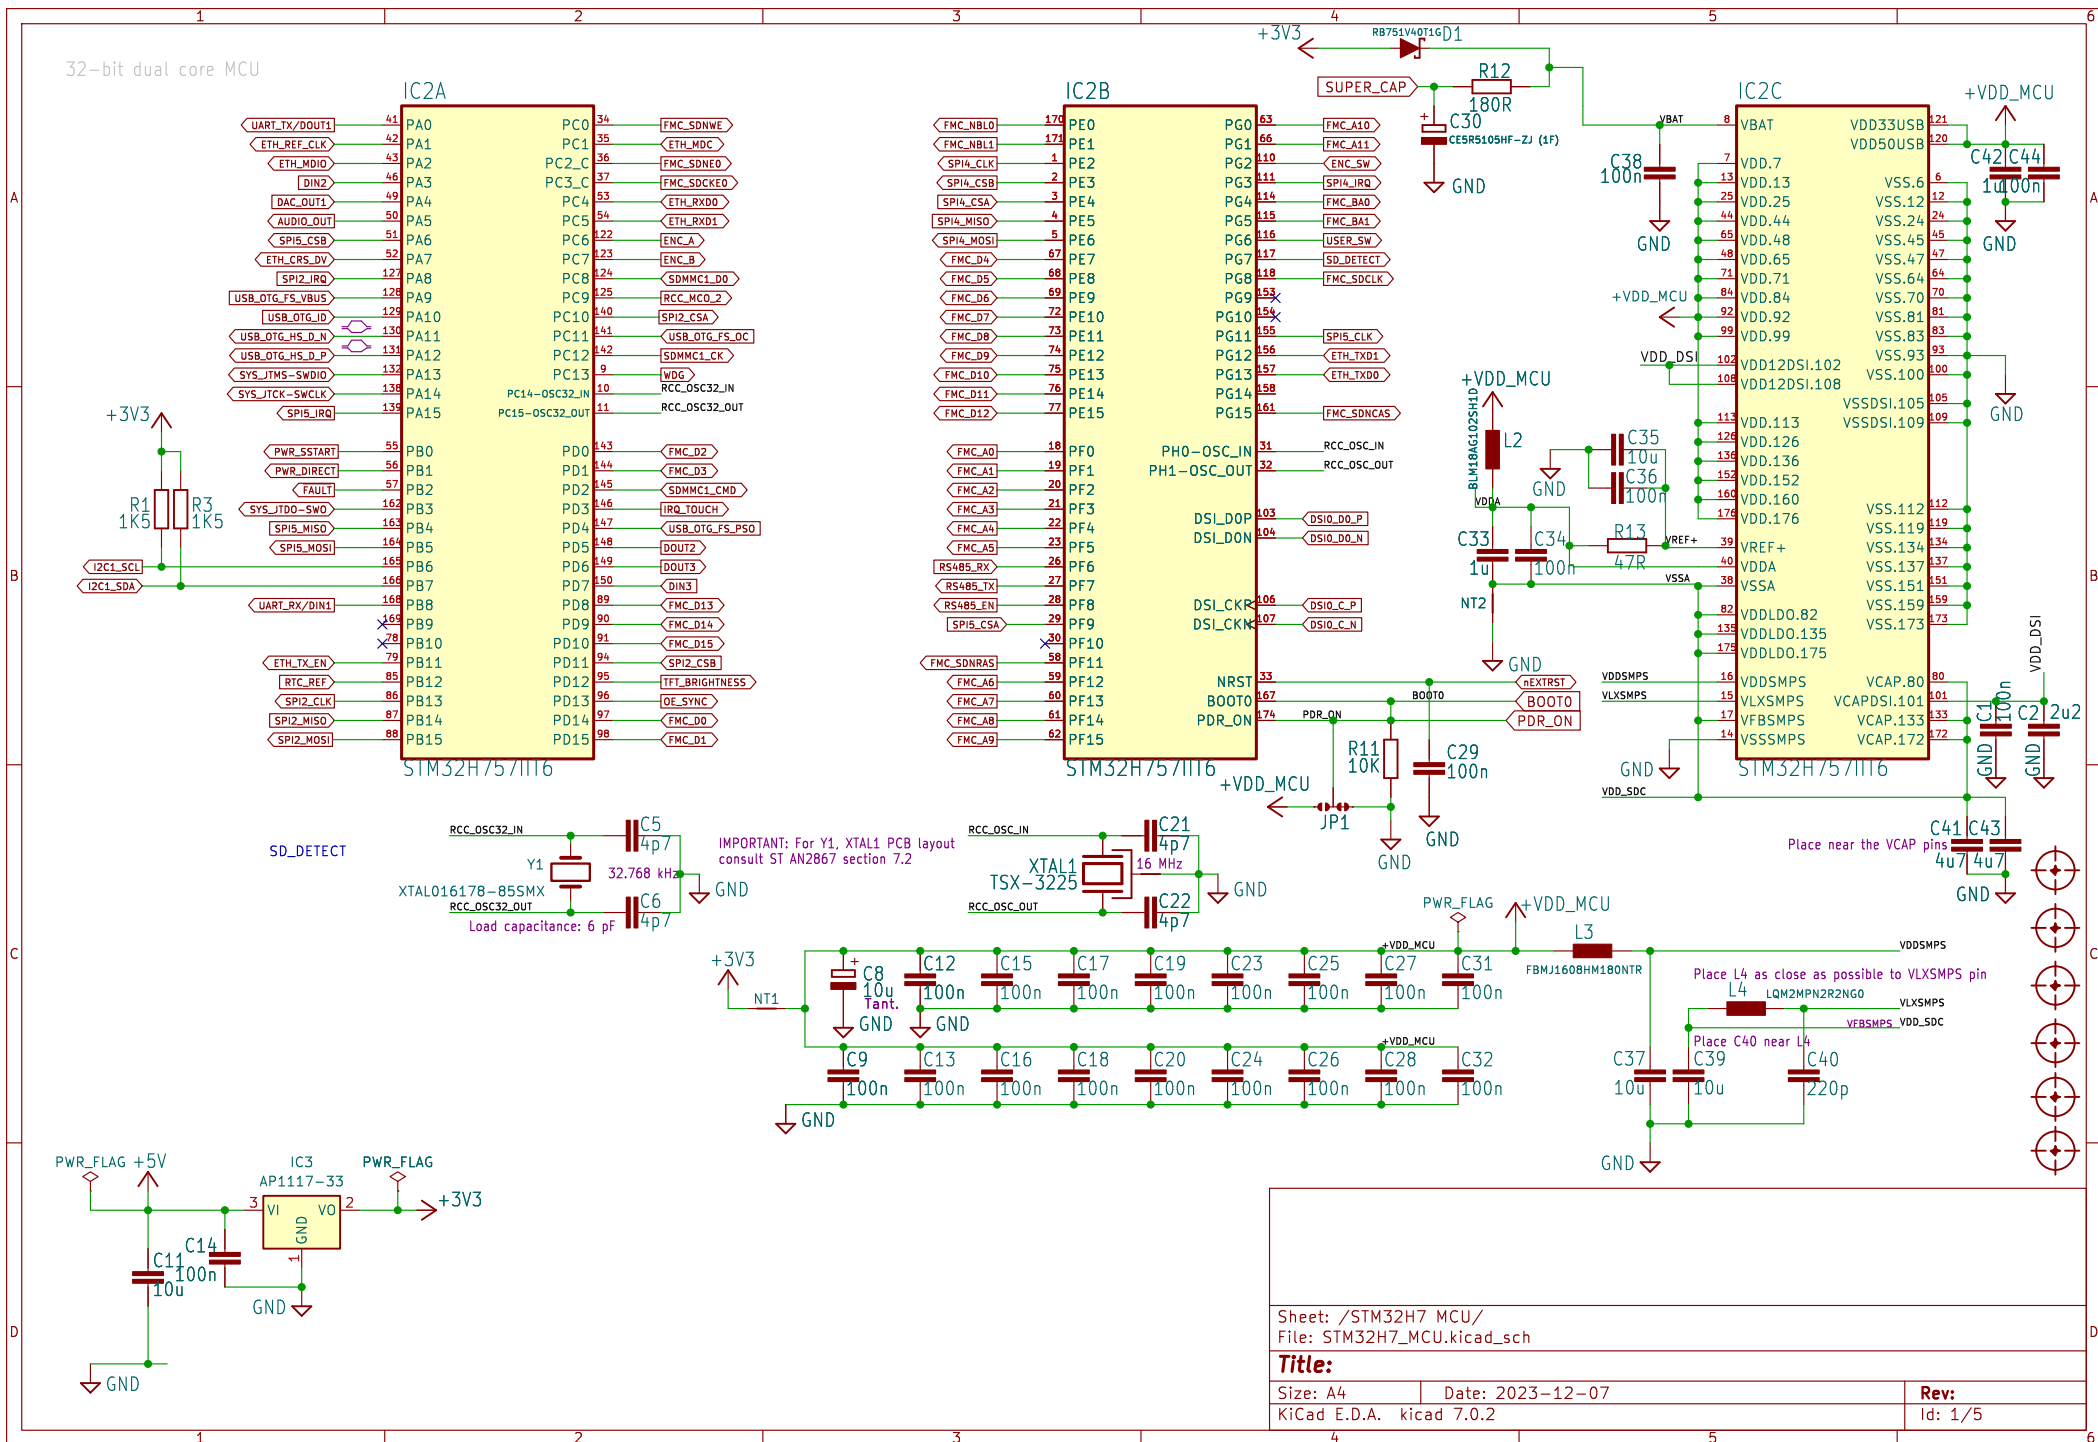


64/128 Mb SDRAM

128 Mb pin-compatible option: IS42S16800F-6TL or W9812G6KH-6


IMPORTANT: For PCB layout consult ST AN4938 section 9.4.3

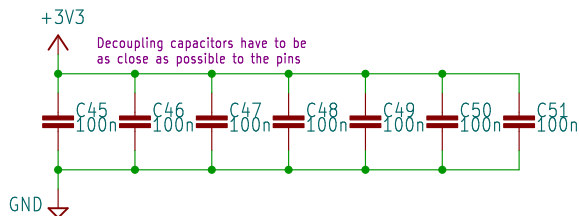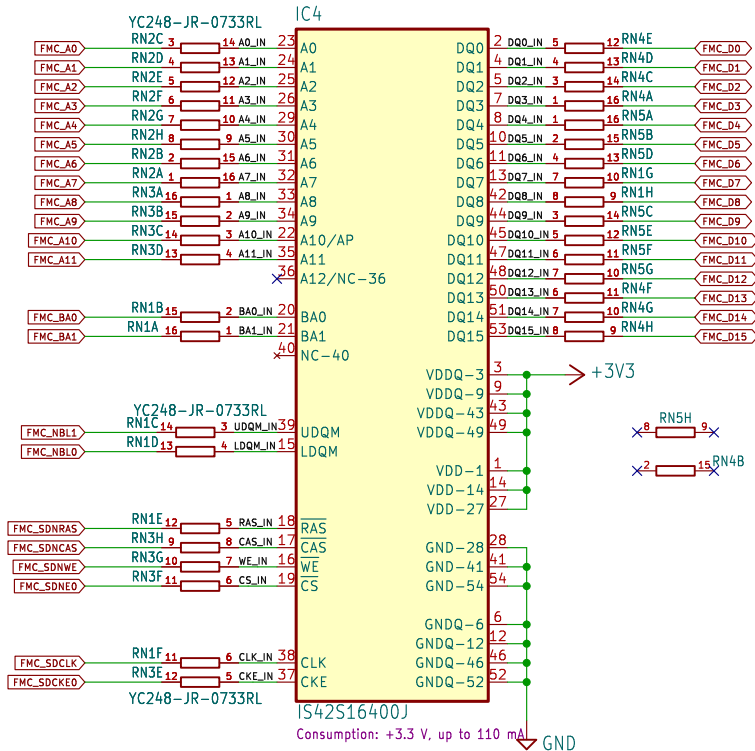


JTAG/SWD (optional)

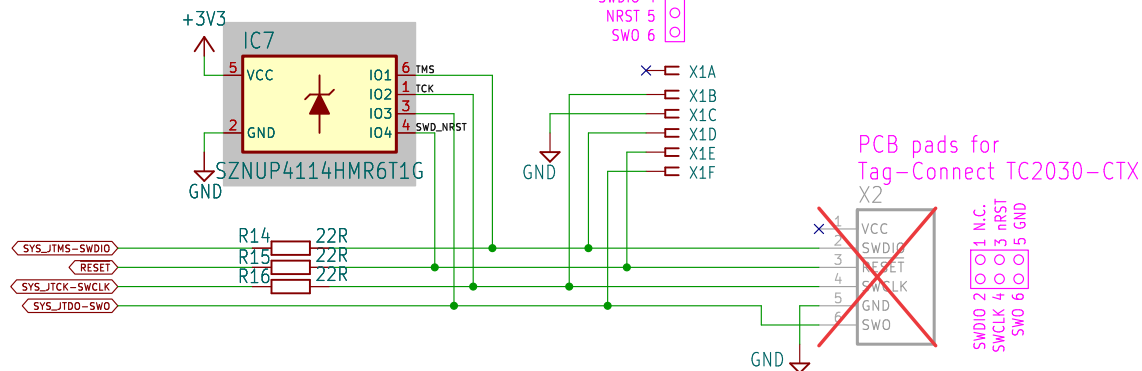

I2C EEPROM

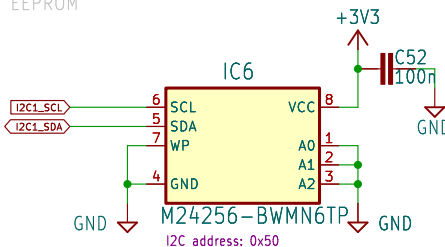


USB OTG port

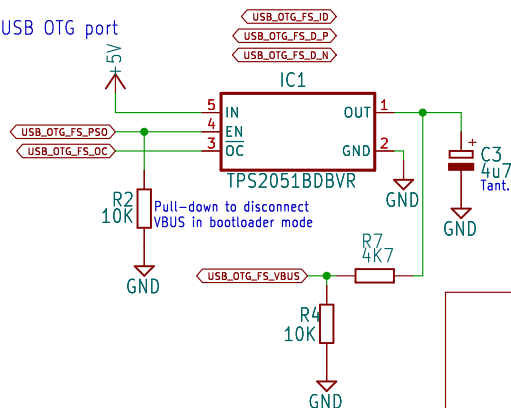

STM-32 board SWD



Micro SD card socket

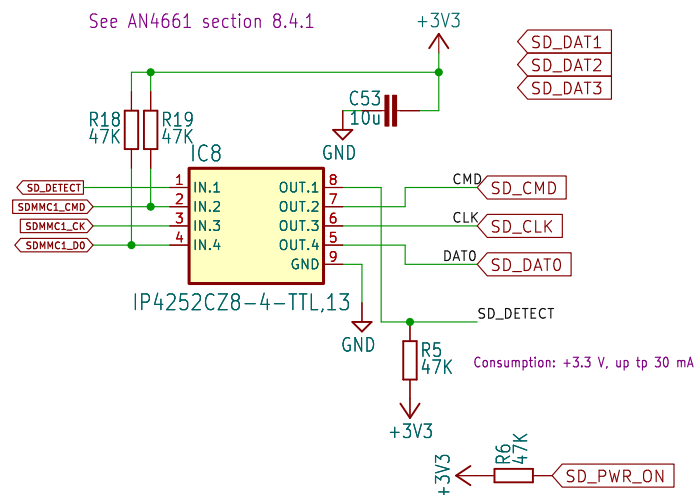

Sheet: /SDRAM, JTAG, SD card, EEPROM/
File: SDRAM,_JTAG,_SD_card,_EEPROM.kicad_sch

Title:

Size: A4 Date: 2023-12-07

KiCad E.D.A. kicad 7.0.2

Rev:

Id: 2/5

