

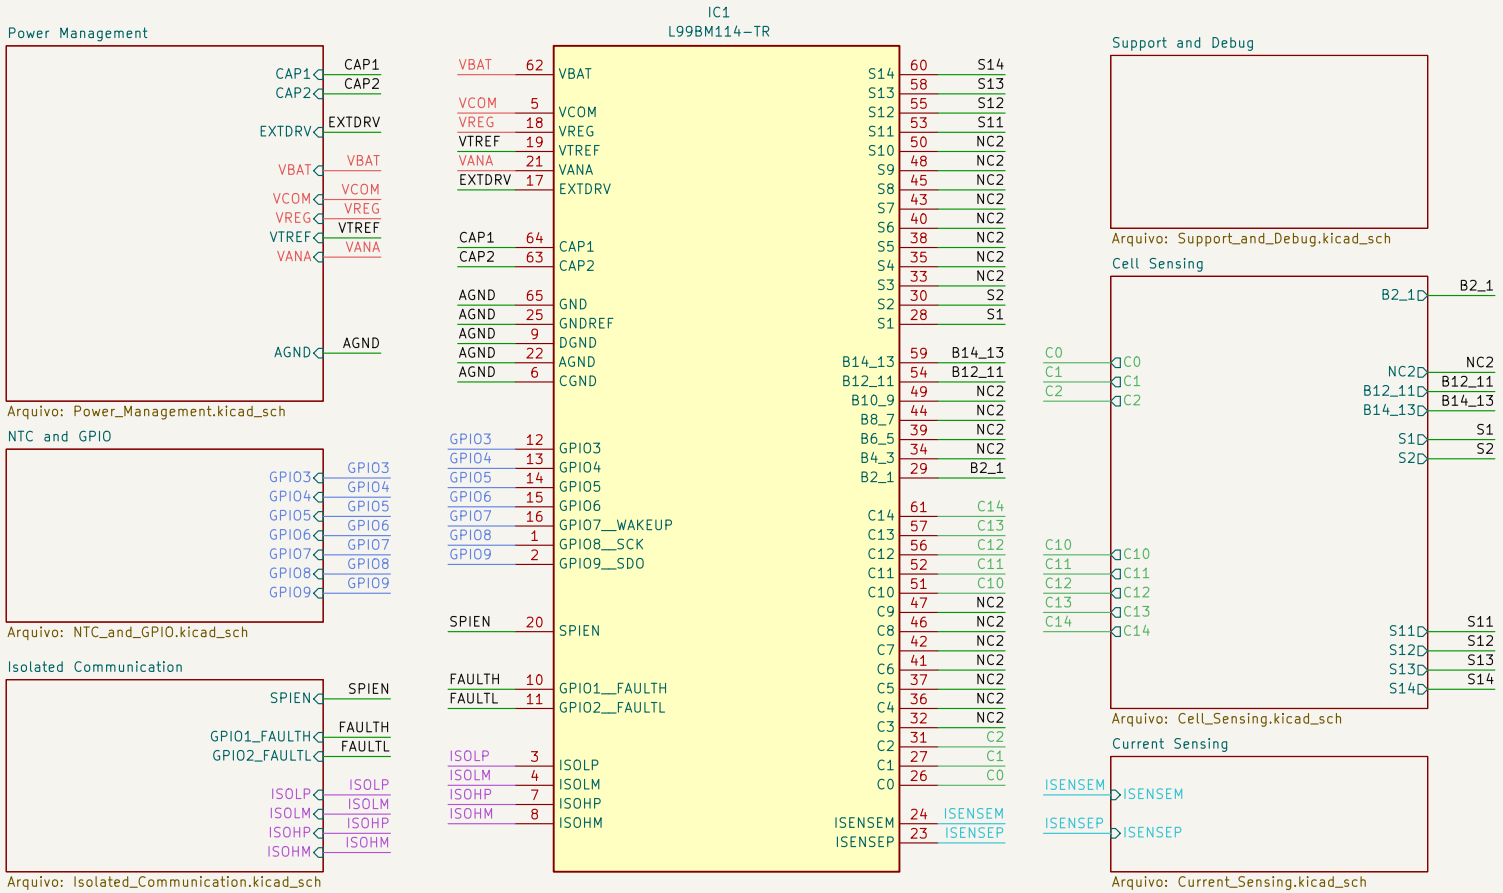



Sheet: /
File: BMS_5S_v2.kicad_sch


Title:


Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.1		Id: 1/7

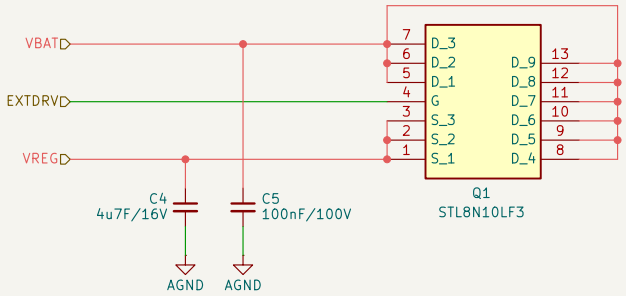


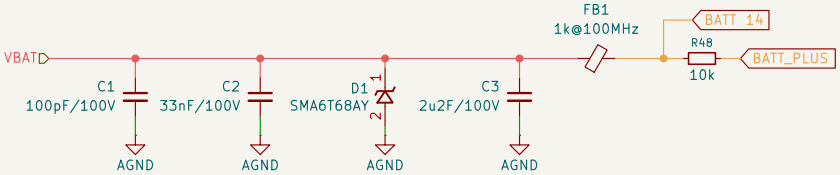











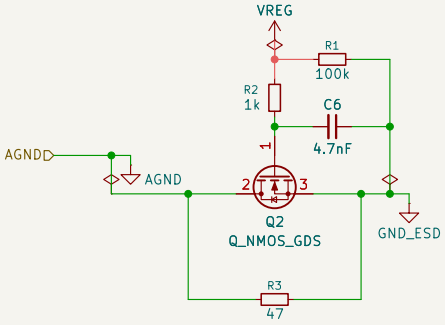

Sheet: /Power Management/ File: Power_Management.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.1		Id: 2/7

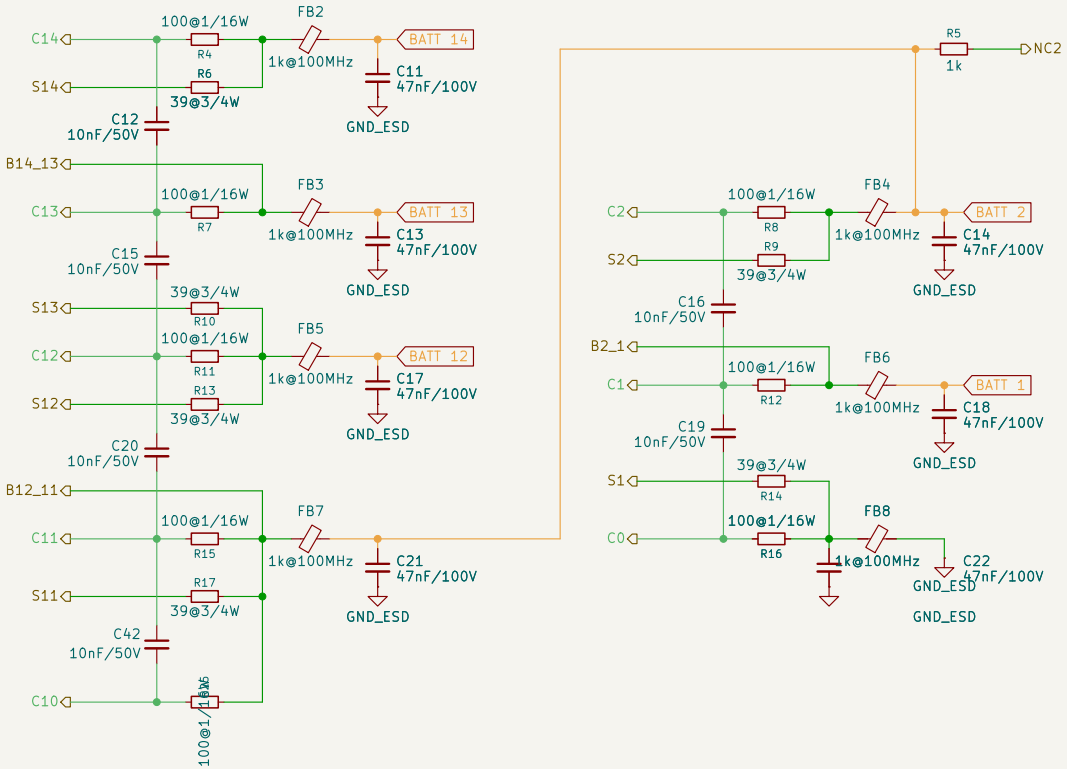

Comentários:

- RLPF 100 Ohm | Filtro passa baixas | Thick Film
- Máximo de 3k Ohm para identificação de cell-open

- CLPF 10nF/50V | Filtro passa baixas
- Não mudar | Tempo de Cell open diagnostic depende desse valor

- CESD 47nF/10V | ESD + ISO spike protect
- Conectar o mais próximo possível de Cx


- FRSNS 1k Ohm @ 100Mhz | RF immunity filter
- MPZ2012S102ATD25 (0603, 1A@125°C) | Indicação do datasheet

A identificação do rompimento do fusible link vai ser feita por meio do firmware.
-> 4.11.5 PCB open diagnostic


Sheet: /Cell Sensing/
File: Cell_Sensing.kicad_sch

Title:


Size: A4 | Date: | **Rev:**
KiCad E.D.A. 10.0.1 | Id: 3/7

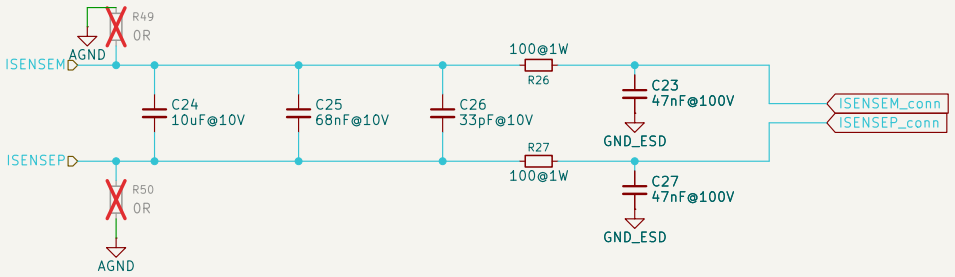


Sheet: /Current Sensing/		
File: Current_Sensing.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.1		Id: 4/7

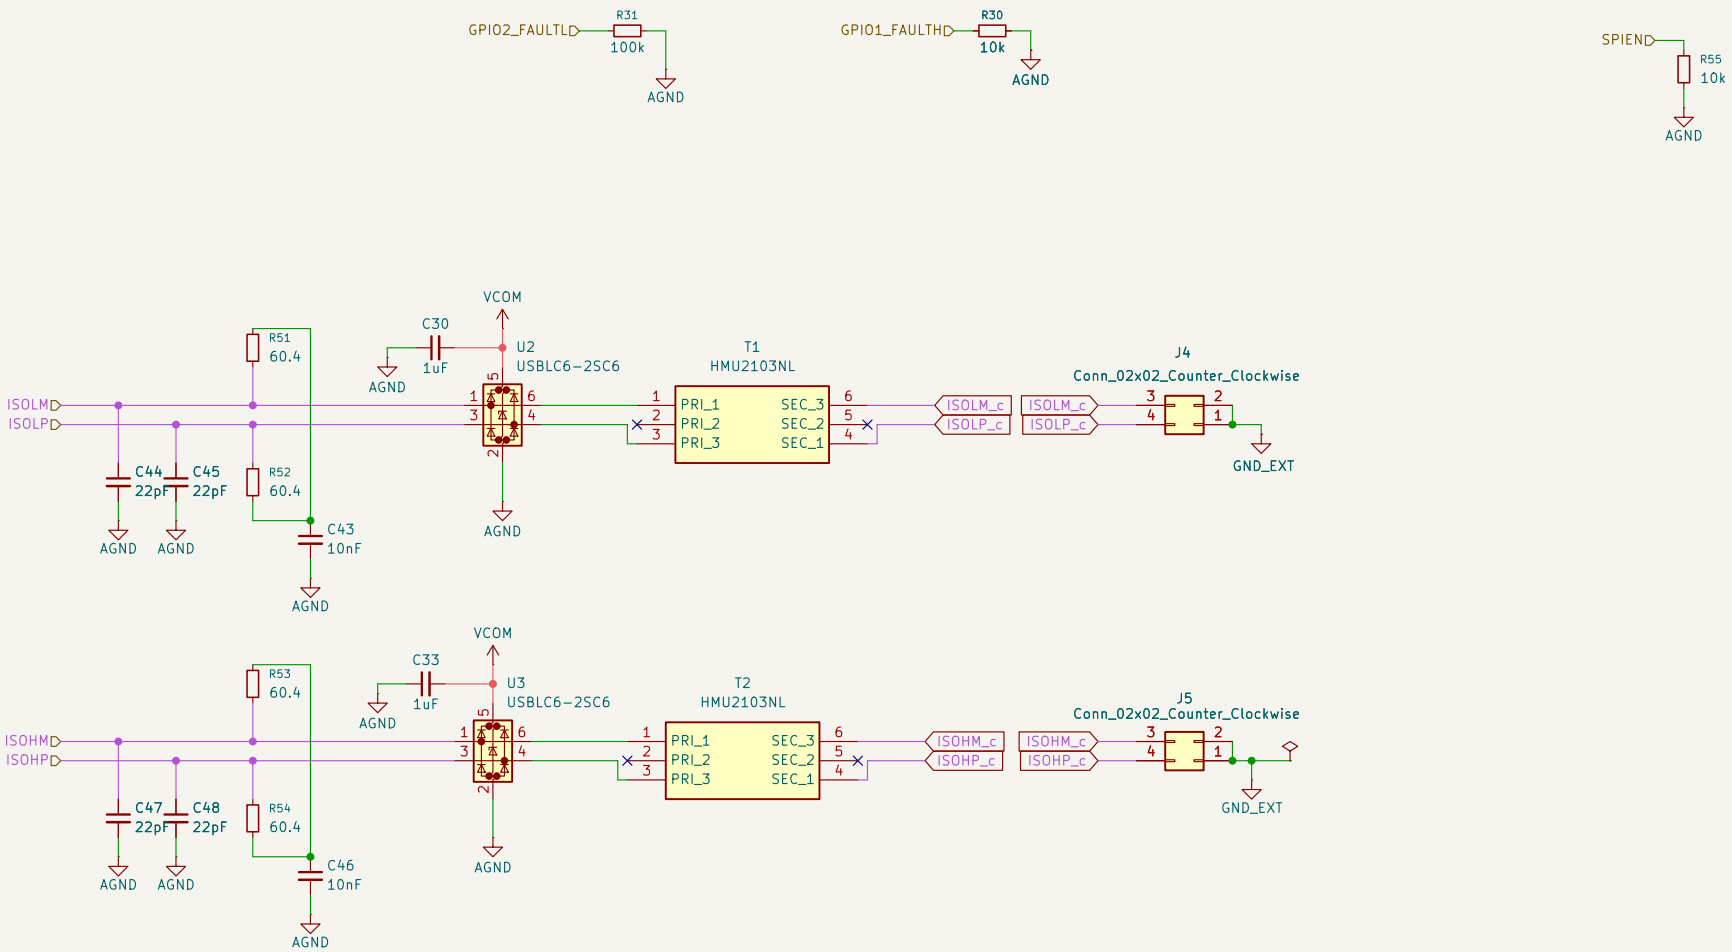

Sheet: /Isolated Communication/		
File: Isolated_Communication.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.1		Id: 5/7

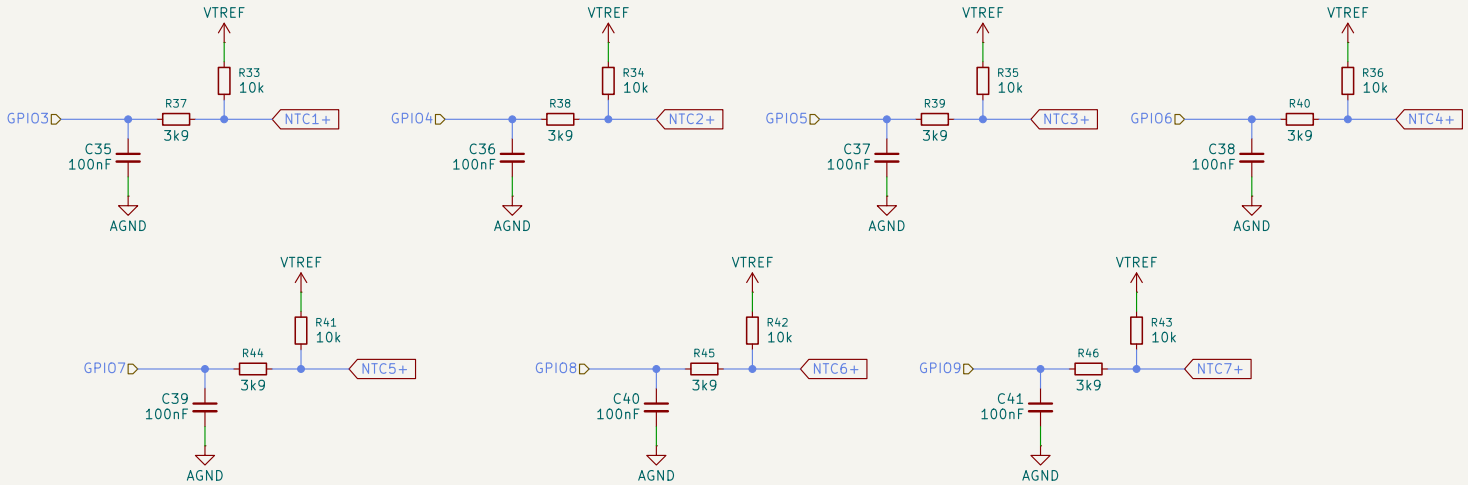

Sheet: /NTC and GPIO/		
File: NTC_and_GPIO.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.1		Id: 6/7

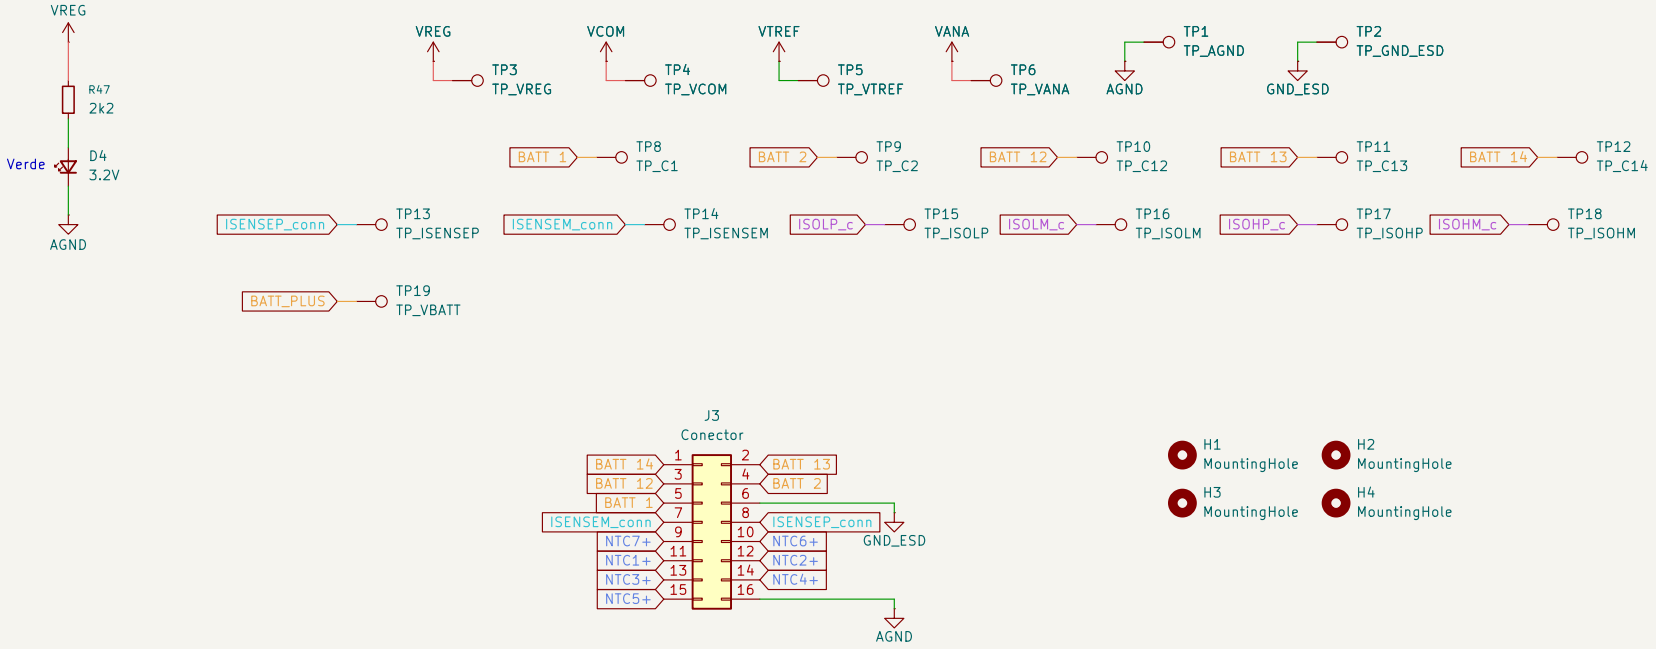

Sheet: /Support and Debug/
File: Support_and_Debug.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.1		Id: 7/7