
WAVE PCM soundfile format

The WAVE file format is a subset of Microsoft's RIFF specification for the storage of multimedia files. A RIFF file starts out with a file header followed by a sequence of data chunks. A WAVE file is often just a RIFF file with a single "WAVE" chunk which consists of two sub-chunks -- a "fmt " chunk specifying the data format and a "data" chunk containing the actual sample data. Call this form the "Canonical form". Who knows how it really all works. An almost complete description which seems totally useless unless you want to spend a week looking over it can be found at MSDN (mostly describes the non-PCM, or registered proprietary data formats).

I use the standard WAVE format as created by the <u>sox</u> program:

The Canonical WAVE file format

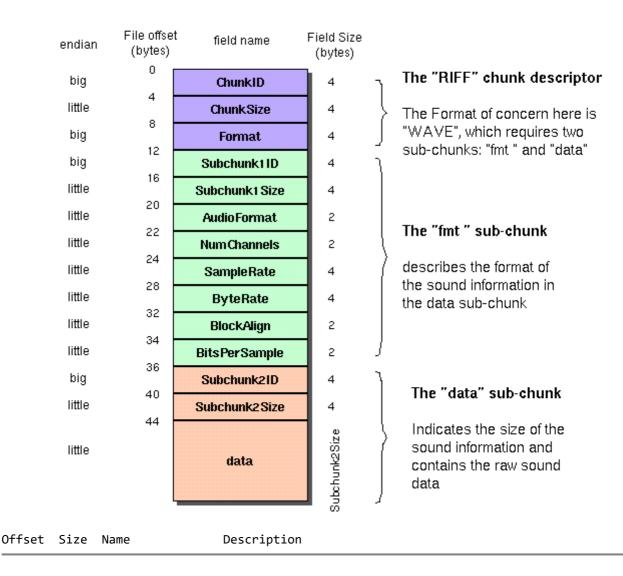

The canonical WAVE format starts with the RIFF header:

O 4 ChunkID Contains the letters "RIFF" in ASCII form (0x52494646 big-endian form).

4 4 ChunkSize 36 + SubChunk2Size, or more precisely:
4 + (8 + SubChunk1Size) + (8 + SubChunk2Size)
This is the size of the rest of the chunk
following this number. This is the size of the
entire file in bytes minus 8 bytes for the
two fields not included in this count:

ChunkID and ChunkSize.

8 4 Format Contains the letters "WAVE" (0x57415645 big-endian form).

The "WAVE" format consists of two subchunks: "fmt " and "data": The "fmt " subchunk describes the sound data's format:

12	4	Subchunk1ID	Contains the letters "fmt " (0x666d7420 big-endian form).
16	4	Subchunk1Size	16 for PCM. This is the size of the rest of the Subchunk which follows this number.
20	2	AudioFormat	PCM = 1 (i.e. Linear quantization) Values other than 1 indicate some form of compression.
22	2	NumChannels	Mono = 1, Stereo = 2, etc.
24	4	SampleRate	8000, 44100, etc.
28	4	ByteRate	== SampleRate * NumChannels * BitsPerSample/8
32	2	BlockAlign	<pre>== NumChannels * BitsPerSample/8 The number of bytes for one sample including</pre>
			all channels. I wonder what happens when this number isn't an integer?
34	2	BitsPerSample	8 bits = 8, 16 bits = 16, etc.
	2	ExtraParamSize	if PCM, then doesn't exist
	Χ	ExtraParams	space for extra parameters


The "data" subchunk contains the size of the data and the actual sound:

36	4	Subchunk2ID	Contains the letters "data"
			(0x64617461 big-endian form).
40	4	Subchunk2Size	<pre>== NumSamples * NumChannels * BitsPerSample/8</pre>
			This is the number of bytes in the data.
			You can also think of this as the size
			of the read of the subchunk following this
			number.
44	*	Data	The actual sound data.

As an example, here are the opening 72 bytes of a WAVE file with bytes shown as hexadecimal numbers:

```
52 49 46 46 24 08 00 00 57 41 56 45 66 6d 74 20 10 00 00 00 01 00 02 00 22 56 00 00 88 58 01 00 04 00 10 00 64 61 74 61 00 08 00 00 00 00 00 24 17 1e f3 3c 13 3c 14 16 f9 18 f9 34 e7 23 a6 3c f2 24 f2 11 ce 1a 0d
```

Here is the interpretation of these bytes as a WAVE soundfile:

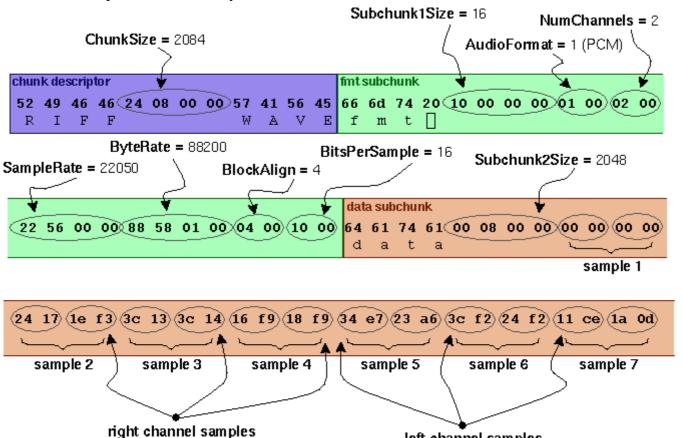

Notes:

• The default byte ordering assumed for WAVE data files is little-endian. Files written using the bigendian byte ordering scheme have the identifier RIFX instead of RIFF.

left channel samples

- The sample data must end on an even byte boundary. Whatever that means.
- 8-bit samples are stored as unsigned bytes, ranging from 0 to 255. 16-bit samples are stored as 2'scomplement signed integers, ranging from -32768 to 32767.
- There may be additional subchunks in a Wave data stream. If so, each will have a char[4] SubChunkID, and unsigned long SubChunkSize, and SubChunkSize amount of data.
- RIFF stands for *Resource Interchange File Format*.

General discussion of RIFF files:

Multimedia applications require the storage and management of a wide variety of data, including bitmaps, audio data, video data, and peripheral device control information. RIFF provides a way to store all these varied types of data. The type of data a RIFF file contains is indicated by the file extension. Examples of data that may be stored in RIFF files are:

- Audio/visual interleaved data (.AVI)
- Waveform data (.WAV)
- Bitmapped data (.RDI)
- MIDI information (.RMI)
- Color palette (.PAL)
- Multimedia movie (.RMN)
- Animated cursor (.ANI)
- A bundle of other RIFF files (.BND)

NOTE: At this point, AVI files are the only type of RIFF files that have been fully implemented using the current RIFF specification. Although WAV files have been implemented, these files are very simple, and

their developers typically use an older specification in constructing them.

For more info see http://www.ora.com/centers/gff/formats/micriff/index.htm

References:

- 1. http://www.ora.com/centers/gff/formats/micriff/index.htm (good).
- 2. http://premium.microsoft.com/msdn/library/tools/dnmult/d1/newwave.htm
- 3. http://www.lightlink.com/tjweber/StripWav/WAVE.html

craig@ccrma.stanford.edu