MACHINE LEARNING

Through Practise

G. V. V. Sharma

Contents

Introduction

This book introduces machine learning through simple examples

Chapter 1

Least Squares

1.0.1 Find the shortest distance between the lines

$$\overrightarrow{r} = (\hat{i} + 2\hat{j} + \hat{k}) + \lambda(\hat{i} - \hat{j} + \hat{k}) \text{ and}$$

$$\overrightarrow{r} = 2\hat{i} - \hat{j} - \hat{k} + \mu(2\hat{i} + \hat{j} + 2\hat{k})$$

1.0.2 Find the shortest distance between the lines

$\frac{x+1}{7} = \frac{y+1}{-6} = \frac{z+1}{1}$ and $\frac{x-3}{1} = \frac{y-5}{-2} = \frac{z-7}{1}$ **Solution:** The given lines can be written as

$$\mathbf{x} = \begin{pmatrix} -1 \\ -1 \\ -1 \end{pmatrix} + \lambda_1 \begin{pmatrix} 7 \\ -6 \\ 1 \end{pmatrix} \tag{1.1}$$

$$\mathbf{x} = \begin{pmatrix} 3 \\ 5 \\ 7 \end{pmatrix} + \lambda_2 \begin{pmatrix} 1 \\ -2 \\ 1 \end{pmatrix} \tag{1.2}$$

$$\mathbf{x_1} = \begin{pmatrix} -1 \\ -1 \\ -1 \end{pmatrix}, \mathbf{x_2} = \begin{pmatrix} 3 \\ 5 \\ 7 \end{pmatrix}, \mathbf{m_1} = \begin{pmatrix} 7 \\ -6 \\ 1 \end{pmatrix}, \mathbf{m_2} = \begin{pmatrix} 1 \\ -2 \\ 1 \end{pmatrix} \tag{1.3}$$

We first check whether the given lines are skew. The lines

$$\mathbf{x} = \mathbf{x_1} + \lambda_1 \mathbf{m_1}, \ \mathbf{x} = \mathbf{x_2} + \lambda_2 \mathbf{m_2} \tag{1.4}$$

intersect if

$$\mathbf{M}\lambda = \mathbf{x_2} - \mathbf{x_1} \tag{1.5}$$

$$\mathbf{M} \triangleq \begin{pmatrix} \mathbf{m_1} & \mathbf{m_2} \end{pmatrix} \tag{1.6}$$

$$\boldsymbol{\lambda} \triangleq \begin{pmatrix} \lambda_1 \\ -\lambda_2 \end{pmatrix} \tag{1.7}$$

$$\tag{1.8}$$

Here we have,

$$\mathbf{M} = \begin{pmatrix} 7 & 1 \\ -6 & -2 \\ 1 & 1 \end{pmatrix} \ \mathbf{x_2} - \mathbf{x_1} = \begin{pmatrix} 4 \\ 6 \\ 8 \end{pmatrix} \tag{1.9}$$

We check whether the equation (1.10) has a solution

$$\begin{pmatrix} 7 & 1 \\ -6 & -2 \\ 1 & 1 \end{pmatrix} \boldsymbol{\lambda} = \begin{pmatrix} 4 \\ 6 \\ 8 \end{pmatrix} \tag{1.10}$$

2

the augmented matrix is given by,

$$
\begin{pmatrix}
7 & 1 & \bigm| & 4 \\
-6 & -2 & \bigm| & 6 \\
1 & 1 & \bigm| & 8
\end{pmatrix}
\xleftarrow[R_3 \leftarrow R_3 - \frac{1}{7}R_1]{R_2 \leftarrow R_2 + \frac{6}{7}R_1}
\tag{1.11}
$$

$$
\begin{pmatrix}
7 & 1 & \bigm| & 4 \\
0 & -\frac{8}{7} & \bigm| & \frac{66}{7} \\
0 & \frac{6}{7} & \bigm| & -\frac{52}{7}
\end{pmatrix}
\xleftarrow{R_3 \leftarrow R_3 + \frac{3}{4}R_2}
\tag{1.12}
$$

$$
\begin{pmatrix}
2 & 3 & \bigm| & 1 \\
0 & -\frac{7}{2} & \bigm| & \frac{1}{2} \\
0 & 0 & \bigm| & -\frac{5}{14}
\end{pmatrix}
\tag{1.13}
$$

The rank of the matrix is 3. So the given lines are skew. The closest points on two skew lines defined by (1.4) are given by

$$
\mathbf{M}^\top \mathbf{M} \boldsymbol{\lambda} = \mathbf{M}^\top (\mathbf{x_2} - \mathbf{x_1})
\tag{1.14}
$$

$$
\implies
\begin{pmatrix}
7 & -6 & 1 \\
1 & -2 & 1
\end{pmatrix}
\begin{pmatrix}
7 & 1 \\
-6 & -2 \\
1 & 1
\end{pmatrix}
\boldsymbol{\lambda}
=
\begin{pmatrix}
7 & -6 & 1 \\
1 & -2 & 1
\end{pmatrix}
\begin{pmatrix}
4 \\
6 \\
8
\end{pmatrix}
\tag{1.15}
$$

$$
\implies
\begin{pmatrix}
86 & 20 \\
20 & 6
\end{pmatrix}
\boldsymbol{\lambda}
=
\begin{pmatrix}
0 \\
0
\end{pmatrix}
\tag{1.16}
$$

The augmented matrix of the above equation (1.16) is given by,

$$
\begin{pmatrix} 86 & 20 & \bigm| & 0 \\ 20 & 6 & \bigm| & 0 \end{pmatrix} \xleftrightarrow{R_2 \leftarrow R_2 - \frac{10}{43} R_1} \begin{pmatrix} 86 & 20 & \bigm| & 0 \\ \\ 0 & \frac{58}{43} & \bigm| & 0 \end{pmatrix} \xleftrightarrow[R_2 \leftarrow \frac{43}{58} R_2]{R_1 \leftarrow \frac{1}{86} \left(R_1 - \frac{430}{29} R_2 \right)}
\tag{1.17}
$$

$$
\begin{pmatrix} 1 & 0 & \bigm| & 0 \\ \\ 0 & 1 & \bigm| & 0 \end{pmatrix}
\tag{1.18}
$$

yielding

$$
\begin{pmatrix} \lambda_1 \\ -\lambda_2 \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \end{pmatrix}
\tag{1.19}
$$

The closest points $\mathbf{A}$ on line l_1 and $\mathbf{B}$ on line l_2 are given by,

$$
\mathbf{A} = \mathbf{x_1} + \lambda_1 \mathbf{m_1} = \begin{pmatrix} -1 \\ -1 \\ -1 \end{pmatrix}
\tag{1.20}
$$

$$
\mathbf{B} = \mathbf{x_2} + \lambda_2 \mathbf{m_2} = \begin{pmatrix} 3 \\ 5 \\ 7 \end{pmatrix}
\tag{1.21}
$$

The minimum distance between the lines is given by

$$\|\mathbf{B} - \mathbf{A}\| = \left\| \begin{pmatrix} 4 \\ 6 \\ 8 \end{pmatrix} \right\| = 2\sqrt{29} \tag{1.22}$$
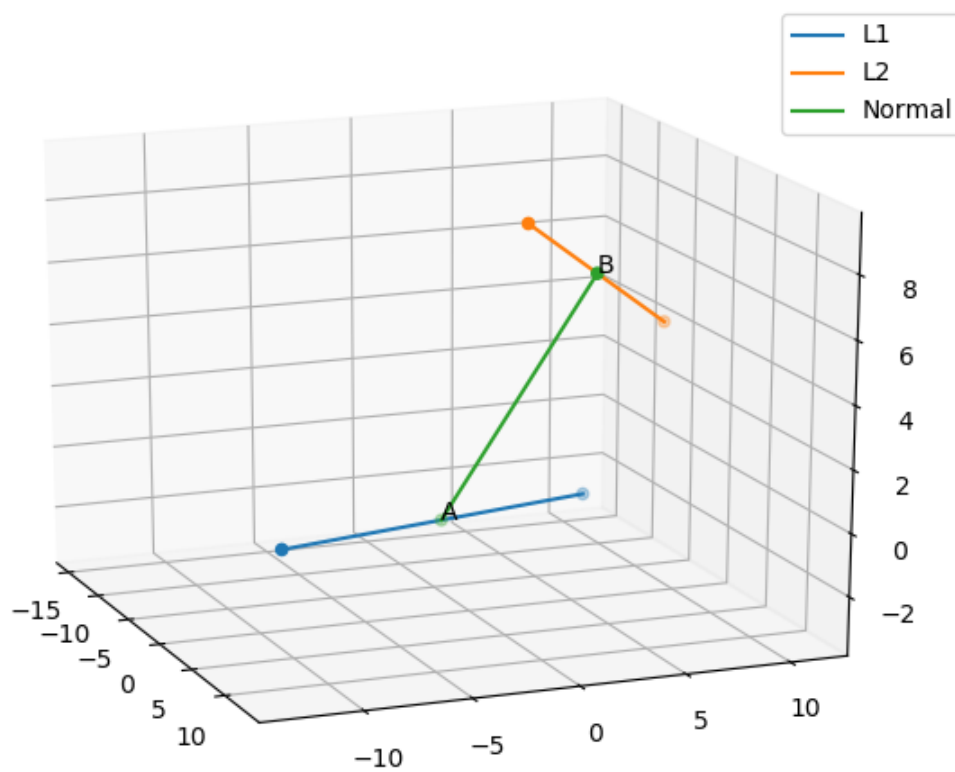

Figure 1.1:

1.0.3 Find the shortest distance between the lines whose vector equations are

$$\mathbf{x} = \begin{pmatrix} 1 \\ 2 \\ 3 \end{pmatrix} + \lambda_1 \begin{pmatrix} 1 \\ -3 \\ 2 \end{pmatrix} \tag{1.23}$$

and

$$\mathbf{x} = \begin{pmatrix} 4 \\ 5 \\ 6 \end{pmatrix} + \lambda_2 \begin{pmatrix} 2 \\ 3 \\ 1 \end{pmatrix} \tag{1.24}$$

Solution: In this case,

$$\mathbf{x_1} = \begin{pmatrix} 1 \\ 2 \\ 3 \end{pmatrix} \quad \mathbf{x_2} = \begin{pmatrix} 4 \\ 5 \\ 6 \end{pmatrix} \quad \mathbf{m_1} = \begin{pmatrix} 1 \\ -3 \\ 2 \end{pmatrix} \quad \mathbf{m_2} = \begin{pmatrix} 2 \\ 3 \\ 1 \end{pmatrix} \tag{1.25}$$

To check whether (A.3) has a solution in λ, we use the augmented matrix.

$$\begin{pmatrix} 1 & 2 & 3 \\ -3 & 3 & 3 \\ 2 & 1 & 3 \end{pmatrix} \xleftrightarrow{R_2 \leftarrow R_2 + 3R_1} \begin{pmatrix} 1 & 2 & 3 \\ 0 & 9 & 12 \\ 2 & 1 & 3 \end{pmatrix} \tag{1.26}$$

$$\xleftrightarrow{R_3 \leftarrow R_3 - 2R_1} \begin{pmatrix} 1 & 2 & 3 \\ 0 & 9 & 12 \\ 0 & -3 & -3 \end{pmatrix} \tag{1.27}$$

$$\xleftrightarrow{R_3 \leftarrow 3R_3 + R_2} \begin{pmatrix} 1 & 2 & 3 \\ 0 & 9 & 12 \\ 0 & 0 & 3 \end{pmatrix} \tag{1.28}$$

Clearly, the rank of this matrix is 3, and therefore, the lines are skew. Substituting

from (1.25) in (A.6) and forming the augmented matrix,

$$\begin{pmatrix} 14 & -5 & 0 \\ -5 & 14 & 18 \end{pmatrix} \xleftarrow{R_1 \leftarrow R_1 + R_2} \begin{pmatrix} 9 & 9 & 18 \\ -5 & 14 & 18 \end{pmatrix} \tag{1.29}$$

$$\xleftarrow{R_1 \leftarrow \frac{R_1}{9}} \begin{pmatrix} 1 & 1 & 2 \\ -5 & 14 & 18 \end{pmatrix} \tag{1.30}$$

$$\xleftarrow{R_2 \leftarrow R_2 + 5R_1} \begin{pmatrix} 1 & 1 & 2 \\ 0 & 19 & 28 \end{pmatrix} \tag{1.31}$$

$$\xleftarrow{R_1 \leftarrow 19R_1 - R_2} \begin{pmatrix} 19 & 0 & 10 \\ 0 & 19 & 28 \end{pmatrix} \tag{1.32}$$

$$\xleftarrow[R_2 \leftarrow \frac{R_2}{9}]{R_1 \leftarrow \frac{R_1}{19}} \begin{pmatrix} 1 & 0 & \frac{10}{19} \\ 0 & 1 & \frac{28}{19} \end{pmatrix} \tag{1.33}$$

$$\implies \lambda = \frac{1}{19} \begin{pmatrix} 10 \\ 28 \end{pmatrix} \tag{1.34}$$

Hence, using (A.5) and substituing into (A.7) and (A.8),

$$\mathbf{A} = \frac{1}{19} \begin{pmatrix} 29 \\ 8 \\ 77 \end{pmatrix} \quad \mathbf{B} = \frac{1}{19} \begin{pmatrix} 20 \\ 11 \\ 86 \end{pmatrix} \tag{1.35}$$

Thus, the required distance is

$$\| \mathbf{B} - \mathbf{A} \| = \frac{\sqrt{9^2 + 3^2 + (-9)^2}}{19} = \frac{3}{\sqrt{19}} \tag{1.36}$$

The situation is depicted in Fig. 1.2.
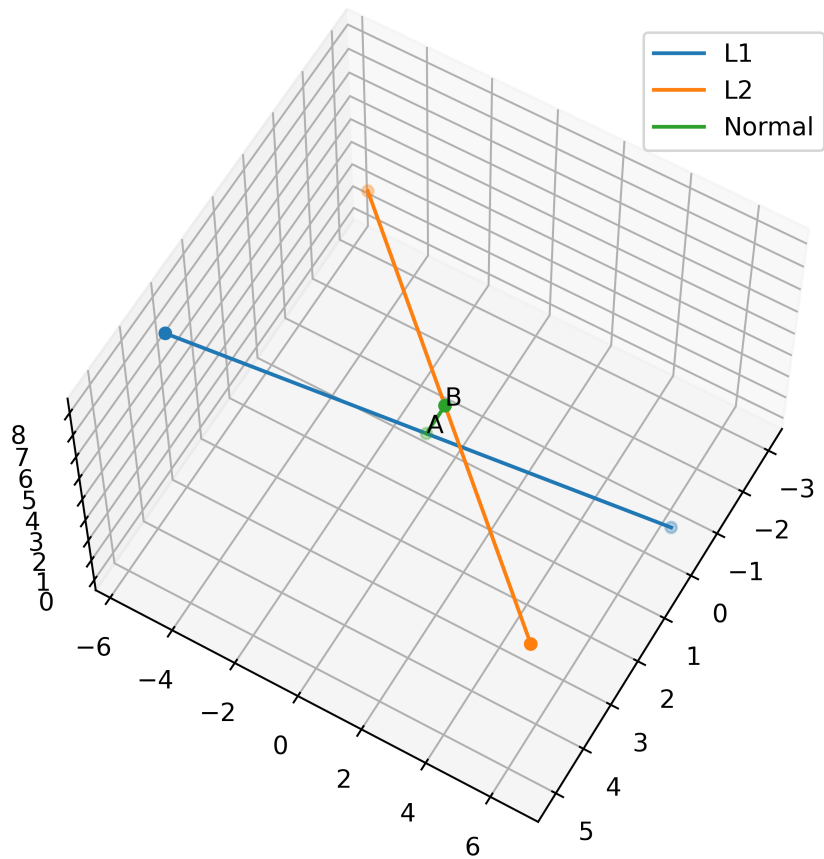
Figure 1.2: AB is the required shortest distance.

1.0.4

1.0.5 Find the shortest distance between the lines l_1 and l_2 whose vector equations are

$$\overrightarrow{r} = \hat{i} + \hat{j} + \lambda(2\hat{i} - \hat{j} + \hat{k}) \text{ and } \overrightarrow{r} = 2\hat{i} + \hat{j} - \hat{k} + \mu(3\hat{i} - 5\hat{j} + 2\hat{k}). \textbf{ Solution: } \text{The givne}$$

lines can be written in vector form as

$$\mathbf{x} = \begin{pmatrix} 1 \\ 1 \\ 0 \end{pmatrix} + \lambda_1 \begin{pmatrix} 2 \\ -1 \\ 1 \end{pmatrix}, \mathbf{x} = \begin{pmatrix} 2 \\ 1 \\ -1 \end{pmatrix} + \lambda_2 \begin{pmatrix} 3 \\ -5 \\ 2 \end{pmatrix} \tag{1.37}$$

$$\implies \mathbf{x_1} = \begin{pmatrix} 1 \\ 1 \\ 0 \end{pmatrix}, \mathbf{x_2} = \begin{pmatrix} 2 \\ 1 \\ -1 \end{pmatrix}, \mathbf{m_1} = \begin{pmatrix} 2 \\ -1 \\ 1 \end{pmatrix}, \mathbf{m_2} = \begin{pmatrix} 3 \\ -5 \\ 2 \end{pmatrix} \tag{1.38}$$

We first check whether the given lines are skew. The lines

$$\mathbf{x} = \mathbf{x_1} + \lambda_1 \mathbf{m_1}, \ \mathbf{x} = \mathbf{x_2} + \lambda_2 \mathbf{m_2} \tag{1.39}$$

intersect if

$$\mathbf{M}\boldsymbol{\lambda} = \mathbf{x_2} - \mathbf{x_1} \tag{1.40}$$

$$\mathbf{M} \triangleq \begin{pmatrix} \mathbf{m_1} & \mathbf{m_2} \end{pmatrix} \tag{1.41}$$

$$\boldsymbol{\lambda} \triangleq \begin{pmatrix} \lambda_1 \\ -\lambda_2 \end{pmatrix} \tag{1.42}$$

$$\tag{1.43}$$

Here we have,

$$\mathbf{M} = \begin{pmatrix} 2 & 3 \\ -1 & -5 \\ 1 & 2 \end{pmatrix}, \mathbf{x_2} - \mathbf{x_1} \qquad = \begin{pmatrix} 1 \\ 0 \\ -1 \end{pmatrix} \tag{1.44}$$

10

We check whether the equation (1.45) has a solution

$$\begin{pmatrix} 2 & 3 \\ -1 & -5 \\ 1 & 2 \end{pmatrix} \boldsymbol{\lambda} = \begin{pmatrix} 1 \\ 0 \\ -1 \end{pmatrix} \tag{1.45}$$

The augmented matrix is given by,

$$\left(\begin{array}{cc|c} 2 & 3 & 1 \\ -1 & -5 & 0 \\ 1 & 2 & -1 \end{array} \right) \xleftarrow[R_3 \leftarrow R_3 - \frac{1}{2}R_1]{R_2 \leftarrow R_2 + \frac{1}{2}R_1} \left(\begin{array}{cc|c} 2 & 3 & 1 \\ 0 & -\frac{7}{2} & \frac{1}{2} \\ 0 & \frac{1}{2} & -\frac{3}{2} \end{array} \right) \tag{1.46}$$

$$\xleftarrow{R_3 \leftarrow R_3 + 7R_2} \left(\begin{array}{cc|c} 2 & 3 & 1 \\ 0 & -\frac{7}{2} & \frac{1}{2} \\ 0 & 0 & -10 \end{array} \right) \tag{1.47}$$

The rank of the matrix is 3. So the given lines are skew. The closest points on two

skew lines defined by (1.39) are given by

$$\mathbf{M}^\top \mathbf{M} \boldsymbol{\lambda} = \mathbf{M}^\top \left(\mathbf{x_2} - \mathbf{x_1} \right) \tag{1.48}$$

$$\implies \begin{pmatrix} 2 & -1 & 1 \\ 3 & -5 & 2 \end{pmatrix} \begin{pmatrix} 2 & 3 \\ -1 & -5 \\ 1 & 2 \end{pmatrix} \boldsymbol{\lambda} = \begin{pmatrix} 2 & -1 & 1 \\ 3 & -5 & 2 \end{pmatrix} \begin{pmatrix} 1 \\ 0 \\ -1 \end{pmatrix} \tag{1.49}$$

$$\implies \begin{pmatrix} 6 & 13 \\ 13 & 38 \end{pmatrix} \boldsymbol{\lambda} = \begin{pmatrix} 1 \\ 1 \end{pmatrix} \tag{1.50}$$

The augmented matrix of the above equation (1.50) is given by,

$$\left(\begin{array}{cc|c} 6 & 13 & 1 \\ 13 & 38 & 1 \end{array} \right) \xleftarrow{R_2 \leftarrow R_2 - \frac{13}{6} R_1} \left(\begin{array}{cc|c} 6 & 13 & 1 \\ \\ 0 & \frac{59}{6} & -\frac{7}{6} \end{array} \right) \tag{1.51}$$

$$\xleftarrow{R_1 \leftarrow R_1 - \frac{78}{59} R_2} \left(\begin{array}{cc|c} 6 & 0 & \frac{150}{59} \\ \\ 0 & \frac{59}{6} & -\frac{7}{6} \end{array} \right) \tag{1.52}$$

So, we get

$$\begin{pmatrix} \lambda_1 \\ -\lambda_2 \end{pmatrix} = \begin{pmatrix} \frac{25}{59} \\ \\ -\frac{7}{59} \end{pmatrix} \tag{1.53}$$

The closest points $\mathbf{A}$ on line l_1 and $\mathbf{B}$ on line l_2 are given by,

$$\mathbf{A} = \mathbf{x_1} + \lambda_1 \mathbf{m_1} = \frac{1}{59} \begin{pmatrix} 109 \\ 34 \\ 25 \end{pmatrix} \tag{1.54}$$

$$\mathbf{B} = \mathbf{x_2} + \lambda_2 \mathbf{m_2} = \frac{1}{59} \begin{pmatrix} 139 \\ 24 \\ -45 \end{pmatrix} \tag{1.55}$$

The minimum distance between the lines is given by,

$$\|\mathbf{B} - \mathbf{A}\| = \left\| \frac{1}{59} \begin{pmatrix} 30 \\ -10 \\ -70 \end{pmatrix} \right\| = \frac{10}{\sqrt{59}} \tag{1.56}$$
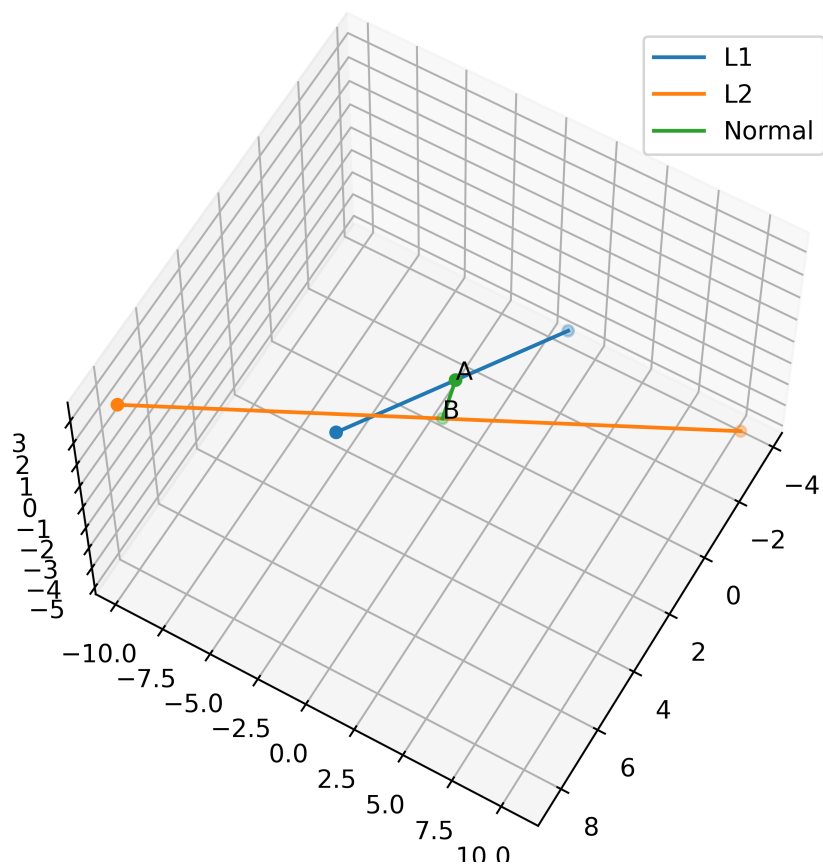
See Fig. 1.3.

Figure 1.3:

Chapter 2

PT-100

This chapter illustrates the use of the least squares method in finding the voltage across the PT-100 RTD (Resistance Temperature Detector) as a function of temperature.

2.1. Training Data

The training data gathered by the PT-100 to train the Arduino is shown in Table 2.1.

Temperature (°C)	Voltage (V)
66	1.85
27	1.76
2	1.66
23	1.72
56	1.82
34	1.76
33	1.75
31	1.74

Table 2.1: Training data.

The C++ source file

pt100/codes/data.cpp

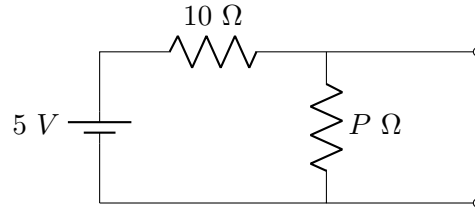was used along with *platformio* to drive the Arduino. The effective schematic circuit diagram is shown in Figure 2.1.

Figure 2.1: Schematic Circuit Diagram to Measure the Output of PT-100 (P).

2.2. Model

For the PT-100, we use the Callendar-Van Dusen equation

$$V(T) = V(0)\left(1 + AT + BT^2\right) \tag{2.1}$$

$$\implies c = \mathbf{n}^\top \mathbf{x} \tag{2.2}$$

where

$$c = V(T), \ \mathbf{n} = V(0)\begin{pmatrix} 1 \\ A \\ B \end{pmatrix}, \ \mathbf{x} = \begin{pmatrix} 1 \\ T \\ T^2 \end{pmatrix} \tag{2.3}$$

For multiple points, (2.2) becomes

$$\mathbf{X}^\top \mathbf{n} = \mathbf{C} \tag{2.4}$$

where

$$\mathbf{X} = \begin{pmatrix} 1 & 1 & \dots & 1 \\ T_1 & T_2 & \dots & T_n \\ T_1^2 & T_2^2 & \dots & T_n^2 \end{pmatrix} \tag{2.5}$$

$$\mathbf{C} = \begin{pmatrix} V(T_1) \\ V(T_2) \\ \vdots \\ V(T_n) \end{pmatrix} \tag{2.6}$$

and $\mathbf{n}$ is the unknown.

2.3. Solution

We approximate $\mathbf{n}$ by using the least sqaures method. The Python code `codes/lsq.py` solves for $\mathbf{n}$.

The calculated value of $\mathbf{n}$ is

$$\mathbf{n} = \begin{pmatrix} 1.6547 \\ 3.199 \times 10^{-3} \\ -3.9599 \times 10^{-6} \end{pmatrix} \tag{2.7}$$

The approximation is shown in Fig. 2.2.

Thus, the approximate model is given by

$$V(T) = 1.6547 + \left(3.199 \times 10^{-3}\right) T$$

$$- \left(3.9599 \times 10^{-6}\right) T^2 \tag{2.8}$$
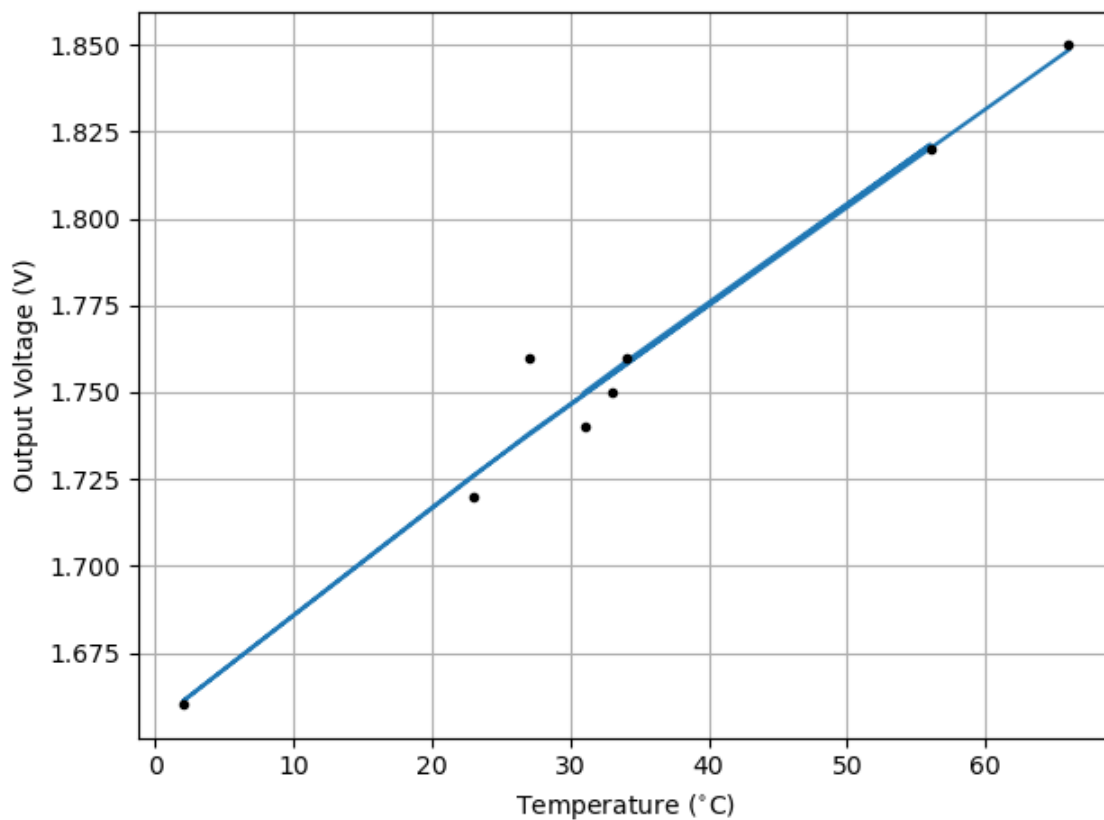
Figure 2.2: Training the model.

Notice in (2.8) that the coefficient of T^2 is negative, and hence the governing function is strictly concave. Hence, we cannot use gradient descent methods to solve this problem.

2.4. Validation

The validation dataset is shown in Table 2.2. The results of the validation are shown in Fig. 2.3.

18

Temperature (°C)	Voltage (V)
4	1.67
25	1.73
61	1.83
35	1.77

Table 2.2: Validation data.

Figure 2.3: Validating the model.

Chapter 3

K-Means Method

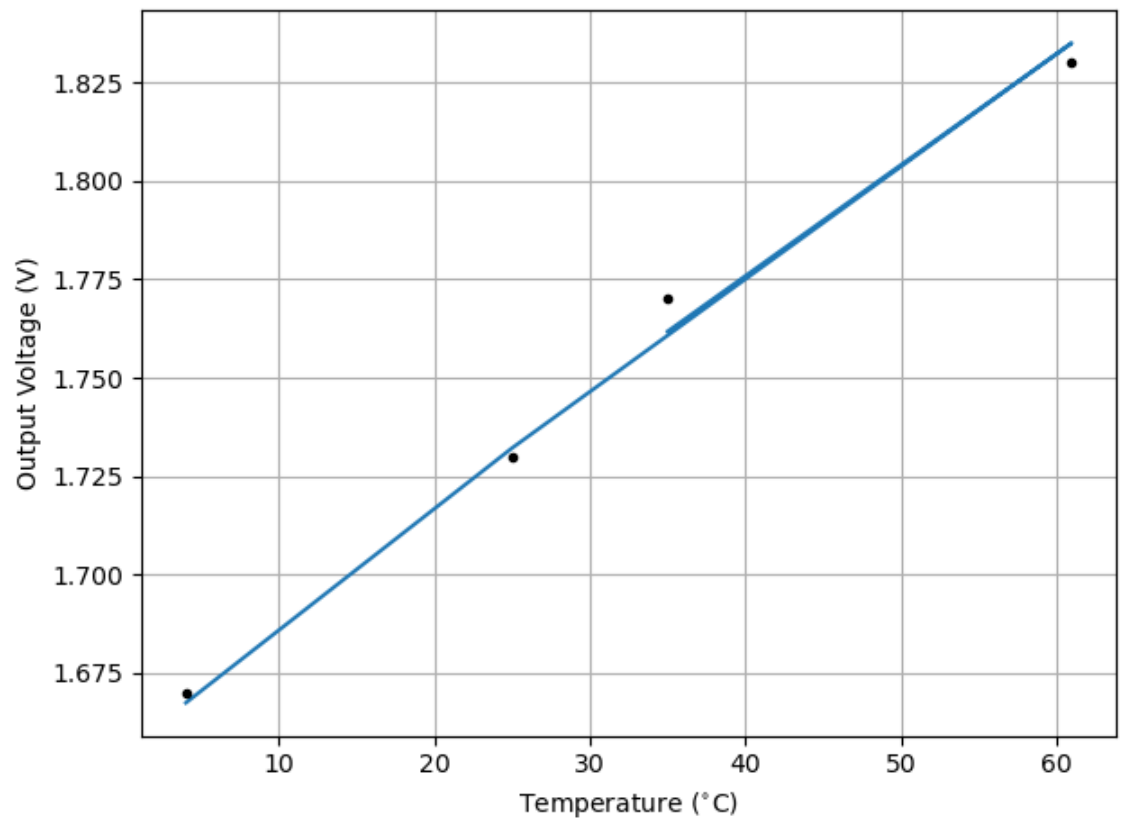## 3.1. Introduction

We test the utility of the K-means algorithm in assigning grades as compared to estimating the grades using the standard normal distribution. We consider the scores of $N = 94$ students who have taken a course in the Indian Institute of Technology, Hyderabad (IITH) as our dataset.

3.2. Fitting a Gaussian Curve

Since N is not very large, given the scores of each student x_i, $1 \leq i \leq N$, we can compute the population mean and population variance as

$$\mu = E\left[x\right] \tag{3.1}$$

$$\sigma^2 = E\left[(x - \mu)^2\right] \tag{3.2}$$

We assume that the scores $x \sim N\left(\mu, \sigma^2\right)$. Thus, we compute the Z-scores as

$$Z = \frac{x - \mu}{\sigma} \qquad (3.3)$$

The grades are assigned as per Table 3.1.

Interval	Grade
$(-\infty, \text{-3}]$	F
(-3, -2]	D
(-2, 1]	C
(-1, 0]	B-
(0, 1]	B
(1, 2]	A-
(2, 3]	A
$(3, \infty)$	A+

Table 3.1: Grading Scheme.

The Python code

grading/codes/grades_norm.py

takes the given input population dataset

grading/codes/marks.xlsx

and assigns grades appropriately. The grades are output to

grading/codes/grades_norm.xlsx

22

3.3. K-Means Clustering

K-Means clustering is an unsupervised classification model, which attempts to cluster unlabeled data in order to gain more structure from it.

We frame this requirement as an optimization problem. For a set of data points $\{\mathbf{x}_i\}_{i=1}^N$ and means $\{\mu_i\}_{i=1}^K$, we define for $1 \leq n \leq N, \; 1 \leq k \leq K$,

$$r_{nk} \triangleq \begin{cases} 1 & \arg\min_j \|\mathbf{x}_n - \mu_j\| = k \\ 0 & \text{otherwise} \end{cases} \tag{3.4}$$

Thus, we need to find points μ_k minimizing the cost function

$$J \triangleq \sum_{n=1}^N \sum_{k=1}^K r_{nk} \|\mathbf{x}_n - \mu_k\|^2 \tag{3.5}$$

Clearly, (3.5) is a quadratic function of μ_k. Differentiating with respect to μ_k and setting the derivative to zero, we get

$$\sum_{n=1}^N 2\mu_k r_{nk} (\mathbf{x}_n - \mu_k) = 0 \tag{3.6}$$

$$\implies \mu_{\mathbf{k}} = \frac{\sum_{n=1}^N r_{nk}\mathbf{x}_n}{\sum_{n=1}^N r_{nk}} = \frac{\mathbf{X}\mathbf{r}_k}{\mathbf{1}^\top \mathbf{r}_k} \tag{3.7}$$

where

$$\mathbf{X} \triangleq \begin{pmatrix} \mathbf{x}_1 & \mathbf{x}_2 & \dots & \mathbf{x}_n \end{pmatrix} \tag{3.8}$$

$$\mathbf{r}_k \triangleq \begin{pmatrix} r_{1k} & r_{2k} & \dots & r_{nk} \end{pmatrix}^\top \tag{3.9}$$

$$\mathbf{1} \triangleq \begin{pmatrix} 1 & 1 & \dots & 1 \end{pmatrix}^\top \tag{3.10}$$

From (3.7), we see that the optimum is attained when μ_k is set to the expectation of the $\mathbf{x}_n$ with respect to r_{nk}.

Thus, the K-means algorithm is essentially an *EM algorithm*, where each iteration consists of two steps.

1. *E Step*: Calculate the K-expected values

$$\tilde{\mu}_k \triangleq \frac{\sum_{n=1}^{N} r_{nk} \mathbf{x}_n}{\sum_{n=1}^{N} r_{nk}} \tag{3.11}$$

   for $1 \leq k \leq K$.

2. *M Step*: Assign $\mu_k \leftarrow \tilde{\mu}_k$ for $1 \leq k \leq K$.

3.4. Results

The grade distribution using each method is shown in Fig. 3.1 and Fig. 3.2. Based on the results, we can make the following observations:

1. Grading using the Gaussian distribution would lead to many students failing the course, while this is not the case using the K-means algorithm.

2. Using the Gaussian distribution is quite unfair, since there could be students with quite similar marks but with a difference in grade, just because they lie on either side of a predefined boundary.

3. The K-means algorithm allows for better decision boundaries, depending on how skewed the performance of the students is, accordingly to the difficulty of the course.

4. Unlike the Gaussian distribution, the K-means algorithm can be used for a fairer
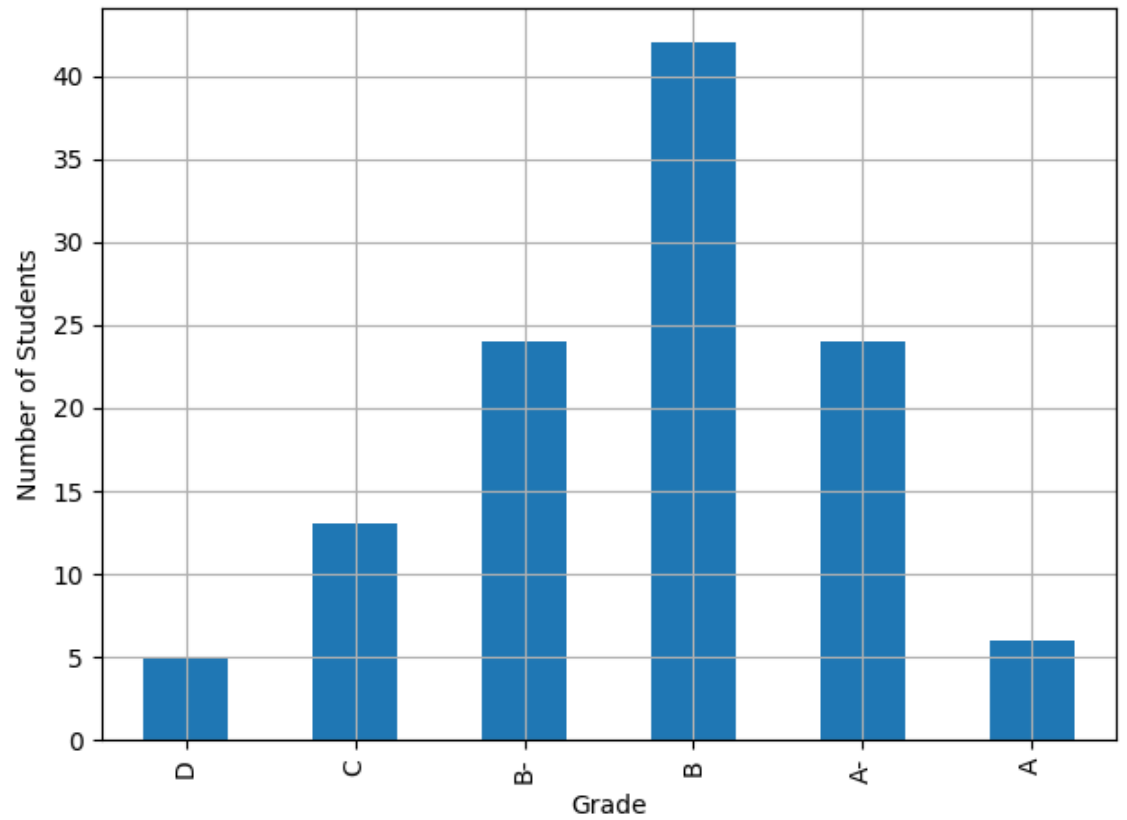
Figure 3.1: Grade distribution using a Gaussian curve.

assignment of the grades, no matter how skewed the performance of students in a course is.
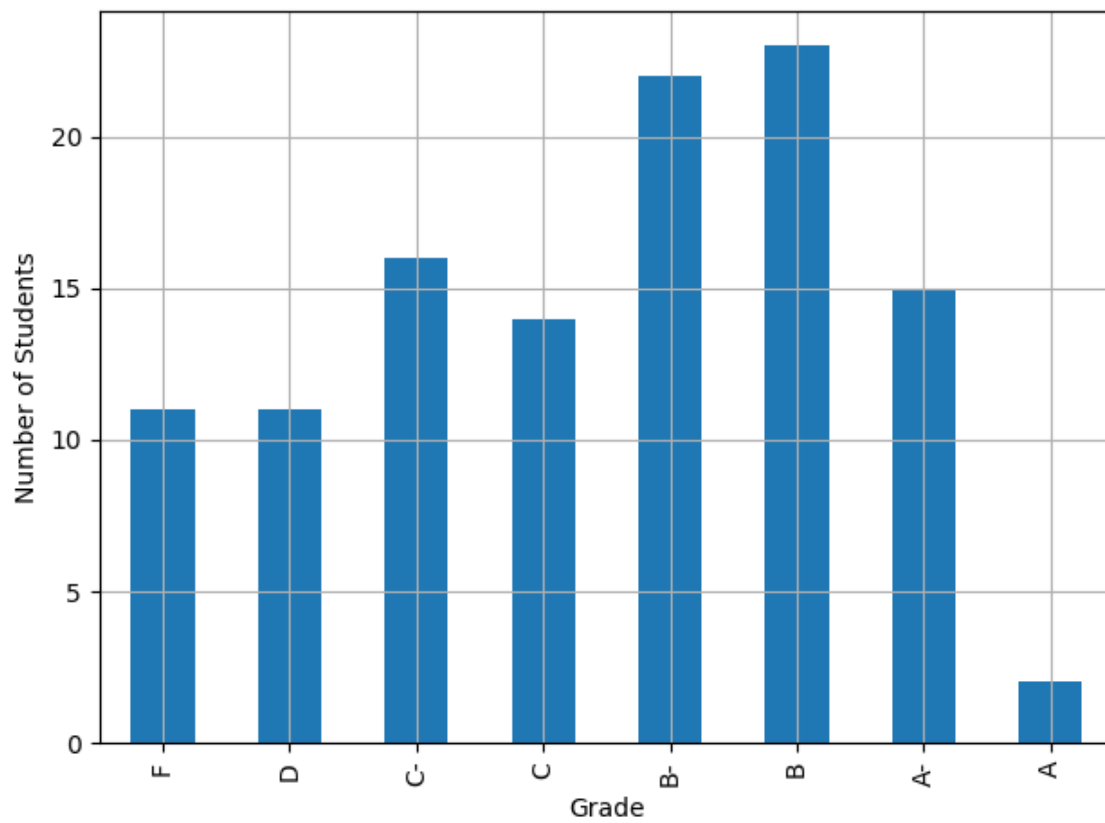
Figure 3.2: Grade distribution using the K-means algorithm.

Chapter 4

Beacon Tracking

This chpater demonstrates the use of machine learning in beacon tracking using an unmanned ground vehicle (UGV) and a WiFi-enabled microcontroller such as the Vaman-ESP32.

4.1. Components

Component	Value	Quantity
USB-OTG		1
Vaman	LC	1
USB-UART		1
UGV Kit		1
Battery	12 V	1
Android Phone		1

Table 4.1: Components Required for Beacon Tracking Using the Vaman-ESP32.

4.2. Procedure

1. Make the connections as per the wiring diagram in Fig. 4.1.

2. Connect the Vaman-ESP32 board to your Android Phone using USB-OTG.

3. Generate the firmware by entering the following commands.

   cd ugv−beacon/codes

   pio run

4. Go to ArduinoDroid and select

   Actions → Upload → Upload Precompiled

   and choose the firmware file at

   ugv−beacon/codes/.pio/build/firmware.hex

5. Now put the phone at a reasonable distance from the UGV with no obstacles in the way and then turn on the hotspot. The UGV should travel towards the phone and stop near it.

4.3. Working

4.3.1. Underlying Principles

1. To estimate (radial) distance to beacon, we use its signal strength. For WiFi, this is the **Received Signal Strength Indicator** (RSSI).

2. The RSSI (R dBm) at distance d metres is given by

$$R(d) = R(1) - 10 \log_{10}(d) \tag{4.1}$$

Figure 4.1: Wiring Diagram for Beacon Tracking.
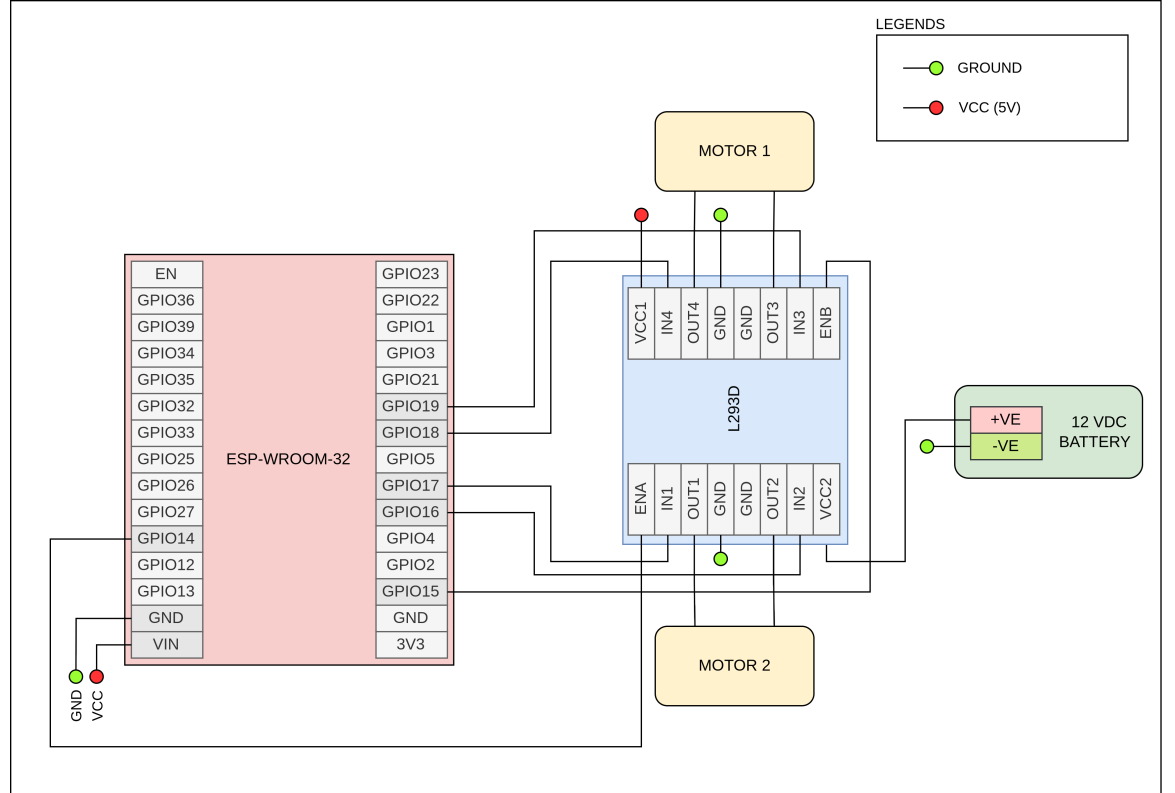
3. Clearly, $R(d)$ is a convex function. Hence, we can use gradient descent.

4.3.2. Algorithm Description

Please note that this is a generic description of the algorithm employed. Refer to

ugv−beacon/codes/src/main.cpp

for a more verbose implementation.

1. If the UGV is close enough to the beacon, *terminate.*

2. Take measurements at various points on a straight line.

3. Based on these measurements, decide the next move of the UGV, and recurse till the UGV is close enough to the beacon.

4.4. Observations

1. The UGV eventually converges close to the beacon (here, the hotspot).

2. However, if there are a lot of nearby obstacles, the UGV may not converge close to the location of the beacon. It may either get physically blocked by the beacon or the signal interference may be too high.

Chapter 5

TinyML

5.1. Gesture Recognition

This section illustrates a use case of TinyML in gesture detection. A video demonstration of the experiment described below is present in the README of the repository.

5.1.1. Component

Component	Value	Quantity
USB-OTG		1
Vaman	LC	1
USB-UART		1
Android Phone		1

Table 5.1: Components Required for Gesture Detection Using TinyML.

5.1.2. Training Data

1. Download the Sensor Logger app from Google Play Store.

2. In the settings on the app, set the sampling frequency up to 100 Hz, and turn off

logging uncalibrated data. Record from the accelerometer and gyroscope only.

3. Press `Start Recording`, and perform the gestures 100 times to gather the data.

4. Press `Stop Recording` when you are done and export the recordings as a zip file.

5. Unzip and rename the CSV files appropriately in

tiny−ml/gesture/data

6. In the same directory, run the following commands:

gcc −O2 format.c

./a.out

7. Two more CSV files `train.csv` and `test.csv` will be created in the same directory.

5.1.3. Model

1. Run the Python script

tiny−ml/gesture/codes/bin_class.py

2. Tweak the neural network parameters in this file if the accuracy is not satisfactory.

3. The neural network model will be present as a bytestream in

tiny−ml/gesture/codes/client/src/gesture_model.h

5.1.4. Implementation

1. Find the IP address of your phone by using the `ifconfig` command.

2. In the Sensor Logger app, set the HTTP Push URL to

> http://<IP>:5000/gesture

in the app settings. Enable the HTTP Push feature.

3. Start the server with the following commands.

> cd tiny−ml/gesture/codes/server
>
> flask run −−host <IP>

4. Compile and upload the *platformio* project in

> tiny−ml/gesture/codes/client

to the Vaman-ESP32 using USB-UART.

5. Attach a serial monitor to the terminal with the following command:

> pio device monitor −b 115200

6. Start recording in the Sensor Logger app and perform the gestures. Verify whether the model works as intended.

7. Implement a decade counter controlled via gesture detection.

5.2. Gesture Controlled Seven Segment

This section demonstrates controlling seven segment display with the Gyroscope sensor present on the mobile.

5.2.1. Commponents

Component	Value	Quantity
Resistor	220 Ohm	1
Vaman	LC	1
Seven Segment Display		1
USB-UART		1
Jumper Wires	F-M	10
Bread board		1

Table 5.3: Components

5.2.2. Setup

1. Install the apk on Mobile, this application is required for accessing the sensor on mobile and send the sensor data to the vaman board

   ```
   cd tiny−ml/gesture−sevenseg

   Click on the apk to Install and give necessary permissions
   ```

2. Execute the Following code

   ```
   cd tiny−ml/gesture−sevenseg/codes/sevenseg

   pio run

   pio run −t upload
   ```

5.2.3. Connections

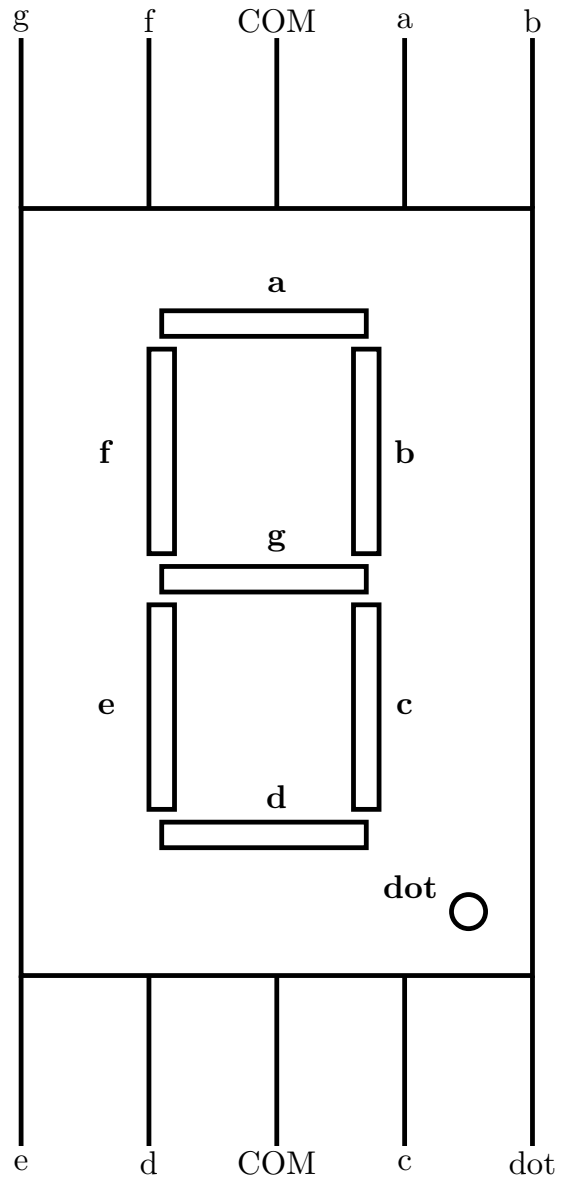1. Pin diagram of seven segment is shown in Fig. 5.1

Figure 5.1: Seven Segment pins

2. Connect the seven segment to the vaman as shown in Table 5.5

3. After uploading the code connect the vaman ip address to mobile application

VAMAN	32	32	25	26	27	14	12
Display	a	b	c	d	e	f	g

Table 5.5: Connections

> ifconfig
>
> nmap −sn 192.168.x.0/24

4. Consider 192.168.x.0 as example and replace the ip address with the one displayed for ifconfig address with "x".

5. Type IP address displayed for vaman board on the mobile application

6. Then click on start on the mobile application

5.2.4. Execution

1. Now tilt the mobile for the change in the seven segment display

2. When mobile is tilted Forward 1 is displayed on the seven segment display

3. When mobile is tilted Left 2 is displayed on the seven segment display

4. When mobile is tilted Right 3 is displayed on the seven segment display

5. When mobile is tilted Back 4 is displayed on the seven segment display

6. When there is no movement then 0 is displayed which indicates stop

7. Repeat the above process for controlling the Toy car using the Gyroscope sensor

> cd tiny−ml/gesture−sevenseg/codes/toycar

```
pio run

pio run −t upload
```

5.3. Gesture Controlled UGV

This section illustrates a use case of TinyML in controlling an unmanned ground vehicle (UGV). A video demonstration of the experiment described below is linked in the README of the repository.

5.3.1. Components

Component	Value	Quantity
USB-OTG		1
Vaman	LC	1
USB-UART		1
UGV Kit		1
Battery	12 V	1
Android Phone		1

Table 5.6: Components Required for Controlling the UGV Using TinyML.

5.3.2. Training Data

1. Download the Sensor Logger app from Google Play Store.

2. In the settings on the app, set the sampling frequency to maximum, and turn off logging uncalibrated data. Record from the device orientation sensor only.

3. Press `Start Recording`, and perform the gestures 100 times to gather the data.

4. Press `Stop Recording` when you are done and export the recordings as a zip file.

5. Unzip and rename the CSV files appropriately in

tiny−ml/ugv/data

6. In the same directory, run the following commands:

gcc −O2 format.c

./a.out

7. Two more CSV files `train.csv` and `test.csv` will be created in the same directory.

5.3.3. Model

1. Run the Python script

tiny−ml/ugv/codes/multi_class.py

2. Tweak the neural network parameters in this file if the accuracy is not satisfactory.

3. The neural network model will be present as a bytestream in

tiny−ml/ugv/codes/client/src/gesture_model.h

5.3.4. Implementation

1. Find the IP address of your phone by using the `ifconfig` command.

2. In the Sensor Logger app, set the HTTP Push URL to

```
http://<IP>:5000/ugv
```

in the app settings. Enable the HTTP Push feature.

3. Run the server with the following commands.

```
cd tiny−ml/ugv/codes/server
flask run −−host <IP>
```

4. Compile and upload the *platformio* project in

```
tiny−ml/ugv/codes/client
```

to the Vaman-ESP32 using USB-UART.

5. Attach a serial monitor to the terminal with the following command:

```
pio device monitor −b 115200
```

6. Start recording in the Sensor Logger app and perform the gestures. Verify whether the model works as intended.

7. Detach the USB-UART from the Vaman-ESP32, and make connections to the inputs of the L293 Motor Driver onboard the assembled UGV as per Table 5.7.

Vaman-ESP32	L293
14	EN_A
15	EN_B
16	MA_1
17	MA_2
18	MB_1
19	MB_2
5V	VCC
GND	GND

Table 5.7: Connections Between Vaman-ESP32 and L293 Motor Driver.

Appendix A

Three Dimensions

A.1. The lines

$$\mathbf{x} = \mathbf{x_1} + \lambda_1 \mathbf{m_1} \tag{A.1}$$

$$\mathbf{x} = \mathbf{x_2} + \lambda_2 \mathbf{m_2} \tag{A.2}$$

intersect if

$$\mathbf{M}\boldsymbol{\lambda} = \mathbf{x_2} - \mathbf{x_1} \tag{A.3}$$

where

$$\mathbf{M} \triangleq \begin{pmatrix} \mathbf{m_1} & \mathbf{m_2} \end{pmatrix} \tag{A.4}$$

$$\boldsymbol{\lambda} \triangleq \begin{pmatrix} \lambda_1 \\ -\lambda_2 \end{pmatrix} \tag{A.5}$$

A.2. The closest points on two skew lines are given by

$$\mathbf{M}^\top \mathbf{M} \boldsymbol{\lambda} = \mathbf{M}^\top \left(\mathbf{x_2} - \mathbf{x_1} \right) \tag{A.6}$$

Solution: For the lines defined in (A.1) and (A.2), Suppose the closest points on both lines are

$$\mathbf{A} = \mathbf{x_1} + \lambda_1 \mathbf{m_1} \tag{A.7}$$

$$\mathbf{B} = \mathbf{x_2} + \lambda_2 \mathbf{m_2} \tag{A.8}$$

Then, AB is perpendicular to both lines, hence

$$\mathbf{m_1}^\top (\mathbf{A} - \mathbf{B}) = 0 \tag{A.9}$$

$$\mathbf{m_2}^\top (\mathbf{A} - \mathbf{B}) = 0 \tag{A.10}$$

$$\implies \mathbf{M}^\top (\mathbf{A} - \mathbf{B}) = \mathbf{O} \tag{A.11}$$

Using (A.7) and (A.8) in (A.11),

$$\mathbf{M}^\top (\mathbf{x_1} - \mathbf{x_2} + \mathbf{M}\boldsymbol{\lambda}) = \mathbf{0} \tag{A.12}$$

$$\tag{A.13}$$

yielding A.6.