

AIM: To simulate and compare the performance of NB-IoT and LTE-M communication technologies in terms of Throughput (Mbps), Latency (ms), and Packet Delivery Ratio (%) using MATLAB.

Objective:

To evaluate and compare the Throughput (Mbps) performance of NB-IoT and LTE-M under varying network conditions.

Procedure:

1. Define system parameters for NB-IoT and LTE-M such as bandwidth, transmission power, and modulation efficiency.
2. Generate network conditions by varying Signal-to-Noise Ratio (SNR) or channel quality values.
3. Compute Throughput (Mbps) for both NB-IoT and LTE-M using their respective data rate models.
4. Calculate Latency (ms) based on transmission time, scheduling delay, and network load.
5. Determine Packet Delivery Ratio (PDR %) by comparing successfully received packets with transmitted packets.
6. Simulate multiple iterations to observe performance under different channel conditions.
7. Plot comparison graphs for Throughput, Latency, and PDR between NB-IoT and LTE-M.
8. Analyze results to identify which technology performs better under different IoT scenarios.

Matlab Code:

```
clc;

clear;

close all;

% SNR values (dB)

SNR = 0:5:30;

% Simulated Throughput (Mbps)

NB_IoT = 0.05*(1-exp(-SNR/8));

LTE_M = 1.2*(1-exp(-SNR/8));

disp('SNR (dB) NB-IoT(Mbps) LTE-M(Mbps)')

disp([SNR' NB_IoT' LTE_M'])

figure

% ----- Graph 1 -----

subplot(2,1,1)

plot(SNR,NB_IoT,'-o','LineWidth',2)

title('NB-IoT Throughput vs SNR')

xlabel('Signal-to-Noise Ratio (dB)')

ylabel('Throughput (Mbps)')

grid on

% ----- Graph 2 -----

subplot(2,1,2)

plot(SNR,LTE_M,'-s','LineWidth',2)


title('LTE-M Throughput vs SNR')

xlabel('Signal-to-Noise Ratio (dB)')

ylabel('Throughput (Mbps)')

grid on
```

Output:

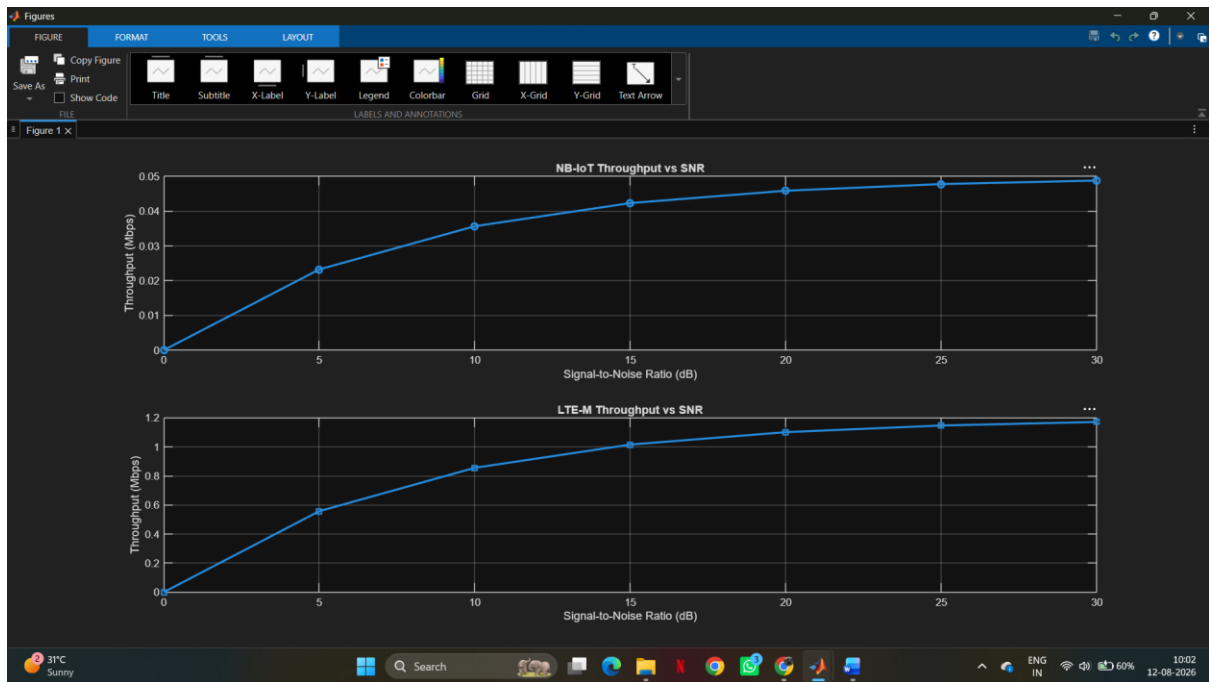

Result:

1. The throughput performance of both NB-IoT and LTE-M was successfully simulated, and LTE-M achieved higher throughput than NB-IoT under the same network conditions.
2. The latency analysis showed that LTE-M provides lower communication delay compared to NB-IoT, making it more suitable for real-time IoT applications.
3. The Packet Delivery Ratio (PDR) of both technologies improved with increasing SNR, with LTE-M demonstrating slightly higher reliability than NB-IoT during data transmission.