

WS-C3750X-24T-S Datasheet

Get a Quote

Overview

WS-C3750X-24T-S

Cisco Catalyst 3750-X Series Switch

Stackable 24 10/100/1000 Ethernet ports

Stackwise plus technology with total 64G stacking bandwidth

Four optional uplink network modules with GE or 10GE ports

Dual redundant, modular power supplies and fans

Media Access Control Security (MACsec) hardware-based encryption

Flexible NetFlow and switch-to-switch hardware encryption with the Service Module uplink

USB Type-A and Type-B ports for storage and console respectively and an out-of-band Ethernet management port

StackWise Plus

Cisco StackPower™ technology: An innovative feature and industry first for sharing power among stack members

Cisco StackWise Plus technology for ease of use and resiliency with 64 Gbps of throughput

Investment protection with backward compatibility with all other models of Cisco Catalyst 3750 Series Switches

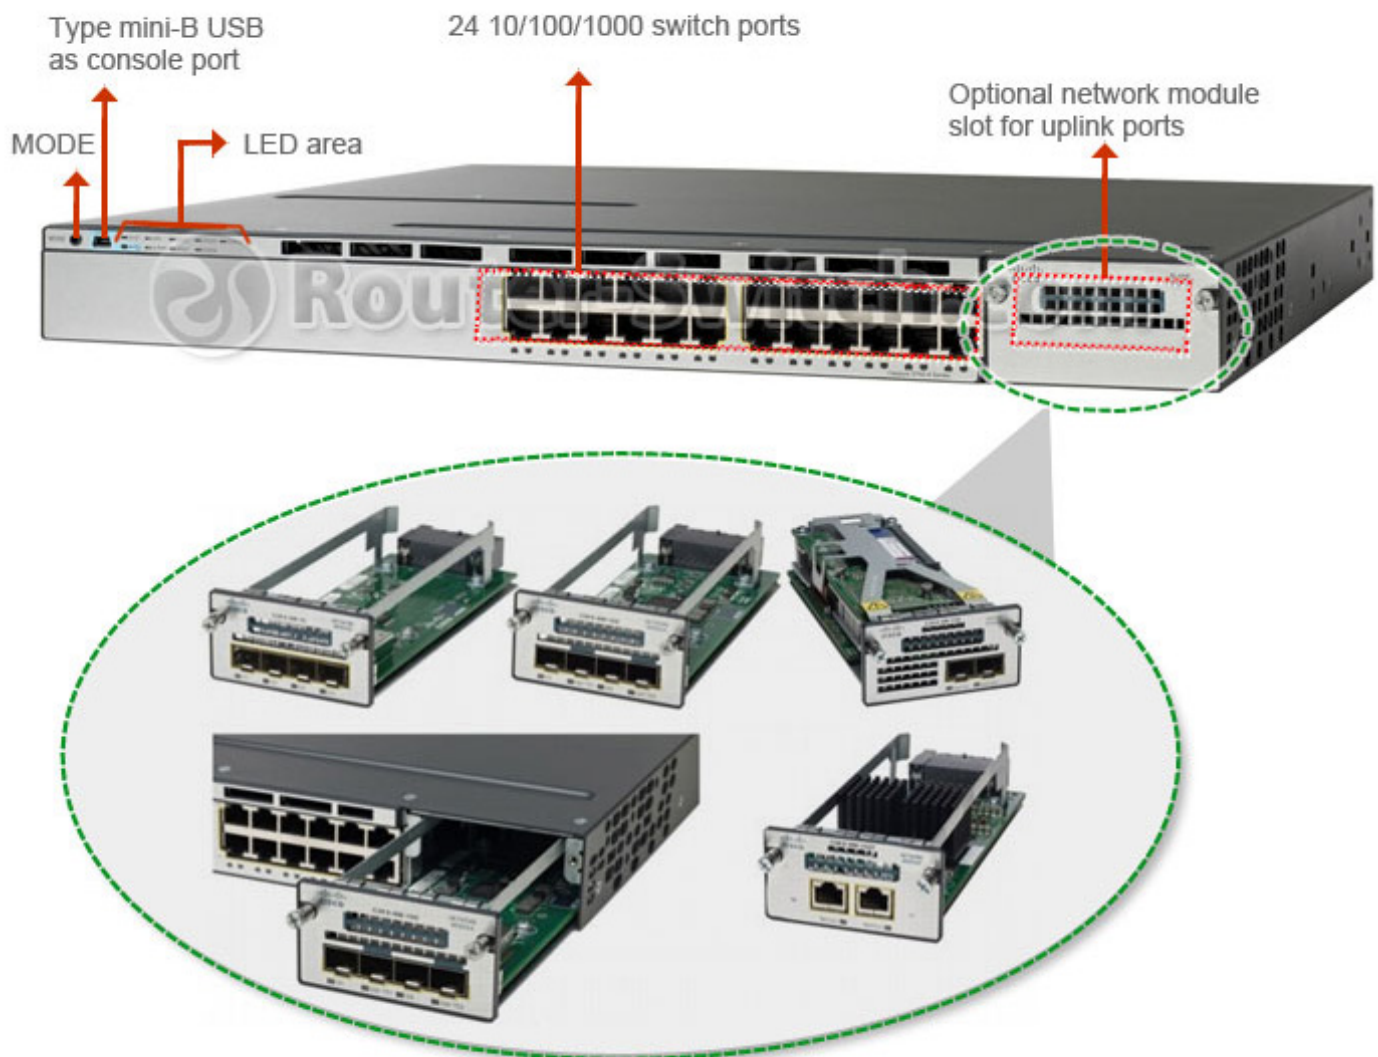


Figure 1

Cisco Catalyst 3750-X Series Switches support 4 optional network modules for uplink ports (Figure 1);
The default switch configuration doesn't include the uplink module;
When purchasing switch, customers have flexibility to choose any group of network modules described below:

Product Number	Product Description
C3KX-NM-1G	Four GbE port network module
C3KX-NM-10G	Two 10GbE SFP+ ports network module with four physical ports with two SFP+ and two regular SFP ports
C3KX-NM-10GT	Two 10GB-T ports network module
C3KX-SM-10G	Service Module with two 10GbE SFP+ ports network module for Netflow and MACsec encryption

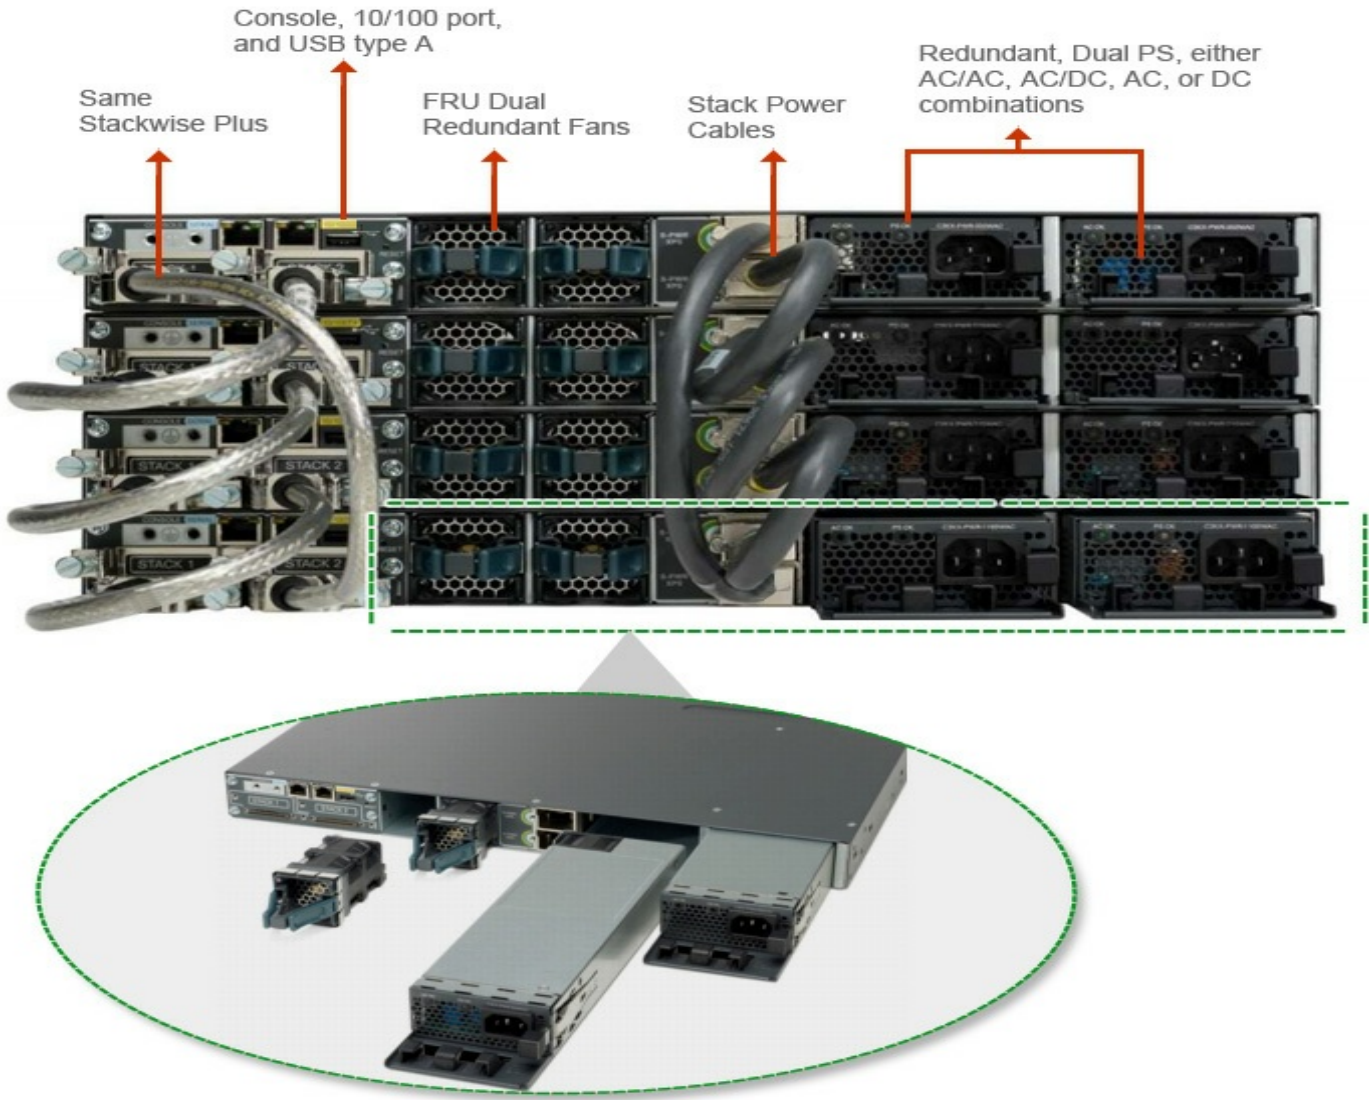


Figure 2

Dual Redundant Modular Power Supplies

Cisco Catalyst 3750-X Series and 3560-X Series Switches support dual redundant power supplies (Figure 2);
One power supply is shipped with the switch by default;
Other power supply/suppliers can be purchased when ordering the switch or next time according to your needs.
If only one power supply is installed, it should always be in the power supply bay 1.

Table below shows the different power supplies available in these switches and available PoE power.

Power Supply Models

Models	Default Power Supply	Available PoE Power
24 Port Data Switch	C3KX-PWR-350WAC	-
48 Port Data Switch		

24 Port PoE Switch	C3KX-PWR-715WAC	435W
48 Port PoE Switch		
48 Port Full PoE Switch	C3KX-PWR-1100WAC	800W
24 Port UPOE Switch	C3KX-PWR-1100WAC	800W
48 Port UPOE Switch		

Cisco Catalyst 3750-X Series Switch WS-C3750X-24T-S is an enterprise-class lines of stackable and standalone switches, respectively. Catalyst 3750-X switches provide high availability, scalability, security, energy efficiency, and ease of operation with innovative features such as Cisco StackPower, IEEE 802.3at Power over Ethernet Plus (PoE+) configurations, optional network modules, redundant power supplies, and Media Access Control Security (MACsec) features. Cisco Catalyst 3750-X Series with StackWise Plus technology provides scalability, ease of management and investment protection for the evolving business needs. The Cisco Catalyst 3750-X switches enhance productivity by enabling applications such as IP telephony, wireless, and video for borderless network experience.




Specification

WS-C3750X-24T-S data sheet	
Manufacturer	Cisco Systems, Inc
Manufacturer Part Number	WS-C3750X-24T-S Catalyst 3750-X Switch
Product Type	Managed, Stackable 24 ports L3 Switch
Form Factor	Fixed, Rack Mountable 1U, Stackable/Clustering
Switch Port density - Uplinks	24 x 10/100/1000 Ethernet Ports
Max Number of Stacks	9
Routing Protocol	RIP-1, RIP-2, HSRP, static IP routing, RIPng
Remote Management Protocol	SNMP 1, SNMP 2, RMON 1, RMON 2, RMON 3, RMON 9, Telnet, SNMP 3, SNMP 2c, TFTP, SSH, CLI
Authentication Method	Kerberos, Secure Shell (SSH), RADIUS, TACACS+
Features	Hot swap module replacement, Layer 3 switching, Layer 2 switching, dynamic IP address assignment , DHCP support, auto-negotiation, ARP support, trunking, VLAN support, auto-uplink (auto MDI/MDI-X), IGMP snooping, Syslog support, traffic shaping, Broadcast Storm Control, High Availability, Multicast Storm Control, Unicast Storm Control, Rapid Spanning Tree Protocol (RSTP) support, DHCP snooping, Dynamic Trunking Protocol (DTP) support, Port Aggregation Protocol (PAgP) support, Access Control List (ACL) support, Quality of Service (QoS), Jumbo Frames support, MLD snooping, Dynamic ARP Inspection (DAI), Per-VLAN Spanning Tree Plus (PVST+), EIGRP Stub Routing
Compliant Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.1D, IEEE 802.1Q, IEEE 802.3ab, IEEE 802.1p, IEEE 802.3x, IEEE 802.3ad (LACP), IEEE 802.1w, IEEE 802.1x, IEEE 802.1s, IEEE 802.1ae
DRAM Memory	256 MB
Flash Memory	128 MB Flash
LED Status Lights Indicators	Port status, link activity, port transmission speed, port duplex mode, power, system
Connectivity / Expansion Slots	

Interfaces	24 x 10Base-T/100Base-TX/1000Base-T - RJ-45 USB : 1 x 4 PIN USB Type A 1 x console - mini-USB Type B - management 1 x RS-232 - RJ-45 - management 1 x 10Base-T/100Base-TX - RJ-45 - management Network stack device : 2 x
Expansion Slot(s)	1 (total) / 1 (free) x Expansion Slot
Power Supply Specifications	
Power Device	Power supply - redundant - plug-in module
Installed Qty	1 (installed) / 2 (max)
Power Redundancy	Optional
Power Redundancy Scheme	1+1 (with optional power supply)
Voltage Required	AC 120/230 V (50/60 Hz)
Features	Redundant Power System (RPS) connector
Dimensions / Weight / Miscellaneous	
Width	44.5 cm
Depth	46 cm
Height	4.5 cm
Weight	7.1 kg
Rack Mounting Kit	Optional
MTBF	189,704 hour(s)
Compliant Standards	CE, TUV GS, CISPR 22 Class A, GOST, cUL, NOM, VCCI Class A ITE, EN55022 Class A, CB, AS/NZS 60950-1, AS/NZ 3548 Class A, CCC, RoHS, UL 60950-1, IEC 60950-1, EN 60950-1, KCC, FCC Part 15 A, CSA C22.2 No. 60950-1
System Software	
Software Included	Cisco IOS IP Base
Manufacturer Warranty	
Service & Support	Limited lifetime warranty
Service & Support Details	Limited warranty - lifetime Limited warranty - power supply and fans - 5 years New releases update

Download Resource

Transition Guide

-  [Find the Right 3650 and 3850 Models](#)
-  [Guide to Upgrade Cisco Access and Backbone Switch](#)
-  [Selecting Cisco Switches-Campus, Branch, Digital Building](#)

Want to Buy

[Order Now](#)[Get a Quote](#)

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

● Tel: +1-626-239-8066 (USA) +852-3050-1066 / +852-3174-6166

● Fax: +852-3050-1066 (Hong Kong)

● Email: sales@router-switch.com