



VIN+ = Positive input to the device.  
high-side: connect to power supply side of sense resistor

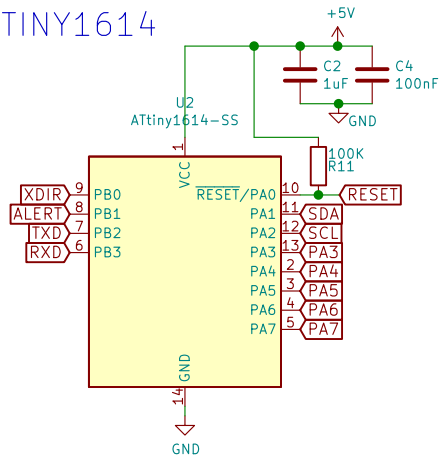

SSR output over current/over voltage

PA5

R8 330R

1 2

4 3


TLP172GM U1

GND

1 2

J6

ScrewTerminal

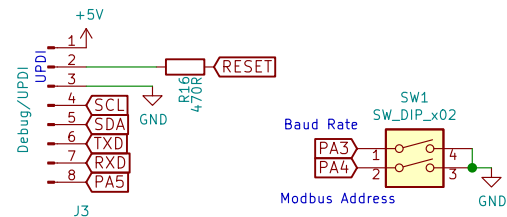[illegible]

Sheet: /  
File: CurrentShuntCircuit.sch

Size: A4	Date: 2021-02-22
KiCad E.D.A. eeschema 5.1.9+dfsg1-1bpo10+1	

Rev: 1  
Id: 1/1