
Master Thesis

The Use of Loaded Antennas as Scattering Relays for Post-Cellular Networks with Closely Spaced Terminals

Autumn Semester 2015

Professor: Armin Wittneben

Supervisor:
Yahia Hassan

Student:
Bernhard Gahr

Declaration of Originality

I hereby declare that the written work I have submitted entitled

Real-Time Demonstrator for ToA based Human Motion tracking System: Localization and Self-Calibration

is original work which I alone have authored and which is written in my own words.¹

Author(s)

Bernhard Gahr

Student supervisor(s)

Yahia Hassan

Supervising lecturer

Armin Wittneben

With the signature I declare that I have been informed regarding normal academic citation rules and that I have read and understood the information on 'Citation etiquette' (<https://www.ethz.ch/content/dam/ethz/associates/students/studium/exams/files-en/plagiarism-citationetiquette.pdf>). The citation conventions usual to the discipline in question here have been respected.

The above written work may be tested electronically for plagiarism.

Place and date

Signature

¹Co-authored work: The signatures of all authors are required. Each signature attests to the originality of the entire piece of written work in its final form.

Contents

| | |
|---|------------|
| Abstract | vii |
| Notations, Acronyms and Abbreviations | ix |
| List of Figures | xi |
| 1 Introduction | 1 |
| 1.1 Motivation and Goals | 1 |
| 1.2 State of the Art | 2 |
| 1.3 Outline | 3 |
| 2 System Description | 5 |
| 2.1 Spatial Channel | 6 |
| 2.2 Receiver Circuit Description | 6 |
| 2.2.1 Multi-Port Networks | 7 |
| 2.2.2 Receiver Blocks | 8 |
| 2.2.3 Port Reduction | 9 |
| 2.2.4 Transfer Function of the Receiver | 10 |
| 2.2.5 Signal Covariance Matrix | 12 |
| 2.2.6 Interference Covariance Matrix | 12 |
| 2.3 Noise Description | 12 |
| 2.3.1 Antenna Noise | 13 |
| 2.3.2 LNA Noise | 13 |
| 2.3.3 Downstream Noise | 15 |
| 2.3.4 Noise Covariance Matrix | 15 |
| 2.4 Rate Calculations | 17 |
| 2.4.1 Achievable Rate | 17 |
| 2.4.2 Interference Limited or Noise Free Rate | 18 |
| 2.4.3 TDMA Rate | 18 |
| 3 Analytical Gradient | 19 |
| 3.1 Signal Gradient | 19 |
| 3.2 Interference Gradient | 21 |
| 3.3 Noise Gradients | 21 |
| 3.3.1 Antenna Noise Gradient | 22 |
| 3.3.2 LNA Noise Gradient | 22 |
| 3.3.3 Downstream Noise Gradient | 23 |
| 4 Problem Statement and Solver Methods | 25 |
| 4.1 Utility Function | 25 |
| 4.1.1 Convexity of the Utility Function | 25 |
| 4.1.2 Dependency on the Input Power | 26 |
| 4.1.3 Difference of Local Optima | 27 |

| | | |
|----------|---|-----------|
| 4.1.4 | Complexity of the Problem | 28 |
| 4.2 | Gradient Search | 28 |
| 4.2.1 | Choice of Initial Values | 29 |
| 4.2.2 | Adaptive Step Size | 30 |
| 4.2.3 | Conjugate Gradient | 30 |
| 4.3 | Heuristic Optimization Algorithms | 31 |
| 4.3.1 | Simulated Annealing | 31 |
| 4.3.2 | GlobalSearch | 32 |
| 4.4 | Further Algorithm Improvements | 33 |
| 4.4.1 | Optimization of the Interference Function | 33 |
| 4.4.2 | Post Refinement of GlobalSearch by Gradient Search | 34 |
| 4.4.3 | Stepwise Optimization | 35 |
| 5 | Simulation Results | 39 |
| 5.1 | Introduction of Measures for Comparison | 39 |
| 5.1.1 | Uncoupled Relay Rates | 40 |
| 5.1.2 | TDMA Rates | 40 |
| 5.1.3 | Noise-free Rates | 41 |
| 5.1.4 | Relays as Fully Cooperation Receivers - Limit | 41 |
| 5.1.5 | Multiport Matching - Limit | 41 |
| 5.2 | Relay Placing | 42 |
| 5.3 | Low SNR performance | 43 |
| 5.4 | Number of Relays to Eliminate Interference | 44 |
| 5.4.1 | One Interferer | 44 |
| 5.4.2 | Two Interferer | 44 |
| 5.4.3 | Three Interferer | 45 |
| 5.4.4 | Cooperative versus Non-cooperative Receive Antennas | 46 |
| 5.5 | Four User System | 47 |
| 5.5.1 | Prediction for four Users | 47 |
| 5.5.2 | Full Four User System Performance | 48 |
| 5.6 | TDMA - Combination | 50 |
| 6 | Conclusion and Outlook | 53 |
| 6.1 | Conclusion | 53 |
| 6.2 | Future Work | 53 |
| A | Lossy Passive Relays | 55 |
| B | Alternative Description of the Receiver | 57 |
| B.1 | Transfer Function | 57 |
| B.1.1 | Signal Transfer Function | 57 |
| B.1.2 | Noise Transfer Function | 58 |
| B.2 | Analytical Gradient | 58 |
| | References | 62 |

Acknowledgements

A huge project like a master thesis is never done alone, and I have many people to thank for their contributions. First, I would like to express my gratitude to my Professor Armin Wittneben for giving me the opportunity to work on this master thesis at the Wireless Communication Group.

I am also grateful to Yahia Hassan, my supervisor, for his help and guidance throughout the thesis. Yahia knew when he had to push me and when I needed a break to talk about football. I also would like to thank him for letting me be part of submitting a scientific paper, and for sharing his insights on that process.

I owe many thanks to Dr. David Adjashvili from the institute for operation research on his help with nonconvex optimizations, and for his advice during lunch breaks. Further, I want to thank Dr. Katherine Caves for proofreading this thesis and for her advice on scientific writing, even when I was on a tight schedule.

Finally, all my love and thanks go to my family, to Laura, and to my flat mates. Mom, Dad, Martin, and Manuel, thank you for your interest in my thesis and its progress. Frederik, Philipp, and Stefan, thank you for getting my mind off the thesis when I came home. Laura, thank you for your love, and for your support during the last six months.

Abstract

In current wireless networks there are two limiting factors for transmission rates: fading and interference. While multiple-input-multiple-output (MIMO) systems reduce the impact of fading, the problem of interference has not yet been satisfyingly solved. The most common methods for addressing the problem of interference are protocols based on schemes like time-division- (TD-), frequency-division- (FD-), or code-division multiple access (CDMA). The simultaneous advantage and downfall of those schemes is their unique allocation of specific time and/or frequency slots for each user, hence blocking all other users.

In this thesis the problem of interference is addressed by using closely spaced passive relays: antennas with only passive, lossless impedances attached, which interact with the receiving antennas only through coupling. These relays require no input power to amplify signals. By using passive elements, the effects of coupling can be changed, and by using multiple passive relays couplings can be used to increase the signal and reduce the interference power to the receivers.

In the following, a description of the system will be derived that allows for an easy and elegant way of analyzing the effects of coupling. Different solver methods are analyzed and discussed in order to find the optimal choice of relay loads. As some of the solvers are based on the method of gradient search, the analytical gradient will be derived. In order to derive the analytical gradient, full channel knowledge of the spatial channel and couplings between receiving elements are assumed. For the gradient search method, a variety of initial value choices will be compared. Further, the results are evaluated and compared to different solver methods and previously known interference-limiting methods.

Notations, Acronyms and Abbreviations

Symbols

| | |
|-----------------------------------|--|
| x^* | conjugate complex of x |
| \mathbf{x} | Vector |
| $\mathbf{x}[i]$ or \mathbf{x}_i | i-th element of vector \mathbf{x} |
| $\ \mathbf{x}\ _p$ | P-norm of vector \mathbf{x} |
| \mathbf{X} | Matrix |
| \mathbf{X}^T | transpose of matrix \mathbf{X} |
| \mathbf{X}^{-1} | inverse of matrix \mathbf{X} |
| \mathbf{X}^H | hermitian transpose of matrix \mathbf{X} |

Indices

| | |
|-----------|--------------|
| x, y, z | x, y, z axis |
|-----------|--------------|

Acronyms and Abbreviations

| | |
|-------------------|--|
| ETH | Eidgenössische Technische Hochschule |
| WCG | Wireless Communicatoin Group |
| (N)LOS | (Non) Line of Sight |
| ML | Maximum Likelihood |
| CDF | Cummulative Distribution Function |
| PDF | Probability Density Function |
| MIMO | Multiple Input Multiple Output |
| IoT | internet of Things |
| T/F/CDMA | Time/Frequency/Code Division Multiple Access |
| S(I/N)R | Signal to Noise/Interference Ratio |
| LNA | Low Noise Amplifier |
| N_{User} | Number of Users |
| N_{T} | Number of Transmitters |
| N_{Tx} | Number of Antennae per Transmitter |
| N_{R} | Number of Receiver |

| | |
|--------------------|---------------------------------|
| N_{Rx} | Number of Antennae per Receiver |
| N_{Relay} | Number of Relays per Receiver |

List of Figures

| | | |
|------|--|----|
| 2.1 | Overview of the system. | 5 |
| 2.2 | Example of the receive antenna and the relay placing. | 6 |
| 2.3 | A twoport network [8]. | 7 |
| 2.4 | The receiver, with the coupling network \mathbf{Z}_C , the SP-matching network \mathbf{Z}_M , the LNA, and loads attached to the LNA. | 8 |
| 2.5 | Schematic of a reciprocal T-network. | 9 |
| 2.6 | Port reduction on a network with one load connected to the last port. | 10 |
| 2.7 | Overview of the system including noise sources. | 13 |
| 4.1 | The utility function for a specific channel realization. | 26 |
| 4.2 | The utility function for an other specific channel realization and a high input power level. | 26 |
| 4.3 | The utility function for the same specific channel realization as in Figure 4.2 and a moderate input power level. | 27 |
| 4.4 | The utility function for a specific channel realization. | 27 |
| 4.5 | The sum rate over the gradient search iterations. | 28 |
| 4.6 | Comparison of the number of initial values used. | 29 |
| 4.7 | Schematic of the adaptive step size algorithm. | 29 |
| 4.8 | A comparison of the convergence of gradient descent with optimal step size (in green) and conjugate vector (in red) for minimizing a quadratic function associated with a given linear system[13]. | 30 |
| 4.9 | Comparison between Steepest Ascent, Polak-Ribière, and Fletcher-Reeves. | 31 |
| 4.10 | Comparison of the Simulated Annealing algorithm for different number of initializations and the results from "Polak-Ribière" and "Steepest Ascent" gradient searches. | 32 |
| 4.11 | Schematics of the GlobalSearch and MultiStart algorithms [18]. | 32 |
| 4.12 | Performance of the GlobalSearch algorithm in comparison to the previous results. | 33 |
| 4.13 | Comparison of the number of initial values used with different pre-optimized initial values. | 33 |
| 4.14 | Comparison the heuristic solvers with and without a post refinement by gradient search. | 34 |
| 4.15 | Comparison of the number of step wise optimization. | 35 |
| 4.16 | Example of choosing the relays for stepwise optimization. | 36 |
| 4.17 | Comparison of optimizing the relays stepwise versus optimizing each user per step. | 37 |
| 5.1 | Comparison of uncoupled relays and optimized coupled relays. | 39 |
| 5.2 | Comparison of the TDMA rate and optimized coupled relays. | 40 |
| 5.3 | Comparison of the full cooperation relay rates, the multiport matching rate and optimized coupled relays rate. | 41 |
| 5.4 | Placing the relays around a receiver uniformly distributed on a disk. | 42 |

| | | |
|------|--|----|
| 5.5 | Optimized Sum Rates for different minimum distances between receiver and relays ($d_z \in \{0.1, 0.2, 0.3, 0.4\}$ from right to left). | 42 |
| 5.6 | Comparison of the optimization algorithm at a moderate and high SNR level and the comparison to the noise free (SIR) rates. | 43 |
| 5.7 | User rates for one interferer and one receiver with $N_{\text{Rel}} \in \{1, 2, 3\}$ (red and blue curves from left to right) and their theoretical limits (black curves). | 44 |
| 5.8 | User rates for two interferer and one receiver with $N_{\text{Rel}} \in \{2, 3, 4, 5\}$ (red and blue curves from left to right) and their theoretical limits (black curves). | 45 |
| 5.9 | User rates for three interferer and one receiver with $N_{\text{Rel}} \in \{4, 5, 6, 7\}$ (red and blue curves from left to right) and their theoretical limits (black curves). | 45 |
| 5.10 | Comparison of constant $N_{\text{Rel}} + N_{\text{Rx}} = 8$, with $N_{\text{Rel}} \in \{4, 5, 6, 7\}$ and $N_{\text{Rx}} \in \{1, 2, 3, 4\}$ from left to right. | 46 |
| 5.11 | Comparison of constant $N_{\text{Rel}} + N_{\text{Rx}} = 8$, with $N_{\text{Rel}} \in \{4, 5, 6, 7\}$ and $N_{\text{Rx}} \in \{1, 2, 3, 4\}$ from left to right, showing only noise free rates. | 46 |
| 5.12 | Plot of the 4 User System, with the predicted performance. | 47 |
| 5.13 | Sum rates of a 4 user MIMO system. | 48 |
| 5.14 | The user rates for four users with seven relays each. | 49 |
| 5.15 | Two different antenna placings, the left leads to a big improvement, the right to a small improvement. | 49 |
| 5.16 | Comparison of different slot TDMA approaches. | 50 |
| 5.17 | Comparison of different slot TDMA approaches. | 51 |
| A.1 | Comparison of loss less and lossy relays. | 55 |
| A.2 | Comparison of loss less and lossy relays. | 56 |

Chapter 1

Introduction

Future wireless networks are assumed to have high receiver density, as more devices with access to the Internet appear on the market and more types of devices are staffed with modules able to connect to the Internet (Internet of things IoT) [1]. Examples of such scenarios are cellular networks in urban areas, wireless networks in public spaces like concert halls, and sensor networks.

Such networks suffer from two main rate-limiting effects: fading and interference. While the effect of fading is mostly solved by MIMO techniques, interference remains as the limiting factor for high data rates. Classical methods of overcoming interference are protocols like TDMA, FDMA, or CDMA. The downside of those protocols is their unique allocation of a user to a specific time and frequency slot, blocking of all other users. More advanced techniques use multiple antennas — similar of overcoming the problem of fading — to achieve multiple observations of the incoming signals, and therefore the ability to zero force the interfering signals. This, however, is only possible if the number of antennas per receiver is larger than the number of interfering signal streams — nearly impossible or very expensive in high-density networks as the size of the receiver structure grows rapidly [1].

In this thesis we introduce the use of passive relays, or antennas with pure imaginary impedances attached. As they are placed very close (in terms of wavelengths) around the receivers, they interact by coupling with the receivers. By the choice of loads, the strength of coupling can be changed. With an increasing number of such passive relays, couplings can be used to steer the signal towards the receiver and block interference. Full channel knowledge is assumed of the spatial channel and the coupling matrix in order to match the relay impedances.

Our strategy proved theoretically effective in situations when adapted coupling of passive relays is possible. We demonstrate that our theoretical foundation is a useful addition to previously conducted research. The paper creates new avenues for future research based on its theoretical insights.

1.1 Motivation and Goals

The achievable rate of a connection pair is dependent on the signal, noise, and interference covariance matrices. In a high power region the effect of noise can be neglected, as the interference is the main diminishing factor. Therefore an interference-free connection is the main goal.

As the method of using passive relays through only their coupling is a new way of addressing the problem of interference, this thesis will look into potential improvements rather than practical feasibility of the method. To achieve the highest possible rate for any realization, the shape of the problem is analyzed and different

solver methods are introduced and compared. Maximum achievable rates shall be given for different settings and topologies in order to enable judgment of which settings for with this method is suitable.

1.2 State of the Art

Six papers are key to current solutions for interference in large multi-user systems. [1] discovered that transmission rates decrease in the presence of large numbers of antennas. [2] described the problem connecting information theory and circuit theory, contributing a novel and useful description of large systems using circuit theory. Following up on that work, [3] used gradient search to optimize large networks—we follow that approach. Using relays, [4] were able eliminate interference. [5] steered antenna beams toward the intended target using relays. Finally, [6] used relays to uncouple antennas. We build upon all of these approaches in this paper.

Because interference is a main problem in larger multi user systems, effects of largely scaled MIMO systems must be studied.

In [1] F. Rusek et al. wrote about scaling up MIMO systems. They exploit opportunities and challenges of large systems with hundreds of antennas. Among other things, they look into the mutual coupling and spatial correlation of large antenna arrays at the transmitter. They came to the conclusion that interactions among antenna elements can incur significant losses, because for large MIMO systems the antenna spacing becomes smaller. Therefore it is important to analyze the behavior of closely spaced antennas.

Working with closely spaced antenna elements requires a useful way of describing couplings. In [2] M. Ivrlac et al. describe compact systems using circuit theory. Their description is also usable for this thesis with some adaptation. Additionally they find an optimal setting for the matching network on the receiver side, called multi-port matching. Multi-port matching will be used in this thesis to serve as theoretical upper limit. For large antenna systems, multi-port matching becomes very complex, and hence hard to implement. Therefore, this thesis looks into a different approach to optimize the achievable rate.

Further research on the matching network was done in [3]. A gradient-search algorithm is developed to design a matching network for achievable rate maximization of multi-user MIMO systems. Their settings are adapted for this thesis. Additionally, we improved upon their developments by using passive relays to amplify the signal and reduce the interference at the receiver.

Although only TDMA has been mentioned so far, further approaches on interference elimination methods exist. In [4], the concept of Distributive Spatial Multiplexing (DSM), is introduced. This attempts to eliminate interference by using amplify and forward (AF) relays. By choosing different amplify gains for each relay, the interference can be eliminated at each receiver. In contrast to the approach in this thesis, their relays are not lossless and require a power source to amplify their signals.

Further research on passive relays, or parasitic elements was done in [5]. They use these parasitic elements to steer the receiving antenna beam. However, for more closely spaced transmitters or signals with a similar angle of incidence, this will not eliminate any interference. We also use passive relays, but in a different context.

Finally, two antennas were uncoupled from each other in [6] by placing parasitic elements in the middle. For an orthogonal channel this will remove the interference. If however — as it is in this thesis — a spatial interference channel is assumed, both receivers will collect an interfering signal. Therefore this thesis tries to use the coupling itself to reduce interference, instead of trying to uncouple the receivers from each other.

Building on all of this work, we address the problem of interference in scaled-up MIMO systems from a circuit theory perspective. We add to this by incorporating information theory, forging a connection between the two. In our implementation we follow the guidance of other studies and use passive relays and the effect of coupling to design a novel method for reducing interference and amplifying the signal.

1.3 Outline

In the following chapter the whole system is described by connecting circuit theory and information theory. The effect of coupling is analyzed and the overall transfer function — from the transmitter to the receiver — is stated. A description of the spatially correlated interference channel is given. All the noise sources appearing in the systems and their transfer function are shown and derived. The transfer functions are split up into smaller, simpler subfunctions, such that the effect of coupling and the interference can be better described and analyzed.

As one of the optimization methods is gradient search, in the third chapter the analytical gradients are derived — for the signal, the interference and the noise. The gradient is dependent on the covariance matrix, therefore they are derived as well for the signal, interference, and noise contributions at the receiver.

In the fourth chapter, different optimization methods are introduced and compared to each other. Aside from the method of gradient search, there are heuristic algorithms introduced. Further improvements in precision and speed of the optimization methods performance are introduced.

The results of the optimization methods and their improvements are evaluated in the fifth chapter. The results is compared to different numbers of relays used in a setup, different relay placements, and different numbers of users. Additionally, theoretical limits of the setups are derived and shown, and the results are compared to current protocols for overcoming interference, such as TDMA.

Finally, in the sixth chapter, a summary of the work achieved in this thesis and an outlook for possible future work is given.

Chapter 2

System Description

In the following the system will be described. Figure 2.1 gives an overview of it. The transmitters on the left are assumed to be widely spaced, so that they experience no coupling among each other. The signals are transmitted over a spatial interference channel, therefore a transmitted signal reaches every receiver.

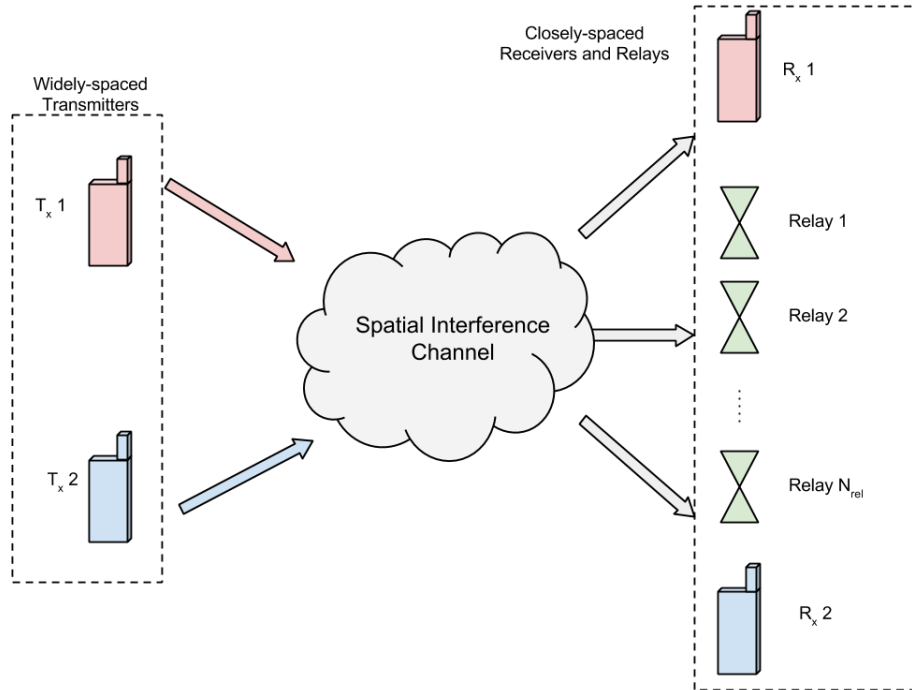


Figure 2.1: Overview of the system.

Besides the receivers themselves, there are passive relays on the right side. The relays and the receivers are closely spaced, therefore the channels between a transmitter and the receivers and relays are spatially correlated and the elements on the receiver side experience coupling among each other.

2.1 Spatial Channel

As mentioned in the previous section the spatial channel is generated by spatial correlation among the receivers and the relays, dependent on the distance. The correlation matrix is generated by the Besselfuntion according to

$$\mathbf{R}_{i,j} = J_0 \left(2 \cdot \pi \cdot \frac{d_{i,j}}{\lambda} \right), \quad (2.1)$$

where $J_0(x)$ is the 0-th Besselfuntion [7, p.191] and $d_{i,j}$ the distance between the i -th and j -th receiving element (receive antennas and relays concatenated). Therefore \mathbf{R} is symmetric with 1 on its diagonal, as $J_0(0) = 1$.

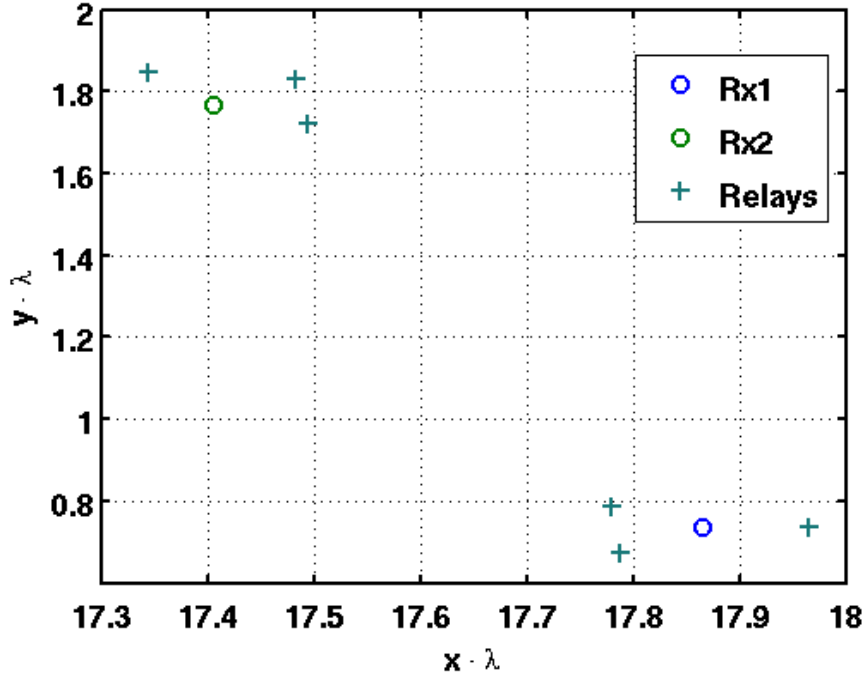


Figure 2.2: Example of the receive antenna and the relay placing.

The spatial channel from n -th transmitter to all receivers and relays is then generated by

$$\mathbf{H}_n^{\text{sp}} = \mathbf{R}^{\frac{1}{2}} \cdot \mathbf{H}_{\text{IID}}, \quad (2.2)$$

where \mathbf{H}_{IID} is a matrix of size $\mathbb{C}^{N_{\text{R}} \cdot (N_{\text{Rx}} + N_{\text{Rel}}) \times N_{\text{Tx}}}$, with complex elements drawn from the standard normal distribution ($\mu = 0$ and $\sigma = 1$). Therefore \mathbf{H}_n^{sp} is of size $\mathbb{C}^{N_{\text{R}} \cdot (N_{\text{Rx}} + N_{\text{Rel}}) \times N_{\text{Tx}}}$.

2.2 Receiver Circuit Description

As mentioned in Section 1.2, the idea of describing the receiver circuitry is based on the work of [2]. To do so, we represent each receiver block (shown in Figure 2.4) by n -ports. A short overview on 2-ports (simplified n -ports) is given in the following.

2.2.1 Multi-Port Networks

In the following a 2-port network will be analyzed. Later this can be easily extended to a multi-port network.

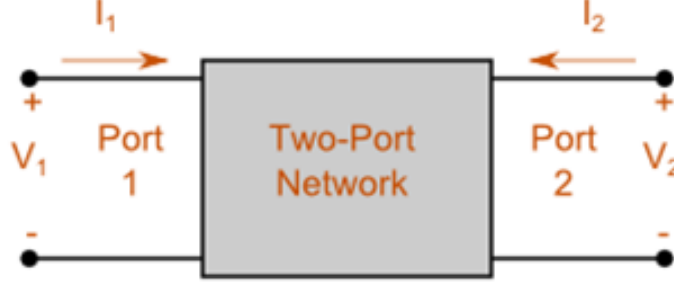


Figure 2.3: A twoport network [8].

Figure 2.3 shows a 2-port network. The two-port network can be represented by an impedance matrix \mathbf{Z} . The elements Z_{ij} of the matrix are defined in the following way:

$$Z_{ij} = \frac{V_i}{I_j}, \quad (2.3)$$

for the currents $I_l = 0, \quad l \neq j.$

Therefore the 2-port's input/output relations can be written as

$$\begin{bmatrix} V_1 \\ V_2 \end{bmatrix} = \mathbf{Z} \cdot \begin{bmatrix} I_1 \\ I_2 \end{bmatrix} \quad (2.4)$$

For a multi-port network, elements the voltages and currents can be represented as vectors on length n , and the elements Z_{ij} , $i, j \in \{1, 2\}$ become sub matrices. Looking from the left into the network with loads R_L attached to the ports on the right, the equivalent input impedance matrix becomes

$$\mathbf{Z}_{\text{eq}_1} = \mathbf{Z}_{11} - \mathbf{Z}_{21} \cdot (\mathbf{Z}_{22} + R_L \cdot \mathbf{I})^{-1} \cdot \mathbf{Z}_{12}. \quad (2.5)$$

With no load attached on port two (open circuited ports, or $R_L \rightarrow \infty$), the equivalent input impedance becomes

$$\mathbf{Z}_{\text{eq}_1} = \mathbf{Z}_{11}. \quad (2.6)$$

Last, having port one short-circuited (i.e. $R_L \rightarrow 0$) and looking from port two into the network, the equivalent network impedance becomes

$$\mathbf{Z}_{\text{eq}_2} = \mathbf{Z}_{22} - \mathbf{Z}_{12} \cdot (\mathbf{Z}_{11})^{-1} \cdot \mathbf{Z}_{21}. \quad (2.7)$$

For reciprocal networks (RLC -Networks, containing only passive elements), following property holds: $\mathbf{Z}_{12} = \mathbf{Z}_{21}^T$.

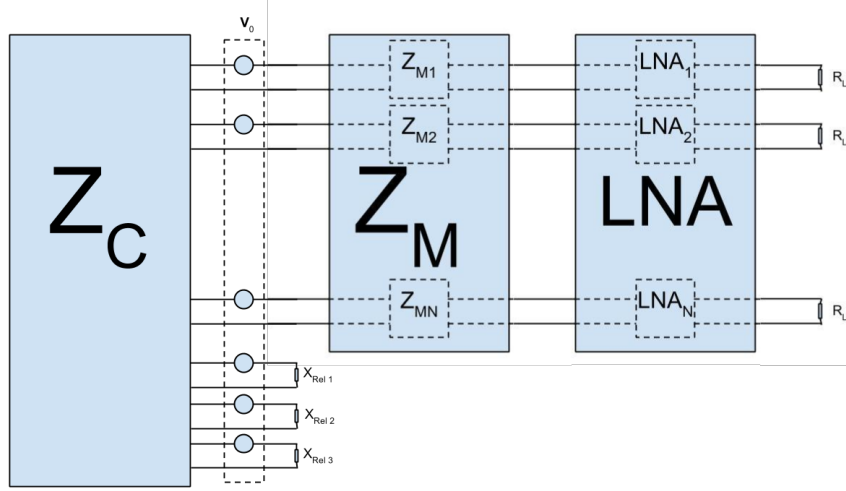


Figure 2.4: The receiver, with the coupling network \mathbf{Z}_C , the SP-matching network \mathbf{Z}_M , the LNA, and loads attached to the LNA.

2.2.2 Receiver Blocks

The receiver (as shown in Figure 2.4) consists of three blocks. From left to right:

1. the coupling network (\mathbf{Z}_C),
2. the matching network (\mathbf{Z}_M), and
3. the low-noise-amplifier (\mathbf{LNA}).

All these blocks can be described in multi-port networks. In the following each block will be discussed.

The Coupling Network

The coupling network is introduced, as a compact antenna spacing is assumed on the receiver side. The strength of the coupling between two antennas depends on the spacing between the antennas. As the effect of coupling from one antenna to another is the same like the reverse, the impedance matrix \mathbf{Z}_C becomes symmetric. The coupling among the antennas is calculated by the "EWA"-Toolbox for MATLAB [9]. The theory of it can be found in [9, Chapter 23].

The Matching Network

In order to improve the performance of the receiver, a matching network is placed after each receiving antenna. For complexity and bandwidth reasons, single-port (SP) matching is assumed [3]. The matching network has the form of

$$\mathbf{Z}_M = \begin{bmatrix} \mathbf{Z}_{M11} & \mathbf{Z}_{M12} \\ \mathbf{Z}_{M21} & \mathbf{Z}_{M22} \end{bmatrix}. \quad (2.8)$$

For a matching network to be lossless it must be pure imaginary and symmetric [2]. Because we assume SP matching the submatrices become diagonal, with the choice of a reciprocal network, additionally following property holds: $\mathbf{Z}_{M12} = \mathbf{Z}_{M21}^T \implies \mathbf{Z}_{M12} = \mathbf{Z}_{M21}$.

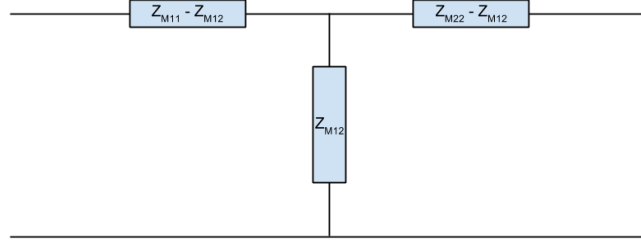


Figure 2.5: Schematic of a reciprocal T-network.

The Low-Noise-Amplifier

In the LNA-block the received signal after the matching network gets amplified. As in the matching network the LNA can be represented in the following way

$$\mathbf{LNA} = \begin{bmatrix} \mathbf{c} & \mathbf{d} \\ \mathbf{e} & \mathbf{g} \end{bmatrix}. \quad (2.9)$$

As each branch has its own LNA, the submatrices \mathbf{c} , \mathbf{e} and \mathbf{g} are again diagonal. Additionally, matrix \mathbf{d} is an all-zeros matrix if the unilateral assumption (*the input of the LNA is not affected by the output of the LNA*) is applied.

2.2.3 Port Reduction

In the following we describe the open circuit reduction of a system like in Figure 2.6. We do the port reduction, because we are interested in the signal only at the loads of the corresponding receiver. The signal picked up at relay antennae or not considered receivers contributes to the considered receiver by the coupling between the antennas, as described in Section 2.2.2. The passive relays are modeled by connecting an impedance directly to the coupling network as shown in the lowest 2 branches on the left in Figure 2.6. Undesired receivers can be modeled equivalently to the relays, with the load corresponding to the equivalent input impedance of the matching network (as in Equation (2.17)) shown by the third lowest branch on the left in Figure 2.6.

In the following, \mathbf{v}_{Ci} denotes the parallel voltages on the ports at the coupling matrix \mathbf{Z}_C and \mathbf{i}_{Ci} denotes the same for the currents. As we are not interested in the input/output-relation of these passive antennas, a port reduction is performed. For the port reduction, the coupling matrix \mathbf{Z}_C can be represented by four submatrices

$$\mathbf{Z}_C = \begin{bmatrix} \mathbf{Z}_{OO} & \mathbf{Z}_{OL} \\ \mathbf{Z}_{LO} & \mathbf{Z}_{LL} \end{bmatrix}, \quad (2.10)$$

so that we get the system relations

$$\begin{bmatrix} \mathbf{v}_{CO} \\ \mathbf{v}_{CL} \end{bmatrix} = \begin{bmatrix} \mathbf{Z}_{OO} & \mathbf{Z}_{OL} \\ \mathbf{Z}_{LO} & \mathbf{Z}_{LL} \end{bmatrix} \cdot \begin{bmatrix} \mathbf{i}_{CO} \\ \mathbf{i}_{CL} \end{bmatrix}. \quad (2.11)$$

The index "O" denotes hereby the ports of the required receiver branches, which are open circuited, the index "L" the ports of the non-required receivers and the relays (i.e. the ports with an impedance attached or loaded, respectively). Therefore \mathbf{Z}_{OO} is of size $\mathbb{C}^{N_{Rx} \times N_{Rx}}$, \mathbf{Z}_{OL} of size $\mathbb{C}^{N_{Rx} \times N_R \cdot (N_{Rx} + N_{Rel})}$ and \mathbf{Z}_{LL} of size $\mathbb{C}^{N_R \cdot (N_{Rx} + N_{Rel}) \times N_R \cdot (N_{Rx} + N_{Rel})}$. The indices will change dependent on the user, however without loss of generality, we will derive the port reduction only for the first

receiver (receiver "0") in the following. We assume, that there are $N_R \cdot N_{Rx}$ antennas, whereby the first N_{Rx} antennas are active (i.e. are the receive antenna of user "0"), and the later ones are passive (i.e. the antennas of the relays and of the other users). \mathbf{Z}_{pass} denotes in the following the $(N_R - 1) \cdot N_{Rx}$ equivalent input impedances \mathbf{Z}_{eqM1} of the non-required receivers and the N_{Rel} impedances representing the relays \mathbf{X}_{Rel} , placed on the diagonal of a $\mathbb{C}^{(N_R - 1) \cdot N_{Rx} + N_R N_{\text{Rel}}} \times (N_R - 1) \cdot N_{Rx} + N_R N_{\text{Rel}}$ square matrix.

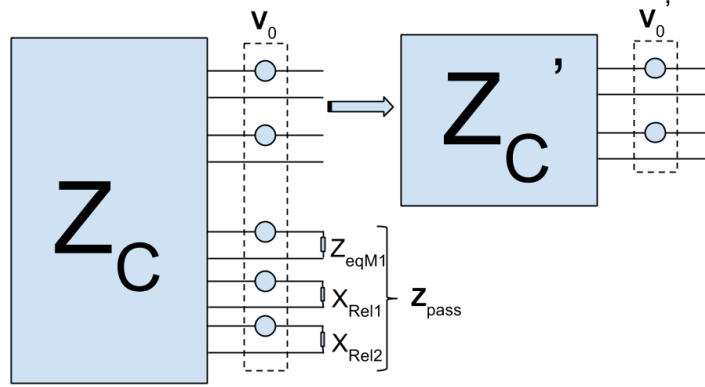


Figure 2.6: Port reduction on a network with one load connected to the last port.

From Equation (2.11) and the property

$$\mathbf{v}_{\text{CL}} = \mathbf{v}_O[N_{Rx} + 1 : N_R \cdot N_{Rx}] - \mathbf{Z}_{\text{pass}} \cdot \mathbf{i}_{\text{CL}} \quad \text{it follows,} \quad (2.12)$$

$$\begin{aligned} \mathbf{i}_{\text{CL}} &= -(\mathbf{Z}_{\text{pass}} + \mathbf{Z}_{\text{LL}})^{-1} \mathbf{Z}_{\text{LO}} \cdot \mathbf{i}_{\text{CO}} - \\ &\quad (\mathbf{Z}_{\text{pass}} + \mathbf{Z}_{\text{LL}})^{-1} \cdot \mathbf{v}_O[N_i + 1 : N_R] \end{aligned} \quad (2.13)$$

and therefore,

$$\begin{aligned} \mathbf{v}_{\text{CO}} &= (\mathbf{Z}_{\text{OO}} - \mathbf{Z}_{\text{OL}}(\mathbf{Z}_{\text{pass}} + \mathbf{Z}_{\text{LL}})^{-1} \mathbf{Z}_{\text{LO}}) \cdot \mathbf{i}_{\text{CO}} - \\ &\quad \mathbf{Z}_{\text{OL}}(\mathbf{Z}_{\text{pass}} + \mathbf{Z}_{\text{LL}})^{-1} \cdot \mathbf{v}_O[N_{Rx} + 1 : N_R \cdot N_{Rx}]. \end{aligned} \quad (2.14)$$

With this port reduction the equivalent coupling matrix \mathbf{Z}'_C and input voltage \mathbf{v}'_0 for receiver "0" become

$$\mathbf{Z}'_C = \mathbf{Z}_{\text{OO}} - \mathbf{Z}_{\text{OL}}(\mathbf{Z}_{\text{pass}} + \mathbf{Z}_{\text{LL}})^{-1} \mathbf{Z}_{\text{LO}} \quad \text{and} \quad (2.15)$$

$$\mathbf{v}'_0 = \mathbf{H}_0^{\text{pr}} \cdot \mathbf{H}_j^{\text{sp}} \cdot \mathbf{v}_j, \quad (2.16)$$

$$\text{with } \mathbf{H}_0^{\text{pr}} = [\mathbf{I}_{N_{Rx}} \quad -\mathbf{Z}_{\text{OL}}(\mathbf{Z}_{\text{pass}} + \mathbf{Z}_{\text{LL}})^{-1}],$$

for any transmitter j , with $j \in \{0, \dots, N_T - 1\}$. It is easy to see, that \mathbf{Z}'_C has size $\mathbb{C}^{N_{Rx} \times N_{Rx}}$. Further, \mathbf{v}'_0 is of length $\mathbb{C}^{N_{Rx} \times 1}$, as \mathbf{H}_0^{pr} is of size $\mathbb{C}^{N_{Rx} \times N_R \cdot (N_{Rx} + N_{\text{Rel}})}$ and \mathbf{H}_j^{sp} has size $\mathbb{C}^{N_R \cdot (N_{Rx} + N_{\text{Rel}}) \times N_T N_{Tx}}$. Therefore we can reduce the system shown in Figure 2.4, to a simpler system which only considers the branches of the receiving antenna.

2.2.4 Transfer Function of the Receiver

The main interest lies in the transfer function $\mathbf{H}_{L,i}$ of the input voltages $\mathbf{H}_j^{\text{sp}} \cdot \mathbf{v}_j$ to the voltage measured at the loads (in Figure 2.4) $\mathbf{v}_{L,i}$. Hereby the signal was transmitted by user j and received by user i .

In the following the transfer function over each block of the receiver will be derived. We use the termination: \mathbf{v}_l are the voltages on the left of the block l (e.g. \mathbf{v}_M are the voltages on the left ports of the matching network). Also we neglect for simplicity reasons the index of the receiver blocks corresponding to the user ("i"). Additionally, we see the left ports as input ports and the right ports as output ports of each block. For the derivation of the transfer function we need four equivalent impedance matrices, namely

1. \mathbf{Z}_{eqM1} , the impedance matrix looking from the left into the matching network,
2. \mathbf{Z}_{eqM2} , the impedance matrix looking from the right into the matching network,
3. $\mathbf{Z}_{\text{eqLNA1}}$, the impedance matrix looking from the left into the LNA, and
4. $\mathbf{Z}_{\text{eqLNA2}}$, the impedance matrix looking from the right into the LNA.

To calculate \mathbf{Z}_{eqM1} and $\mathbf{Z}_{\text{eqLNA1}}$, we use Equation (2.5) and the unilateral assumption ($\mathbf{d} = 0$), to get

$$\mathbf{Z}_{\text{eqM1}} = \mathbf{Z}_{M11} - \mathbf{Z}_{M21} \cdot (\mathbf{Z}_{M22} + \mathbf{Z}_{\text{eqLNA1}})^{-1} \cdot \mathbf{Z}_{M12}, \quad \text{and} \quad (2.17)$$

$$\mathbf{Z}_{\text{eqLNA1}} = \mathbf{c} - \mathbf{e} \cdot (R_L \mathbf{I}_{N_R} + \mathbf{g})^{-1} \cdot \mathbf{d} = \mathbf{c}. \quad (2.18)$$

For the calculation, we assume, that port reduction was performed on the system, hence, the sub-matrices of the matching network and the LNA, and therefore also the equivalent input impedance matrices are of size $\mathbb{C}^{N_{\text{Rx}} \times N_{\text{Rx}}}$.

As we step through the receiver blocks from left to right, we always have the parallel voltages applied to each receiver block on the left. Therefore the equivalent input impedances \mathbf{Z}_{eqM2} and $\mathbf{Z}_{\text{eqLNA2}}$ can be derived using again the unilateral assumption and Equation (2.6), which leads to

$$\mathbf{Z}_{\text{eqM2}} = \mathbf{Z}_{M22} - \mathbf{Z}_{M12} \cdot (\mathbf{Z}_{M11})^{-1} \cdot \mathbf{Z}_{M21}, \quad \text{and} \quad (2.19)$$

$$\mathbf{Z}_{\text{eqLNA2}} = \mathbf{g} - \mathbf{d} \cdot (\mathbf{c})^{-1} \cdot \mathbf{e} = \mathbf{g}. \quad (2.20)$$

To get the parallel input voltage on the left of the matching network, we use the principle of a voltage divider as

$$\mathbf{v}_M = \mathbf{Z}_{\text{eqM1}} \cdot (\mathbf{Z}_{\text{eqM1}} + \mathbf{Z}_C)^{-1} \mathbf{H}_i^{\text{pr}} \cdot \mathbf{H}_j^{\text{sp}} \cdot \mathbf{v}_j \quad (2.21)$$

To transfer the voltages from the left ports to the right ports of each block we proceed for each block in the following:

1. Calculate the input currents,
2. Transfer the input currents to the output voltages in series, and
3. Calculate the output voltages in parallel, by a voltage divider.

For the matching network, it follows:

$$\mathbf{i}_M = \mathbf{Z}_{M11}^{-1} \cdot \mathbf{v}_M, \quad (2.22)$$

$$\mathbf{v}_{\text{LNA}_{\text{series}}} = \mathbf{Z}_{M12} \cdot \mathbf{i}_M = \mathbf{Z}_{M12} \mathbf{Z}_{M11}^{-1} \cdot \mathbf{v}_M, \quad (2.23)$$

$$\begin{aligned} \mathbf{v}_{\text{LNA}} &= \mathbf{Z}_{\text{eqLNA1}} (\mathbf{Z}_{\text{eqLNA1}} + \mathbf{Z}_{\text{eqM2}})^{-1} \cdot \mathbf{v}_{\text{LNA}_{\text{series}}} \\ &= \mathbf{Z}_{\text{eqLNA1}} (\mathbf{Z}_{\text{eqLNA1}} + \mathbf{Z}_{\text{eqM2}})^{-1} \mathbf{Z}_{M12} \mathbf{Z}_{M11}^{-1} \cdot \mathbf{v}_M, \end{aligned} \quad (2.24)$$

and equivalent for the LNA block

$$\mathbf{v}_L = R_L \mathbf{I}_{N_{\text{Rx}}} (R_L \mathbf{I}_{N_{\text{Rx}}} + \mathbf{Z}_{\text{eqLNA2}})^{-1} \mathbf{e} \cdot \mathbf{c}^{-1} \cdot \mathbf{v}_{\text{LNA}}. \quad (2.25)$$

Therefore we have in total four sub-transfer functions (including the port reduction transfer function) to describe the receiver side. Denoting the transfer function from voltage \mathbf{v}_j to voltage \mathbf{v}_i as $\mathbf{H}_{i,j}$ (i.e. $\mathbf{v}_i = \mathbf{H}_{i,j} \cdot \mathbf{v}_j$), it follows

$$\mathbf{H}_{M,O'} = \mathbf{Z}_{eqM1} \cdot (\mathbf{Z}_{eqM1} + \mathbf{Z}'_C)^{-1}, \quad (2.26)$$

$$\mathbf{H}_{LNA,M} = \mathbf{Z}_{eqLNA1}(\mathbf{Z}_{eqLNA1} + \mathbf{Z}_{eqM2})^{-1} \mathbf{Z}_{M12} \mathbf{Z}_{M11}^{-1}, \quad \text{and} \quad (2.27)$$

$$\mathbf{H}_{L,LNA} = R_L \mathbf{I}_{N_{Rx}} (R_L \mathbf{I}_{N_{Rx}} + \mathbf{Z}_{eqLNA2})^{-1} \mathbf{e} \cdot \mathbf{c}^{-1}, \quad (2.28)$$

and therefore the overall transfer function

$$\mathbf{H}_{L,i} = \mathbf{H}_{L,LNA} \cdot \mathbf{H}_{LNA,M} \cdot \mathbf{H}_{M,O'} \cdot \mathbf{H}_i^{\text{pr}}. \quad (2.29)$$

including a port reduction towards receiver "i". As the first three sub transfer functions ($\mathbf{H}_{L,LNA}$, $\mathbf{H}_{LNA,M}$ and $\mathbf{H}_{M,O'}$) are of size $\mathbb{C}^{N_{Rx} \times N_{Rx}}$, the overall transfer function is of size $\mathbb{C}^{N_{Rx} \times N_{Rx} \cdot (N_{Rx} + N_{Rel})}$.

2.2.5 Signal Covariance Matrix

To calculate the achievable sum rate of the systems (c.f. Section 2.4), we need to derive the signal covariance matrix, defined as $\mathbb{E}[\mathbf{v}_{L,i}^s \mathbf{v}_{L,i}^{sH}]$.

The overall transfer functions from \mathbf{v}_i to $\mathbf{v}_{L,i}^s$ therefore can be extended from Equation (2.29) to

$$\begin{aligned} \mathbf{v}_{L,i} &= \mathbf{H}_{L,LNA} \cdot \mathbf{H}_{LNA,M} \cdot \mathbf{H}_{M,O'} \cdot \mathbf{H}_i^{\text{pr}} \cdot \mathbf{H}_i^{\text{sp}} \cdot \mathbf{v}_i, \\ &= \mathbf{H}_{L,i} \cdot \mathbf{H}_i^{\text{sp}} \cdot \mathbf{v}_i, \end{aligned} \quad (2.30)$$

and hence the signal covariance matrix becomes

$$\mathbf{K}_{S,i} = \mathbf{H}_{L,i} \cdot \mathbf{H}_i^{\text{sp}} \cdot \mathbb{E}[\mathbf{v}_i \mathbf{v}_i^H] \cdot \mathbf{H}_i^{\text{sp}H} \cdot \mathbf{H}_{L,i}^H, \quad (2.31)$$

where $\mathbf{H}_{L,i}$ is the transfer function including any port reduction at the receiver derived in Equation (2.29) and \mathbf{H}_i^{sp} the transfer function over the spatial channel derived in Equation (2.2).

2.2.6 Interference Covariance Matrix

To calculate the interference covariance matrix, all the signal sources besides the partner (in this case, all but "i") have to be consider. This means, that all signal parts arriving at the loads of receiver "i" must be summed up over all the interferer.

The interference covariance matrix hence becomes

$$\begin{aligned} \mathbf{K}_{I,i} &= \sum_{j=0, j \neq i}^{N_{User}-1} \mathbf{H}_{L,i} \cdot \mathbf{H}_j^{\text{sp}} \cdot \mathbb{E}[\mathbf{v}_j \mathbf{v}_j^H] \cdot \mathbf{H}_j^{\text{sp}H} \cdot \mathbf{H}_{L,i}^H \\ &= \mathbf{H}_{L,i} \cdot \left(\sum_{j=1, j \neq i}^{N_{User}-1} \mathbf{H}_j^{\text{sp}} \cdot \mathbb{E}[\mathbf{v}_j \mathbf{v}_j^H] \cdot \mathbf{H}_j^{\text{sp}H} \right) \cdot \mathbf{H}_{L,i}^H. \end{aligned} \quad (2.32)$$

2.3 Noise Description

As mentioned in [3], there are four main noise sources in the receiver. In the following each noise source will be described and its transfer function towards the loads will be derived.

Figure 2.7 gives an overview of the different noise sources. Important hereby is, that the first three noise sources (\mathbf{n}_{AR} , \mathbf{v}_{LNA} and \mathbf{i}_{LNA}) also contribute to the other

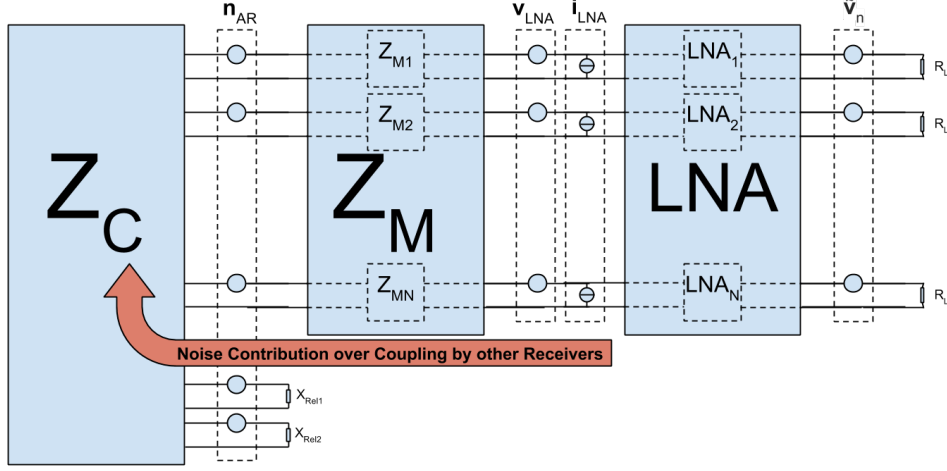


Figure 2.7: Overview of the system including noise sources.

receivers by the coupling. Only the downstream noise $\tilde{\mathbf{v}}_n$ is contributing just to its receiver, because of the unilateral assumption of the LNA.

In the following, the transfer functions for the different noise sources will be derived, so that in the end, the total noise contribution at the receiver can be expressed as

$$\begin{aligned} \mathbf{u}_L &= \mathbf{u}_{AR} + \mathbf{u}_{LNA_v} + \mathbf{u}_{LNA_c} + \mathbf{u}_{\tilde{n}}, \\ &= f(\mathbf{n}_{AR}) + g(\mathbf{v}_{LNA}) + h(\mathbf{i}_{LNA}) + k(\tilde{\mathbf{v}}_n), \end{aligned} \quad (2.33)$$

with f, g, h , and k as the transfer functions for each noise source.

2.3.1 Antenna Noise

The antennas introduce two noise sources. The external noise \mathbf{n}_{ext} , collected from the radiation component of the antenna array and the noise generated by the losses in the antennas \mathbf{n}_l . From [10] it follows,

$$\mathbf{R}_{na} = \mathbb{E}[\mathbf{n}_{AR}\mathbf{n}_{AR}^H] = 4k_B B_W (T_{AE}\mathbb{R}\{\mathbf{Z}_{AR}\} + T_{AL}\mathbf{R}_{AR}), \quad (2.34)$$

with k_B the Boltzmann constant and B_W the bandwidth.

Transfer Function of the Antenna Noise

As the antenna noise is picked up by the antennas in the same way as the signal, the transfer function remains the same as the one derived in Equation (2.30) for the signal, e.g.

$$\mathbf{H}_{L,i} = \mathbf{H}_{L,LNA} \cdot \mathbf{H}_{LNA,M} \cdot \mathbf{H}_{M,O'} \cdot \mathbf{H}_i^{pr}. \quad (2.35)$$

2.3.2 LNA Noise

The LNA introduces the third noise source. From the discussion in [2], the noise of the LNA is modeled by a series of voltages and parallel currents at the input of the

LNA Block. The noise sources have the following statistical properties,

$$\begin{aligned}\mathbb{E}[\mathbf{i}_{\text{LNA}} \mathbf{i}_{\text{LNA}}^H] &= \beta \cdot \mathbf{I}_{N_R N_{\text{Rx}}}, \\ \mathbb{E}[\mathbf{v}_{\text{LNA}} \mathbf{v}_{\text{LNA}}^H] &= \beta \cdot R_n^2 \mathbf{I}_{N_R N_{\text{Rx}}}, \quad \text{and} \\ \mathbb{E}[\mathbf{v}_{\text{LNA}} \mathbf{i}_{\text{LNA}}^H] &= \rho \beta \cdot R_n \mathbf{I}_{N_R N_{\text{Rx}}},\end{aligned}\tag{2.36}$$

with ρ and β as correlation coefficients.

Transfer Function of the LNA Noise

As written above, we have two noise sources, the serial voltage sources and the parallel current sources. For both of them, we need to consider, that at the loads, we have noise contribution of the LNA of the own receiver branch and LNA noise of the other receiver branches, by the coupling. Therefore two transfer functions will be derived in the following:

1. The indirect - a transfer function towards the antenna, and
2. The direct - a transfer function towards the loads.

With the indirect transfer function derived, we can (as in the previous section) concatenate the transfer function of the signal, to get the LNA noise contribution of the other receivers.

Direct LNA Noise Contribution: First we will transfer the current source into a voltage source in series as we then can use the same transfer function for the voltage and the transferred current sources. To do so, we need the equivalent input impedances looking from the left into the LNA block and from the right into the matching network. The equivalent input impedance for the LNA network $\mathbf{Z}_{\text{eqLNA}_1}$ was already derived in (2.18). To get the equivalent input impedance for the matching network looking from the right into it we use Equation (2.5) and get

$$\tilde{\mathbf{Z}}_{\text{eqM}_2} = \mathbf{Z}_{\text{M}22} - \mathbf{Z}_{\text{M}12} \cdot (\mathbf{Z}_{\text{M}11} + \mathbf{Z}_{\text{C}'})^{-1} \cdot \mathbf{Z}_{\text{M}21}.\tag{2.37}$$

Transferring the current source into a series of voltages gives us

$$\mathbf{v}_{\text{LNA}_c} = -\tilde{\mathbf{Z}}_{\text{eqM}_2} \mathbf{i}_{\text{LNA}},\tag{2.38}$$

and therefore a transfer function of

$$\mathbf{H}_{\text{L,LNA}_v,\text{dir}} = R_L \mathbf{I}_{N_R} (R_L \mathbf{I}_{N_R} + \tilde{\mathbf{Z}}_{\text{eqLNA}_2})^{-1} \mathbf{e} \cdot (\mathbf{c} + \tilde{\mathbf{Z}}_{\text{eqM}_2})^{-1},\tag{2.39}$$

for the series voltages and

$$\begin{aligned}\mathbf{H}_{\text{L,LNA}_c,\text{dir}} &= -R_L \mathbf{I}_{N_R} (R_L \mathbf{I}_{N_R} + \tilde{\mathbf{Z}}_{\text{eqLNA}_2})^{-1} \mathbf{e} \cdot (\mathbf{c} + \tilde{\mathbf{Z}}_{\text{eqM}_2})^{-1} \tilde{\mathbf{Z}}_{\text{eqM}_2}, \\ &= -\mathbf{H}_{\text{L,LNA}_v,\text{dir}} \cdot \tilde{\mathbf{Z}}_{\text{eqM}_2},\end{aligned}\tag{2.40}$$

for the LNA noise currents. Both transfer functions assume user i to be the receiver. It is clear to see, that both transfer functions are of size $\mathbb{C}^{N_{\text{Rx}} \times N_{\text{Rx}}}$.

Indirect LNA Noise Contribution: In a second step we transfer the LNA-voltage and -current sources, respectively to parallel voltage sources at the antennas, so that the transfer function derived in Equation (2.29) can be applied. In the following, all the indices are neglected for simplicity reasons. For the transfer functions towards the antennas, we consider all the ports of the passive receivers. Therefore we are looking at matrices of size $\mathbb{C}^{(N_R-1)N_{\text{Rx}} \times (N_R-1)N_{\text{Rx}}}$.

By multiplying the LNA-current noise source by the equivalent input impedance of the LNA

$$\mathbf{v}_{\text{LNAc}} = \mathbf{Z}_{\text{eqLNA1}} \mathbf{i}_{\text{LNA}}, \quad (2.41)$$

it is transferred to a series voltage, just like the LNA-voltage noise. Now we only need to find the transfer function for the LNA-voltage source \mathbf{v}_{LNAv} . The transfer function over the matching network is given by

$$\mathbf{H}_{\text{O,LNA}} = \mathbf{Z}_{\text{M12}}(\mathbf{Z}_{\text{M22}} + \mathbf{Z}_{\text{eqLNA1}})^{-1}. \quad (2.42)$$

This leads to the overall indirect LNA noise transfer functions of

$$\begin{aligned} \mathbf{H}_{\text{L,LNAv,ind}} &= \mathbf{H}_{\text{L,i}} \cdot \mathbf{H}_{\text{O,LNA}}, \quad \text{for the voltage sources, and} \\ \mathbf{H}_{\text{L,LNAc,ind}} &= \mathbf{H}_{\text{L,LNAv,ind}} \cdot \mathbf{Z}_{\text{eqLNA1}}, \quad \text{for the current sources.} \end{aligned} \quad (2.43)$$

Looking at the size of the matrices, we see, that the $\mathbf{H}_{\text{O,LNA}}$ as well as $\mathbf{Z}_{\text{eqLNA1}}$ are of size $\mathbb{C}^{(N_{\text{R}}-1)N_{\text{Rx}} \times (N_{\text{R}}-1)N_{\text{Rx}}}$ and therefore the overall transfer function is of size $\mathbb{C}^{N_{\text{Rx}} \times (N_{\text{R}}-1)N_{\text{Rx}}}$.

2.3.3 Downstream Noise

The last noise source is the downstream noise, generated by all the circuitry after the LNA [11] and modeled by voltage sources $\tilde{\mathbf{v}}_{\text{n}}$ in series to the loads. With the statistical property

$$\mathbb{E}[\tilde{\mathbf{v}}_{\text{n}} \tilde{\mathbf{v}}_{\text{n}}^H] = \psi \cdot \mathbf{I}_{N_{\text{R}}N_{\text{Rx}}}. \quad (2.44)$$

Transfer Function of the Downstream Noise

For the transfer function of the downstream noise we need a simple voltage divider of the loads and the equivalent input impedance $\tilde{\mathbf{Z}}_{\text{eqLNA}_2}$ looking from the right into the LNA block.

$$\mathbf{H}_{\text{L,n}} = R_{\text{L}} \mathbf{I}_{N_{\text{R}}} (R_{\text{L}} \mathbf{I}_{N_{\text{R}}} + \tilde{\mathbf{Z}}_{\text{eqLNA}_2})^{-1}, \quad (2.45)$$

with

$$\tilde{\mathbf{Z}}_{\text{eqLNA}_2} = \mathbf{g} - \mathbf{d} \cdot (\mathbf{c} + \tilde{\mathbf{Z}}_{\text{eqM}_2})^{-1} \cdot \mathbf{e} = \mathbf{g}, \quad (2.46)$$

whereby the unilateral assumption ($\mathbf{d} = \mathbf{0}$) was applied, and hence $\tilde{\mathbf{Z}}_{\text{eqLNA}_2} = \mathbf{Z}_{\text{eqLNA}_2}$ from Equation (2.20).

For the downstream noise we note, that under the unilateral assumption, the transferred noise towards the antennas is zero, because

$$\mathbf{v}_{\text{LNA n}} = \mathbf{d}(\mathbf{g} + R_{\text{L}} \mathbf{I}_{N_{\text{R}}})^{-1} \tilde{\mathbf{v}}_{\text{v}} = \mathbf{0}, \quad (2.47)$$

when $\mathbf{d} = \mathbf{0}$. Therefore, the downstream noise does only contribute to its own receiver branch, and hence $\mathbf{H}_{\text{L,n}}$ is of size $\mathbb{C}^{N_{\text{Rx}} \times N_{\text{Rx}}}$.

2.3.4 Noise Covariance Matrix

In the following we will describe the whole system by its noise transfer functions. We thereby use the index i for the branches of the active receivers and index j for the branches of the passive receiver, i.e. the branches which contributed only by

their coupling. With the transfer functions derived for each noise source, we can finally express each noise contribution at the loads as stated in Equation (2.33) by

$$\begin{aligned}
\mathbf{u}_{AR} &= \mathbf{H}_{L,0} \cdot \mathbf{n}_{AR}, \\
\mathbf{u}_{LNA_v} &= \mathbf{H}_{L,LNA_v,ind} \cdot \mathbf{v}_{LNA,j} + \mathbf{H}_{L,LNA_v,dir} \cdot \mathbf{v}_{LNA,i}, \\
\mathbf{u}_{LNA_c} &= \mathbf{H}_{L,LNA_c,ind} \cdot \mathbf{i}_{LNA,j} + \mathbf{H}_{L,LNA_c,dir} \cdot \mathbf{i}_{LNA,i}, \\
\mathbf{u}_{\tilde{n}} &= \mathbf{H}_{L,n} \cdot \tilde{\mathbf{v}}_n,
\end{aligned}$$

and therefore $\mathbf{u}_L = \mathbf{u}_{AR} + \mathbf{u}_{LNA_v} + \mathbf{u}_{LNA_c} + \mathbf{u}_{\tilde{n}}$. (2.48)

As each vector is of size $\mathbb{C}^{N_{Rx} \times 1}$, the noise covariance matrix, described in the following will be of size $\mathbb{C}^{N_{Rx} \times N_{Rx}}$. Because all the noise sources are uncorrelated, except for the LNA noise sources (c.f. Equation (2.36)), the noise covariance matrix can be written as:

$$\begin{aligned}
\mathbf{K}_{N,i} = \mathbb{E}[\mathbf{u}_L \mathbf{u}_L^H] &= \mathbb{E}[\mathbf{u}_{AR} \mathbf{u}_{AR}^H] + \mathbb{E}[\mathbf{u}_{LNA_v} \mathbf{u}_{LNA_v}^H] + \mathbb{E}[\mathbf{u}_{LNA_c} \mathbf{u}_{LNA_c}^H] + \\
&\quad \mathbb{E}[\mathbf{u}_{LNA_c} \mathbf{u}_{LNA_v}^H] + \mathbb{E}[\mathbf{u}_{LNA_v} \mathbf{u}_{LNA_c}^H] + \mathbb{E}[\mathbf{u}_{\tilde{n}} \mathbf{u}_{\tilde{n}}^H].
\end{aligned}
\tag{2.49}$$

For simplicity reasons, we will look in every summand separately in the following. For the antenna noise it follows therefore

$$\mathbb{E}[\mathbf{u}_{AR} \mathbf{u}_{AR}^H] = \mathbf{H}_{L,i} \mathbb{E}[\mathbf{n}_{AR} \mathbf{n}_{AR}^H] \mathbf{H}_{L,i}^H = \mathbf{H}_{L,i} \mathbf{R}_{na} \mathbf{H}_{L,i}^H, \tag{2.50}$$

using (2.34), with \mathbf{R}_{na} of size $\mathbb{R}^{N_R \cdot (N_{Rx} + N_{Rel}) \times N_R \cdot (N_{Rx} + N_{Rel})}$ and hence, by the shape of $\mathbf{H}_{L,i}$, $\mathbb{E}[\mathbf{u}_{AR} \mathbf{u}_{AR}^H]$ becomes a matrix of size $\mathbb{C}^{N_{Rx} \times N_{Rx}}$.

For the LNA voltage noise, using (2.36), it follows

$$\begin{aligned}
\mathbb{E}[\mathbf{u}_{LNA_v} \mathbf{u}_{LNA_v}^H] &= \mathbb{E}[(\mathbf{H}_{L,LNA_v,ind} \cdot \mathbf{v}_{LNA,j} + \mathbf{H}_{L,LNA_v,dir} \cdot \mathbf{v}_{LNA,i}) \cdot \\
&\quad (\mathbf{H}_{L,LNA_v,ind} \cdot \mathbf{v}_{LNA,j} + \mathbf{H}_{L,LNA_v,dir} \cdot \mathbf{v}_{LNA,i})^H],
\end{aligned}
\tag{2.51}$$

by the fact, that $\mathbf{v}_{LNA,j}$ and $\mathbf{v}_{LNA,i}$ are independent of each other (c.f. Equation (2.36)), the cross terms cancel out and hence,

$$\begin{aligned}
\mathbb{E}[\mathbf{u}_{LNA_v} \mathbf{u}_{LNA_v}^H] &= \mathbf{H}_{L,LNA_v,ind} \cdot \mathbb{E}[\mathbf{v}_{LNA,j} \mathbf{v}_{LNA,j}^H] \cdot \mathbf{H}_{L,LNA_v,ind}^H + \\
&\quad \mathbf{H}_{L,LNA_v,dir} \cdot \mathbb{E}[\mathbf{v}_{LNA,i} \mathbf{v}_{LNA,i}^H] \cdot \mathbf{H}_{L,LNA_v,dir}^H \\
&= (\mathbf{H}_{L,LNA_v,ind} \cdot \mathbf{H}_{L,LNA_v,ind}^H + \mathbf{H}_{L,LNA_v,dir} \cdot \mathbf{H}_{L,LNA_v,dir}^H) \cdot \beta \cdot R_n^2.
\end{aligned}
\tag{2.52}$$

for the LNA-voltage source and similar for the current source

$$\mathbb{E}[\mathbf{u}_{LNA_c} \mathbf{u}_{LNA_c}^H] = (\mathbf{H}_{L,LNA_c,ind} \cdot \mathbf{H}_{L,LNA_c,ind}^H + \mathbf{H}_{L,LNA_c,dir} \cdot \mathbf{H}_{L,LNA_c,dir}^H) \cdot \beta. \tag{2.53}$$

The remaining terms for the LNA noise contribution are the cross terms. For

them it follows,

$$\begin{aligned}
\mathbb{E}[\mathbf{u}_{\text{LNA}_c} \mathbf{u}_{\text{LNA}_v}^H] + \mathbb{E}[\mathbf{u}_{\text{LNA}_c} \mathbf{u}_{\text{LNA}_c}^H] &= \mathbf{H}_{\text{L,LNA}_v,\text{dir}} \cdot \rho\beta \cdot R_n \cdot \mathbf{H}_{\text{L,LNA}_c,\text{dir}}^H + \\
&\quad \mathbf{H}_{\text{L,LNA}_c,\text{dir}} \cdot \rho^* \beta \cdot R_n \cdot \mathbf{H}_{\text{L,LNA}_v,\text{dir}}^H + \\
&\quad \mathbf{H}_{\text{L},0} \cdot \mathbf{H}_{\text{L,LNA}_v,\text{ind}} \cdot \rho\beta \cdot R_n \cdot \mathbf{H}_{\text{L,LNA}_c,\text{ind}}^H \mathbf{H}_{\text{L},0}^H + \\
&\quad \mathbf{H}_{\text{L},0} \cdot \mathbf{H}_{\text{L,LNA}_c,\text{ind}} \cdot \rho^* \beta \cdot R_n \cdot \mathbf{H}_{\text{L,LNA}_v,\text{ind}}^H \mathbf{H}_{\text{L},0}^H \\
&= \beta \cdot R_n \left(-\mathbf{H}_{\text{L,LNA}_v,\text{dir}} \left(\rho \tilde{\mathbf{Z}}_{\text{eqM}_2}^H + \tilde{\mathbf{Z}}_{\text{eqM}_2} \rho^* \right) \mathbf{H}_{\text{L,LNA}_v,\text{dir}} + \right. \\
&\quad \left. \mathbf{H}_{\text{L,LNA}_v,\text{ind}} \left(\rho \mathbf{Z}_{\text{eqLNA}_1}^H + \mathbf{Z}_{\text{eqLNA}_1} \rho^* \right) \mathbf{H}_{\text{L,LNA}_v,\text{ind}} \right) \\
&= 2\beta \cdot R_n \left(-\mathbf{H}_{\text{L,LNA}_v,\text{dir}} \cdot \mathbb{R}\{\rho^* \tilde{\mathbf{Z}}_{\text{eqM}_2}\} \cdot \mathbf{H}_{\text{L,LNA}_v,\text{dir}} + \right. \\
&\quad \left. \mathbf{H}_{\text{L,LNA}_v,\text{ind}} \cdot \mathbb{R}\{\rho^* \mathbf{Z}_{\text{eqLNA}_1}\} \cdot \mathbf{H}_{\text{L,LNA}_v,\text{ind}} \right), \tag{2.54}
\end{aligned}$$

where Equations (2.36), (2.40) and (2.43) were used.

Finally, there is only the downstream noise contribution left. Because of the unilateral assumption, this becomes less complex, i.e.

$$\mathbb{E}[\mathbf{u}_{\tilde{n}} \mathbf{u}_{\tilde{n}}^H] = \psi \left(\mathbf{H}_{\text{L},\tilde{n}} \cdot \mathbf{H}_{\text{L},\tilde{n}}^H \right),$$

where the statistical property of the downstream noise from Equation (2.44) was used.

With these results we can form the final noise covariance matrix as

$$\begin{aligned}
\mathbf{K}_{\text{N},i} &= \mathbf{H}_{\text{L},i} \mathbf{R}_{\text{na}} \mathbf{H}_{\text{L},i}^H + \\
&\quad \beta \cdot R_n^2 \cdot \left(\mathbf{H}_{\text{L,LNA}_v,\text{ind}} \cdot \mathbf{H}_{\text{L,LNA}_v,\text{ind}}^H + \mathbf{H}_{\text{L,LNA}_v,\text{dir}} \cdot \mathbf{H}_{\text{L,LNA}_v,\text{dir}}^H \right) + \\
&\quad \beta \cdot \left(\mathbf{H}_{\text{L,LNA}_c,\text{ind}} \cdot \mathbf{H}_{\text{L,LNA}_c,\text{ind}}^H + \mathbf{H}_{\text{L,LNA}_c,\text{dir}} \cdot \mathbf{H}_{\text{L,LNA}_c,\text{dir}}^H \right) + \\
&\quad 2\beta \cdot R_n \left(-\mathbf{H}_{\text{L,LNA}_v,\text{dir}} \cdot \mathbb{R}\{\rho^* \tilde{\mathbf{Z}}_{\text{eqM}_2}\} \cdot \mathbf{H}_{\text{L,LNA}_v,\text{dir}} + \right. \\
&\quad \left. \mathbf{H}_{\text{L,LNA}_v,\text{ind}} \cdot \mathbb{R}\{\rho^* \mathbf{Z}_{\text{eqLNA}_1}\} \cdot \mathbf{H}_{\text{L,LNA}_v,\text{ind}} \right) + \\
&\quad \psi \left(\mathbf{H}_{\text{L},\tilde{n}} \cdot \mathbf{H}_{\text{L},\tilde{n}}^H \right). \tag{2.55}
\end{aligned}$$

According to the noise vector sizes given in the beginning of this section, the noise covariance matrix is of size $\mathbb{C}^{N_{\text{Rx}} \times N_{\text{Rx}}}$.

2.4 Rate Calculations

2.4.1 Achievable Rate

After the derivation of the signal, interference and noise covariance matrix, we can now describe the achievable rate for each connection pair. The achievable rate for user j is described as

$$\begin{aligned}
r_j &= \log_2 \left(\det \left(\mathbf{K}_{\text{S},j} (\mathbf{K}_{\text{I},j} + \mathbf{K}_{\text{N},j})^{-1} + \mathbf{I}_{N_R} \right) \right) \\
&= \log_2 (\det (\mathbf{K}_{\text{S},j} + \mathbf{K}_{\text{I},j} + \mathbf{K}_{\text{N},j})) - \log_2 (\det (\mathbf{K}_{\text{I},j} + \mathbf{K}_{\text{N},j})). \tag{2.56}
\end{aligned}$$

Stacking the achievable rates per user into a vector, leads to

$$\mathbf{r} = [r_0 \quad r_1 \quad \cdots \quad r_{N_{\text{User}}-1}]^T. \tag{2.57}$$

And by this vector we can describe the achievable sum rate as

$$r_{\text{Sum}} = \|\mathbf{r}\|_1, \quad (2.58)$$

with $\|\cdot\|_1$ the 1-norm, i.e. the sum of the elements of \mathbf{r} .

$$\max_{\mathbf{z}_M, \mathbf{x}_{\text{Rel}}} (r_{\text{Sum}}) = \max_{\mathbf{z}_M, \mathbf{x}_{\text{Rel}}} \left(\sum_{j=0}^{N_{\text{User}}-1} r[j] \right), \quad (2.59)$$

2.4.2 Interference Limited or Noise Free Rate

Another measure required in this thesis is the interference limited or noise free rate. It is calculated by only considering signal and interference power at the loads. Therefore neglecting the noise in Equation 2.56 leads to

$$r_j = \log_2 (\det (\mathbf{K}_{S,j} + \mathbf{K}_{I,j})) - \log_2 (\det (\mathbf{K}_{I,j})). \quad (2.60)$$

This is helpful, to see how good the interference was removed by the optimization, which will be introduced in Chapter 4. The noise free rate also will be denoted as SIR-rate.

2.4.3 TDMA Rate

In the later sections the results achieved in this thesis will be compared to existing protocols eliminating interference, such as TDMA. Therefore in the following the achievable rates for the TDMA protocol will be shown.

As the time in TDMA is split up in slots in which each user is allowed to transmit without any interference, the achievable rate from Equation (2.56) reduces to the interference free achievable rate of

$$r_j = \frac{1}{N_{\text{User}}} \cdot (\log_2 (\det (\mathbf{K}_{S,j} + \mathbf{K}_{N,j})) - \log_2 (\det (\mathbf{K}_{N,j}))). \quad (2.61)$$

It is obvious, that with no interference, this rate would be higher than the achievable rate with interference, if the factor of $\frac{1}{N_{\text{User}}}$ was not considered. However each user is not allowed anymore, to use the full transmission period, but only a time slot of length $\frac{1}{N_{\text{User}}} \cdot T_0$, with T_0 the length of the full transmission period. Therefore the achievable sum rate can be written as

$$\begin{aligned} r_{\text{Sum}} &= \|\mathbf{r}\|_1, \\ &= \frac{1}{N_{\text{User}}} \cdot \sum_{j=0}^{N_{\text{User}}-1} r_j. \end{aligned} \quad (2.62)$$

The term $\frac{1}{N_{\text{User}}}$ is hereby called "pre-log" factor and the reason why TDMA is not a good approach for a large number of users, as N_{User} increases linearly, however the advantage of an interference free link will only increase the rate logarithmically over a low interference connection.

There are different approaches of using TDMA, such as allowing a small number of users at the same time to transmit during one time slot. This will lead to some interference but therefore also a smaller pre-log factor. Such an approach is used in the later chapters.

Chapter 3

Analytical Gradient

In the following the derivation of the gradients will be given. In the first section the signal gradients will be derived, in the later the noise gradients. The gradients are derived to improve the achievable rates of the system (Equation (2.56)). We are interested in the gradient of the achievable rates with respect to the matching network and the passive antenna loads. Using the matrix relations from [12] and restricting to the achievable sum rate, the gradient becomes

$$\frac{\partial \mathbf{r}}{\partial \mathbf{Z}_{l,ij}} = \sum_{i=0}^{N_{\text{User}}-1} \frac{\partial r_i}{\partial \mathbf{Z}_{l,ij}}. \quad (3.1)$$

Therefore, the gradient must be derived for each user, hence looking at one and applying it similarly to the others is sufficient. The gradient of one user (neglecting the user index, for simplicity reasons) can be written as

$$\frac{\partial r}{\partial \mathbf{Z}_{l,ij}} = \frac{1}{\ln(2)} \text{Tr} \left((\mathbf{K}_s + \mathbf{K}_i + \mathbf{K}_n)^{-1} \left(\frac{\partial \mathbf{K}_s}{\partial \mathbf{Z}_{l,ij}} + \frac{\partial \mathbf{K}_i}{\partial \mathbf{Z}_{l,ij}} + \frac{\partial \mathbf{K}_n}{\partial \mathbf{Z}_{l,ij}} \right) - \right. \quad (3.2)$$

$$\left. (\mathbf{K}_s + \mathbf{K}_n)^{-1} \left(\frac{\partial \mathbf{K}_i}{\partial \mathbf{Z}_{l,ij}} + \frac{\partial \mathbf{K}_n}{\partial \mathbf{Z}_{l,ij}} \right) \right), \quad (3.3)$$

with $l \in \{\text{M11, M12, M22, pass}\}$ denoting the sub-matrices of the matching network or the passive antenna loads and i, j denoting the element in the i -th row and j -th column. In the following the gradient is split up in the signal, interference and the noise part. The derivatives for each covariance matrix will be derived.

3.1 Signal Gradient

For the signal covariance matrix, we see from Equation (2.31), that we can take the derivative of each sub transfer function and place them together afterwards by the chain rule. Therefore the gradient of the signal covariance becomes

$$\begin{aligned} \frac{\partial \mathbf{K}_s}{\partial \mathbf{Z}_{l,ij}} &= \frac{\partial \mathbf{H}_{L,0}}{\partial \mathbf{Z}_{l,ij}} \cdot \mathbf{H}_0^{\text{sp}} \cdot \mathbb{E}[\mathbf{v}_0 \mathbf{v}_0^H] \cdot \mathbf{H}_0^{\text{sp}^H} \cdot \mathbf{H}_{L,0}^H + \\ &\quad \mathbf{H}_{L,0} \cdot \mathbf{H}_0^{\text{sp}} \cdot \mathbb{E}[\mathbf{v}_0 \mathbf{v}_0^H] \cdot \mathbf{H}_0^{\text{sp}^H} \cdot \frac{\partial \mathbf{H}_{L,0}^H}{\partial \mathbf{Z}_{l,ij}}. \end{aligned} \quad (3.4)$$

First of all, we check which sub transfer functions (c.f. Equation (2.30)) are affected by the gradient. We see that the transfer functions $\mathbf{H}_{\text{LNA},\text{M}}$, $\mathbf{H}_{\text{M},0}$ and

obviously \mathbf{H}_i^{pr} for the port reduction are affected by the relay loads and the matching network.

For the following \mathbf{J}_{ij} denotes the single entry matrix, with respect to the i -th row and the j -th column. It follows for the port reduction transfer function (again, neglecting the user index)

$$\frac{\partial \mathbf{H}^{\text{pr}}}{\partial \mathbf{Z}_{\text{pass},ij}} = [\mathbf{0}_{N_{\text{Rx}}} \quad \mathbf{Z}_{\text{OL}}(\mathbf{Z}_{\text{pass}} + \mathbf{Z}_{\text{LL}})^{-1} \mathbf{J}_{ij}(\mathbf{Z}_{\text{pass}} + \mathbf{Z}_{\text{LL}})^{-1}] \quad (3.5)$$

with $\mathbf{0}_{N_{\text{Rx}}}$ the N_{Rx} by N_{Rx} all-zeros matrix.

Next, for the voltage divider before the matching network, hence the transfer function of the open circuit voltages at the antennas to parallel input voltages of the matching network it follows,

$$\frac{\partial \mathbf{H}_{\text{M},0'}}{\partial \mathbf{Z}_{11,ij}} = \mathbf{J}_{ij}(\mathbf{Z}_{\text{eqM}_1} + \mathbf{Z}_{\text{C}'})^{-1} - \mathbf{Z}_{\text{eqM}_1}(\mathbf{Z}_{\text{eqM}_1} + \mathbf{Z}_{\text{C}'})^{-1} \mathbf{J}_{ij}(\mathbf{Z}_{\text{eqM}_1} + \mathbf{Z}_{\text{C}'})^{-1}, \quad (3.6)$$

$$\begin{aligned} \text{with } \frac{\partial \mathbf{Z}_{\text{eqM}_1}}{\partial \mathbf{Z}_{\text{M12}}} &= \mathbf{J}_{ij}^T(\mathbf{Z}_{\text{M22}} + \mathbf{Z}_{\text{eqLNA}_1})^{-1} \mathbf{Z}_{\text{M12}} + \mathbf{Z}_{\text{M12}}^T(\mathbf{Z}_{\text{M22}} + \mathbf{Z}_{\text{eqLNA}_1})^{-1} \mathbf{J}_{ij}, \\ \frac{\partial \mathbf{H}_{\text{M},0'}}{\partial \mathbf{Z}_{12,ij}} &= \frac{\partial \mathbf{Z}_{\text{eqM}_1}}{\partial \mathbf{Z}_{\text{M12}}}(\mathbf{Z}_{\text{eqM}_1} + \mathbf{Z}_{\text{C}'})^{-1} - \\ &\quad \mathbf{Z}_{\text{eqM}_1}(\mathbf{Z}_{\text{eqM}_1} + \mathbf{Z}_{\text{C}'})^{-1} \frac{\partial \mathbf{Z}_{\text{eqM}_1}}{\partial \mathbf{Z}_{\text{M12}}}(\mathbf{Z}_{\text{eqM}_1} + \mathbf{Z}_{\text{C}'})^{-1}, \end{aligned} \quad (3.7)$$

$$\begin{aligned} \text{with } \frac{\partial \mathbf{Z}_{\text{eqM}_1}}{\partial \mathbf{Z}_{\text{M22}}} &= \mathbf{Z}_{\text{M12}}^T(\mathbf{Z}_{\text{M22}} + \mathbf{Z}_{\text{eqLNA}_1})^{-1} \mathbf{J}_{ij}^T(\mathbf{Z}_{\text{M22}} + \mathbf{Z}_{\text{eqLNA}_1})^{-1} \mathbf{Z}_{\text{M12}}, \\ \frac{\partial \mathbf{H}_{\text{M},0'}}{\partial \mathbf{Z}_{22,ij}} &= \frac{\partial \mathbf{Z}_{\text{eqM}_1}}{\partial \mathbf{Z}_{\text{M22}}}(\mathbf{Z}_{\text{eqM}_1} + \mathbf{Z}_{\text{C}'})^{-1} - \\ &\quad \mathbf{Z}_{\text{eqM}_1}(\mathbf{Z}_{\text{eqM}_1} + \mathbf{Z}_{\text{C}'})^{-1} \frac{\partial \mathbf{Z}_{\text{eqM}_1}}{\partial \mathbf{Z}_{\text{M22}}}(\mathbf{Z}_{\text{eqM}_1} + \mathbf{Z}_{\text{C}'})^{-1}, \end{aligned} \quad (3.8)$$

$$\begin{aligned} \text{and with } \frac{\partial \mathbf{Z}_{\text{C}'}}{\partial \mathbf{Z}_{\text{pass},ij}} &= \mathbf{Z}_{\text{OL}}(\mathbf{Z}_{\text{pass}} + \mathbf{Z}_{\text{LL}})^{-1} \mathbf{J}_{ij}(\mathbf{Z}_{\text{pass}} + \mathbf{Z}_{\text{LL}})^{-1} \mathbf{Z}_{\text{LO}} \\ \frac{\partial \mathbf{H}_{\text{M},0'}}{\partial \mathbf{Z}_{\text{pass},ij}} &= -\mathbf{Z}_{\text{eqM}_1}(\mathbf{Z}_{\text{eqM}_1} + \mathbf{Z}_{\text{C}'})^{-1} \frac{\partial \mathbf{Z}_{\text{C}'}}{\partial \mathbf{Z}_{\text{pass},ij}}(\mathbf{Z}_{\text{eqM}_1} + \mathbf{Z}_{\text{C}'})^{-1}. \end{aligned} \quad (3.9)$$

After deriving the gradient for the open circuit - matching network transfer function, the transfer function over the matching network is the last remaining affected transfer function. Its gradient can be written as

$$\begin{aligned} \frac{\partial \mathbf{H}_{\text{LNA},\text{M}}}{\partial \mathbf{Z}_{11,ij}} &= -\mathbf{H}_{\text{LNA},\text{M}} \mathbf{J}_{ij} \mathbf{Z}_{\text{M11}}^{-1} \mathbf{Z}_{\text{M12}}(\mathbf{Z}_{\text{eqLNA}_1} + \mathbf{Z}_{\text{eqM}_2})^{-1} \mathbf{Z}_{\text{M12}} \mathbf{Z}_{\text{M11}}^{-1} - \\ &\quad \mathbf{H}_{\text{LNA},\text{M}} \mathbf{J}_{ij} \mathbf{Z}_{\text{M11}}^{-1}, \end{aligned} \quad (3.10)$$

$$\begin{aligned} \frac{\partial \mathbf{H}_{\text{LNA},\text{M}}}{\partial \mathbf{Z}_{12,ij}} &= -\mathbf{Z}_{\text{eqLNA}_1}(\mathbf{Z}_{\text{eqLNA}_1} + \mathbf{Z}_{\text{eqM}_2})^{-1} \mathbf{J}_{ij}^T \mathbf{Z}_{\text{M11}}^{-1} \mathbf{Z}_{\text{M12}} - \\ &\quad \mathbf{Z}_{\text{M12}}^T \mathbf{Z}_{\text{M11}}^{-1} \mathbf{J}_{ij}(\mathbf{Z}_{\text{eqLNA}_1} + \mathbf{Z}_{\text{eqM}_2})^{-1} \mathbf{Z}_{\text{M12}} \mathbf{Z}_{\text{M11}}^{-1} + \\ &\quad \mathbf{Z}_{\text{eqLNA}_1}(\mathbf{Z}_{\text{eqLNA}_1} + \mathbf{Z}_{\text{eqM}_2})^{-1} \mathbf{J}_{ij} \mathbf{Z}_{\text{M11}}^{-1}, \quad \text{and} \end{aligned} \quad (3.11)$$

$$\frac{\partial \mathbf{H}_{\text{LNA},\text{M}}}{\partial \mathbf{Z}_{22,ij}} = \mathbf{Z}_{\text{eqLNA}_1}(\mathbf{Z}_{\text{eqLNA}_1} + \mathbf{Z}_{\text{eqM}_2})^{-1} \mathbf{J}_{ij}(\mathbf{Z}_{\text{eqLNA}_1} + \mathbf{Z}_{\text{eqM}_2})^{-1} \mathbf{Z}_{\text{M12}} \mathbf{Z}_{\text{M11}}^{-1}. \quad (3.12)$$

Note, that the transfer function is only affected by the matching network and not by the coupling network, hence also not by the relay loads.

3.2 Interference Gradient

From Equation (2.32), it can be seen, that the interference is similar to the signal, hence the same derivatives as in Section 3.1 will apply on the interference. This leads to the gradient of the interference covariance matrix, of user m

$$\begin{aligned} \frac{\partial \mathbf{K}_{i,m}}{\partial \mathbf{Z}_{l,ij}} &= \frac{\partial \mathbf{H}_{L,m}}{\partial \mathbf{Z}_{l,ij}} \cdot \left(\sum_{n=0, n \neq m}^{N_{\text{User}}-1} \mathbf{H}_n^{\text{sp}} \cdot \mathbb{E}[\mathbf{v}_n \mathbf{v}_n^H] \cdot \mathbf{H}_n^{\text{sp}^H} \right) \cdot \mathbf{H}_{L,m}^H + \\ &\quad \mathbf{H}_{L,m} \cdot \left(\sum_{n=1}^{N_{\text{User}}-1} \mathbf{H}_n^{\text{sp}} \cdot \mathbb{E}[\mathbf{v}_n \mathbf{v}_n^H] \cdot \mathbf{H}_n^{\text{sp}^H} \right) \cdot \frac{\partial \mathbf{H}_{L,m}^H}{\partial \mathbf{Z}_{l,ij}}. \end{aligned} \quad (3.13)$$

Again, only the transfer function $\mathbf{H}_{L,m}$ is affected by the matching network and the relay loads. Its gradient was shown in Section 3.1, hence is neglected here.

3.3 Noise Gradients

As written in Section 2.3, we have four noise sources, where only the two LNA noise sources correlated with each other. From the noise covariance matrix derived in Equation (2.55), the gradient of it can be written as

$$\begin{aligned} \frac{\partial \mathbf{K}_n}{\partial \mathbf{Z}_{l,ij}} &= \frac{\partial \mathbf{H}_{L,i}}{\partial \mathbf{Z}_{l,ij}} \mathbf{R}_{\text{na}} \mathbf{H}_{L,i}^H + \mathbf{H}_{L,0} \mathbf{R}_{\text{na}} \frac{\partial \mathbf{H}_{L,i}^H}{\partial \mathbf{Z}_{l,ij}} + \\ &\quad \beta \cdot R_n^2 \cdot \left(\frac{\partial \mathbf{H}_{L,\text{LNAv,ind}}}{\partial \mathbf{Z}_{l,ij}} \cdot \mathbf{H}_{L,\text{LNAv,ind}}^H + \frac{\partial \mathbf{H}_{L,\text{LNAv,dir}}}{\partial \mathbf{Z}_{l,ij}} \cdot \mathbf{H}_{L,\text{LNAv,dir}}^H + \right. \\ &\quad \left. \mathbf{H}_{L,\text{LNAv,ind}} \cdot \frac{\partial \mathbf{H}_{L,\text{LNAv,ind}}^H}{\partial \mathbf{Z}_{l,ij}} + \mathbf{H}_{L,\text{LNAv,dir}} \cdot \frac{\partial \mathbf{H}_{L,\text{LNAv,dir}}^H}{\partial \mathbf{Z}_{l,ij}} \right) + \\ &\quad \beta \cdot \left(\frac{\partial \mathbf{H}_{L,\text{LNAc,ind}}}{\partial \mathbf{Z}_{l,ij}} \cdot \mathbf{H}_{L,\text{LNAc,ind}}^H + \frac{\partial \mathbf{H}_{L,\text{LNAc,dir}}}{\partial \mathbf{Z}_{l,ij}} \cdot \mathbf{H}_{L,\text{LNAc,dir}}^H + \right. \\ &\quad \left. \mathbf{H}_{L,\text{LNAc,ind}} \cdot \frac{\partial \mathbf{H}_{L,\text{LNAc,ind}}^H}{\partial \mathbf{Z}_{l,ij}} + \mathbf{H}_{L,\text{LNAc,dir}} \cdot \frac{\partial \mathbf{H}_{L,\text{LNAc,dir}}^H}{\partial \mathbf{Z}_{l,ij}} \right) + \\ &\quad 2\beta \cdot R_n \left(-\frac{\partial \mathbf{H}_{L,\text{LNAv,dir}}}{\partial \mathbf{Z}_{l,ij}} \cdot \Re\{\rho^* \tilde{\mathbf{Z}}_{\text{eqM}_2}\} \cdot \mathbf{H}_{L,\text{LNAv,dir}} + \right. \\ &\quad \frac{\partial \mathbf{H}_{L,\text{LNAv,ind}}}{\partial \mathbf{Z}_{l,ij}} \cdot \Re\{\rho^* \mathbf{Z}_{\text{eqLNA}_1}\} \cdot \mathbf{H}_{L,\text{LNAv,ind}} \\ &\quad \left. - \mathbf{H}_{L,\text{LNAv,dir}} \cdot \Re\{\rho^* \tilde{\mathbf{Z}}_{\text{eqM}_2}\} \cdot \frac{\partial \mathbf{H}_{L,\text{LNAv,dir}}}{\partial \mathbf{Z}_{l,ij}} + \right. \\ &\quad \left. \mathbf{H}_{L,\text{LNAv,ind}} \cdot \Re\{\rho^* \mathbf{Z}_{\text{eqLNA}_1}\} \cdot \frac{\partial \mathbf{H}_{L,\text{LNAv,ind}}}{\partial \mathbf{Z}_{l,ij}} \right) + \\ &\quad \psi \left(\frac{\partial \mathbf{H}_{L,n}}{\partial \mathbf{Z}_{l,ij}} \cdot \mathbf{H}_{L,n}^H + \mathbf{H}_{L,n} \cdot \frac{\partial \mathbf{H}_{L,n}^H}{\partial \mathbf{Z}_{l,ij}} \right). \end{aligned} \quad (3.14)$$

The gradient for the antenna noise ($\frac{\partial \mathbf{H}_{L,i}}{\partial \mathbf{Z}_{l,ij}}$) is the same as for the signal. For the LNA noise, some new gradients must be found. And for the downstream noise contribution, it can be shown, that under the unilateral assumption, the transfer function is independent of the matching network and the relay loads, hence the gradient is zero. In the following the gradients of the sub covariance matrices will be derived and described more in detail.

3.3.1 Antenna Noise Gradient

As the antenna noise is picked up at the same place as the signal, its gradient is also the same as the signal covariance gradient. The formulas from (3.5) to (3.12) apply in the same manner to the antenna noise transfer functions. Therefore they are omitted here. We only note, that the transfer functions \mathbf{H}_0^{PT} , $\mathbf{H}_{\text{M},0}$ and $\mathbf{H}_{\text{LNA},\text{M}}$ are affected in the derivation of $\frac{\partial \mathbf{K}_n}{\partial \mathbf{Z}_{l,ij}}$, with $l \in \{\text{M11}, \text{M12}, \text{M22}, \text{pass}\}$.

3.3.2 LNA Noise Gradient

Looking at the transfer function of the two LNA noise sources, we see that the newly introduced $\tilde{\mathbf{Z}}_{\text{eqM}_2}$ (Equation (2.37)) is dependent on the matching network and on the coupling matrix, hence on the relay loads. Further, as the direct transfer function from Equations (2.39) and (2.40) are dependent on $\tilde{\mathbf{Z}}_{\text{eqM}_2}$, their gradient must be derived. Last, obviously also the gradient of the indirect transfer functions (Equation (2.43)) must be derived.

Gradient of the Direct Noise Contribution

First the gradient of the newly introduced equivalent impedance matrix $\tilde{\mathbf{Z}}_{\text{eqM}_2}$ will be given. It can be written as

$$\frac{\partial \tilde{\mathbf{Z}}_{\text{eqM}_2}}{\partial \mathbf{Z}_{11,ij}} = \mathbf{Z}_{\text{M12}}(\mathbf{Z}_{\text{M11}} + \mathbf{Z}_{\text{C}'})^{-1} \mathbf{J}_{ij}(\mathbf{Z}_{\text{M11}} + \mathbf{Z}_{\text{C}'})^{-1}, \quad (3.15)$$

$$\frac{\partial \tilde{\mathbf{Z}}_{\text{eqM}_2}}{\partial \mathbf{Z}_{12,ij}} = -\mathbf{J}_{ij}(\mathbf{Z}_{\text{M11}} + \mathbf{Z}_{\text{C}'})^{-1} \mathbf{Z}_{\text{M21}} - \mathbf{Z}_{\text{M12}}(\mathbf{Z}_{\text{M11}} + \mathbf{Z}_{\text{C}'})^{-1} \mathbf{J}_{ij}^T, \quad (3.16)$$

$$\frac{\partial \tilde{\mathbf{Z}}_{\text{eqM}_2}}{\partial \mathbf{Z}_{22,ij}} = \mathbf{J}_{ij}, \quad (3.17)$$

$$\text{and with } \frac{\partial \mathbf{Z}_{\text{C}'}}{\partial \mathbf{Z}_{\text{pass},ij}} = \mathbf{Z}_{\text{OL}}(\mathbf{Z}_{\text{pass}} + \mathbf{Z}_{\text{LL}})^{-1} \mathbf{J}_{ij}(\mathbf{Z}_{\text{pass}} + \mathbf{Z}_{\text{LL}})^{-1} \mathbf{Z}_{\text{LO}},$$

$$\frac{\partial \tilde{\mathbf{Z}}_{\text{eqM}_2}}{\partial \mathbf{Z}_{\text{pass},ij}} = \mathbf{Z}_{\text{M12}}(\mathbf{Z}_{\text{M11}} + \mathbf{Z}_{\text{C}'})^{-1} \frac{\partial \mathbf{Z}_{\text{C}'}}{\partial \mathbf{Z}_{\text{pass},ij}} (\mathbf{Z}_{\text{M11}} + \mathbf{Z}_{\text{C}'})^{-1} \mathbf{Z}_{\text{M21}}. \quad (3.18)$$

Therefore the direct transfer functions from Equation (2.39) and (2.40) can be expressed by

$$\begin{aligned} \frac{\partial \mathbf{H}_{\text{L,LNAv,dir}}}{\partial \mathbf{Z}_{l,ij}} &= -R_L \mathbf{I}_{N_R} (R_L \mathbf{I}_{N_R} + \tilde{\mathbf{Z}}_{\text{eqLNA}_2})^{-1} \mathbf{e} \cdot (\mathbf{c} + \tilde{\mathbf{Z}}_{\text{eqM}_2})^{-1} \cdot \\ &\quad \frac{\partial \tilde{\mathbf{Z}}_{\text{eqM}_2}}{\partial \mathbf{Z}_{l,ij}} \cdot (\mathbf{c} + \tilde{\mathbf{Z}}_{\text{eqM}_2})^{-1}, \quad \text{and} \end{aligned} \quad (3.19)$$

$$\frac{\partial \mathbf{H}_{\text{L,LNAc,dir}}}{\partial \mathbf{Z}_{l,ij}} = -\frac{\partial \mathbf{H}_{\text{L,LNAv,dir}}}{\partial \mathbf{Z}_{l,ij}} \cdot \tilde{\mathbf{Z}}_{\text{eqM}_2} - \mathbf{H}_{\text{L,LNAv,dir}} \cdot \frac{\partial \tilde{\mathbf{Z}}_{\text{eqM}_2}}{\partial \mathbf{Z}_{l,ij}}. \quad (3.20)$$

Gradient of the Direct Noise Contribution

The indirect transfer function consists of two parts, namely the sub-function $\mathbf{H}_{\text{O,LNA}}$, to transfer the signal towards the antennas and the sub-function $\mathbf{H}_{\text{L},i}$ transferring the noise towards the loads over the coupling. The gradient of the second function was already derived for the signal, hence is neglected here. Therefore the gradient

of $\mathbf{H}_{\text{O,LNA}}$ is given by

$$\frac{\partial \mathbf{H}_{\text{O,LNA}}}{\partial \mathbf{Z}_{M12,ij}} = \mathbf{J}_{ij}(\mathbf{Z}_{M22} + \mathbf{Z}_{\text{eqLNA1}})^{-1}, \quad \text{and} \quad (3.21)$$

$$\frac{\partial \mathbf{H}_{\text{O,LNA}}}{\partial \mathbf{Z}_{M22,ij}} = -\mathbf{Z}_{M12}(\mathbf{Z}_{M22} + \mathbf{Z}_{\text{eqLNA1}})^{-1} \cdot \mathbf{J}_{ij}(\mathbf{Z}_{M22} + \mathbf{Z}_{\text{eqLNA1}})^{-1}, \quad (3.22)$$

as $\mathbf{H}_{\text{O,LNA}}$ is independent of \mathbf{Z}_{11} and \mathbf{Z}_{Pass} , therefore zero for them. This leads to the gradient of the indirect transfer function given by

$$\frac{\partial \mathbf{H}_{\text{L,LNAv,ind}}}{\partial \mathbf{Z}_{l,ij}} = \frac{\partial \mathbf{H}_{\text{L,i}}}{\partial \mathbf{Z}_{l,ij}} \cdot \mathbf{H}_{\text{O,LNA}} + \mathbf{H}_{\text{L,i}} \cdot \frac{\partial \mathbf{H}_{\text{O,LNA}}}{\partial \mathbf{Z}_{l,ij}}, \quad \text{for the voltage, and} \quad (3.23)$$

$$\frac{\partial \mathbf{H}_{\text{L,LNAc,ind}}}{\partial \mathbf{Z}_{l,ij}} = \frac{\partial \mathbf{H}_{\text{L,LNAv,ind}}}{\partial \mathbf{Z}_{l,ij}} \cdot \mathbf{Z}_{\text{eqLNA1}}, \quad \text{for the current sources.} \quad (3.24)$$

3.3.3 Downstream Noise Gradient

Last, we see, that the transfer function of the downstream noise $\mathbf{H}_{\text{L},\tilde{n}}$ is not affected by any of the derivations above under the unilateral assumption. Hence its gradient is zero, no matter for the matching network or the relay loads.

Chapter 4

Problem Statement and Solver Methods

In the following, the problem to optimize will be introduced and analyzed. Although the thesis is not looking into finding the optimal solution, different solver strategies have to be introduced and compared to each other, as the utility function is not trivial and the differences are severe. Their advantages and disadvantages will be shown. If not specifically mentioned, we will look at a 2x2 MIMO system with one receive antenna per user and three relays, as shown in Figure 2.2. The relays in this system will be lossless, i.e. the impedances will be pure imaginary.

4.1 Utility Function

As the aim for wireless communication networks is to maximize the achievable rate, we take the formulas derived in Section 2.4, which describe the rates for each transmit-receive pair. In order to get an utility function from the achievable rates, we take the vector of achievable rates $\mathbf{r} = [r_1 \ r_2 \ \cdots \ r_N]^T$ from Equation (2.57).

To optimize the rates, different approaches are possible.

- Optimize the minimum rate, i.e. $\max(\min(\mathbf{r}))$ (maxmin), and
- Optimize the mean rate, i.e. $\max(\sum(\mathbf{r}))$ (maxsum)

This is done using the LP-norm ($\|\mathbf{r}\|_p$) [7, p.853]. By setting $p = -\text{Inf}$, the "maxmin" method is achieved. Setting $p = 1$, the "maxsum" method is applied. For all values in between, the utility function "tends" to optimize the sum and the minimum value respectively. In the following we restrict ourselves to the "maxsum" method. As the other methods easily can be applied and will lead to a similarly good result without loss of generality.

4.1.1 Convexity of the Utility Function

In the following the convexity of the utility function is analyzed. This is done, because the choice of the solver depends on the shape of the utility function (e.g. in case of a concave utility function, a normal gradient search is sufficient to provide good results).

To do so, we analyze the utility function at different input values for the passive relays. It is clear, that the function (heavily) changes for every channel realization. Figure 4.1 and 4.2 show two different channel realizations for the same input power and the same domain of two passive impedances.

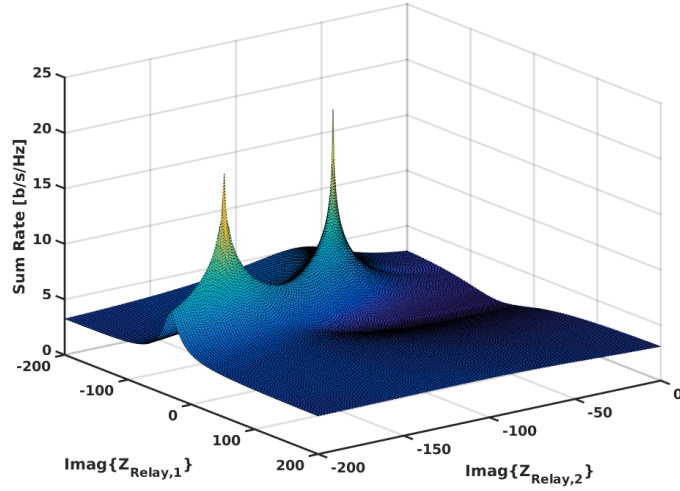


Figure 4.1: The utility function for a specific channel realization.

For the domain of the relay values showed in Figure 4.1, even two local maxima could be found, with an immensely higher sum rate value. On the other hand, the utility function in Figure 4.2 shows only one local maximum with such a huge performance difference.

4.1.2 Dependency on the Input Power

We will analyze now the utility function for different input powers. In Figure 4.2 and Figure 4.3 we see the same channel realization for two different input powers.

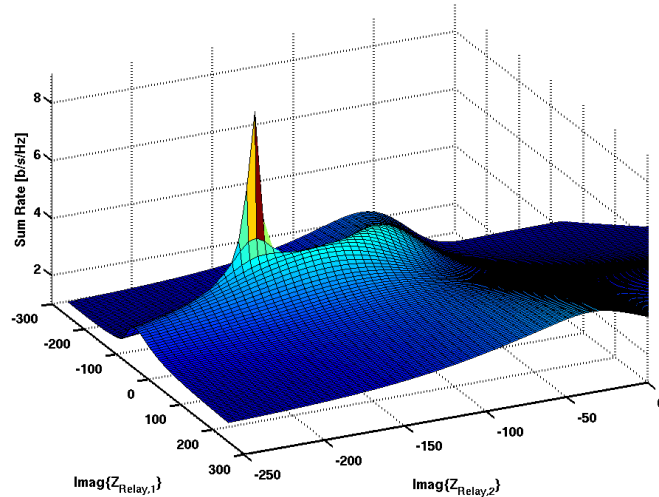


Figure 4.2: The utility function for an other specific channel realization and a high input power level.

We observe, that the optima in Figure 4.2 and Figure 4.3 lie at different impedance values of the relays, therefore we can conclude, that an optimal solution for one

input power does not necessarily lead to a good solution for a different input power solution.

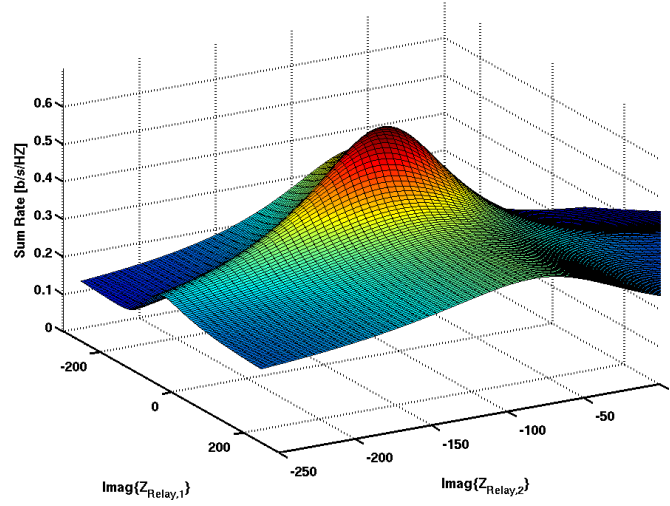


Figure 4.3: The utility function for the same specific channel realization as in Figure 4.2 and a moderate input power level.

4.1.3 Difference of Local Optima

Last, we want to look at the local optima we can possibly run into. We see in Figure 4.1, that if we hit the local optimum at the left, the performance will be nearly the same as with the local optimum at the right. However looking at Figure 4.4, we see that the difference of the global optimum of the section shown is with above 18 [b/s/Hz] severely higher than the local optimum on its left with around 8.5 [b/s/Hz]. Therefore, we can not only try to run the optimization with one initialization, but instead, we need multiple initializations, to be sure, that we haven't missed a severe maximum.

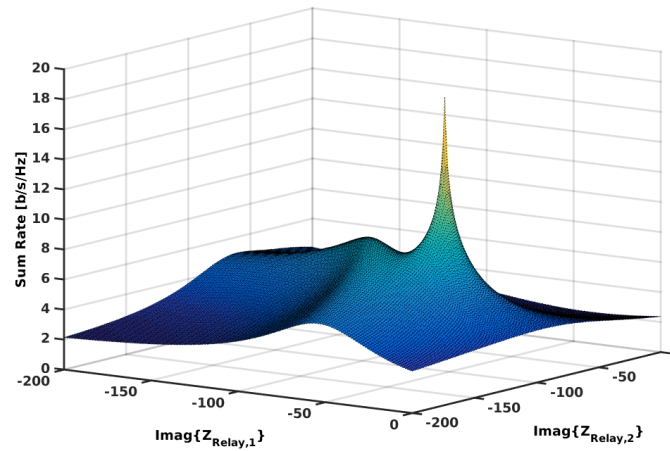


Figure 4.4: The utility function for a specific channel realization.

4.1.4 Complexity of the Problem

As we will discuss different solver approaches in the following Sections, a short description of the complexity of the problem is given. For each relay we use, we will have one variable (N_{Rel}), if we restrict the relays to the imaginary domain. Allowing the relay to become lossy and therefore the impedance complex, the number of variables is doubled. Further for each receiver branch, i.e. receiver antenna, we have a reciprocal (lossless) matching network (see Section 2.2.2), which has to be optimized. Therefore we have three elements per branch (in total: $3 \cdot N_{\text{R}} \cdot N_{\text{Rx}}$). For a four user MIMO system with two receive antennas and five lossy relays per user, this would lead to a problem of size $N_{\text{var}} = 2 \cdot 4 \cdot 5 + 3 \cdot 4 \cdot 2 = 64$. As mentioned in the beginning of this chapter, we look at a 2x2 MIMO system with one receive antenna and three lossless relays. The complexity of this system is therefore $N_{\text{var}} = 1 \cdot 2 \cdot 3 + 3 \cdot 2 \cdot 1 = 12$.

4.2 Gradient Search

Despite this large number of variables and the non-convexity of the utility function, the first approach remains a gradient search. Figure 4.5 shows the typical behavior of the gradient search versus the iteration steps. In the following, different methods are described, to improve the algorithm.

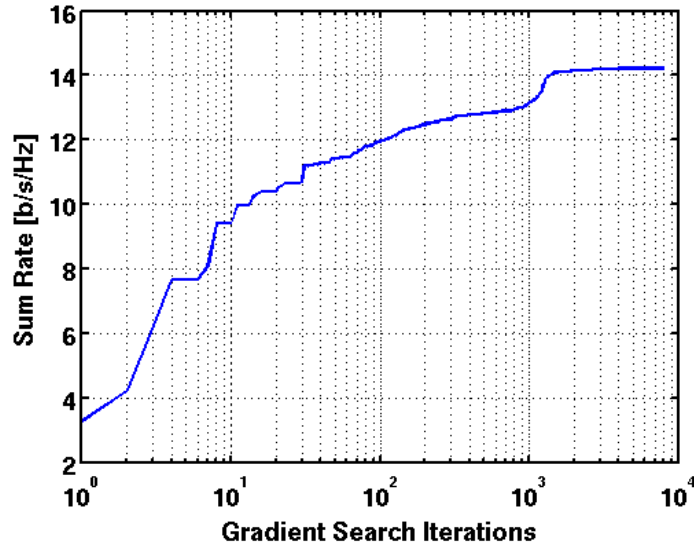


Figure 4.5: The sum rate over the gradient search iterations.

From Figure 4.5, it is also obvious to see, why the method of gradient search was taken despite the non-convexity of the problem: The rate is tripled after seven steps, and after 100 steps the rate is improved by a factor of four. Afterwards only small improvements can be achieved, which leads to the assumption, that a sufficiently good local maximum can be found very fast. If after such a small number of steps no good result can be achieved, it leads to the assumption, that the initial value was poorly chosen, hence with a different initialization a better result might be achieved. This is also shown in the following section.

4.2.1 Choice of Initial Values

We try to overcome the non-pleasant properties of the problem with a larger number of initial guesses, so that the gradient search approach tends more towards a grid search optimization method. The gradient search routine itself is then used as a refinement step of the grid search.

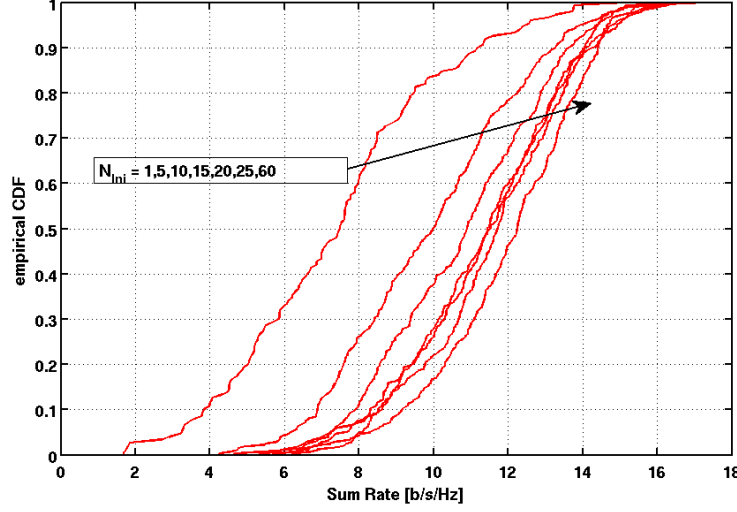


Figure 4.6: Comparison of the number of initial values used.

Figure 4.6 shows the empirical CDFs of the optimized sum rate, for different numbers of initializations. The initial values were drawn uniformly at random for $Z_{\text{Rel}}[i] \in [-600, 600]j$, $\forall i \in [1, N_{\text{Rel}}]$.

It is obvious and clear to see, that the larger the number of initializations, the better the result. However, even with 25 and 60 initializations, there improvement is still immense, which shows, that the number of initializations must be a lot larger than twice the input vector length. A good tradeoff between a decent optimization and a comparable small run time of the optimization is achieved by a choice of four times the input vector length.

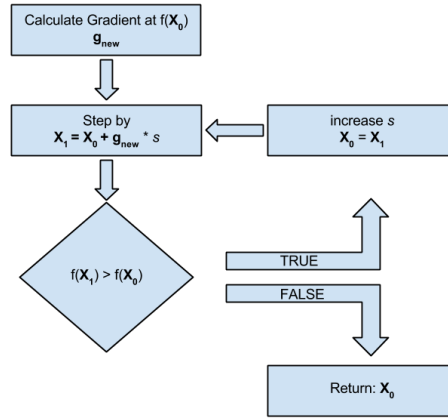


Figure 4.7: Schematic of the adaptive step size algorithm.

4.2.2 Adaptive Step Size

The performance of the gradient search routine is improved by the use of an adaptive step size. For each calculated gradient, the step taken into the direction of the gradient is increased until the new rate value is smaller than the previous calculated value as shown in Figure 4.7. Therefore the number of time-expensive gradient calculations is reduced immense.

4.2.3 Conjugate Gradient

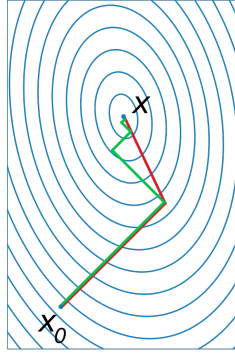


Figure 4.8: A comparison of the convergence of gradient descent with optimal step size (in green) and conjugate vector (in red) for minimizing a quadratic function associated with a given linear system[13].

As the gradient search performance still requires too many iterations, further improvements were made. The shape of such complex problems can - in some cases - have the shape of a crest, where, with a unpleasant choice of the initial value, a pure gradient search routine might jump around the optimum, without improving a lot. Conjugate gradient routines like "Fletcher-Reeves" or "Polak-Ribière" lead to a faster convergence, as they weight the gradient by the previous gradient and a weigh factor β .

Like Polak-Ribière, the Fletcher-Reeves method updates the conjugate direction according to

$$\mathbf{s}_n = \mathbf{g}_n + \beta_n \cdot \mathbf{s}_{n-1}, \quad (4.1)$$

where \mathbf{g} denotes the gradient. The conjugate direction \mathbf{s} is then used to perform the conjugate gradient search. Polak-Ribière and Fletcher-Reeves differ in the way, they calculate the weight factor β .

Fletcher-Reeves

For the method of Fletcher-Reeves, β is calculated according to [14]

$$\beta_n^{FR} = \frac{\mathbf{g}_n^T \mathbf{g}_n}{\mathbf{g}_{n-1}^T \mathbf{g}_{n-1}}. \quad (4.2)$$

Polak-Ribière

For the method of Polak-Ribière, β is calculated according to [15]

$$\beta_n^{PR} = \frac{\mathbf{g}_n^T (\mathbf{g}_n - \mathbf{g}_{n-1})}{\mathbf{g}_{n-1}^T \mathbf{g}_{n-1}}. \quad (4.3)$$

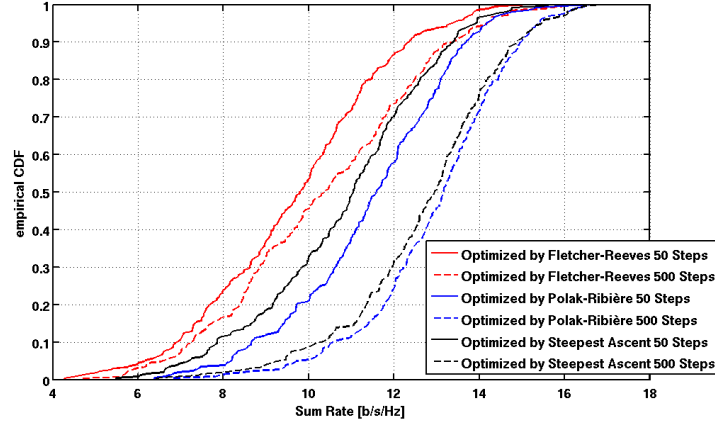


Figure 4.9: Comparison between Steepest Ascent, Polak-Ribière, and Fletcher-Reeves.

In Figure 4.9 the pure gradient search (steepest ascent) method is compared to the methods of Fletcher Reeves and Polak-Ribière. The Figure shows once the optimization after 50 iterations (solid lines), to see, which method optimizes the problem the best after just a few steps, and at 500 iterations, to see which routine might get caught in the shape of the problem.

We can see, that Fletcher-Reeves is not well suited for our kind of optimization problem. Better is Polak-Ribière, which outperforms the standard gradient search method at 50 iterations and has a slightly better performance at 500 iterations.

4.3 Heuristic Optimization Algorithms

Due to the non convexity and the non trivial optimization problem, we further analyze (some) heuristic optimization methods. In the following three heuristic algorithms will be introduced and analyzed by their performance. They were chosen, because they already exist in the MATLAB library and do not require any strenuous implementation.

4.3.1 Simulated Annealing

Simulated Annealing was developed, as there is a deep and useful connection between statistical mechanics (the behavior of systems with many degrees of freedom in thermal equilibrium at a finite temperature) and multivariate or combinatorial optimization (finding the minimum of a given function depending on many parameters) [16]. In this thesis, Simulated Annealing was chosen as it is a method to solve optimization problems of multivariate optimization.

The Algorithm used in this thesis is a build-in function of MATLAB®. A description can be found on the MathWorks homepage [17].

Figure 4.10 shows the performance of Simulated Annealing algorithm dependent on the choice of numbers of initializations (red curves). Again we see, that the more initializations we have, the better the sum rate can be optimized. However, we also see, that even with 60 initializations, Simulated Annealing leads to a result, which is worse than the sum rates achieved by steepest ascend (black dashed curve) and Polak-Ribière (blue dashed curve).

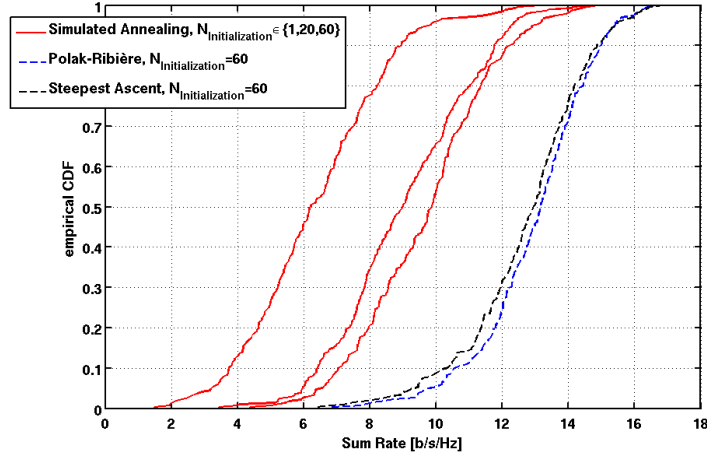


Figure 4.10: Comparison of the Simulated Annealing algorithm for different number of initializations and the results from "Polak-Ribière" and "Steepest Ascent" gradient searches.

4.3.2 GlobalSearch

The other two heuristic optimization algorithms are GlobalSearch (GS) and MultiStart (MS). They are very similar to each other, the only difference is the choice of the starting values. As MultiStart requires the number of initialization values, GlobalSearch generates trial points on its own [18]. GlobalSearch - the optimization function, which we will analyze - is based on the MATLAB©built-in function *fmincon*. Figure 4.11 shows the schematics of GS and MS.

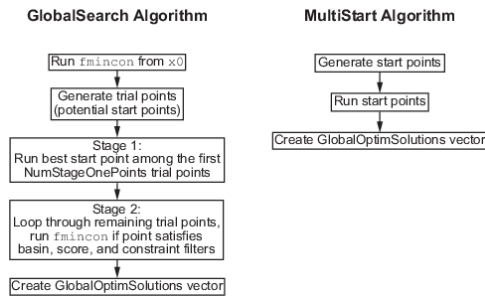


Figure 4.11: Schematics of the GlobalSearch and MultiStart algorithms [18].

Figure 4.12 shows the performance of GlobalSearch (red curve). We see, that it has almost the same performance as the conjugate gradient method by Polak-Ribière with 60 initializations (blue curve). GlobalSearch is less dependent on the initial value - for the relays it is chosen very large ($\mathbf{X}_{\text{Rel}} = 1000j$) and not at random, compared to the gradient search methods, to simulate an open circuited antenna and therefore no coupling.

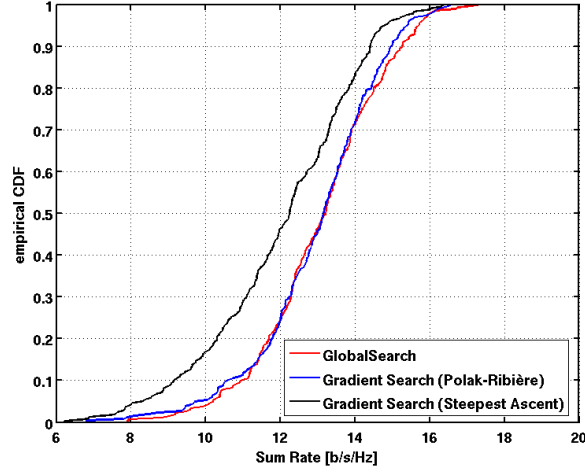


Figure 4.12: Performance of the GlobalSearch algorithm in comparison to the previous results.

4.4 Further Algorithm Improvements

4.4.1 Optimization of the Interference Function

A further approach to optimize the gradient search routine is a good initial guess. The problem of the sum rate maximization is reduced only to the description of the interference. Therefore the number of variables can be reduced by a factor of two third for the matching network, as the interference function from Equation (2.15) - even after multiplication with the spatial channel transfer function (2.2) - only requires the input impedance of the matching network. This reduced problem has

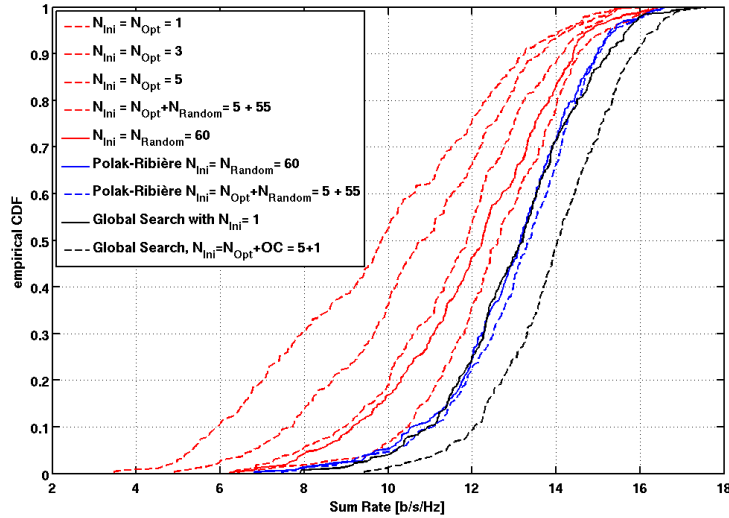


Figure 4.13: Comparison of the number of initial values used with different pre-optimized initial values.

size of $N_{\text{var}} = 2 \cdot N_{\text{Rel}} + 2 \cdot N_{\text{R}} \cdot N_{\text{Rx}} = 2 \cdot 4 \cdot 5 + 2 \cdot 4 \cdot 2 = 56$, for the same settings

as above. The factor 2 from the matching network variables comes from the fact, that with pure imaginary elements in the matching network, any complex value of the input impedance can be achieved.

Figure 4.13 shows the performance of the steepest ascent algorithm, with the pre-optimized initial values (three red dotted curves on the left). We see, that using the five best pre-optimizations leads to a performance almost as good as initializing the algorithm with 60 random vectors (red solid curve). To push the optimization even further, we can combine these two techniques and take the best optimization from the five best pre-optimized initial values and 55 random initial values (red dotted curve on the right). This leads to a 0.5 [b/s/Hz] improvement at the mean and a 1.5 [b/s/Hz] improvement for the lowest 10% of the rates, than only considering random values.

Applying this to the method of Polak-Ribière (blue dotted curve), however, does not improve the results as much as with the steepest ascent method. A sum rate of only about 0.1 [b/s/Hz] higher is achieved by using pre-optimized initial values in combination with the method of Polak-Ribière.

Finally, this method is applied to the heuristic GlobalSearch routine. As mentioned in Section 4.3.2, GloablSearch is less dependent on the initial value and therefore, the initial value is chose to be open circuited for the relays. With five optimized initial values plus the standard open circuit initial value, an improvement of almost 1.0 [b/s/Hz] can be achieved (black dotted curve) compared to initializing only by the open circuited value (black solid curve).

4.4.2 Post Refinement of GlobalSearch by Gradient Search

When the problem of gradient search is, that it may run into non optimal local maximas, the questions remaining for the heuristic solvers are: "How good are the results after all?" and "Can they be improved any further?"

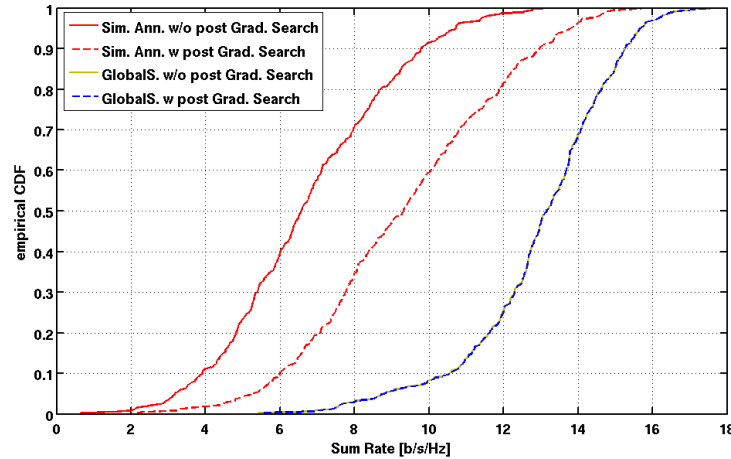


Figure 4.14: Comparison the heuristic solvers with and without a post refinement by gradient search.

The approach in finding the answers, is to use the gradient search routine on top of the heuristic solvers as a refinement. Figure 4.14 shows the performance of the Simulated Annealing and the GlobalSearch algorithm (solid red and solid yellow curves). The dashed lines show the result, when gradient search was added on top of the heuristic solvers (red for Simulated Annealing and blue for GlobalSearch).

This shows, that the poor results of the Simulated Annealing algorithm does not lead to any good initial value for the gradient search as after the refinement the performance is still about 5 [b/s/Hz] worse, than the performance of GlobalSearch. Second, it shows that the performance of GlobalSearch is quite good, as any post refinement of gradient search *does not lead to any significant improvement*.

4.4.3 Stepwise Optimization

In the previous Sections, we saw the performance of different methods for three relays per user. The number of relays was kept small for the analysis of the algorithms, so that complexity effects diminishing the performance were avoided. Increasing the number of relays might result in worse sum rates as the complexity of the system correlates with the number of required initial values to achieve similar good results, hence the run time of the solver must be increased, or the precision is decreased. Therefore we will have a look at the performance of the optimization and how it can be pushed in the following. For the results shown below, the number of relays were increased to seven, if not mentioned specifically.

In Figure 4.15 we see the performance of the GlobalSearch algorithm, optimizing a 2x2 MIMO system, with seven relays and one receiving antenna per user (red curve). The black curve shows the performance of the algorithm optimizing only three relays per user (c.f. red curve in Figure 4.12). Actually this should be a lower limit of the red curve, as one solution for seven relays is to optimize only three of them and open circuit the remaining four. However this is only the case for about 85% of the cases, the lowest 15% actually lead to a worse solution than only optimizing three relays. This shows, that the GlobalSearch optimization might not perform very good on larger problems, i.e. reducing the size of the problem results in a better sum rate.

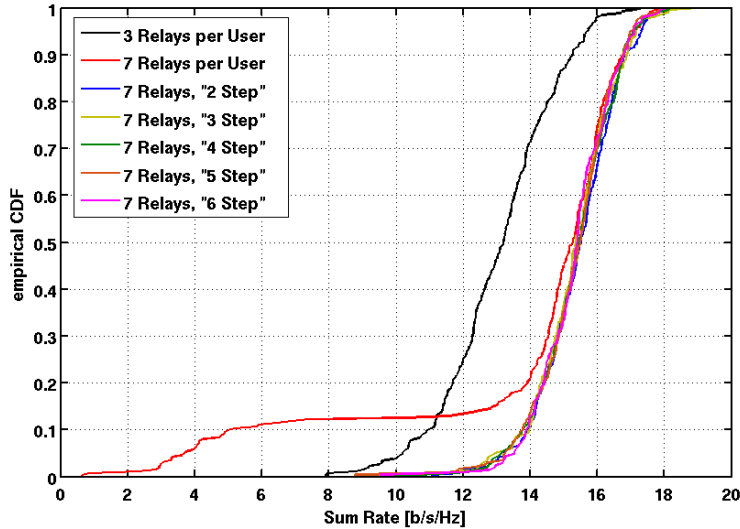


Figure 4.15: Comparison of the number of step wise optimization.

Therefore one approach to prevent GlobalSearch of running into a low rate, is to reduce the number of relays to optimize and increase them stepwise. The blue curve shows the result of the optimization, when GlobalSearch is allowed to optimize only two relays. Once finished, two additional relays are considered so that in total four relays per user are optimized. This is repeated until the total number of relays

is reached (in this case four times, $N_{\text{Rep}} = \lceil \frac{N_{\text{Relays}}}{N_{\text{Step}}} \rceil = \lceil \frac{7}{2} \rceil = 4$). This leads to a tradeoff between the precision of the routine and the run-time, as a smaller number of relay steps (N_{Step}) will lead probably to a better result, but also to a larger number of repetitions and therefore it will take a lot longer ($\approx N_{\text{Rep}} * T_0$, for T_0 , the time for one optimization).

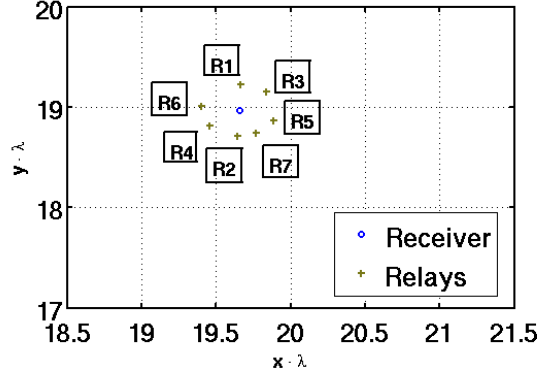


Figure 4.16: Example of choosing the relays for stepwise optimization.

The first relay is thereby chosen at random. For the following relays, the algorithm takes always the next free relay across the receiver. Figure 4.16 shows an example on how the relays would be chosen for this setting.

Back in Figure 4.15, the yellow curve shows the optimization for a stepwise increment of $N_{\text{Step}} = 3$. Therefore $N_{\text{Rep}} = 3$ had to be taken. As for $N_{\text{Step}} = 4$, $N_{\text{Step}} = 5$ and $N_{\text{Step}} = 6$ (with each $N_{\text{Rep}} = 2$), it leads almost to the same result. It can also be seen, that none of the stepwise optimized solvers has a significant low rate outlier (logarithmic scaled subplot), therefore we can say, that the outliers from the direct optimization can be avoided, when a single repetition is added.

A second approach is to optimize one user and its relays per step. This reduces the size of the problem to $N_{\text{R}} \cdot N_{\text{Rx}} + N_{\text{Rel}}$ for each optimization step. The number of optimization steps is increased by N_{R} . Additionally after optimizing each user a final step might be included, where the whole system is refined.

Figure 4.17 shows the performance of this method for a 2×2 system with three relays per user. The blue solid curve denotes the performance of optimizing the system directly. The red solid curve shows the performance of optimizing each user on its own and additionally optimizing the whole system in a refinement step afterwards. It can be seen that optimizing each user in advance of optimizing the whole system, leads to a slight improvement, even for this small system.

For both cases - the user stepwise optimization and the relay stepwise optimization - a lower sum rate limit constraint is set after each step. With this inequality constraint, the heuristic algorithm is prevented in running into a lower rate than in the previous step.

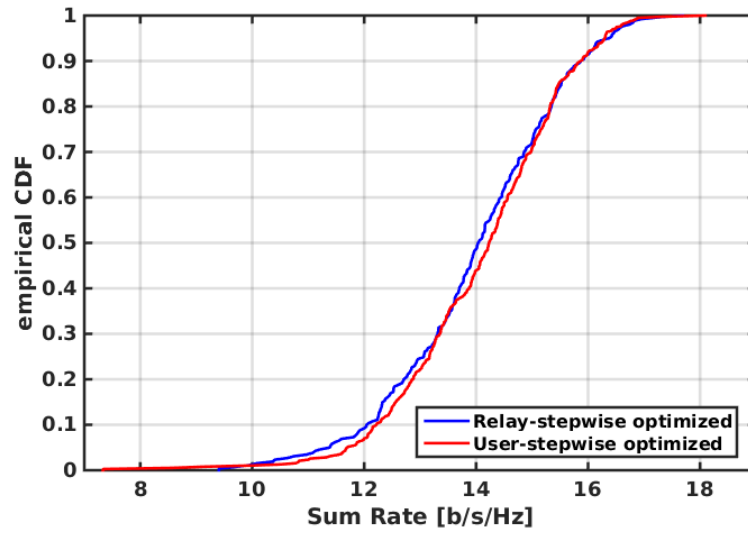


Figure 4.17: Comparison of optimizing the relays stepwise versus optimizing each user per step.

Chapter 5

Simulation Results

In the following, the results of the thesis will be discussed. The performance of the optimization routine will be shown for different settings, i.e. for different number of relays, receiving antennas per user, users, relay placings, and input powers. If not any further mentioned, the same settings will be used, as in Section 4, i.e. we will look at a two user system with one receive antenna and three relays per user, as shown in Figure 2.2. The relays in this system will be lossless, i.e. the impedance will be pure imaginary. Additionally only the noise contribution of the circuitry after the LNA, i.e. only downstream noise (c.f. Equation (2.33)) will be considered. Therefore, because of the unilateral assumption, the noise contribution will be i.i.d. and independent of the matching network or the relays. Hence, the optimization algorithm is only able to adapt the signal and the interference.

5.1 Introduction of Measures for Comparison

To be able to rate the results on how good they are, the performance will be compared to classical interference eliminating methods such as TDMA. Additionally, improvements from the uncoupled case will be given, as well as theoretical performance limits in order to see by how much the performance can be pushed. In the following, the rates, to which the optimization is compared to will be introduced.

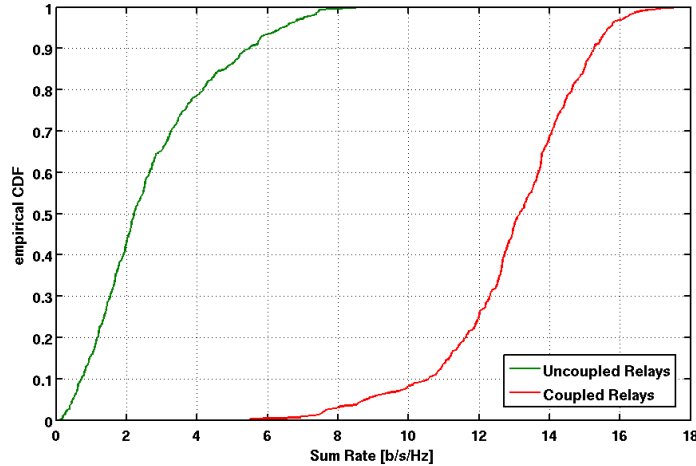


Figure 5.1: Comparison of uncoupled relays and optimized coupled relays.

5.1.1 Uncoupled Relay Rates

One of the logical performances to compare the use of loaded antennas to, is the same setting without any coupling among the relays. Logically, the "uncoupled relays rate" should be smaller than including the relays and adapting their impedances to our needs. If no higher rate can be achieved, the whole idea of using passive relays would fail.

In Figure 5.1, the green solid line shows the performance if no coupling among the relays and receivers exist. It is clear, that the rates including relay coupling (red solid line) are much larger. Therefore this method is suitable to improve the achievable rates.

5.1.2 TDMA Rates

The next performance, the optimized rates are compared to are the TDMA rates for the equivalent setup. Therefore, the relays are again assumed to be uncoupled from the receivers and the transmit/receive pairs are assumed to divide the time equally among each other for transmission. For the calculation the formulas from Equation (2.61) and (2.62) are used.

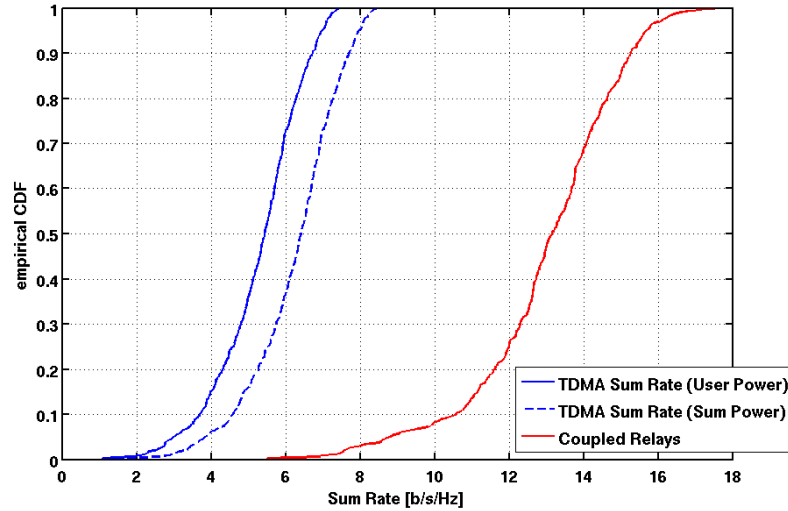


Figure 5.2: Comparison of the TDMA rate and optimized coupled relays.

In Figure 5.2, the blue solid line shows the performance if TDMA was applied under the user-power constraint (i.e. the limit of the transmit power is given per user and therefore the same for each user as in the coupled relay case) and the relays were uncoupled from the receivers. The blue dashed line shows the performance of TDMA under the sum power constraint (i.e. the limit of the transmit power is given by the total transmit power and therefore the power per user in TDMA is N_{User} times the power per user in the coupled relay case - here two times). As before, the rates including relay coupling (red solid line) are much larger than without any coupling and TDMA. Of course this comparison is more dependent on the choice of the settings (especially the choice of the number of transmit-receive pairs) and we will see different behaviors in the following sections.

5.1.3 Noise-free Rates

As we are addressing the problem of interference, a good measure is the noise-free rate (short: SIR-rate). It is calculated similar to the SINR-rate, however it only considers the interference and not the noise (c.f. Equation (2.60)). As written in the previous chapters, in high SNR regime, the interference is the main diminishing factor for the rates (c.f. Section 2.4), the SIR-rates will give an indicator, on how good the relays and the matching network were optimized. Example curves of the SIR-rates (blue dashed lines) can be seen in Figures 5.7 to 5.9.

5.1.4 Relays as Fully Cooperation Receivers - Limit

The remaining two function to which the rates after the optimization algorithms are compared against will give limits on how good the method of loaded antennas can be at best. The first approach is to see the relays as fully cooperation receivers, which are widely spread. Hence they experience no coupling among each other. The number of observations the receiver has on the incoming signals is increased to $N_{\text{Rx}} + N_{\text{Relays}}$. As we choose the number of relays larger than the number of interferer in most of the cases, this method will lead to an interference free connection.

The performance of the fully cooperation relays can be seen in Figure 5.3 (black solid curve). At median it is almost 2 [b/s/Hz] higher, than the optimized rate of the passive coupled relays. For the best 10% of the cases this is reduced to 1 [b/s/Hz] and less, for the worst 10% of the cases this lies in between 2.5 [b/s/Hz] and 4.7 [b/s/Hz].

5.1.5 Multiport Matching - Limit

It has been shown that the multiport matching is the optimal setting for a matching network (without considering any coupling among the receivers, and any relays) [2]. For the comparison with the coupled relays, the relays are, as in the previous section, assumed to be fully cooperating receiver antennas. However, the placing of the

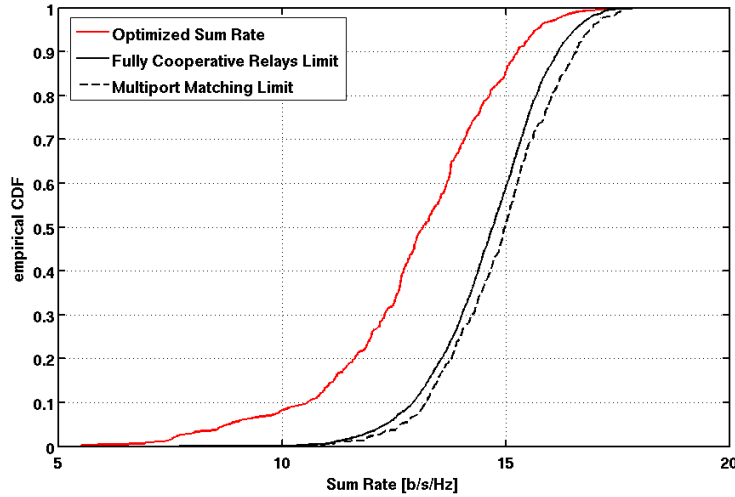


Figure 5.3: Comparison of the full cooperation relay rates, the multiport matching rate and optimized coupled relays rate.

relays remains the same, i.e. no widely spread receivers are assumed. The number

of observations one receiver has, is again $N_{\text{Rx}} + N_{\text{Relays}}$. And hence it can be expected, that it is higher than the optimized coupled relays rate. In Figure 5.3 and the following, this limit is shown by the black dashed line.

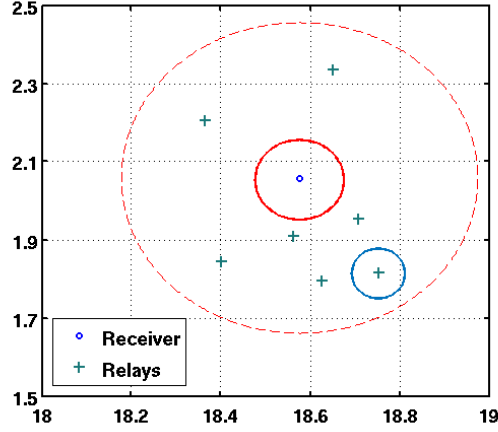


Figure 5.4: Placing the relays around a receiver uniformly distributed on a disk.

5.2 Relay Placing

Before analyzing the solver with different settings, the placing of the relays around a receiver is discussed a bit more in detail. Figure 5.4 shows, by which criteria, the relays were placed.

The red solid circle (with radius d_z) denotes a zone around the receiver, in which no relays must not be placed. The red dashed line shows the maximum distance at which the relays may be placed away from the receiver. Within those two lines, the relays are thrown uniformly distributed. The blue circle (with radius d_{Relay}) around the relay at the right bottom denotes a zone in which no other relay may be placed, i.e. the minimum distance between each relay. If there is a violation by the relay distances, all the relays are thrown again.

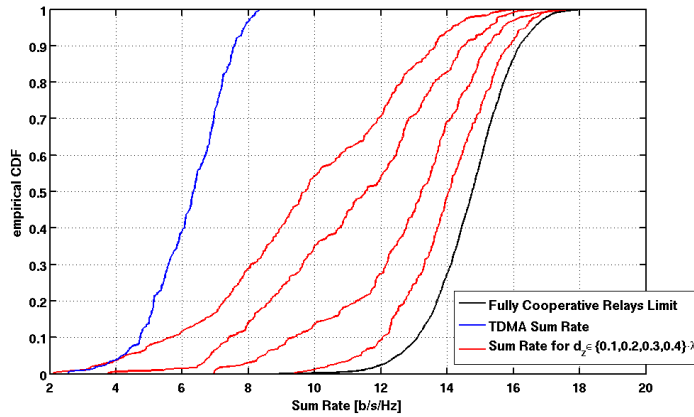


Figure 5.5: Optimized Sum Rates for different minimum distances between receiver and relays ($d_z \in \{0.1, 0.2, 0.3, 0.4\}$ from right to left).

The minimum receiver distance and the minimum relay distance might differ, however, if not specially mentioned, they are assumed to be both 0.1λ . By a smaller choice of the maximum distance, the relays can be placed more dense. When the maximum distance is set equal the minimum distance, the relays will be placed on a circle around the receiver.

Figure 5.5 shows the performance of the optimized sum rate for $d_z \in \{0.1, 0.2, 0.3, 0.4\} \cdot \lambda$ (red curves from right to left). For all the curves, the relays had the same minimum spacing, i.e. $d_{\text{Relay}} = 0.1 \cdot \lambda$. Obviously a higher rate can be achieved, when the relays are closer to the receiver and thus the coupling is stronger. Even with a minimum distance of 0.4λ , the achievable rate is higher than the the TDMA rate (blue solid curve) under the sum power constraint.

5.3 Low SNR performance

At first we want to analyze the optimization algorithm at different SNR levels. Later we will only look at a high SNR level, as our aim is to minimize the interference. As we assume only downstream noise, the optimization algorithm can only change the signal and the interference covariance matrices.

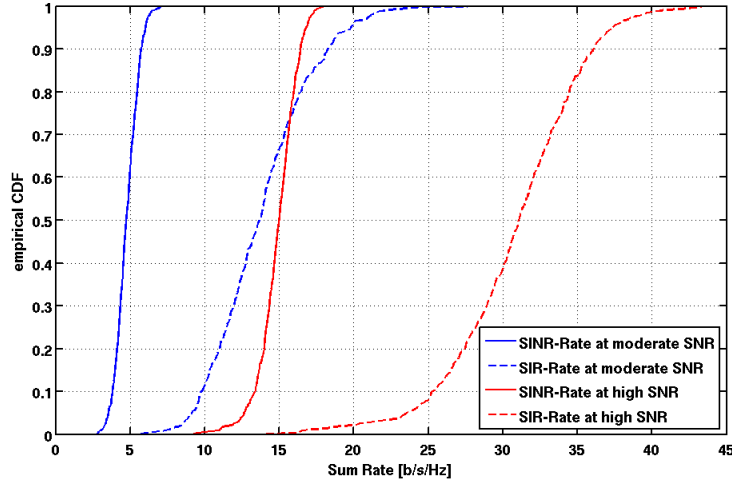


Figure 5.6: Comparison of the optimization algorithm at a moderate and high SNR level and the comparison to the noise free (SIR) rates.

Figure 5.6 shows the SINR- and SIR- rates at a moderate SNR level (blue curves) and at a high SNR level (red curves). As the achievable rate at a moderate SNR level (blue solid line) is less interference driven and more noise limited, the resulting SIR-rate (blue dashed curve) is also lower than the SIR-rate of the optimized achievable rate at a high SNR region (red dashed line).

This shows for the moderate SNR level, that the optimization algorithm was matching the values of the relays and the matching network in order to amplify the signal at first and only second reducing the interference. For two users (as it is here the case) the interference is increased the same as the signal power (from moderate SNR to high SNR), hence if the optimization would have let to the same reduction of the interference at the moderate SNR level, the SIR rates would have become equivalent.

5.4 Number of Relays to Eliminate Interference

In the following, the number of relays required for an interference free connections will be analyzed. For the following plots, the number of receivers was set to one ($N_R = N_{R_x} = 1$) in order to increase the performance of the solver (c.f. Section 4.4.3).

In the following sections the term "*interference free*" will be used a couple of times. Hereby only a reduced interference is meant. Full interference elimination as in a MIMO system with more receive antennas than interferer will not be reached. However when the term is used, the interference will be so low, that the effect of noise will be the same or even a stronger diminishing factor.

5.4.1 One Interferer

To eliminate interference with two transmitters normally two observations are required. Figure 5.7 shows the performance of a transmit/receiver pair with one interferer and $N_{\text{Rel}} \in \{1, 2, 3\}$ (red curves from left to right). It is clear to see,

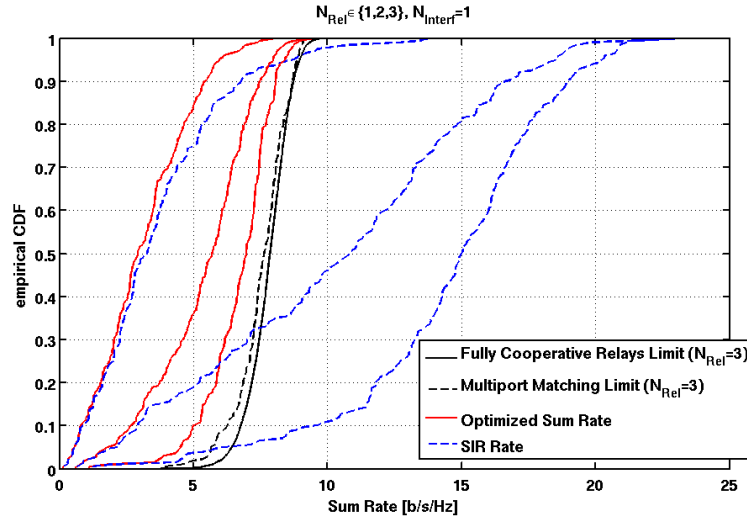


Figure 5.7: User rates for one interferer and one receiver with $N_{\text{Rel}} \in \{1, 2, 3\}$ (red and blue curves from left to right) and their theoretical limits (black curves).

that the higher the number of relays, the better the performance of the optimized system. The blue dashed lines show the rates considering only the SI-ratio (c.f. Equation (2.60)). The use of only one relay, leads only for 10% of the cases to an interference free connection. Increasing the number of relays to two leads to an interference free connection of almost 80% of the realizations, however, to achieve for almost all realizations a noise limited connection at least three relays per receiver are required.

5.4.2 Two Interferer

To eliminate interference with three transmitters normally three observations are required. Figure 5.8 shows the performance of a transmit/receiver pair with two interferer and $N_{\text{Rel}} \in \{2, 3, 4, 5\}$ (red curves from left to right). And, as before, the blue dashed lines show the rates considering only the SI-ratio.

We see, that for two relays per user, the interference limited rate behaves almost the same as the optimized achievable user rate. For three relays per user, some

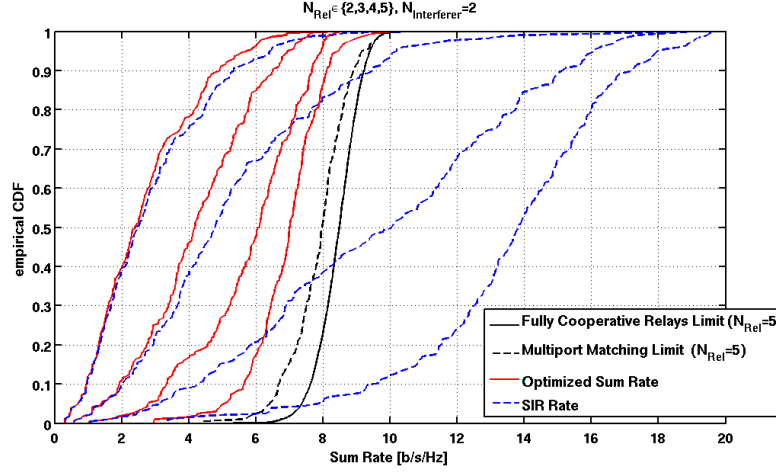


Figure 5.8: User rates for two interferer and one receiver with $N_{\text{Rel}} \in \{2, 3, 4, 5\}$ (red and blue curves from left to right) and their theoretical limits (black curves).

realizations lead to an interference free connection. But only for five relays per user, over 90% of the realizations can be driven into an low interference state.

5.4.3 Three Interferer

To eliminate interference with four transmitters normally four observations are required. Figure 5.9 shows the performance of a transmit/receiver pair with three interferer and $N_{\text{Rel}} \in \{4, 5, 6, 7\}$ (red and blue dashed curves from left to right).

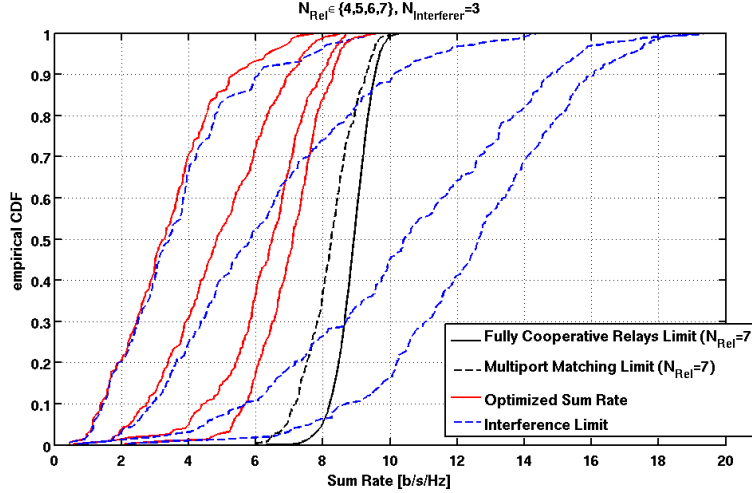


Figure 5.9: User rates for three interferer and one receiver with $N_{\text{Rel}} \in \{4, 5, 6, 7\}$ (red and blue curves from left to right) and their theoretical limits (black curves).

We see, that for four relays per user, the interference limited rate behaves almost the same as the optimized achievable user rate. For five and six relays per user, some realizations lead to an interference free connection. For seven relays per user, over 90% of the realizations can be driven into an low interference state.

Comparing this to the previous results with one and two interferer, we can see,

that the number of required relays to eliminate the interference grows not linearly as with the use of fully cooperating receivers. It looks like, that it requires at least twice the number of interferer ($N_{\text{Rel}} > N_{\text{Interferer}} \cdot 2$) per user, to overcome the interference.

5.4.4 Cooperative versus Non-cooperative Receive Antennas

In the following, we want to analyze what happens, if the number of relays plus receiver antennas is kept constant. First, we analyze the case of one receive/transmit pair, as this decreases the size of the problem by a factor of four. Behaviors as shown in Section 4.4.3 are therefore less likely to happen. Figure 5.10 shows the

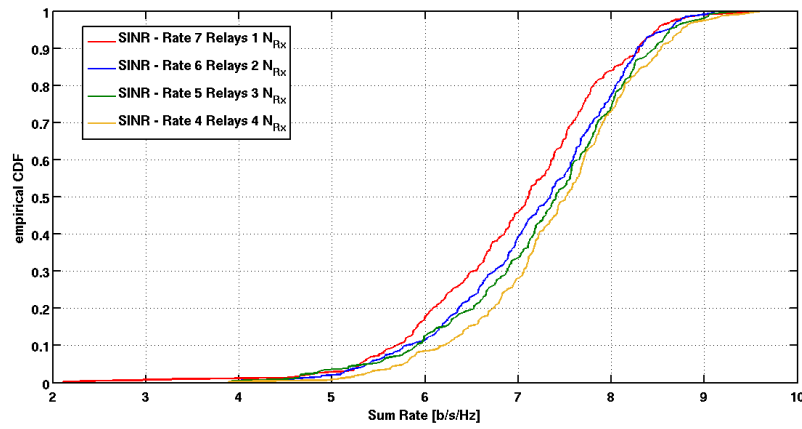


Figure 5.10: Comparison of constant $N_{\text{Rel}} + N_{\text{Rx}} = 8$, with $N_{\text{Rel}} \in \{4, 5, 6, 7\}$ and $N_{\text{Rx}} \in \{1, 2, 3, 4\}$ from left to right.

performance with three interferer and one transmit/receive pair. Obviously in the case where four receive antennas were used (yellow curve), the interference can be fully zero forced therefore it also shows the highest rate. However the performance is only 0.5 [b/s/Hz] smaller, if seven relays and only one receive antenna were used - for the values in between even less. This shows, that with one additional observation and one relay less, the rate can not be improved significantly. Therefore we can stick

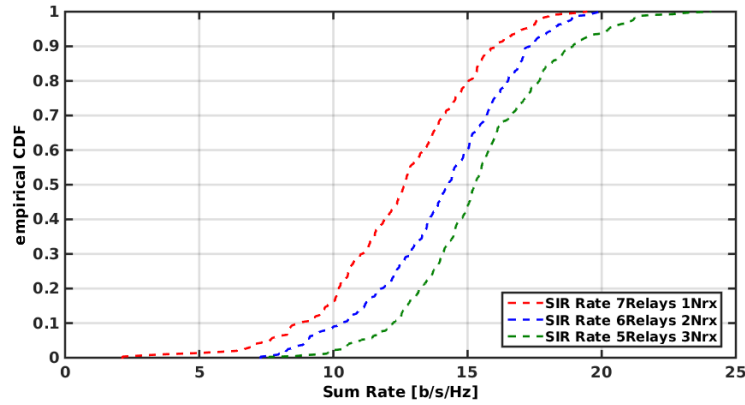


Figure 5.11: Comparison of constant $N_{\text{Rel}} + N_{\text{Rx}} = 8$, with $N_{\text{Rel}} \in \{4, 5, 6, 7\}$ and $N_{\text{Rx}} \in \{1, 2, 3, 4\}$ from left to right, showing only noise free rates.

with a system, which uses one receiver antenna and multiple relays, and can expect to perform close to MIMO system with a sufficient large number of receive antennas to zero-force any interference.

Figure 5.11 shows the noise free, hence interference limited rates for a constant number of relays and receivers. The SIR-rate for the receiver with four antennas is neglected, as the interference can be fully eliminated. Again, it can be seen, that the larger the number of receive antennas, the better the interference can be reduced. However, the differences are — as mentioned above — small. Therefore we can conclude, that a system can almost perform the same by increasing the numbers of relays, as it would increasing the number of receive antennas.

5.5 Four User System

In the previous sections, the requirements for a system with three interferers were given. Therefore in the following sections a full four user system will be analyzed and it will be shown, if the conclusions drawn from the previous sections were correct.

5.5.1 Prediction for four Users

By the results shown in the previous section, the performance of a four user system can now be predicted. A simulation of a four user system with widely spread receivers should lead to the same results like summing up the previous curves four times.

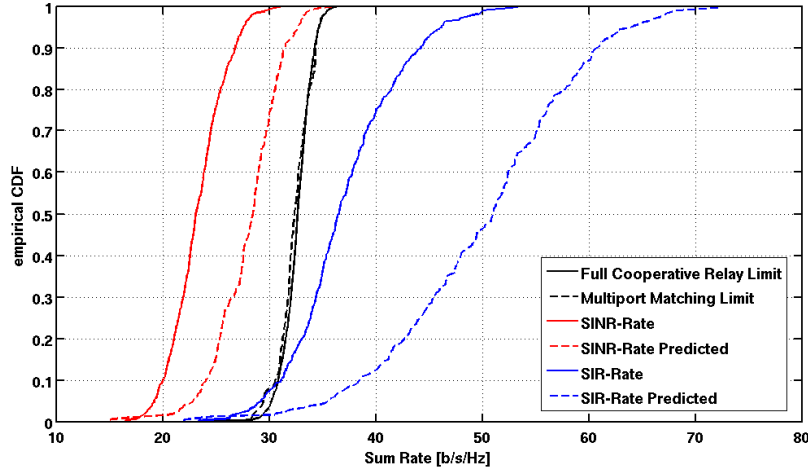


Figure 5.12: Plot of the 4 User System, with the predicted performance.

Figure 5.12 shows the predicted performance (dashed lines) compared to the simulated performance (solid lines). The rates of the simulated realizations are hereby lower than the predicted behavior. For the simulation, the receivers were not place widely spaced apart, which is one reason for the lower rates, as the coupling among the receivers is diminishing the performance. The second reason is, as mention above, a lower performance of the optimization algorithm with a larger problem. Still we can conclude, that the optimal solution must be placed between the solid and the dashed curves.

Additionally, by the black curves, theoretical limits of the sum rates are given. Because the predicted performance is not outperforming the theoretical limits, it consolidates, that the optimal solution lies around the predicted performance.

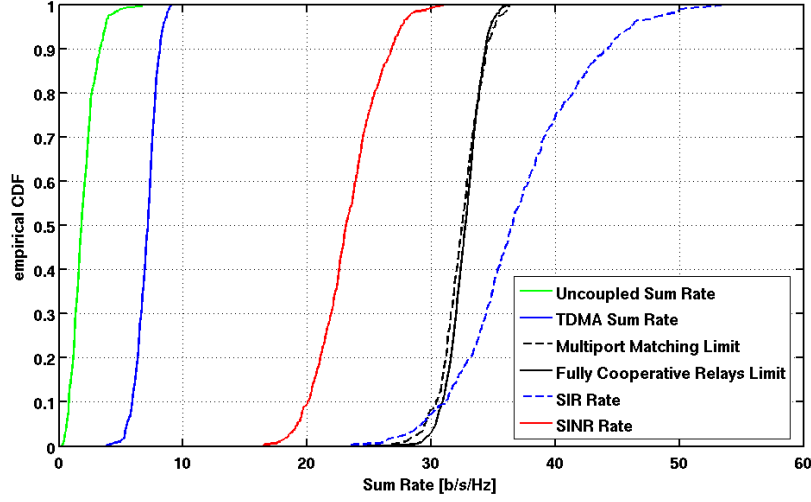


Figure 5.13: Sum rates of a 4 user MIMO system.

5.5.2 Full Four User System Performance

Finally we want to analyze the relay and matching network optimization of a four user system. Two different realizations and antenna placings can be seen in Figure 5.15. The achievable rates after optimization will be analyzed in the following for such placings.

Figure 5.13 shows the sum rate of the optimized system (red solid curve) compared to the rates we introduced in the beginning of this chapter. We see, that the uncoupled rate, i.e. each receiver has only one receive antenna and no relays, and the TDMA rate (under sum power constraint) are outperformed by far. Further we see, that the noise free rate (dashed blue line) is always larger by at least 10 [b/s/Hz], which lets us conclude, that the interference cancellation was performed well, i.e. that we are in an interference free region for at least some users. The black curves denoting the fully cooperative relays limit and the multi-port matching limit (dashed curve) are between 5 [b/s/Hz] and 10 [b/s/Hz] bits per second larger than the optimized sum rate. From Figure 5.9 we know, that the limits are around 2 [b/s/Hz] larger than the optimized sum rate per user. This shows, that at the median for four users, the optimization algorithm performs almost as good as for one user, however the lower rates seem to suffer from a bad optimization.

We saw in Figure 5.9 that it requires at least seven relays for one user to eliminate the interference from three users. Figure 5.14 shows the rates for each transmit/receive pair by the red solid curves. Again, the black dashed curves denote the multi-port matching rates, the green solid lines denote the performance if the relays were uncoupled, and the blue solid line shows the TDMA rate for each user under the sum power constraint.

We observe at first, that the uncoupled rate as well as the TDMA rate are outperformed by around 5 [b/s/Hz] for the three top users at the median. The lowest user however is - contradicting to the results from Section 5.4.3 - not interference free for

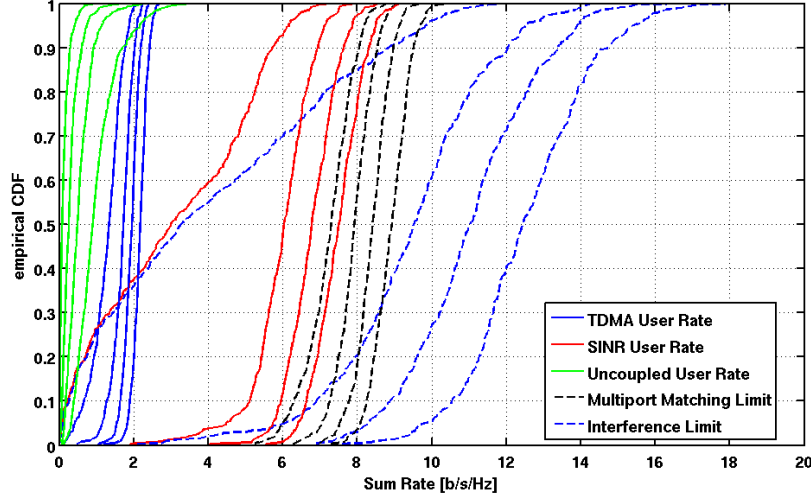


Figure 5.14: The user rates for four users with seven relays each.

almost 50% of the cases. For 10% of the cases it even shows a worse performance than the TDMA rate. It seems, that this user is for some realizations blocked, in order to enhance the other three users. This might be the optimal solution, it might however also be, that the solver did not reach the best optimum.

To explore this a little bit further, Figure 5.15 shows typical placings when the minimum user rate could be improved strongly on the left and when the rate could only be improved a little on the right. Both subplots show a field of size $2\lambda \times 2\lambda$. For the left subplot, the receivers have a larger distance between each other and the relay belonging to the receiver can be easily distinguished - they are more or less nicely separated. This also accounts for receiver one and three in the subplot on the right, however receiver two and four are not so nicely separated anymore. Additionally their distance is smaller than 0.5λ . This leads to a stronger coupling between the receiving elements of receiver two and four.

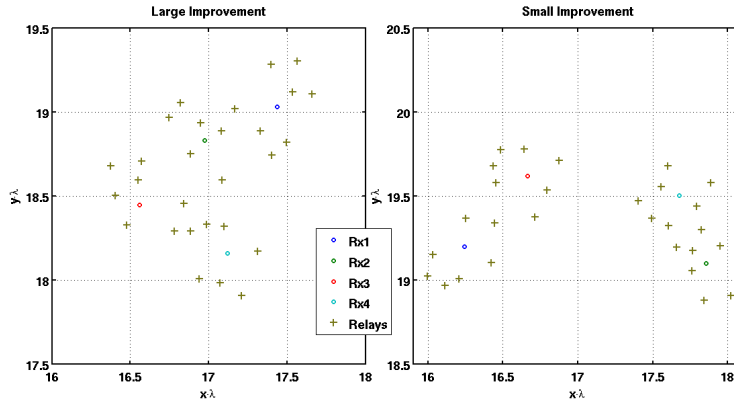


Figure 5.15: Two different antenna placings, the left leads to a big improvement, the right to a small improvement.

For the optimization this means, that if one receiver and its relays are optimized, their coupling might diminish the rate of the other receiver severely. This effect can

be seen as an additional interferer. Any poor channel realization can lead than to a case, where the second receiver rate can not be optimized significantly anymore.

5.6 TDMA - Combination

In the following a combination of the optimization method with currently existing interference avoiding methods is analyzed. As seen in the previous sections, the number of required relays, to reduce the interference grows with the number of users in the the system. For large systems with hundrets of users the required number of relays hence would become extremly large. Therefore a combination with the TDMA method is one way, to reduce the number of users in one time slot, hence it reduces the number of required relays.

Using two slot TDMA, reduces the number of users per slot from four to two. Therefore, the results from Figure 5.13 can be used to compare them to TDMA applied on the results from Figure 4.13. The combination of TDMA and the optimization introduced in this thesis leads additionally to half the problem size, therefore results closer to the (corresponding) optimum can be expected from 2-slot TDMA, than from the pure optimization.

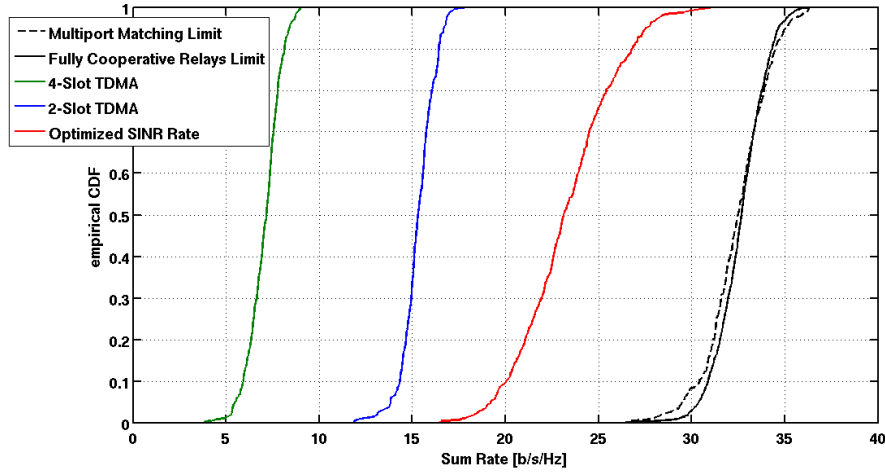


Figure 5.16: Comparison of different slot TDMA approaches.

Figure 5.17 shows in red the results of the four user system without TDMA (or 1-slot TDMA). In blue the performance of the 2-slot TDMA approach applied on a four user system with only three relays per receiver is shown. And in green the performance of a 4-slot TDMA approach without the use of any relay is shown. Still the method introduced in this thesis without the use of TDMA outperforms 2- and 4-slot TDMA. However it can also be observed, that the use of only three relays per user and a 2-slot TDMA approach outperforms the pure TDMA approach by approximately 8 [b/s/Hz]. Hence the combination of using passive relays and TDMA also significantly improves the performance of a system suffering from strong interference.

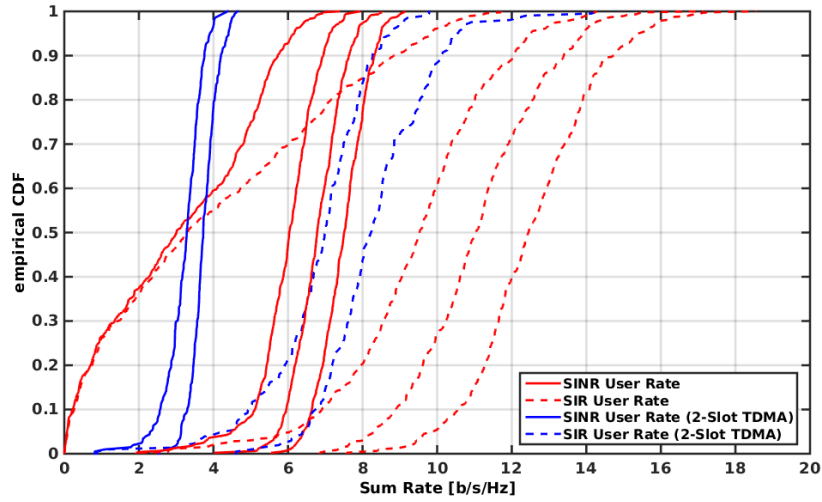


Figure 5.17: Comparison of different slot TDMA approaches.

Chapter 6

Conclusion and Outlook

6.1 Conclusion

This thesis showed that the use of passive relays with an optimal choice of relay and matching network impedances can improve the achievable rates significantly. It was not only shown, that current interference eliminating protocols are outperformed by this method, but also that any combination with methods like TDMA lead to far better results than without using passive relays.

For the optimization of the relay loads and the matching network of the receivers, different solver approaches were introduced with promising results. For the method of gradient search the partial derivatives of the achievable user rates and the achievable sum rate were derived for any noise contribution, any spatial channel realization and different antenna topologies. The introduced optimization methods were further improved by the use of an adaptive step size, conjugate gradients method, and heuristic solvers. Their performance was further optimized, by a better choice of initial values, a post refinement of the solution and a stepwise optimization.

The results of the optimization routine were compared to receiver structures with widely spaced antennas and optimal choices of the matching network assuming the relays to be fully cooperative receiving antennae. These results were given for different number of passive relays, receiving antennae per user, users, relay placings, and input powers. With just one receive antenna, rates close to these limits were achieved. A lower bound of the required number of relays was given to achieve a low interference link for all users in a network. This lower bound was then compared to a four user system and evaluated. To achieve this lower bound, the noise-free rates of the systems were calculated and analyzed.

Further, it was shown, that by keeping the sum of relays and receivers fixed leads to similar good results independent of whether more receivers and less relays or less receivers and more relays were used. Hence increasing the number of relays leads to almost the same improvements as increasing the number of receivers per user.

6.2 Future Work

Because this thesis looked into the achievable improvements by the use of passive relays and showed that this method is an auspicious method in diminishing interference for dense networks, the practical feasibility remains to be proven. For that, the system must be scaled to larger numbers of users and hence relays and the speed of the solver to find a satisfyingly good result must be improved. Therefore maybe different solver approaches could be the solution. As the coupling is dependent on

the distances among the antennae, a way to determine each antenna position must be found.

Further, an analysis of the optimal impedance values would most certainly lead to a better understanding and maybe also for a good choice of initial values, so that a normal gradient search routine with less initializations could be used. Maybe correlations of the impedance values to the antenna placing could be found and hence again a better optimization routine with educated initial guesses could be found.

The choice of complex components at the relays (i.e. lossy relays), must be further explored, as it gives a higher degree of freedom for the solution finding. However this also requires a better performance of the solver routine, in speed and precision.

Finally, a real system setup, for correctness validation of the solver and the system would give certainty, that the approach of eliminating interference by the use of passive relays is a reasonable approach.

Appendix A

Lossy Passive Relays

In this chapter, the effect of lossy passive relays will be explored. In the beginning we justified the choice of considering only pure imaginary impedances at the relays, by the fact, that this results in loss less relays. In the following we will allow the impedances to become complex, with a strict positive real part, i.e. $\mathbf{Z}_{\text{Rel}} = \mathbf{R}_{\text{Rel}} + j\mathbf{X}_{\text{Rel}}$ with $R_{\text{Rel}}[i] \geq 0, \forall i \in [1, \dots, N_{\text{Rel}}]$.

It is obvious, that the performance of this system must be strictly larger than allowing only loss less relays, as we can set the real part to zero and therefore we would get the same result.

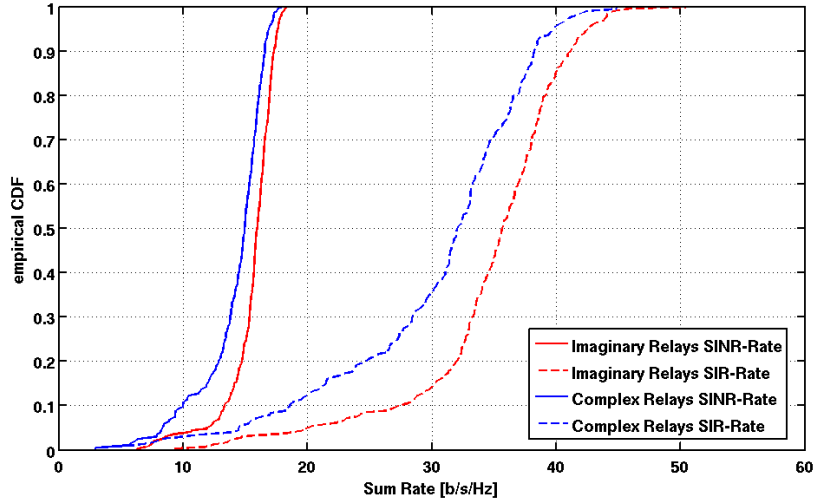


Figure A.1: Comparison of loss less and lossy relays.

Figure A.1 shows the performance of the loss less relays in red, as we know them from the previous chapters. In blue the performance of the lossy relays is given. We see, that the performance is lower than the performance of the loss less relays, which is contradicting to the statement above. This leads to the conclusion, that the performance of the solver is worse, when the degree of freedom is larger.

Therefore, we introduce a stepwise optimization similar to the one in Section 4.4.3. At first the system is optimized for only pure values of the relay loads. In a second step the impedances are allowed to become complex, with positive real parts — we neglect negative values, as the relays would then required a power source and noise

effects would appear.

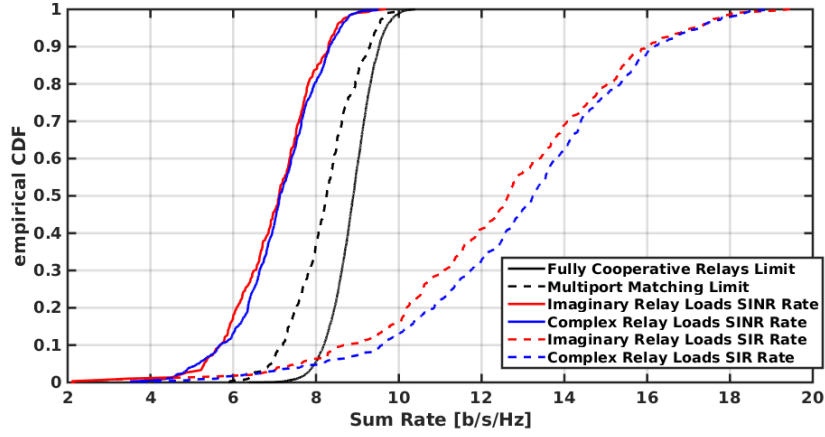


Figure A.2: Comparison of lossless and lossy relays.

Figure A.2 shows the result of this optimization for one receiver with seven relays and three interferers. The settings were changed, in order to have a smaller problem size. By the solid lines we see, that allowing the loads to become complex (blue solid and dashed lines), improves as expected the performance. However, the improvement is not significantly larger, to the lossless loads (red solid and dashed lines).

Appendix B

Alternative Description of the Receiver

As written in the Introduction of this thesis, the circuit description is based on the methods introduced in [2]. Therefore in the following a similar description as used in [2] is given.

B.1 Transfer Function

To be able to fully use this method some adoptions need to be made. In [2], the use of relays was not introduced. In order to use the description, we model the relays as receivers with the following setting for the matching network:

$$\mathbf{Z}_{M11}[N_R \cdot N_{Rx} + (1 : N_{Relay})] = \text{diag}(\mathbf{Z}_{Relay}) \quad (\text{B.1})$$

$$\mathbf{Z}_{M12}[N_R \cdot N_{Rx} + (1 : N_{Relay})] = \mathbf{Z}_{M21}[N_R \cdot N_{Rx} + (1 : N_{Relay})] = \mathbf{0} \quad (\text{B.2})$$

$$\mathbf{Z}_{M22}[N_R \cdot N_{Rx} + (1 : N_{Relay})] = \text{undef.} \quad (\text{B.3})$$

The equivalent input impedance matrix for the relay ports hence becomes

$$\mathbf{Z}_{inM}[N_R \cdot N_{Rx} + (1 : N_{Relay})] = \text{diag}(\mathbf{Z}_{Relay}). \quad (\text{B.4})$$

B.1.1 Signal Transfer Function

The circuitry transfer function from [2] applied to the adoptions, leads to

$$\mathbf{H}_{L,A} = \frac{z_l d}{z_l + g} \mathbf{D} \mathbf{F}_R, \quad \text{with} \quad (\text{B.5})$$

$$\mathbf{D} = (c\mathbf{I} + \mathbf{Z}_R)^{-1}, \quad (\text{B.6})$$

$$\mathbf{F}_R = \mathbf{Z}_{M12}(\mathbf{Z}_{M11} + \mathbf{Z}_C)^{-1}, \quad \text{and} \quad (\text{B.7})$$

$$\mathbf{Z}_R = \mathbf{Z}_{M22} + \mathbf{F}_R \mathbf{Z}_{M12}. \quad (\text{B.8})$$

Note, that in [2], the matching network is defined differently, i.e. \mathbf{Z}_{M11} and \mathbf{Z}_{M22} are swapped. $\mathbf{H}_{L,A}$ denotes hereby the transfer function from all the open circuit input voltages to all the voltages over the downstream circuitry loads. To get the transfer function only towards receiver j , only the rows $[(j-1) \cdot N_{Rx} + 1 : j \cdot N_{Rx}]$ must be considered. In the following we denote such case by $\mathbf{H}_{L,j}$ and we can write the overall transfer function by

$$\mathbf{v}_{L,j}^s = \mathbf{H}_{L,j} \cdot \mathbf{H}_j^{\text{sp}} \cdot \mathbf{v}_j. \quad (\text{B.9})$$

B.1.2 Noise Transfer Function

Similarly, the new model can be applied to the noise sources. According to [3, Equation (14)], this leads to the transfer function

$$\mathbf{v}_{L,j}^n = \frac{z_l d}{z_l + g} \left(\mathbf{D} (\mathbf{Z}_R \mathbf{i}_{LNA} - \mathbf{v}_{LNA} + \mathbf{F}_R \mathbf{n}_{AR}) + \frac{1}{d} \tilde{\mathbf{v}}_n \right). \quad (\text{B.10})$$

Compared to the sources introduced in Section 2.3, the noise contribution for the LNA and the downstream used in this formula must be extended by the length of N_{Relay} with zeros, to form a valid matrix multiplication. As in the previous section the index j denotes the branches of the j -th receiver, i.e. the rows $[(j-1) \cdot N_{\text{Rx}} + 1 : j \cdot N_{\text{Rx}}]$ of the transfer function matrix.

B.2 Analytical Gradient

In the following the analytical gradient will be derived. In contrast to Chapter 3, the rate is only dependent on $\mathbf{Z}_{M,ij}$, with $i, j \in \{1, 2\}$, as the relays were expressed by the matching network as written above. Therefore, similar to [3], with the adoptions to the matching network it follows

$$\begin{aligned} \frac{\partial r}{\partial \mathbf{Z}_{M,ij}} = \frac{1}{\ln(2)} \text{Tr} & \left((\mathbf{K}_s + \mathbf{K}_i + \mathbf{K}_n)^{-1} \left(\frac{\partial \mathbf{K}_s}{\partial \mathbf{Z}_{M,ij}} + \frac{\partial \mathbf{K}_i}{\partial \mathbf{Z}_{M,ij}} + \frac{\partial \mathbf{K}_n}{\partial \mathbf{Z}_{M,ij}} \right) - \right. \\ & \left. (\mathbf{K}_i + \mathbf{K}_n)^{-1} \left(\frac{\partial \mathbf{K}_i}{\partial \mathbf{Z}_{M,ij}} + \frac{\partial \mathbf{K}_n}{\partial \mathbf{Z}_{M,ij}} \right) \right). \end{aligned} \quad (\text{B.11})$$

The derivations of the rate with no interference can be found in [3]. In the following it is adapted to the needs of this thesis. To get the gradient of the interference, the sum over all interferer is taken, as in Section 2.2.6.

For notational convenience, we define the following

$$\begin{aligned} \mathbf{G} &= \mathbf{H}_j^{\text{sp}} \mathbf{J} [\mathbf{v}_j \mathbf{v}_j^H] \mathbf{H}_j^{\text{sp}H}, \quad \text{and} \\ \mathbf{P}_j &= \mathbf{F}_R \mathbf{G} \mathbf{F}_R^H. \end{aligned} \quad (\text{B.12})$$

The covariance matrix of the desired signal and interference at the receiver is

$$\mathbf{K}_s = \left| \frac{z_l d}{z_l + g} \right|^2 \mathbf{D} \mathbf{P}_j \mathbf{D}^H, \quad \text{and} \quad (\text{B.13})$$

$$\mathbf{K}_i = \left| \frac{z_l d}{z_l + g} \right|^2 \mathbf{D} \sum_{i=0, i \neq j}^{N_{\text{User}}-1} \mathbf{P}_i \mathbf{D}^H. \quad (\text{B.14})$$

The covariance matrix of the noise voltages $\mathbf{v}_{L,j}^n$ is given as

$$\mathbf{K}_n = \mathbf{J} [\mathbf{v}_{L,j}^n \mathbf{v}_{L,j}^{nH}] = \left| \frac{z_l d}{z_l + g} \right|^2 \mathbf{D} \Phi \mathbf{D}^H, \quad (\text{B.15})$$

with

$$\begin{aligned} \Phi &= \underbrace{\beta (\mathbf{Z}_R \mathbf{Z}_R^H - 2R_N \Re\{\rho^* \mathbf{Z}_R\} + R_N^2 \mathbf{I}_M)}_{\text{LNA noise}} + \underbrace{\mathbf{F}_R \mathbf{R}_{na} \mathbf{F}_R^H}_{\text{Ant. noise}} + \\ &\quad \underbrace{\frac{1}{|d|^2} \mathbf{D}^{-1} \psi \mathbf{I}_{N_{\text{Rx}}} \mathbf{D}^{-H}}_{\text{Downstream noise}}. \end{aligned} \quad (\text{B.16})$$

To get the gradient of the achievable rate, we proceed as in [3], namely by the LNA in (B.16). Additionally we introduce for symmetric matrices the unit differential matrix \mathbf{S}_{ij} , and all-zeros matrix except for the two elements in i -th row and j -th column and j -th row and i -th column, which are equal to 1 (hence $\mathbf{S}_{ij} = \mathbf{J}_{ij} + \mathbf{J}_{ji}$, if $j \neq i$, else $\mathbf{S}_{ij} = \mathbf{J}_{ij}$). We start by the first term $\beta \mathbf{T}_1 = \beta \mathbf{Z}_R \mathbf{Z}_R^H$.

$$\begin{aligned} \frac{\partial \mathbf{T}_1}{\partial \mathbf{Z}_{M22,ij}} &= \mathbf{S}_{ij} \mathbf{Z}_R^H + \mathbf{Z}_R (\mathbf{S}_{ij}) \\ \frac{\partial \mathbf{T}_1}{\partial \mathbf{Z}_{M12,ij}} &= (\mathbf{J}_{ij} \mathbf{F}_R^T + \mathbf{F}_R \mathbf{J}_{ij}^T) \mathbf{Z}_R^H + \mathbf{Z}_R (\mathbf{J}_{ij} \mathbf{F}_R^H + \mathbf{Z}_{M11} \mathbf{B}_1^H \mathbf{J}_{ij}^T) \\ \frac{\partial \mathbf{T}_1}{\partial \mathbf{Z}_{M11,ij}} &= \mathbf{F}_R (-\mathbf{S}_{ij}) \mathbf{F}_R^T \mathbf{Z}_R^H + \mathbf{Z}_R \mathbf{Z}_{M12} \mathbf{B}_1^H (\mathbf{S}_{ij}) \mathbf{F}_R^H, \end{aligned} \quad (\text{B.17})$$

where we define the matrix $\mathbf{B}_1 = (\mathbf{Z}_{M11} + \mathbf{Z}_{CR})^{-1}$. Since both matrices \mathbf{Z}_{M11} and \mathbf{Z}_{CR} are symmetric, \mathbf{B}_1 is also symmetric.

In the second term of the LNA noise contribution $-\beta R_N \mathbf{T}_2 = -\beta R_N (\rho^* \mathbf{Z}_R + \rho \mathbf{Z}_R^*)$ the derivatives are

$$\begin{aligned} \frac{\partial \mathbf{T}_2}{\partial \mathbf{Z}_{M22,ij}} &= \rho^* \mathbf{S}_{ij} + \rho (-\mathbf{S}_{ij}) \\ \frac{\partial \mathbf{T}_2}{\partial \mathbf{Z}_{M12,ij}} &= \rho^* (\mathbf{J}_{ij} \mathbf{F}_R^T + \mathbf{F}_R \mathbf{J}_{ij}^T) + \rho (\mathbf{J}_{ij} \mathbf{F}_R^H + \mathbf{F}_R^* \mathbf{J}_{ij}^T) \\ \frac{\partial \mathbf{T}_2}{\partial \mathbf{Z}_{M11,ij}} &= \rho^* \mathbf{F}_R (-\mathbf{S}_{ij}) \mathbf{F}_R^T + \rho \mathbf{Z}_{M12} \mathbf{B}_1^H (\mathbf{S}_{ij}) \mathbf{F}_R^H. \end{aligned} \quad (\text{B.18})$$

For the downstream noise components $\frac{\psi}{|d|^2} \mathbf{T}_3 = \frac{\psi}{|d|^2} \mathbf{D}^{-1} \mathbf{I}_M \mathbf{D}^{-H}$ the derivatives become

$$\begin{aligned} \frac{\partial \mathbf{T}_3}{\partial \mathbf{Z}_{M22,ij}} &= \mathbf{S}_{ij} (c^* \mathbf{I}_M + \mathbf{Z}_R^H) + (c \mathbf{I}_M + \mathbf{Z}_R) (-\mathbf{S}_{ij}) \\ \frac{\partial \mathbf{T}_3}{\partial \mathbf{Z}_{M12,ij}} &= (\mathbf{J}_{ij} \mathbf{F}_R^T + \mathbf{F}_R \mathbf{J}_{ij}^T) (c^* \mathbf{I}_M + \mathbf{Z}_R^H) + \\ &\quad (c \mathbf{I}_M + \mathbf{Z}_R) (\mathbf{J}_{ij} \mathbf{F}_R^H + \mathbf{Z}_{M12} \mathbf{B}_1^H \mathbf{J}_{ij}^T) \\ \frac{\partial \mathbf{T}_3}{\partial \mathbf{Z}_{M11,ij}} &= (\mathbf{F}_R (-\mathbf{S}_{ij}) \mathbf{F}_R^T) (c^* \mathbf{I}_M + \mathbf{Z}_R^H) + \\ &\quad (c \mathbf{I}_M + \mathbf{Z}_R) (\mathbf{Z}_{M12} \mathbf{B}_1^H (\mathbf{S}_{ij}) \mathbf{F}_R^H). \end{aligned} \quad (\text{B.19})$$

As mentioned in Chapter 3, the transfer function of the signal and the antenna noise are the same. Therefore also the gradients become the same, namely

$$\begin{aligned} \frac{\partial \mathbf{P}}{\partial \mathbf{Z}_{M12,ij}} &= \mathbf{J}_{ij} \mathbf{B}_1 \mathbf{G} \mathbf{F}_R^H + \mathbf{F}_R \mathbf{G} \mathbf{B}_1^H \mathbf{J}_{ij}^T \\ \frac{\partial \mathbf{P}}{\partial \mathbf{Z}_{M11,ij}} &= \mathbf{F}_R ((-\mathbf{S}_{ij}) \mathbf{B}_1 \mathbf{G} + \mathbf{G} \mathbf{B}_1^H (\mathbf{S}_{ij})) \mathbf{F}_R^H. \end{aligned} \quad (\text{B.20})$$

The derivative of the antenna noise is identical to (B.20), but with replacing \mathbf{G} by \mathbf{R}_{na} . With the derivatives given above, the gradient of the achievable rate can now be calculated.

Bibliography

- [1] F. Rusek, D. Persson, B. K. Lau, E. Larsson, T. Marzetta, O. Edfors, and F. Tufvesson, “Scaling up mimo: Opportunities and challenges with very large arrays,” *Signal Processing Magazine, IEEE*, vol. 30, pp. 40–60, Jan 2013.
- [2] M. Ivrlac and J. Nossék, “Toward a circuit theory of communication,” *Circuits and Systems I: Regular Papers, IEEE Transactions on*, vol. 57, pp. 1663–1683, July 2010.
- [3] Y. Hassan and A. Wittneben, “Rate maximization in coupled mimo systems: A generic algorithm for designing single-port matching networks,” in *Wireless Communications and Networking Conference (WCNC), 2014 IEEE*, pp. 1287–1292, April 2014.
- [4] S. Berger and A. Wittneben, “Cooperative distributed multiuser mmse relaying in wireless ad-hoc networks,” in *Signals, Systems and Computers, 2005. Conference Record of the Thirty-Ninth Asilomar Conference on*, pp. 1072–1076, October 2005.
- [5] R. Bains, R. R. Müller, and S. Members, “Using parasitic elements for implementing the rotating antenna for mimo receivers,” *IEEE Trans. on Wireless Communications*, pp. 4522–4533, 2008.
- [6] B. K. Lau and J. Andersen, “Simple and efficient decoupling of compact arrays with parasitic scatterers,” *Antennas and Propagation, IEEE Transactions on*, vol. 60, pp. 464–472, Feb 2012.
- [7] E. Kreyszig, *Advanced Engineering Mathematics*. New York, NY, USA: John Wiley & Sons, Inc., 9th ed., 2006.
- [8] Antenna Magus, “ANTENNA MAGUS - Utilities information — The leading Antenna Design Software tool. — Antenna Design. Simplified,” 2015. [Online] Available: http://www.antennamagus.com/database/utilities/tools_page.php?id=24&page=two-port-network-conversion-tool.
- [9] S. J. Orfanidis, *Electromagnetic Waves and Antennas*. ECE Department, Rutgers University, 94 Brett Road, Piscataway, NJ 08854-8058: Rutgers University, 2014. [Online]. Available: <http://www.ece.rutgers.edu/~orfanidi/ewa/>.
- [10] R. Q. Twiss, “Nyquist’s and Thevenin’s Theorems Generalized for Nonreciprocal Linear Networks,” *Journal of Applied Physics*, vol. 26, pp. 599–602, May 1955.
- [11] C. Domizioli and B. Hughes, “Front-end design for compact mimo receivers: A communication theory perspective,” *Communications, IEEE Transactions on*, vol. 60, pp. 2938–2949, October 2012.

- [12] K. B. Petersen and M. S. Pedersen, “The Matrix Cookbook,” Nov. 2012. Version 20121115.
- [13] Wikipedia, “Conjugate gradient method — Wikipedia, the free encyclopedia,” 2015. [Online] Available: http://en.wikipedia.org/wiki/Conjugate_gradient_method.
- [14] R. Fletcher and C. M. Reeves, “Function minimization by conjugate gradients,” *The Computer Journal*, vol. 7, no. 2, pp. 149–154, 1964.
- [15] E. Polak and G. Ribiere, “Note sur la convergence de méthodes de directions conjuguées,” *ESAIM: Mathematical Modelling and Numerical Analysis - Modélisation Mathématique et Analyse Numérique*, vol. 3, no. R1, pp. 35–43, 1969.
- [16] S. Kirkpatrick, C. D. Gelatt, and M. P. Vecchi, “Optimization by simulated annealing,” *SCIENCE*, vol. 220, no. 4598, pp. 671–680, 1983.
- [17] The MathWorks, Inc., “How Simulated Annealing Works - MATLAB & Simulink - MathWorks Schweiz,” 2015. [Online] Available: <http://ch.mathworks.com/help/gads/how-simulated-annealing-works.html>.
- [18] The MathWorks, Inc., “How GlobalSearch and MultiStart Work - MATLAB & Simulink - MathWorks Schweiz,” 2015. [Online] Available: <http://ch.mathworks.com/help/gads/how-globalsearch-and-multistart-work.html#bsfjle9>.