

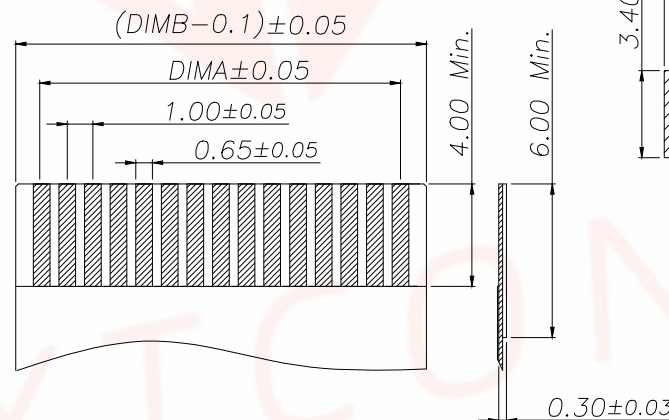
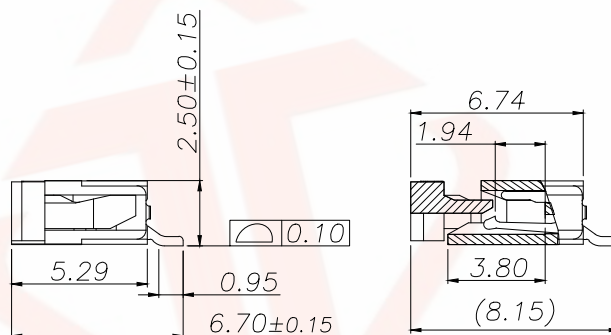
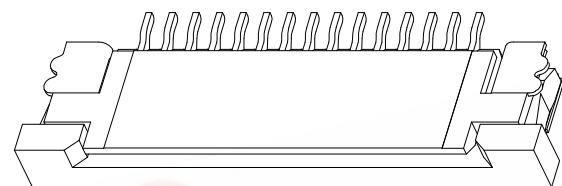


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

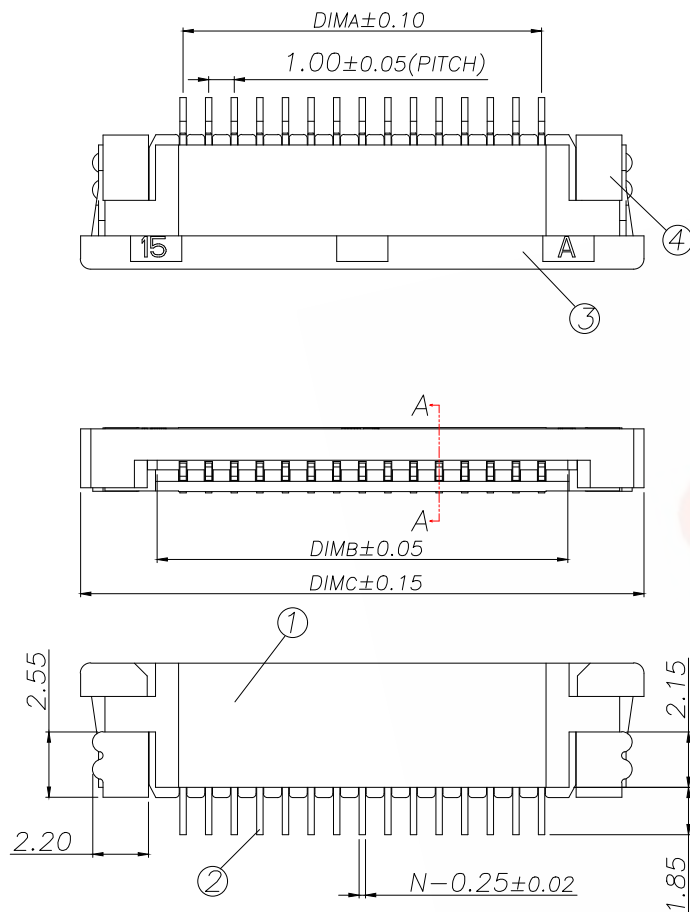

Part No	Pin	A	B	C
A10FC-S04FCA-H25	4	3.00	5.03	11.10
A10FC-S05FCA-H25	5	4.00	6.03	12.10
A10FC-S06FCA-H25	6	5.00	7.03	13.10
A10FC-S07FCA-H25	7	6.00	8.03	14.10
A10FC-S08FCA-H25	8	7.00	9.03	15.10
A10FC-S09FCA-H25	9	8.00	10.03	16.10
A10FC-S10FCA-H25	10	9.00	11.03	17.10
A10FC-S11FCA-H25	11	10.00	12.03	18.10
A10FC-S12FCA-H25	12	11.00	13.03	19.10
.....
A10FC-S40FCA-H25	40	(40-1)*1.0	(40+1)*1.0+0.03	(40+6)*1.0+0.10

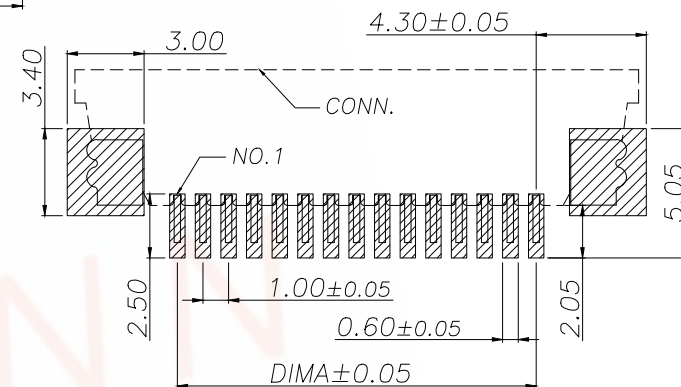

适用线路板(PCB LAYOUT)

序号	品名	材质
1	1.0胶芯(H2.5)	LCP UL94V-0 本色
2	1.0下接端子(H2.5)	铜合金/表面镀锡
3	1.0卧式后盖(H2.5)	LCP UL94V-0 黑色
4	1.0卧式焊片(H2.5)	铜合金/表面镀锡

适用扁平线(Applicable Flat Cable)

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25°C~+85°C.
3. 额定电压: 50V, AC/DC.
4. 接触电阻: ≤0.03Ω.
5. 绝缘电阻: ≥500MΩ

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd			
.X:±0.38	.X':±5°	PART NO. A10FC-SNFCA-H25	TITLE: FPC 1.0mm间距抽屉式下接贴板		
.XX:±0.20	.XX':±3°				
.XXX:±0.05	.XXX':±1°				
UNITS	mm	DESIGN: Ethan	MANUFACTURE DWG		
MATERILA	— — —	CHED: Olvia		SCALE	SHEET
FINISH	— — —	APPD: Ava		N:A	1/1